Gmail

Walter Pirri <walter@pirri.com.ar>

Display AFY240320B0-2.4N6NTM-R


veronica.chen@orientdisplay.com <veronica.chen@orientdisplay.com> 19 de noviembre de 2024, 18:01
Para: walter@pirri.com.ar
Cc: Bill Cheung <bill@orientdisplay.com>


Hi Walter,

The default interface is a 16-bit MCU. If you want to change it to an 8-bit MCU, it can be done by modifying the resistor values on the FPC.

The current resistor values on the FPC are as shown in the image below.

[IM3, IM0] = 0 (R8=0Ω, R7=NC), 0 (R6=0Ω, R5=NC), 0 (R4=0Ω, R3=NC), 1 (R2=NC, R1=0Ω)



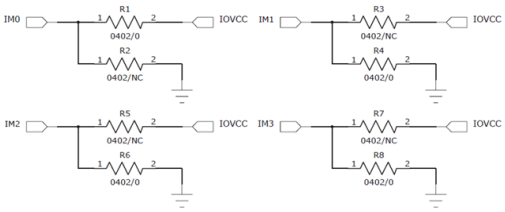

To change to 8-bit MCU. Please set resistor value as below.

[IM3, IM0] = 0 (R8=0Ω, R7=NC), 0 (R6=0Ω, R5=NC), 0 (R4=0Ω, R3=NC), 0 (R2=0Ω, R1=NC)

- Select the MCU interface mode

IM3	IM2	IM1	IM0	MCU-Interface Mode	DB Pin in use	
					Register/Content	GRAM
0	0	0	0	80 MCU 8-bit bus interface I	D[7:0]	D[7:0]
0	0	0	1	80 MCU 16-bit bus interface I	D[7:0]	D[15:0]
0	0	1	0	80 MCU 9-bit bus interface I	D[7:0]	D[8:0]
0	0	1	1	80 MCU 18-bit bus interface I	D[7:0]	D[17:0]
0	1	0	1	3-wire 9-bit data serial interface I	SDA: In/OUT	
0	1	1	0	4-wire 8-bit data serial interface I	SDA: In/OUT	

Thank you,

Veronica Chen

Technical Support

ORIENT DISPLAY
MAKE THINGS POSSIBLE

220 Royal Crest Court, Unit 6

Markham, ON L3R 9Y2 Canada

Tel: 905.477.1166

Fax: 905.477.1782

Email: veronica.chen@orientdisplay.com

Website: www.orientdisplay.com

[El texto citado está oculto]

AFY240320B0-2.4N6NTM schematics.pdf
349K