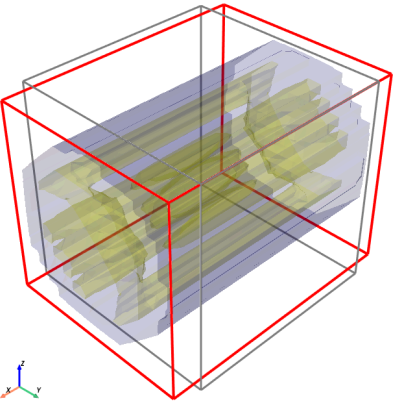
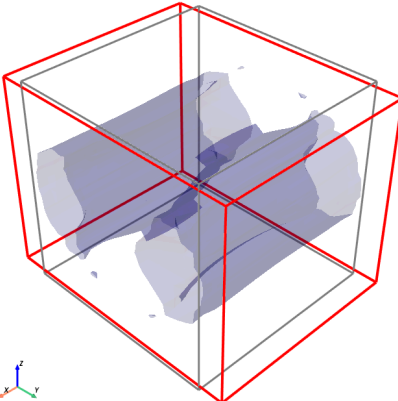
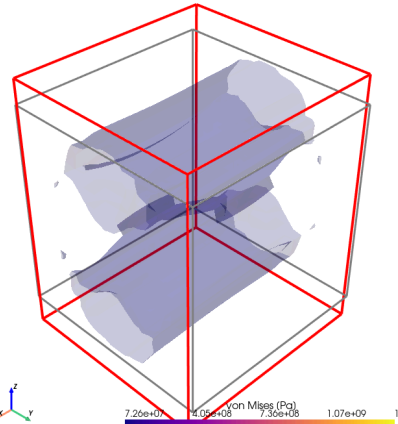


Pull along x  INPUTS matrix: E_L=3.00 E_T=3.00 G_LT=1.11 GPa, nu_LT=0.35 yam: E_L=140.00 E_T=10.00 G_LT=5.00 GPa, nu_LT=0.28 cylinder yam r=0.4, vf=0.503, axis=(np.float64(1.0), np.float64(0.0), np.float64(0.0)) mesh = (16, 16, 16) (tet)	Pull along y  OUTPUTS (effective stiffness, KUBC) E_x=72.0 E_y=6.1 E_z=6.1 GPa nu_xy=0.309 nu_xz=0.309 nu_yz=0.434 G_xy=2.92 G_xz=2.92 G_yz=2.06 GPa	Pull along z  BCs Visualization (this figure): mixed BC (Dirichlet axial pull + 4 traction-free lateral faces + 2 single-point pins to fix translations); applied strain 1% Homogenization solver: KUBC (Dirichlet $u = E \cdot x$ on the entire boundary), δ unit Vo
put the inputs and outputs in a typst table write script to run this where are shear cases? commit point and move to periodic bcs		