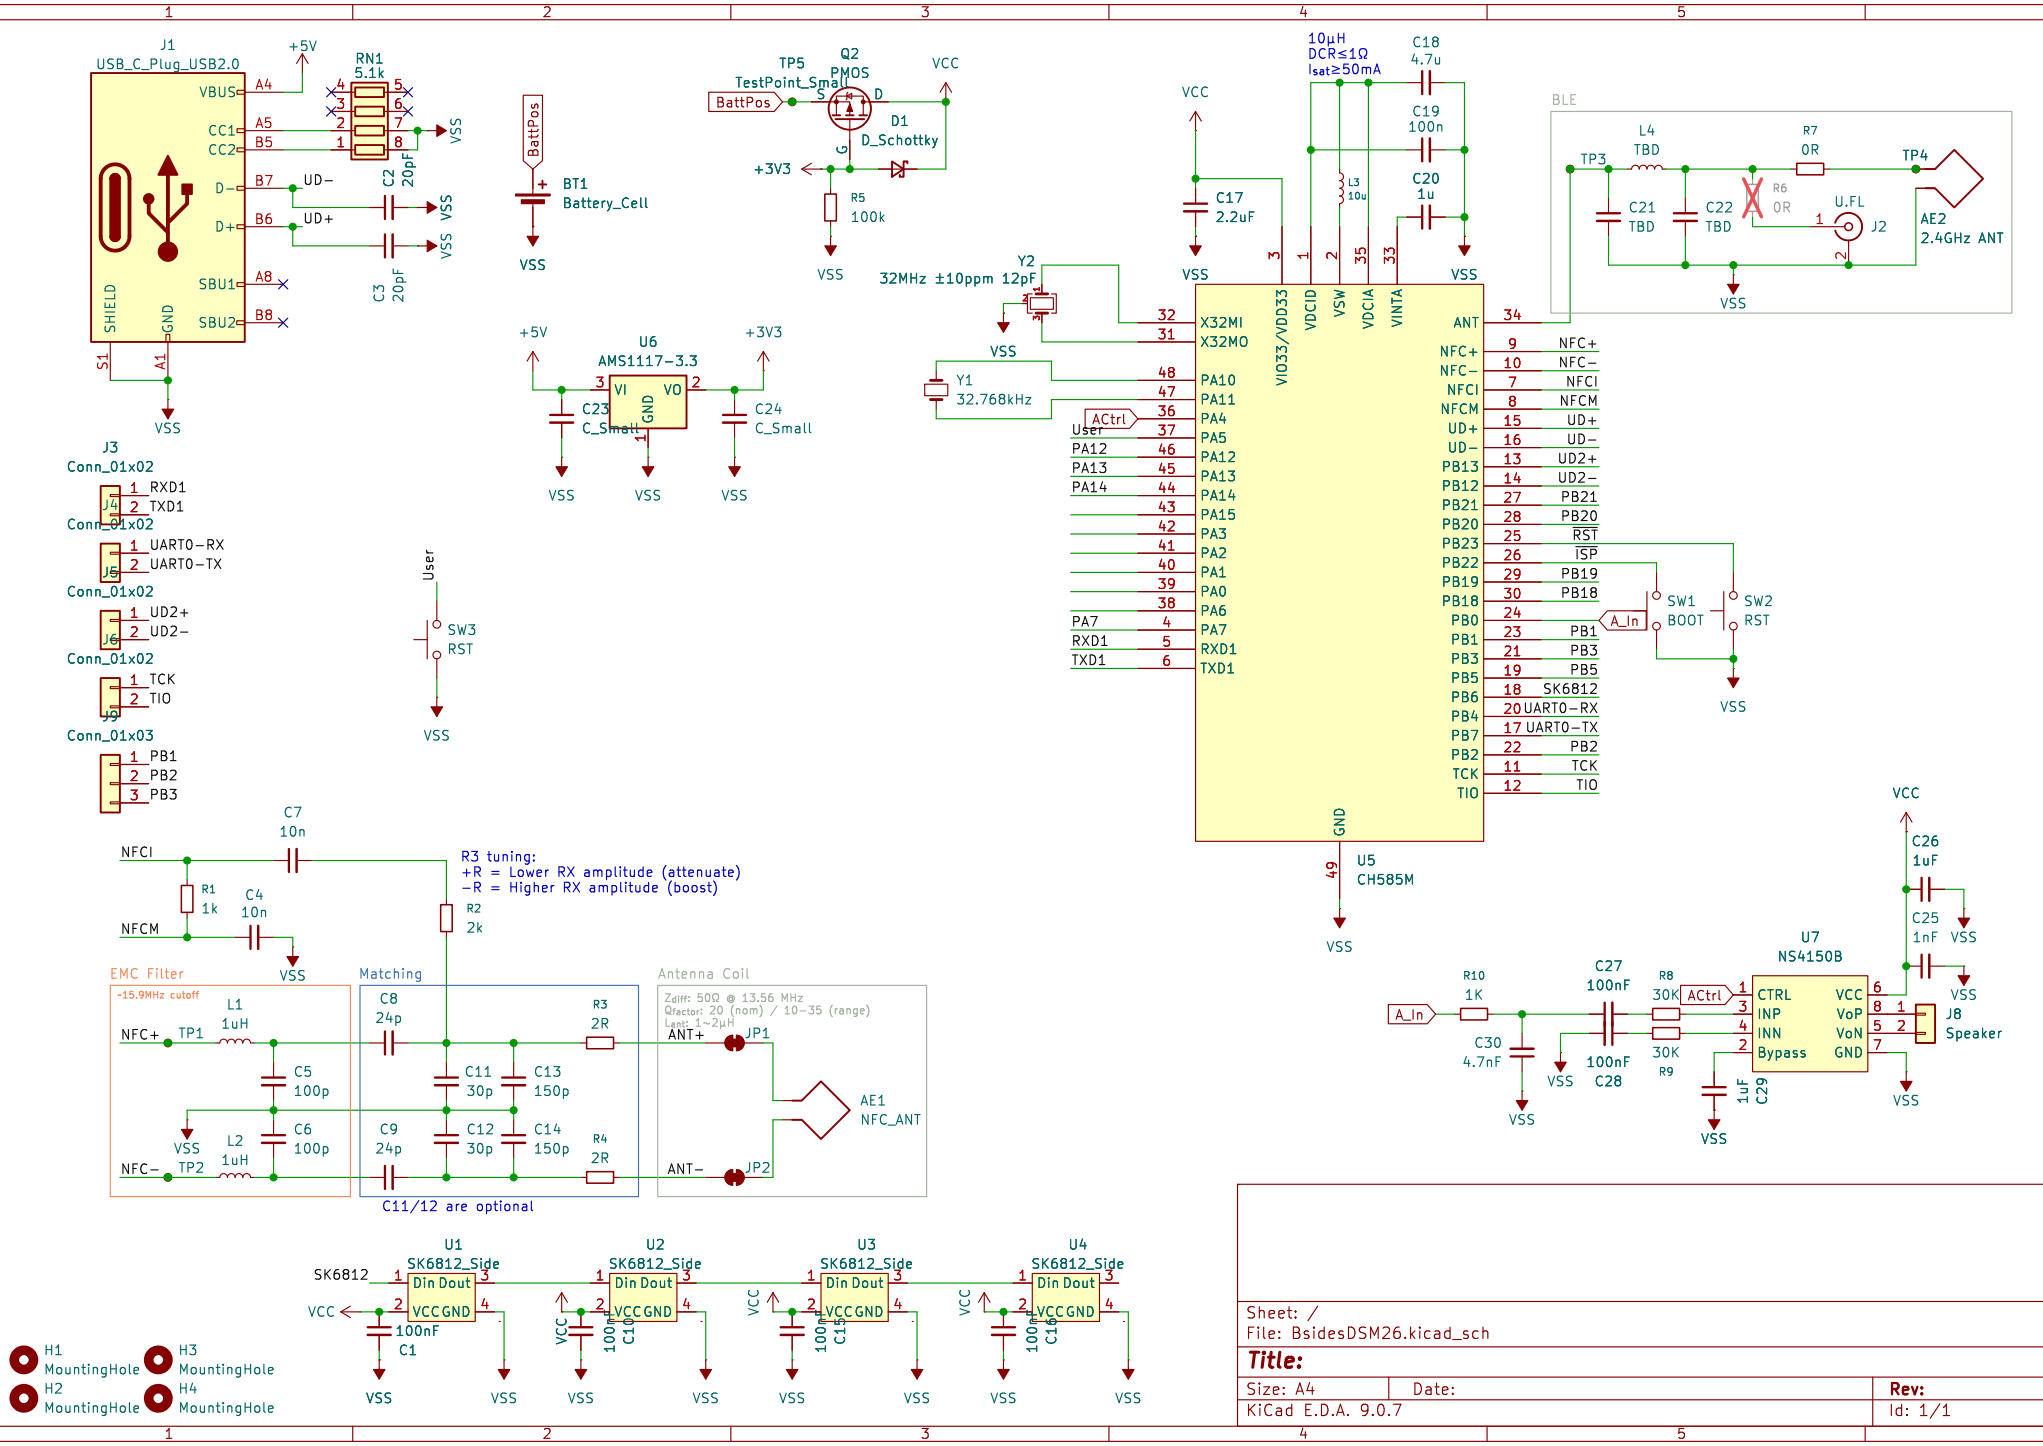
J1
USB_C_Plug_USB2.0
RN1
5.1k
C2
20pF
C3
20pF
BT1
Battery_Cell
TP5
TestPoint_Small
Q2
PMOS
D1
D_Schottky
R5
100k
U6
AMS1117-3.3
C23
C_Small
C24
C_Small
Y2
32MHz ±10ppm 12pF
Y1
32.768kHz
C17
2.2uF
10µH
DCR≤1Ω
Isat≥50mA
C18
4.7u
C19
100n
C20
1u
L3
10u
U5
CH585M
BLE
L4
TBD
R7
0R
R6
0R
C21
TBD
C22
TBD
U.FL
J2
TP3
TP4
AE2
2.4GHz ANT
J3
Conn_01x02
RXD1
TXD1
Conn_01x02
UART0-RX
UART0-TX
Conn_01x02
UD2+
UD2-
Conn_01x02
TCK
TIO
Conn_01x03
PB1
PB2
PB3
SW3
RST
User
SW1
BOOT
SW2
RST
A_In
C7
10n
R1
1k
C4
10n
R2
2k
R3 tuning:
+R = Lower RX amplitude (attenuate)
−R = Higher RX amplitude (boost)
EMC Filter
-15.9MHz cutoff
Matching
Antenna Coil
L1
1uH
L2
1uH
C5
100p
C6
100p
C8
24p
C9
24p
C11
30p
C12
30p
C13
150p
C14
150p
R3
2R
R4
2R
JP1
JP2
AE1
NFC_ANT
C11/12 are optional
U7
NS4150B
R10
1K
C30
4.7nF
C27
100nF
C28
100nF
R8
30K
R9
30K
C29
1uF
C26
1uF
C25
1nF
J8
Speaker
U1
U2
U3
U4
SK6812_Side
SK6812
C1
100nF
H1
MountingHole
H2
MountingHole
H3
MountingHole
H4
MountingHole
Sheet: /
File: BsidesDSM26.kicad_sch
Title:
Size: A4
Date:
Rev:
KiCad E.D.A. 9.0.7
Id: 1/1