




A. Across the channel through the sensor plate and grip ribs (x = 5)

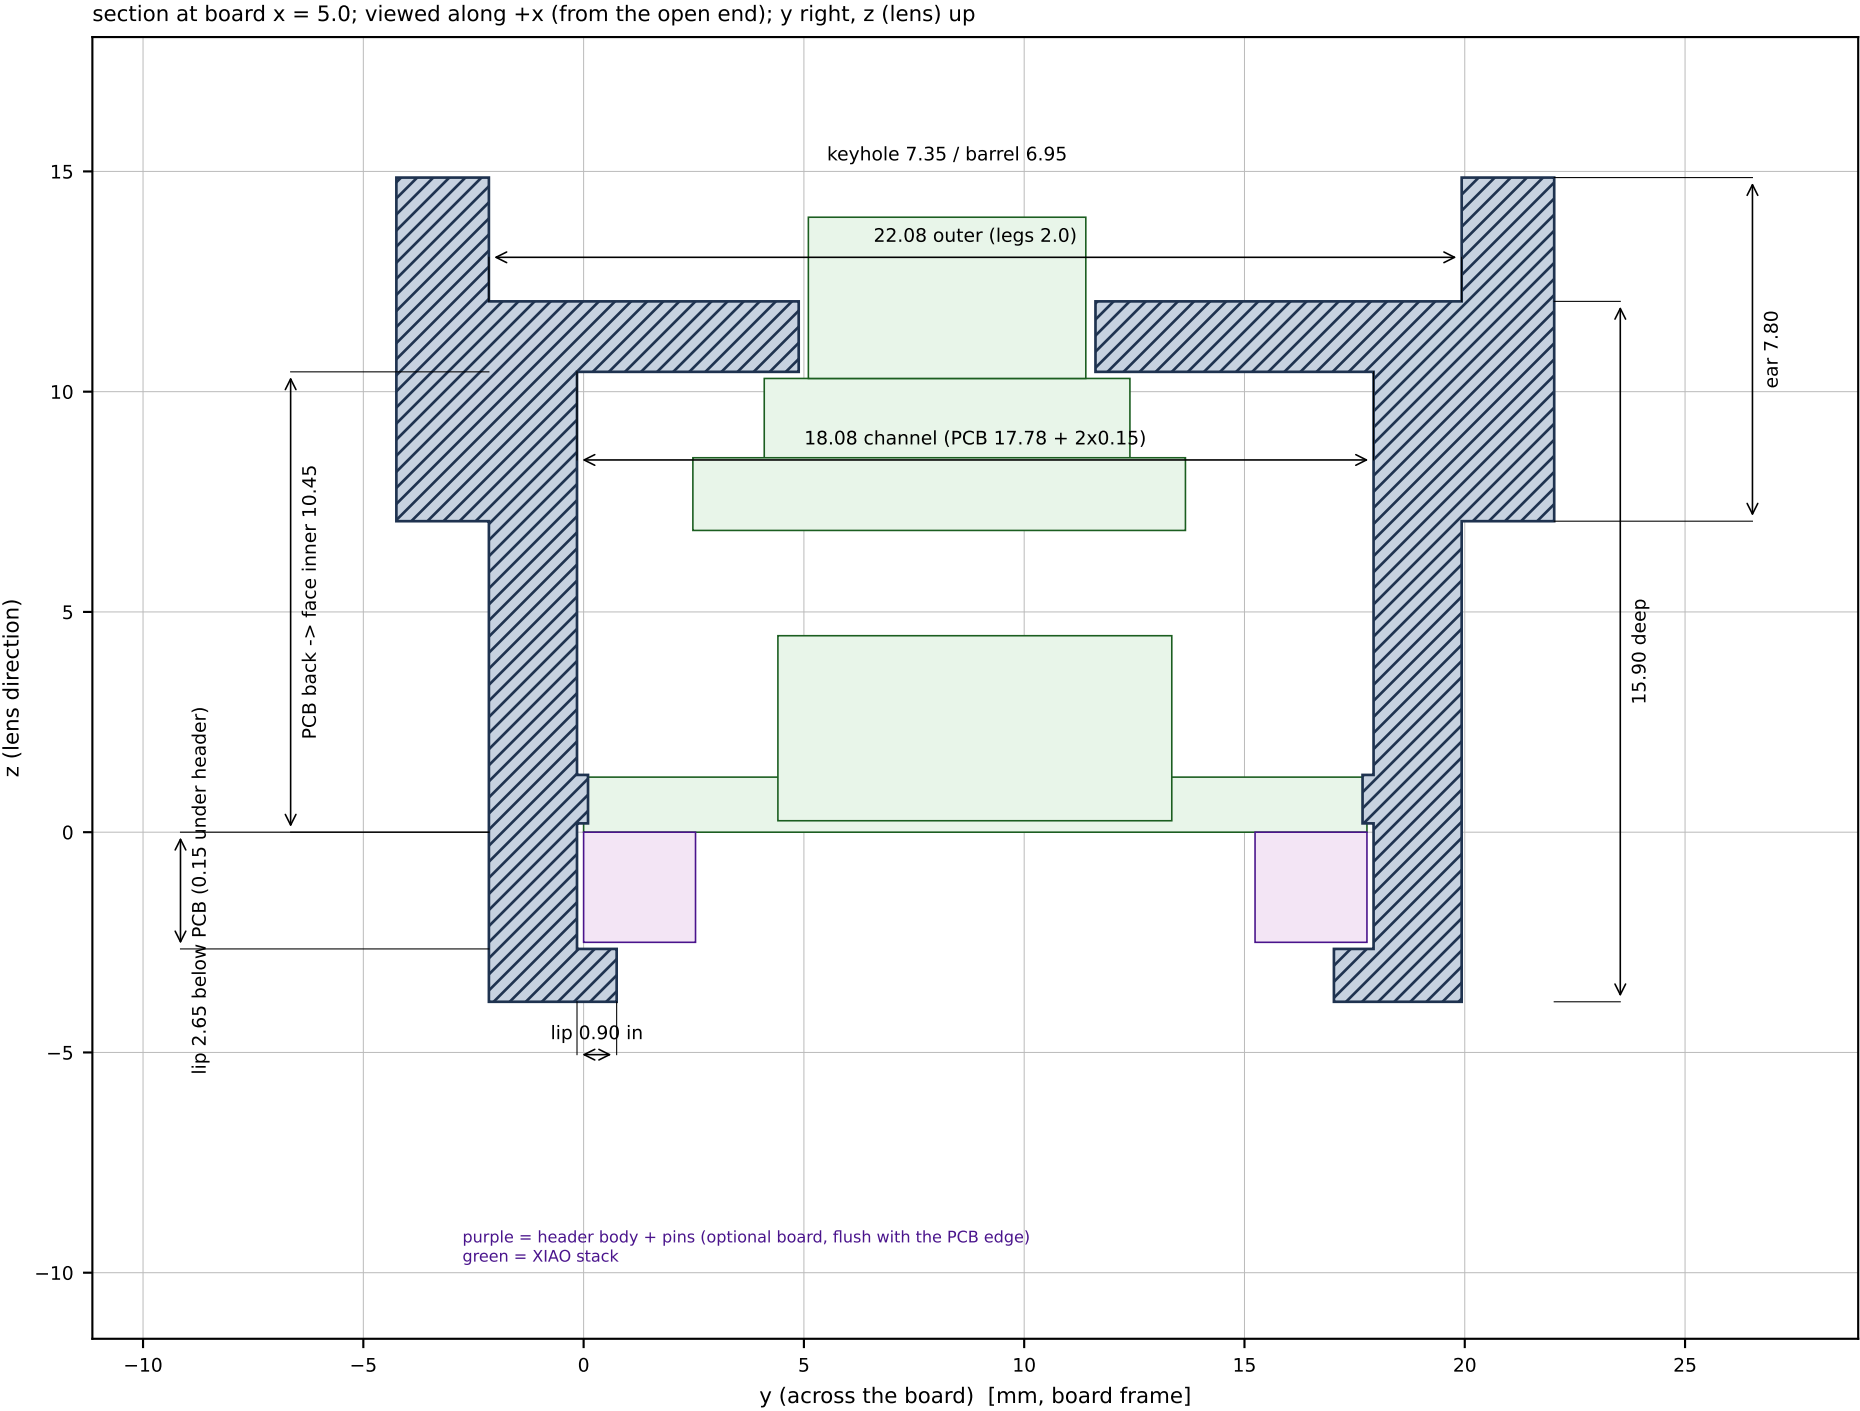


A2. Across the channel through the SD socket / flex (x = 12)

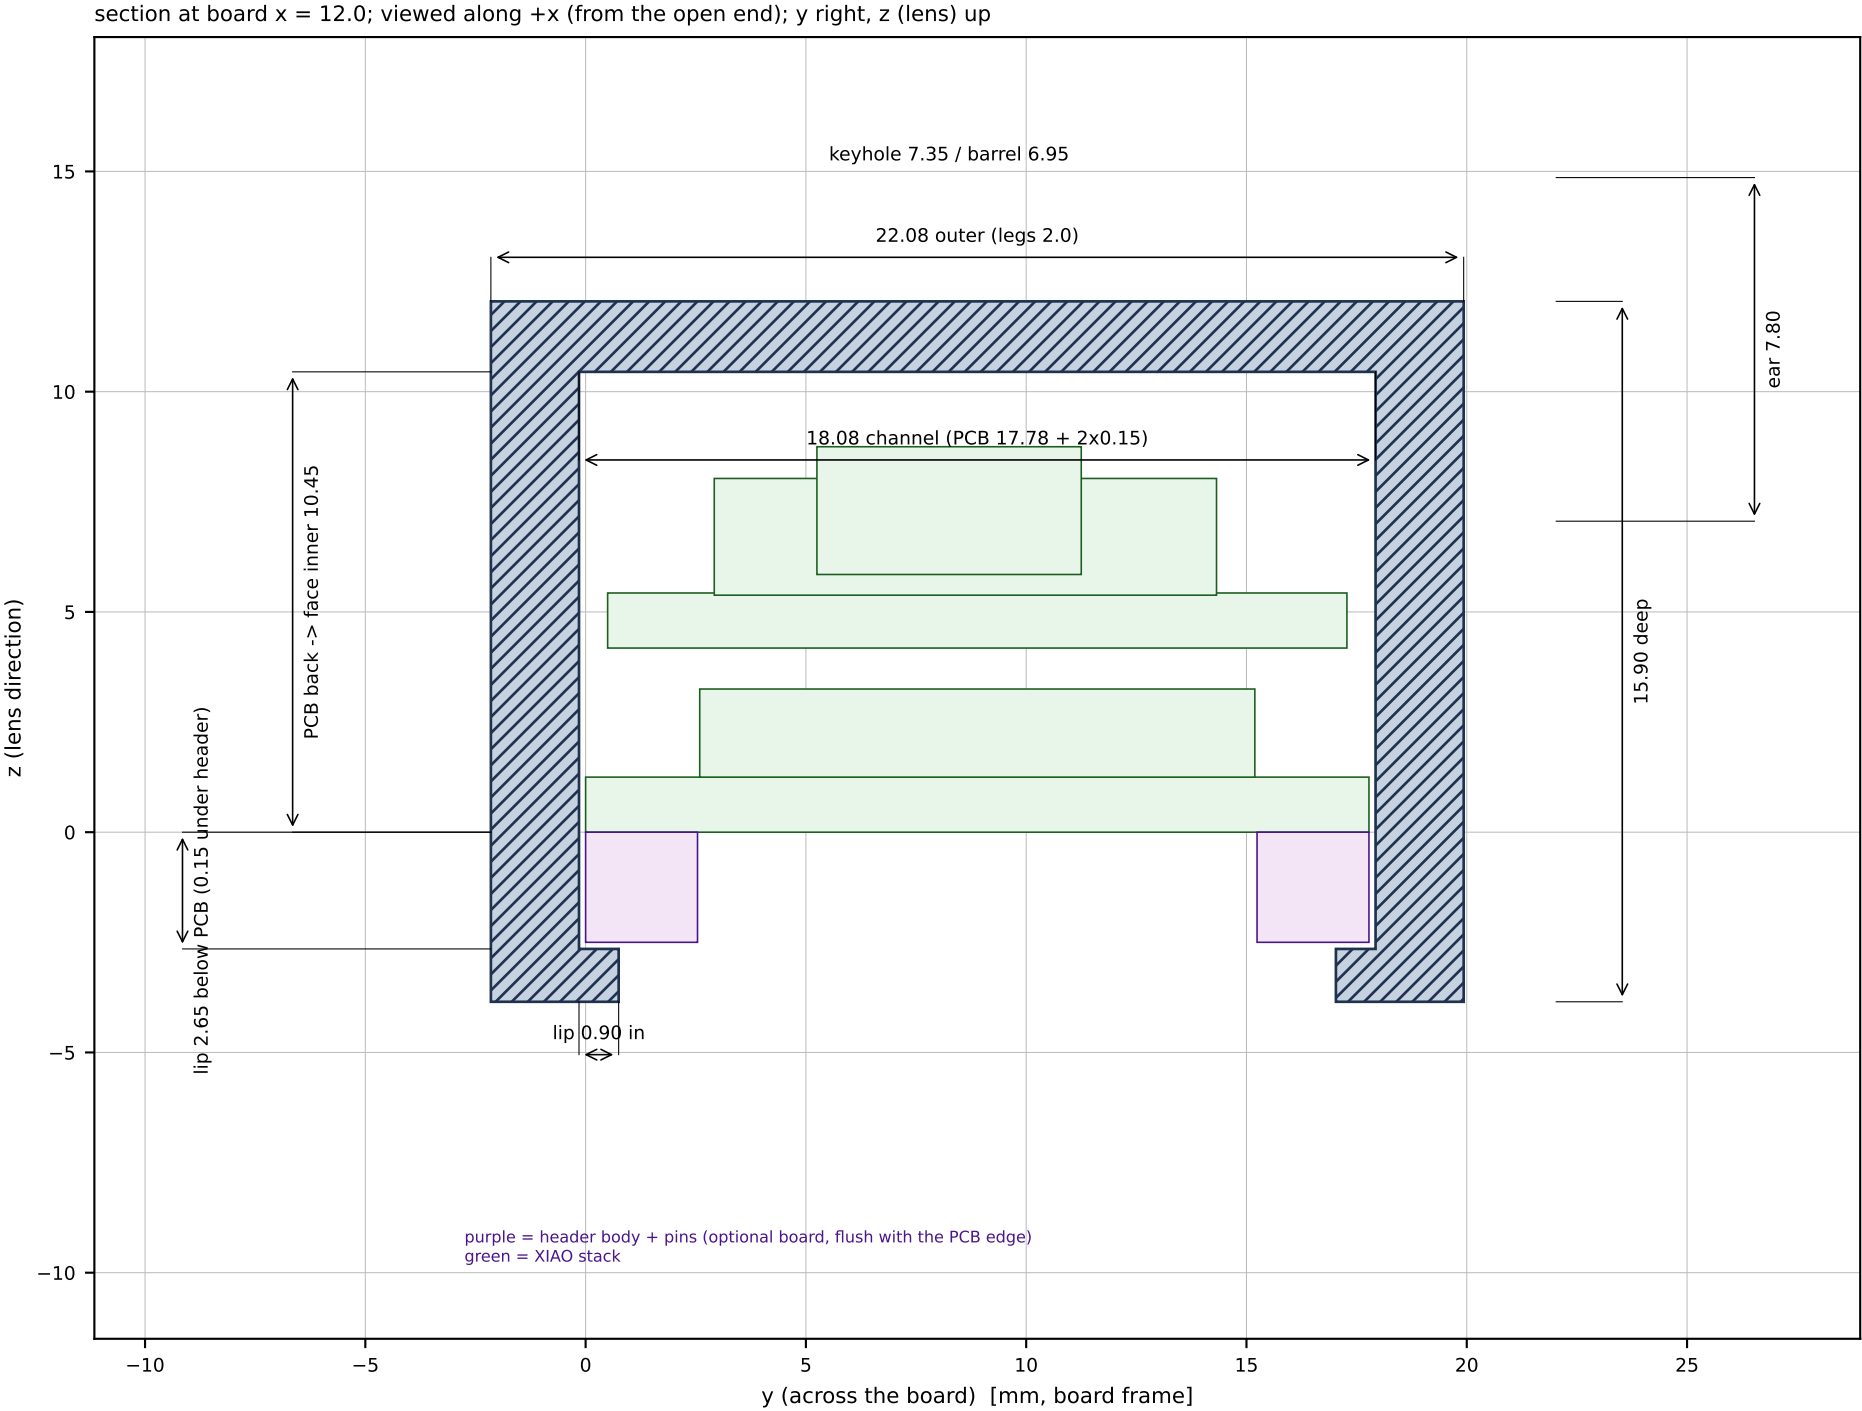


B. Along the lens axis (y = 8.25): face, keyhole, sensor plate

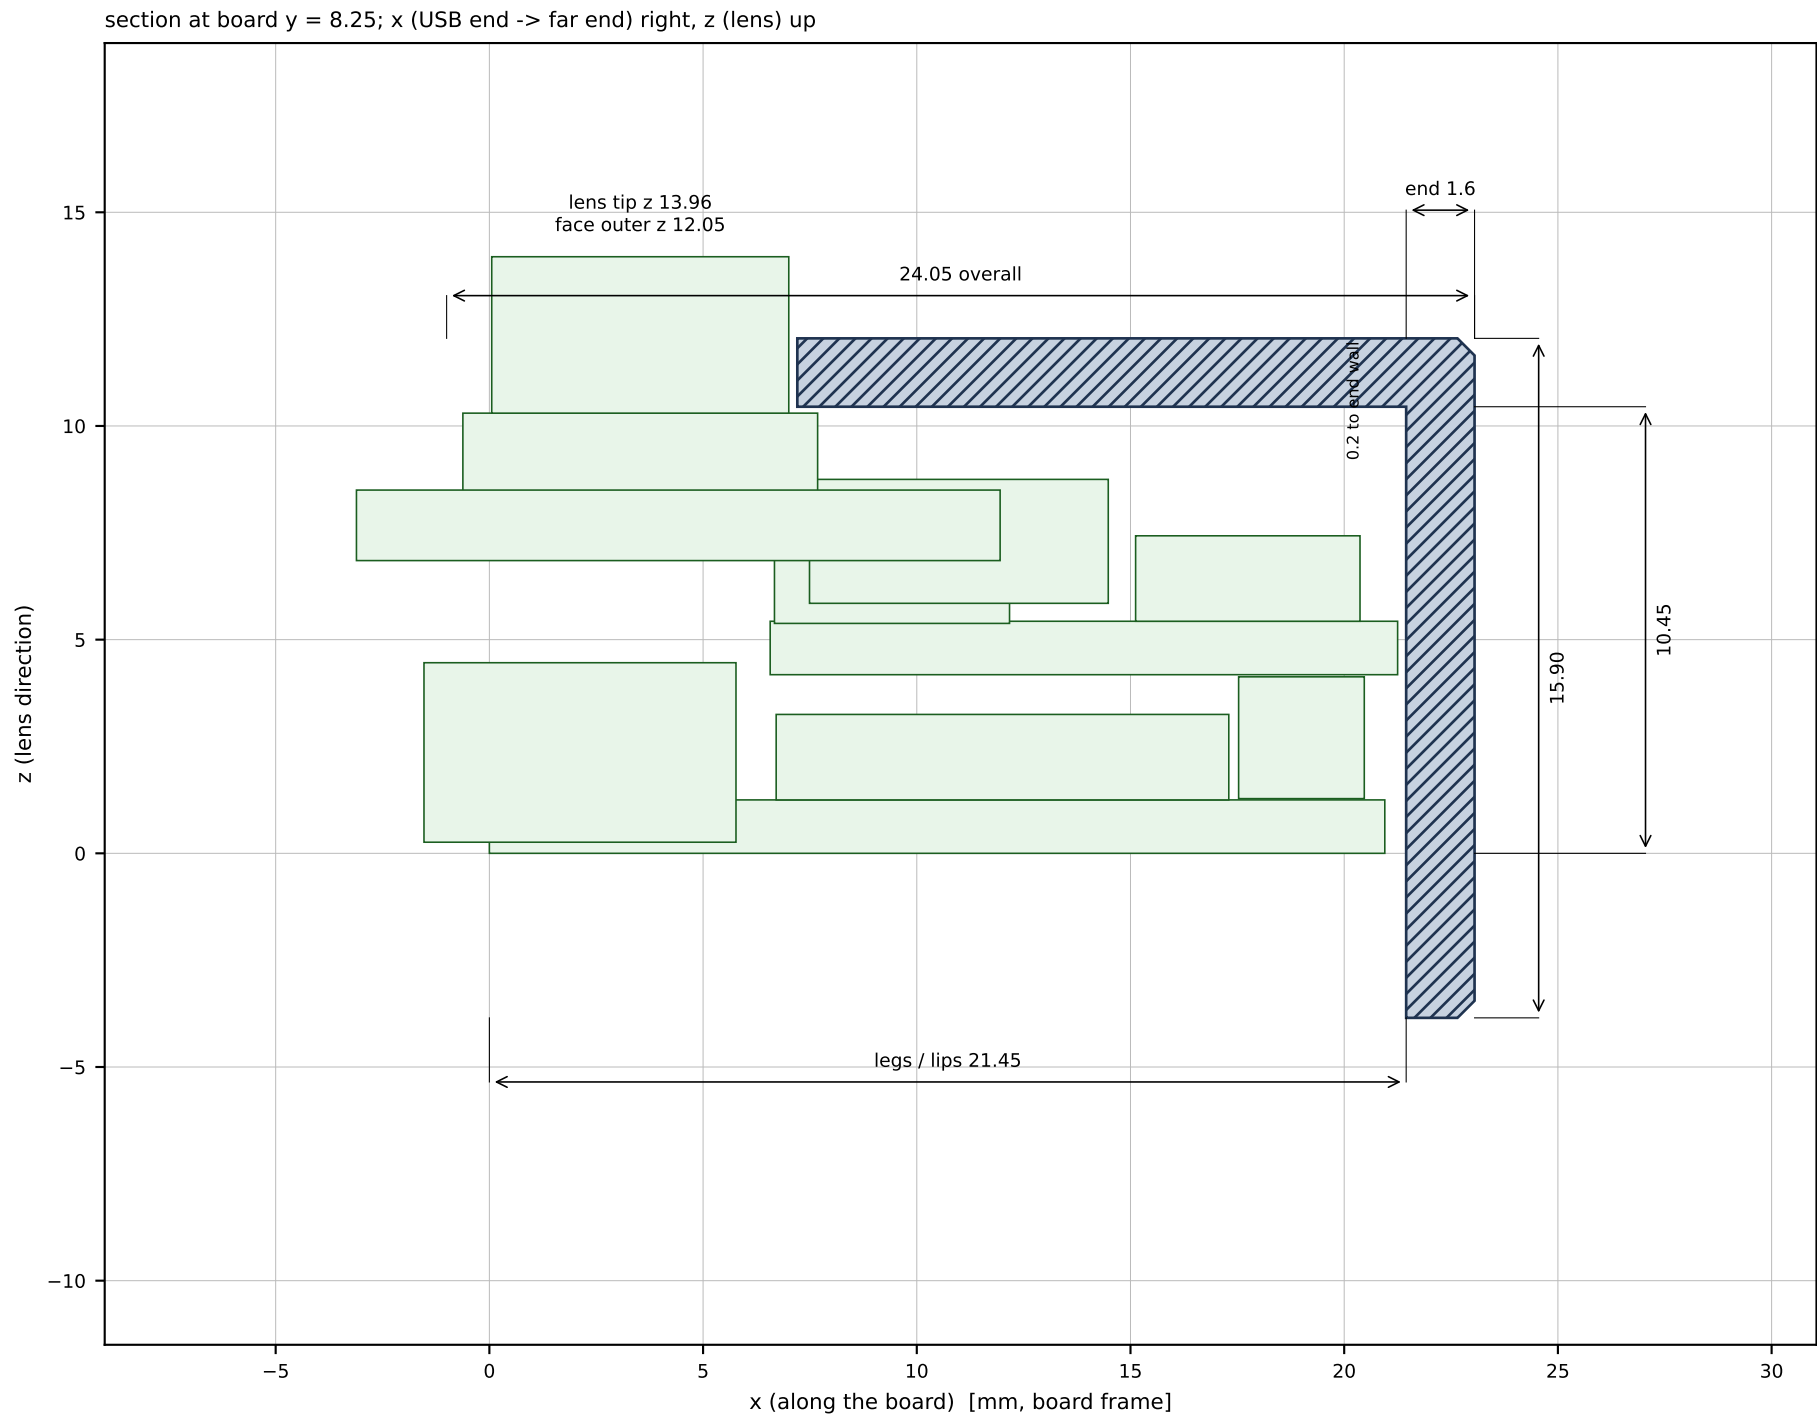


C. Along the header strip (y = 0.4): leg, ribs, header body, lip under it

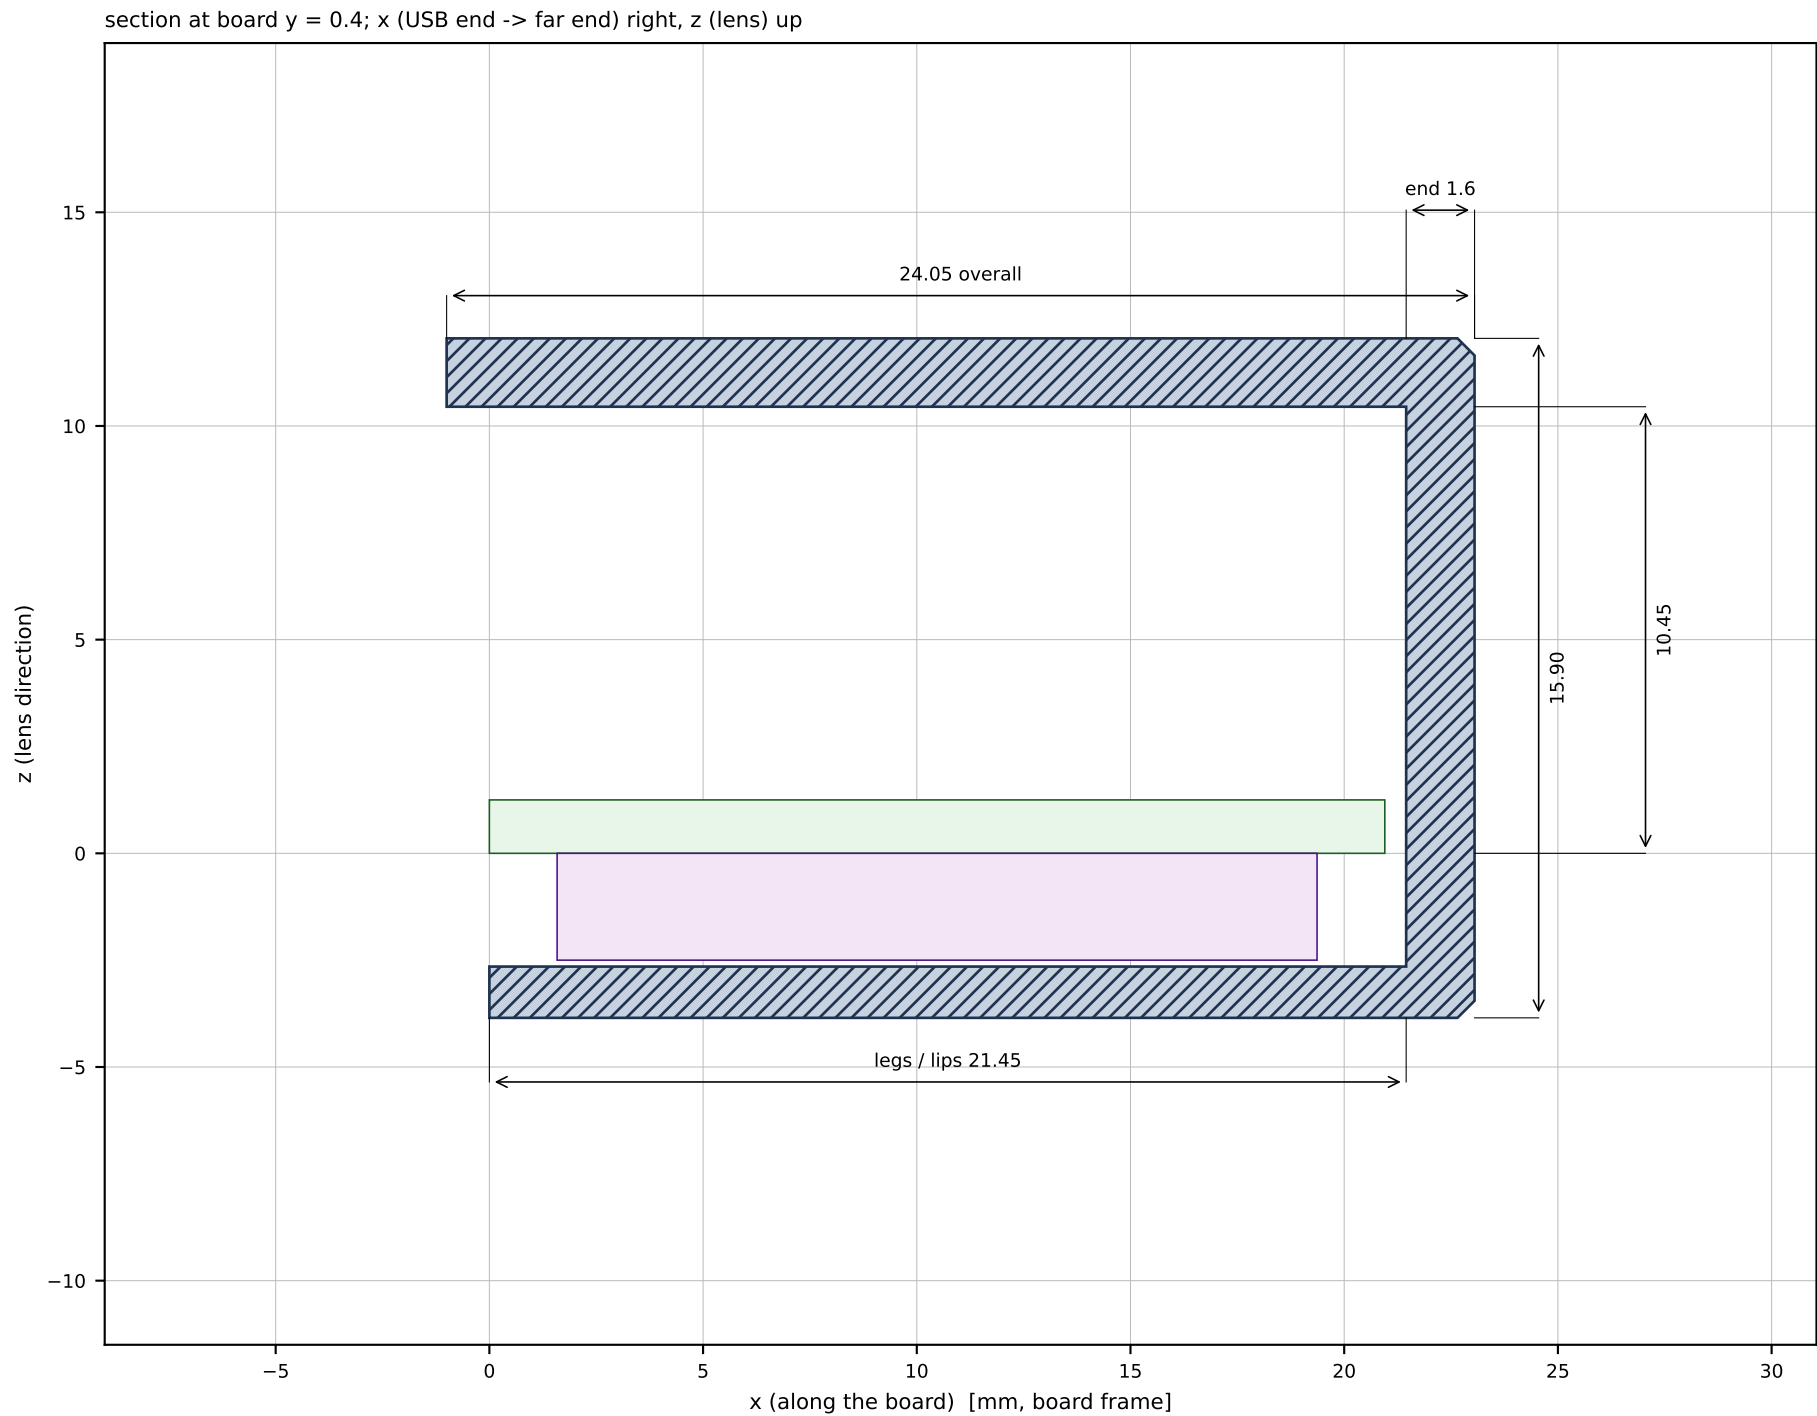


D. Through the -y leg (y = -2.0): coax window, ear

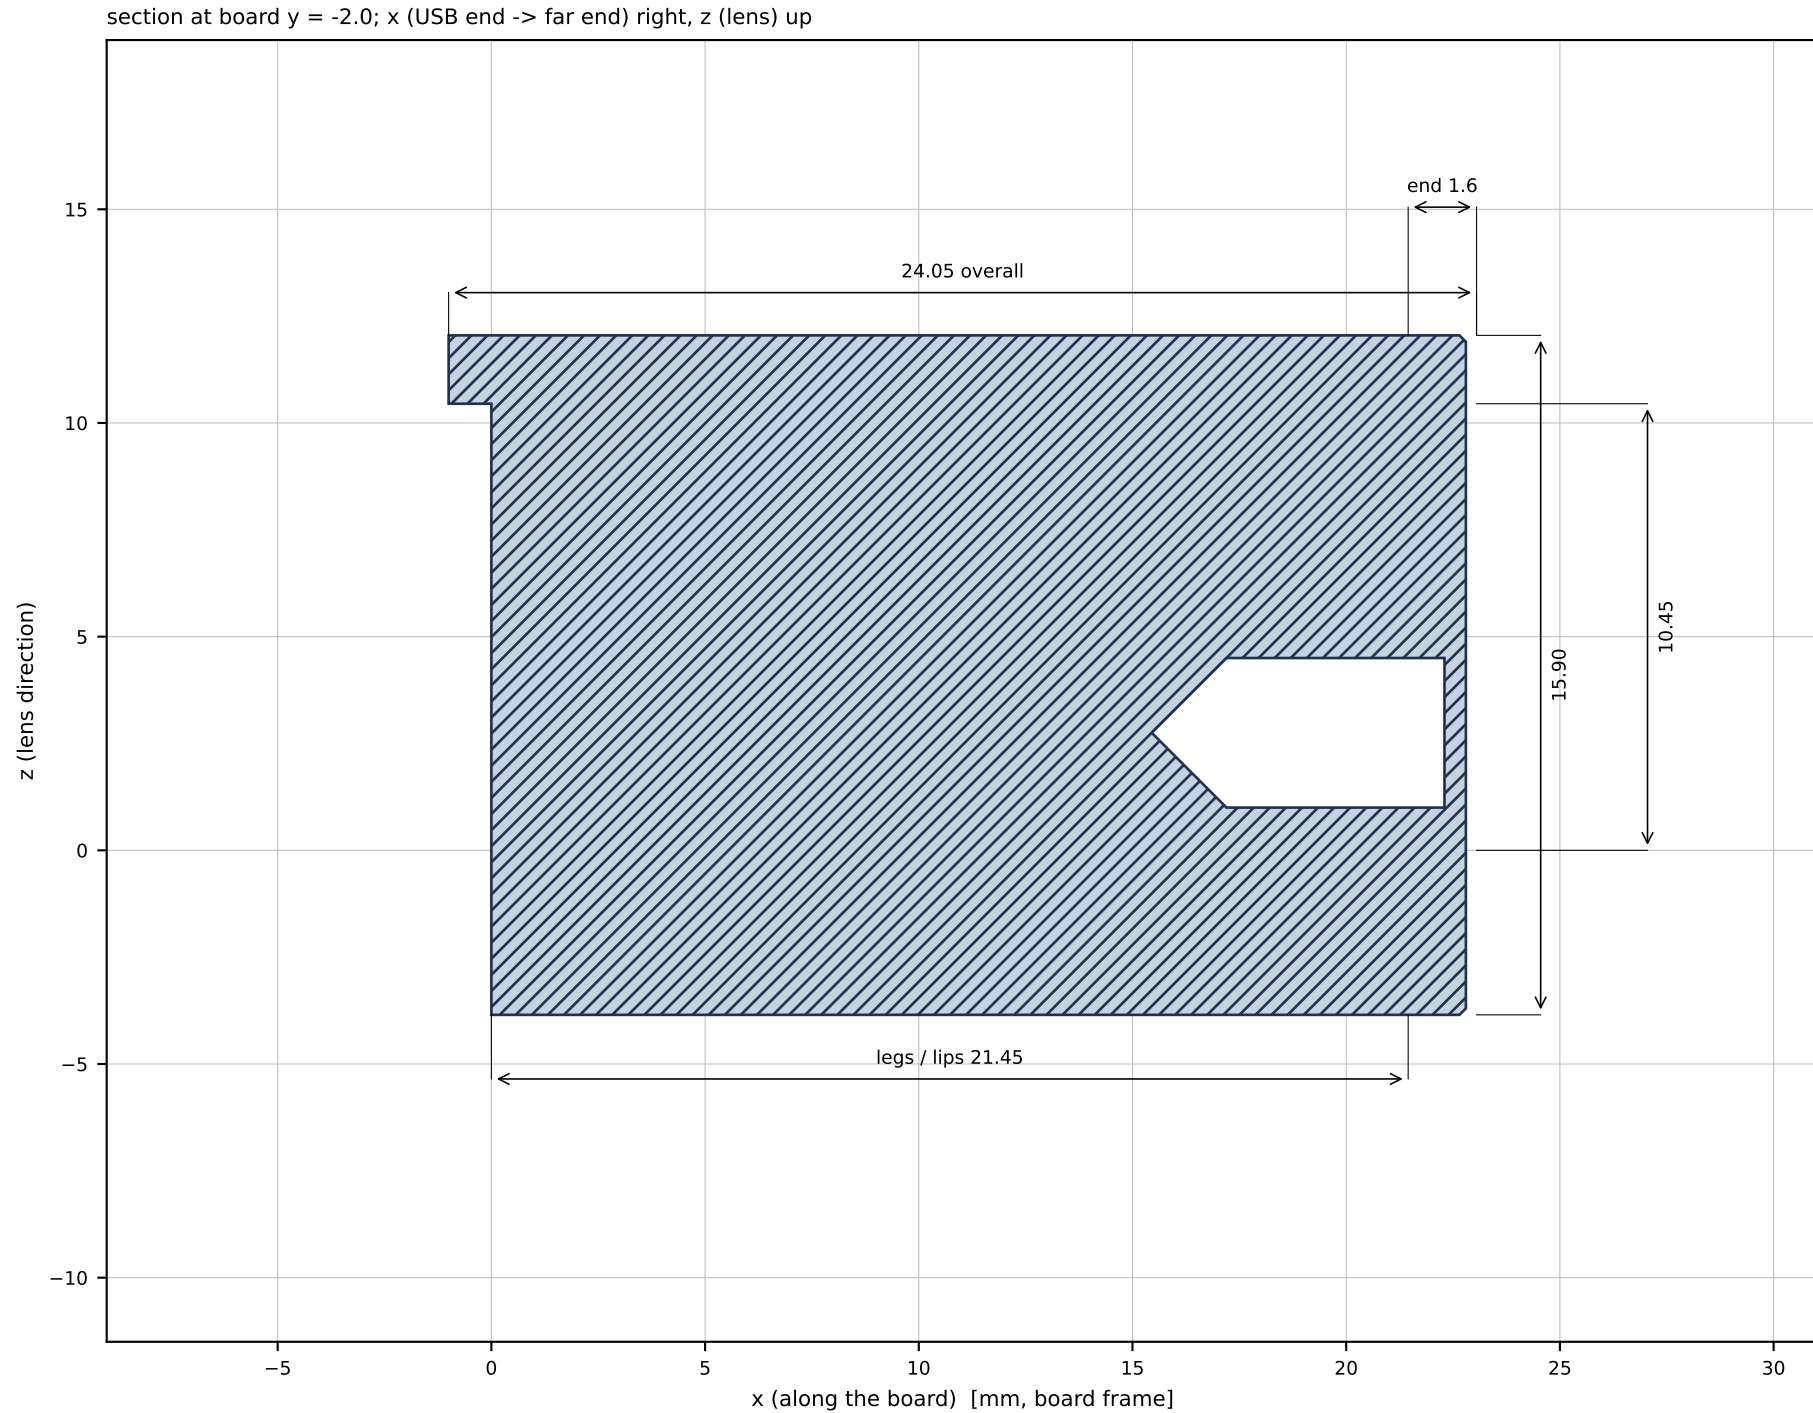


E. Plan through the lips ($z = -3.2$): lips under the header strips, pins between

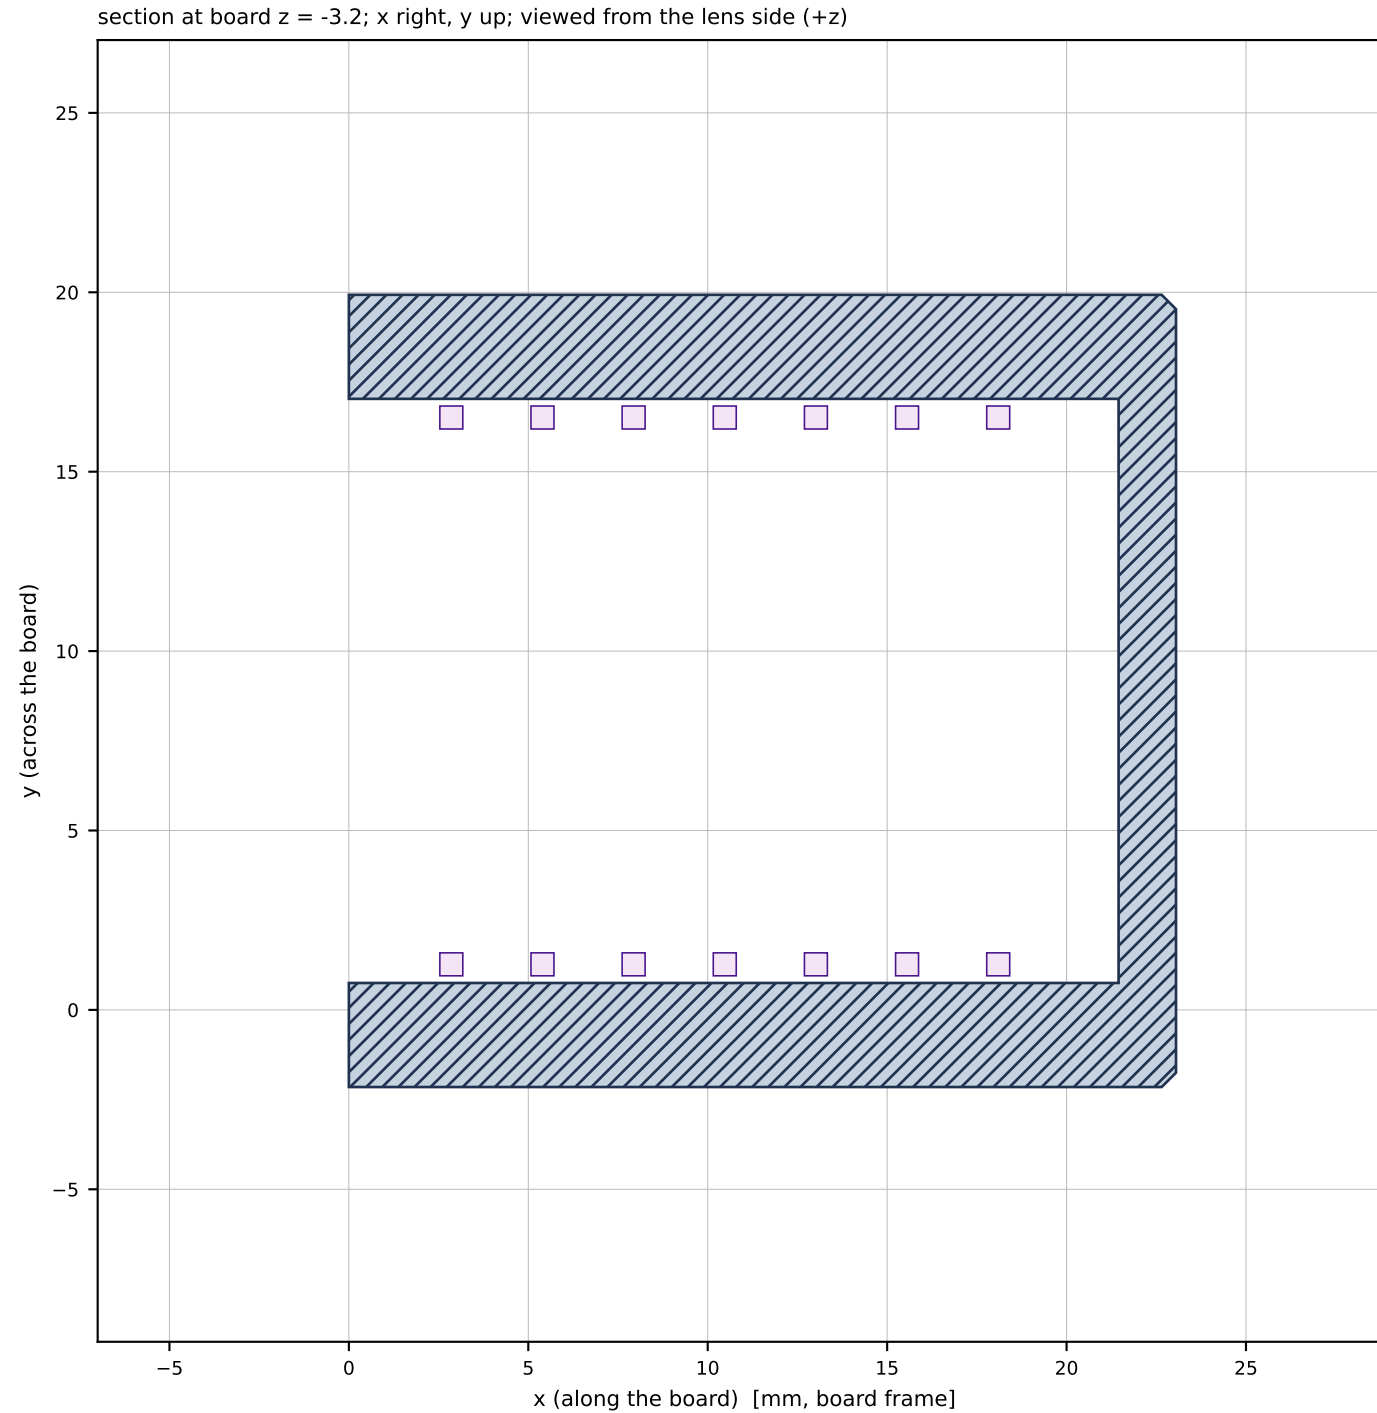

F. Plan through the PCB (z = 0.8): channel, grip ribs, end wall

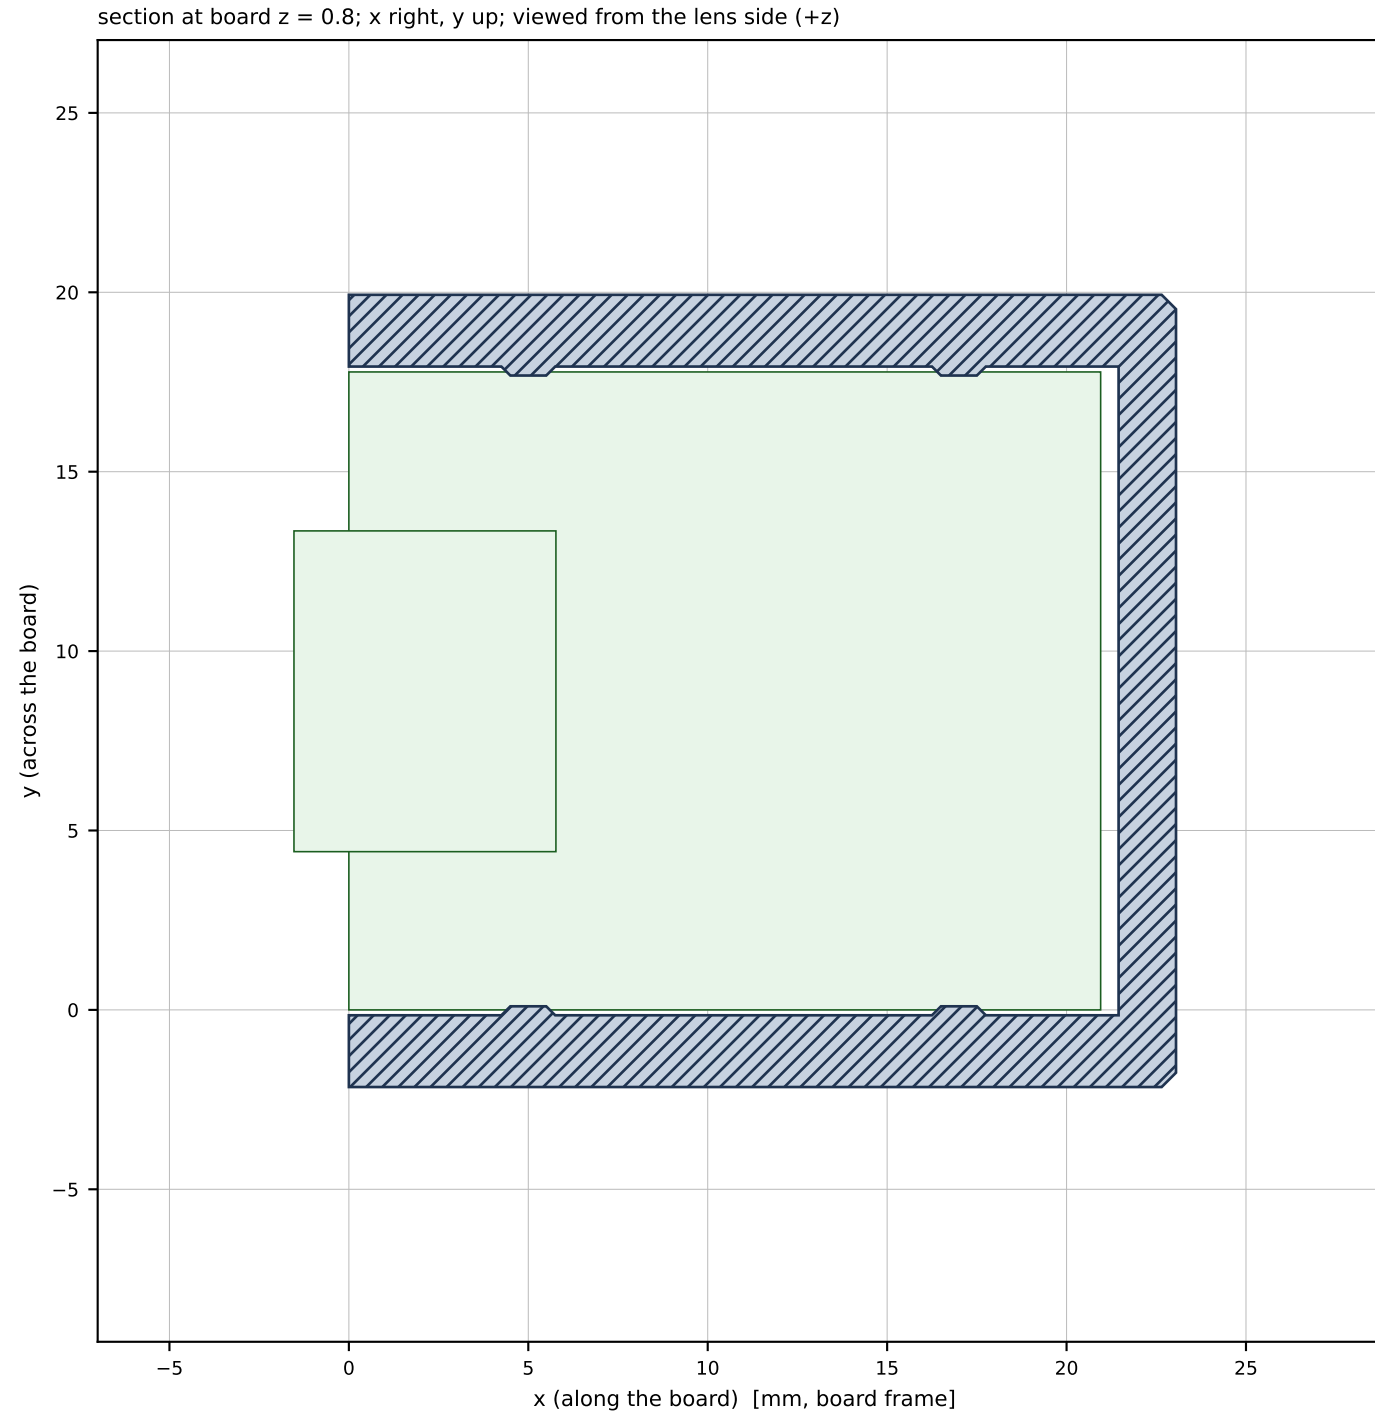

G. Plan through the front face ($z = 11$): keyhole, ears

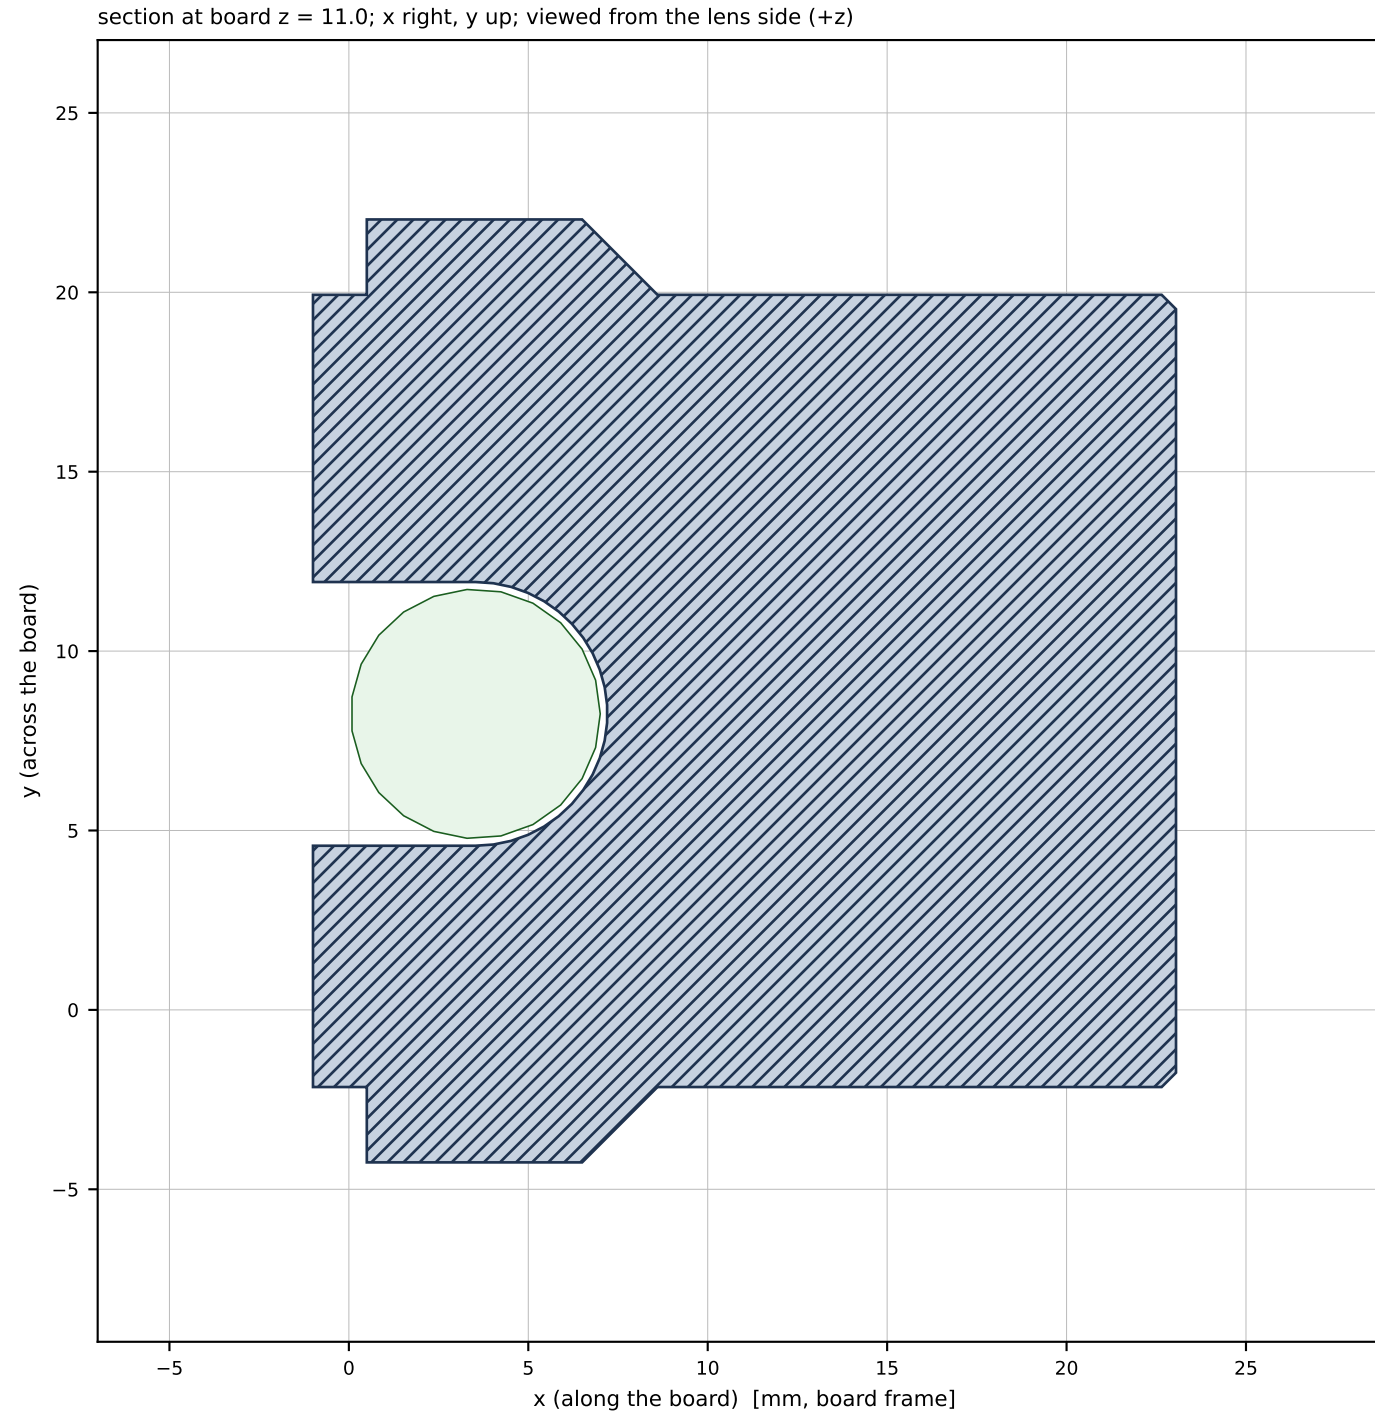

H. Plan just under the face ($z = 9$): sensor plate, card, flex, coax window

