




A. Across the channel through the sensor plate and grip ribs (x = 5)

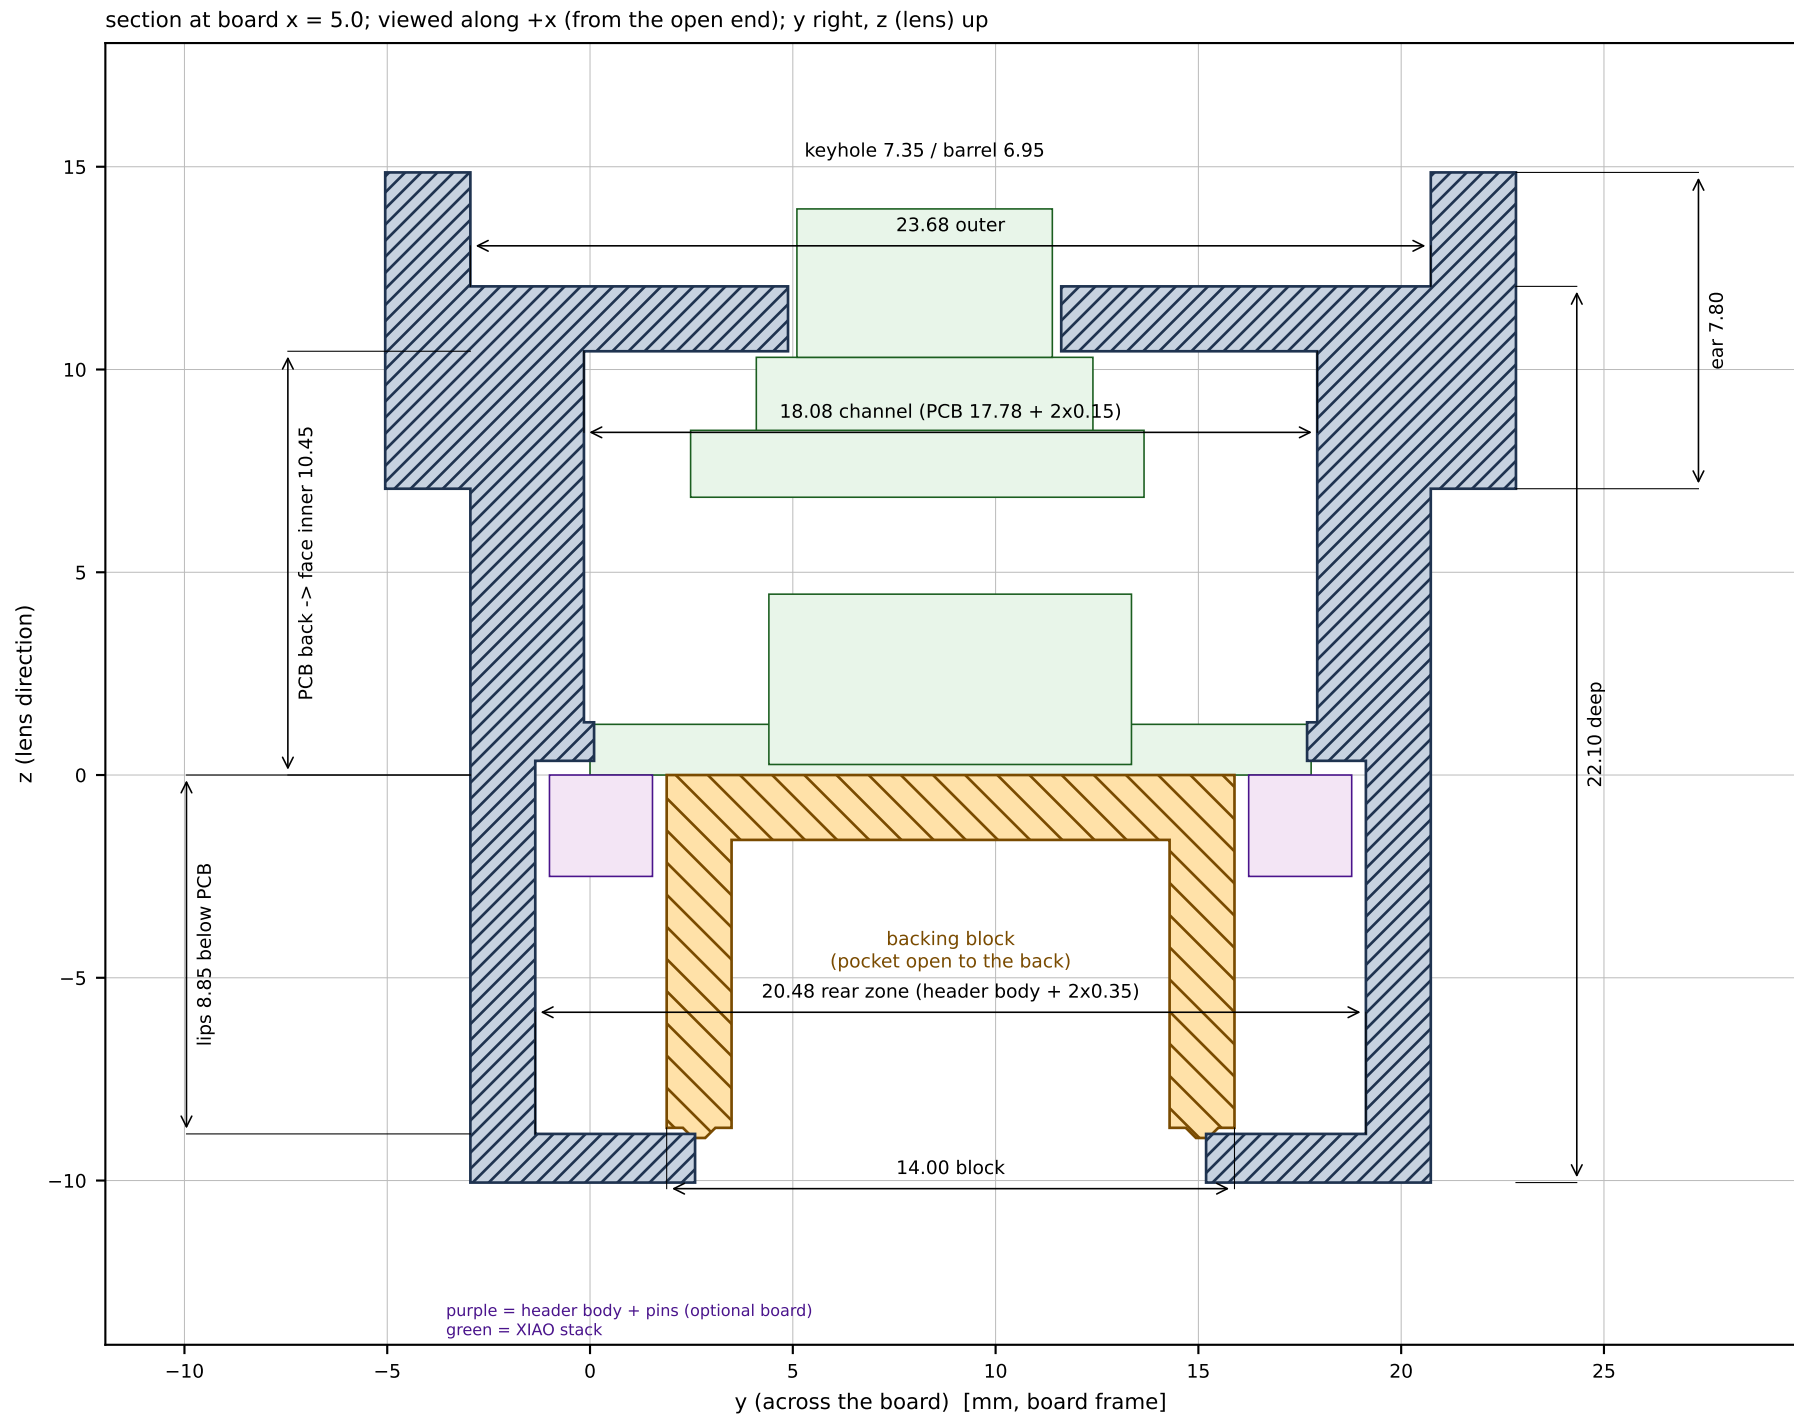


A2. Across the channel through the SD socket / flex (x = 12)

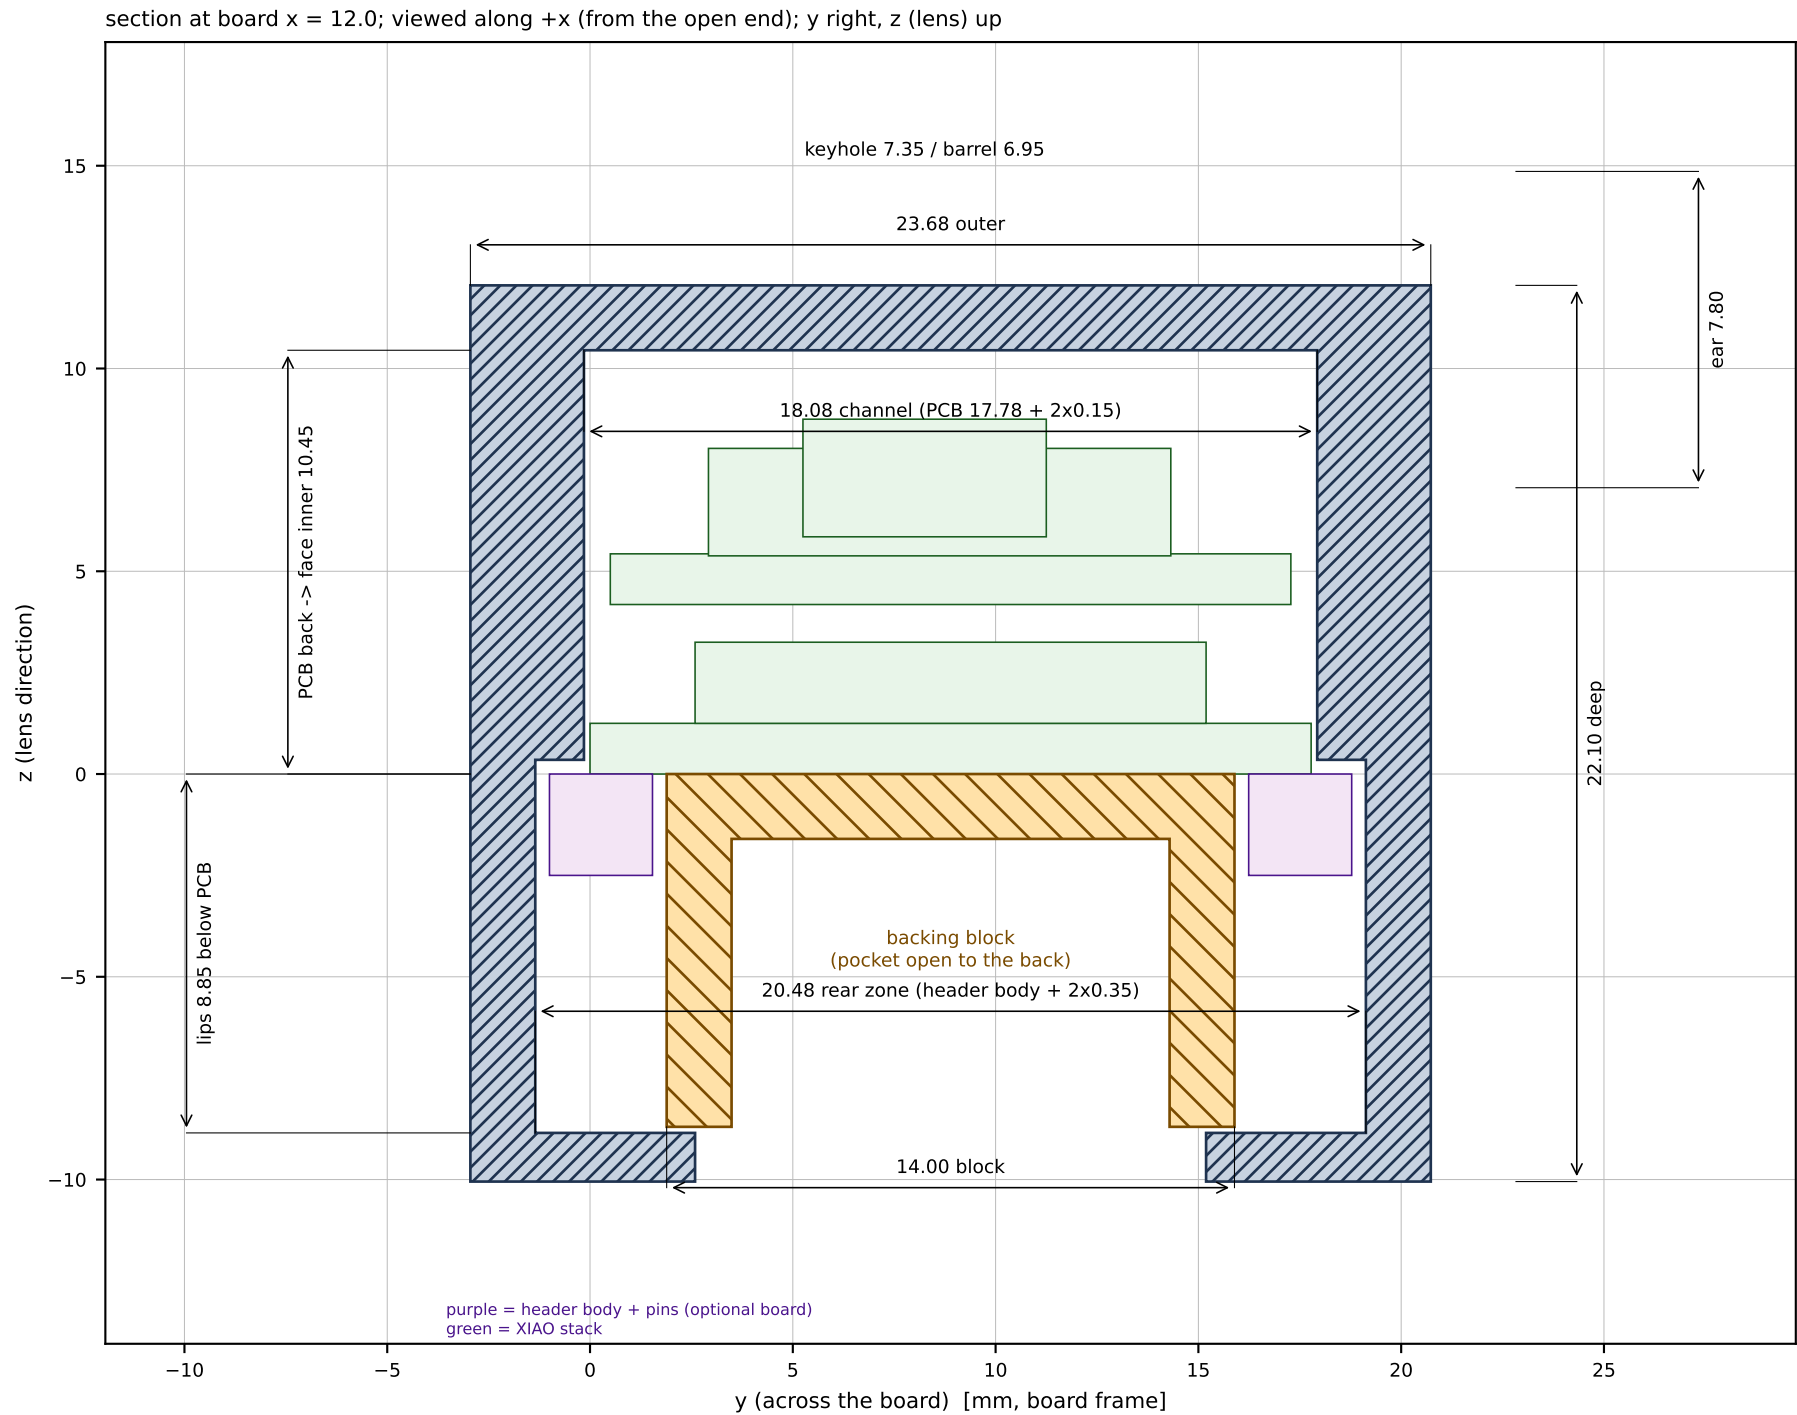


B. Along the lens axis ($y = 8.25$): face, keyhole, sensor plate, block, lips

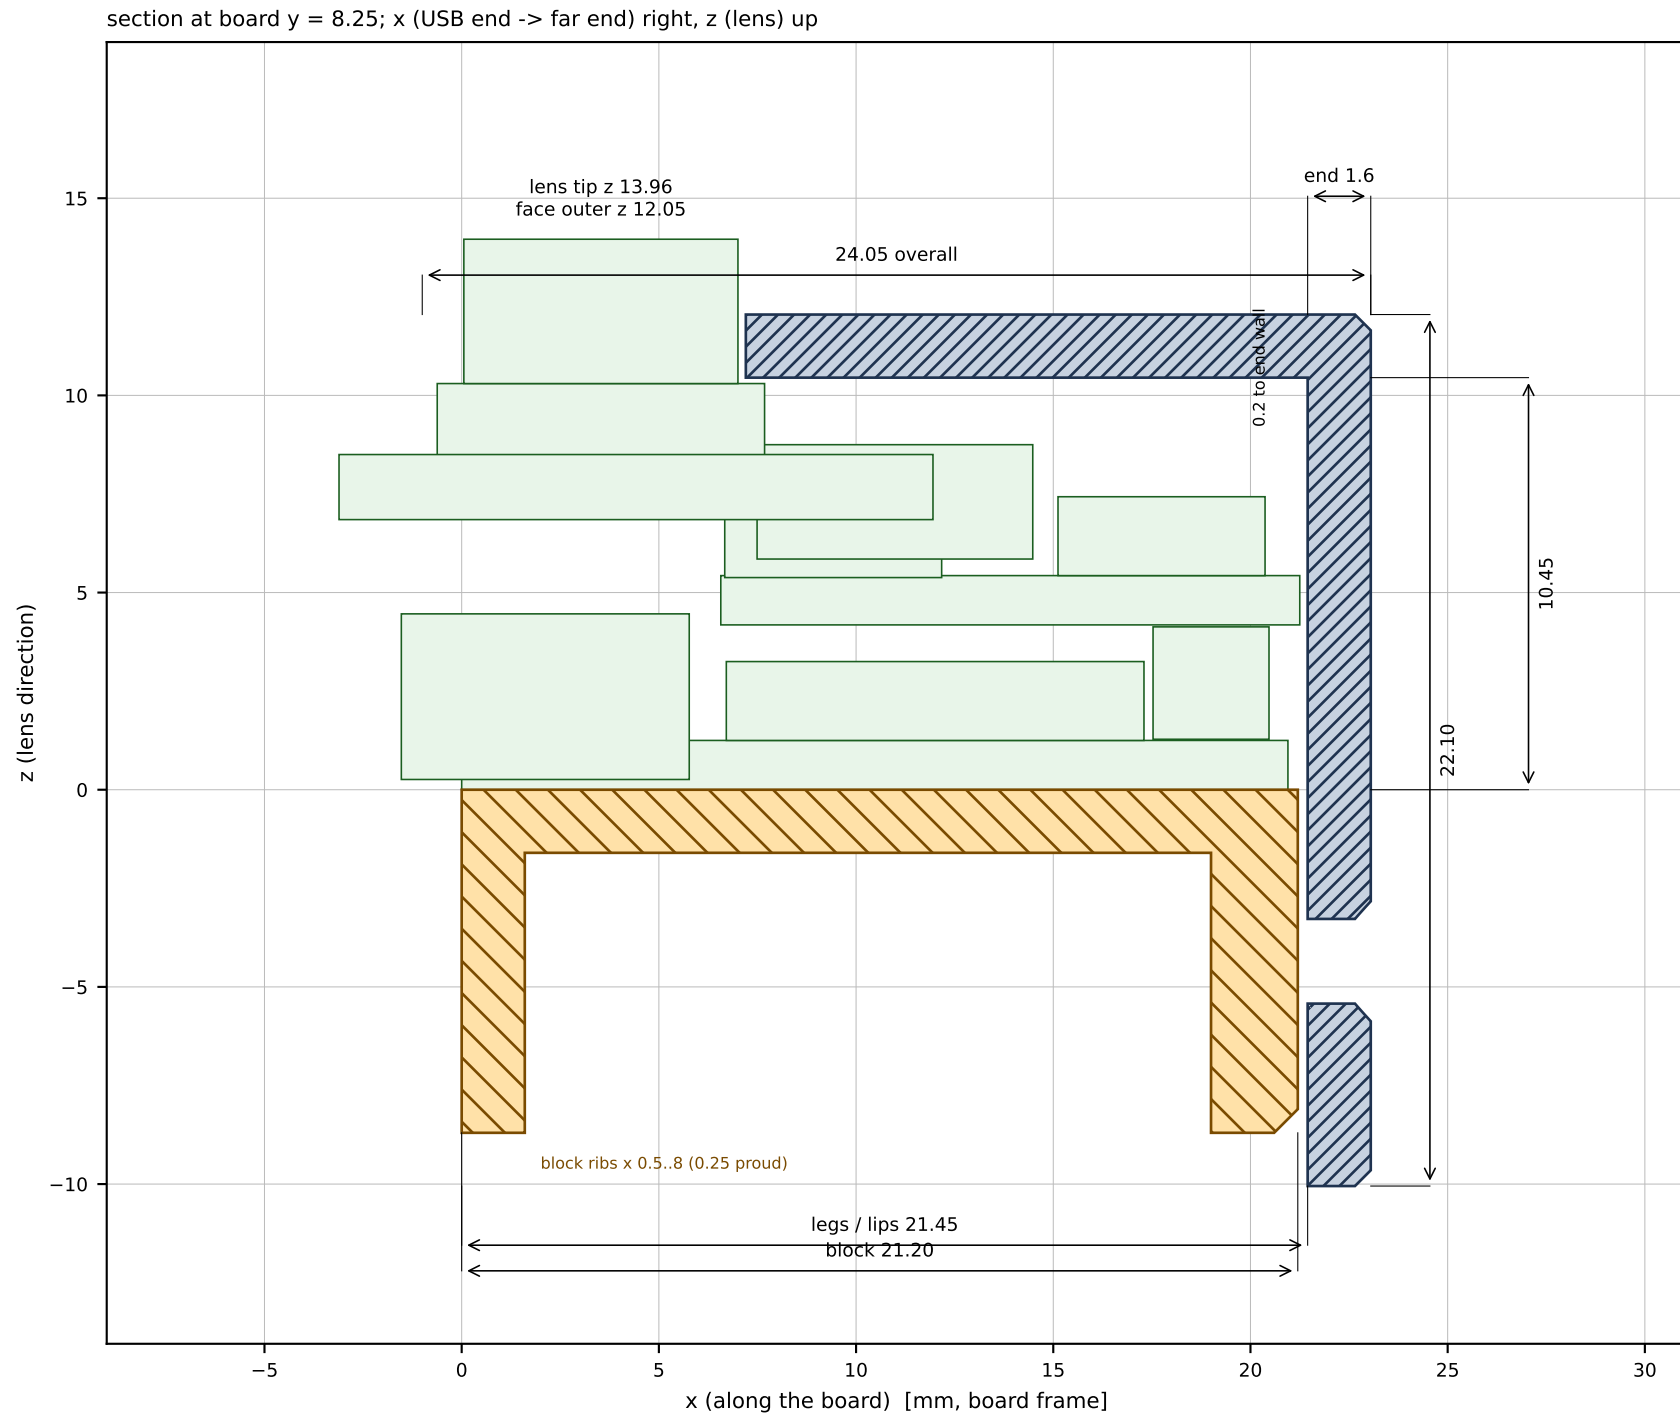


C. Along the header lane (y = 0.27): leg profile, ribs, header body/pins, lip

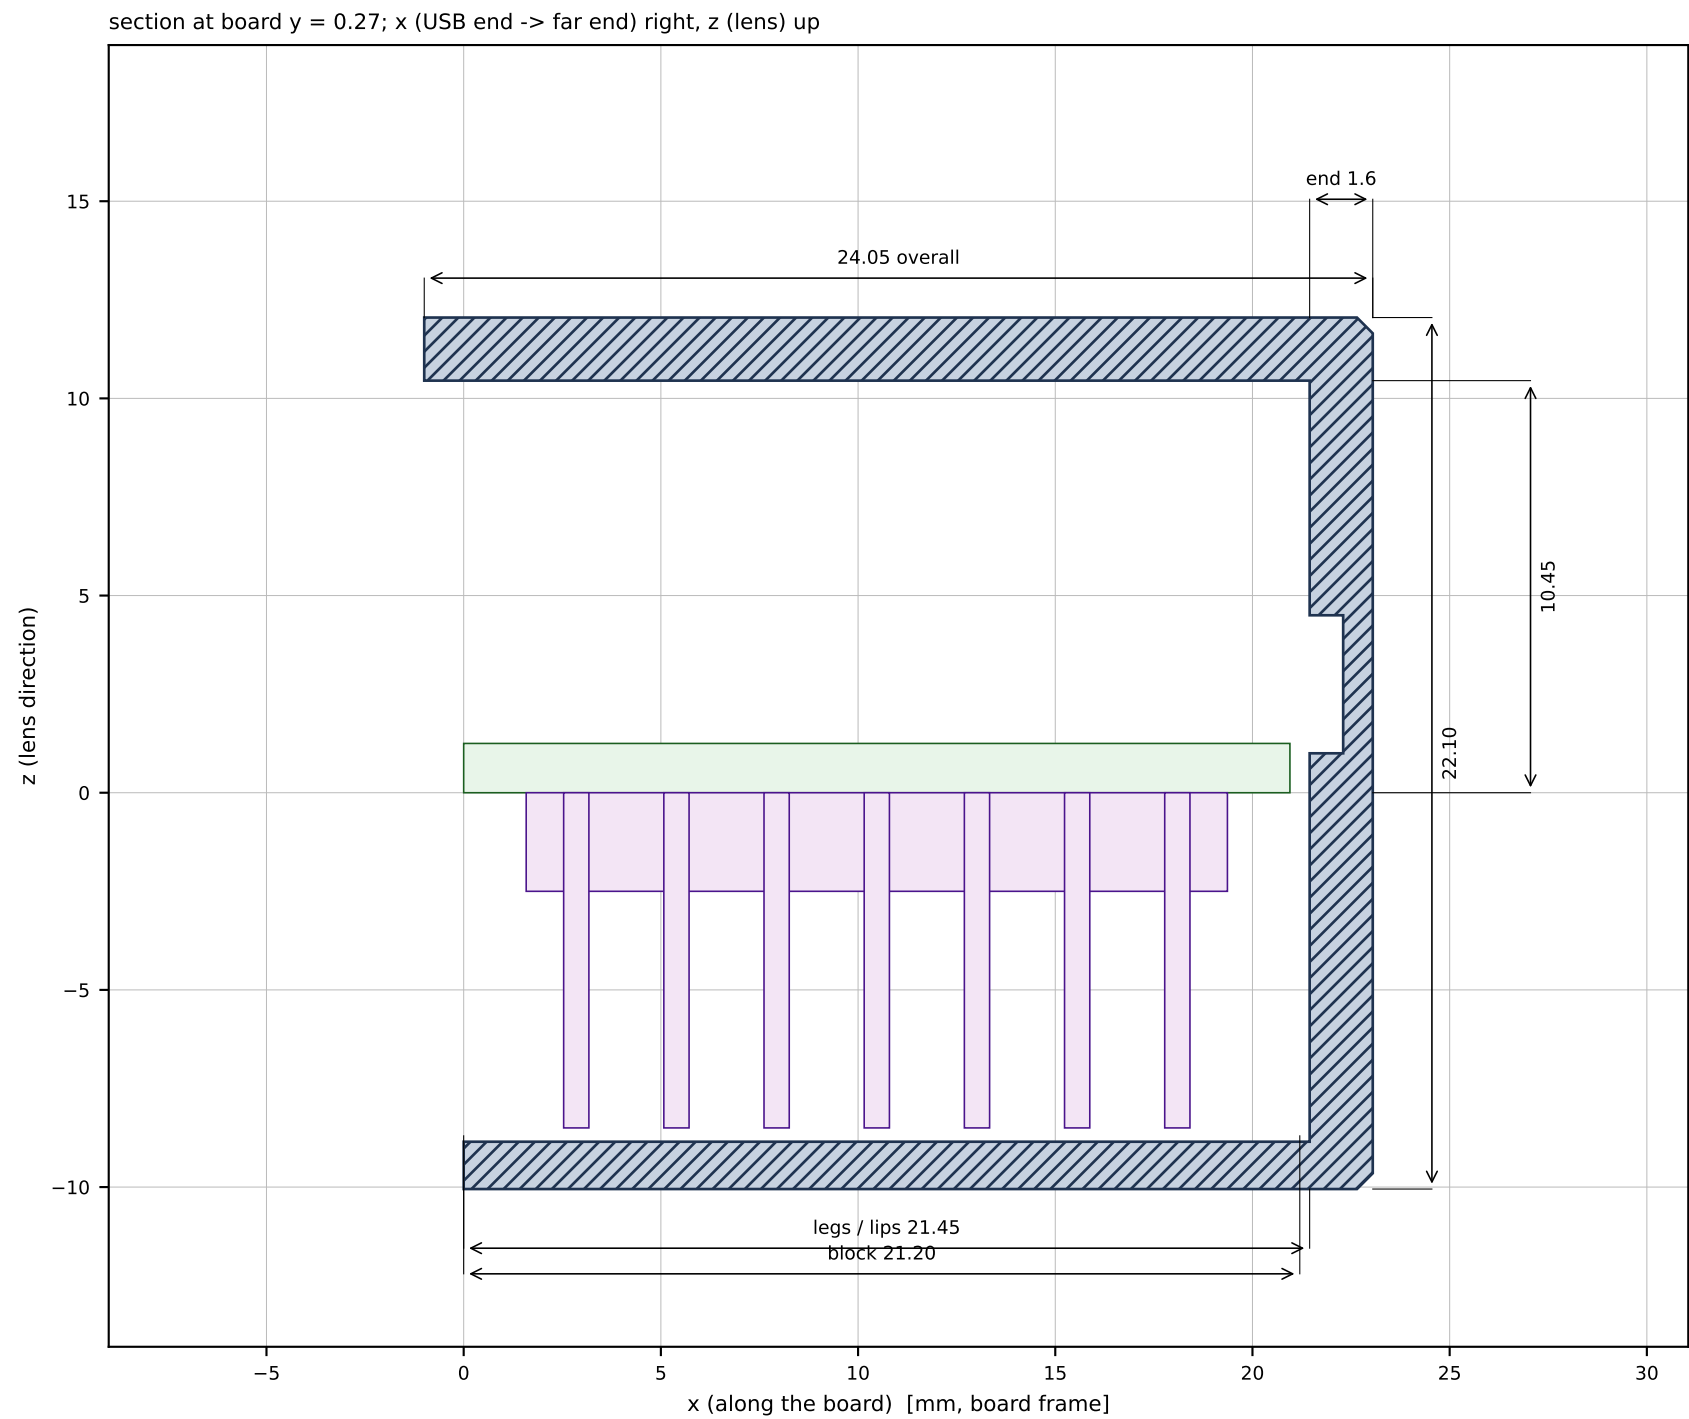


D. Through the -y leg (y = -2.0): coax window, ear

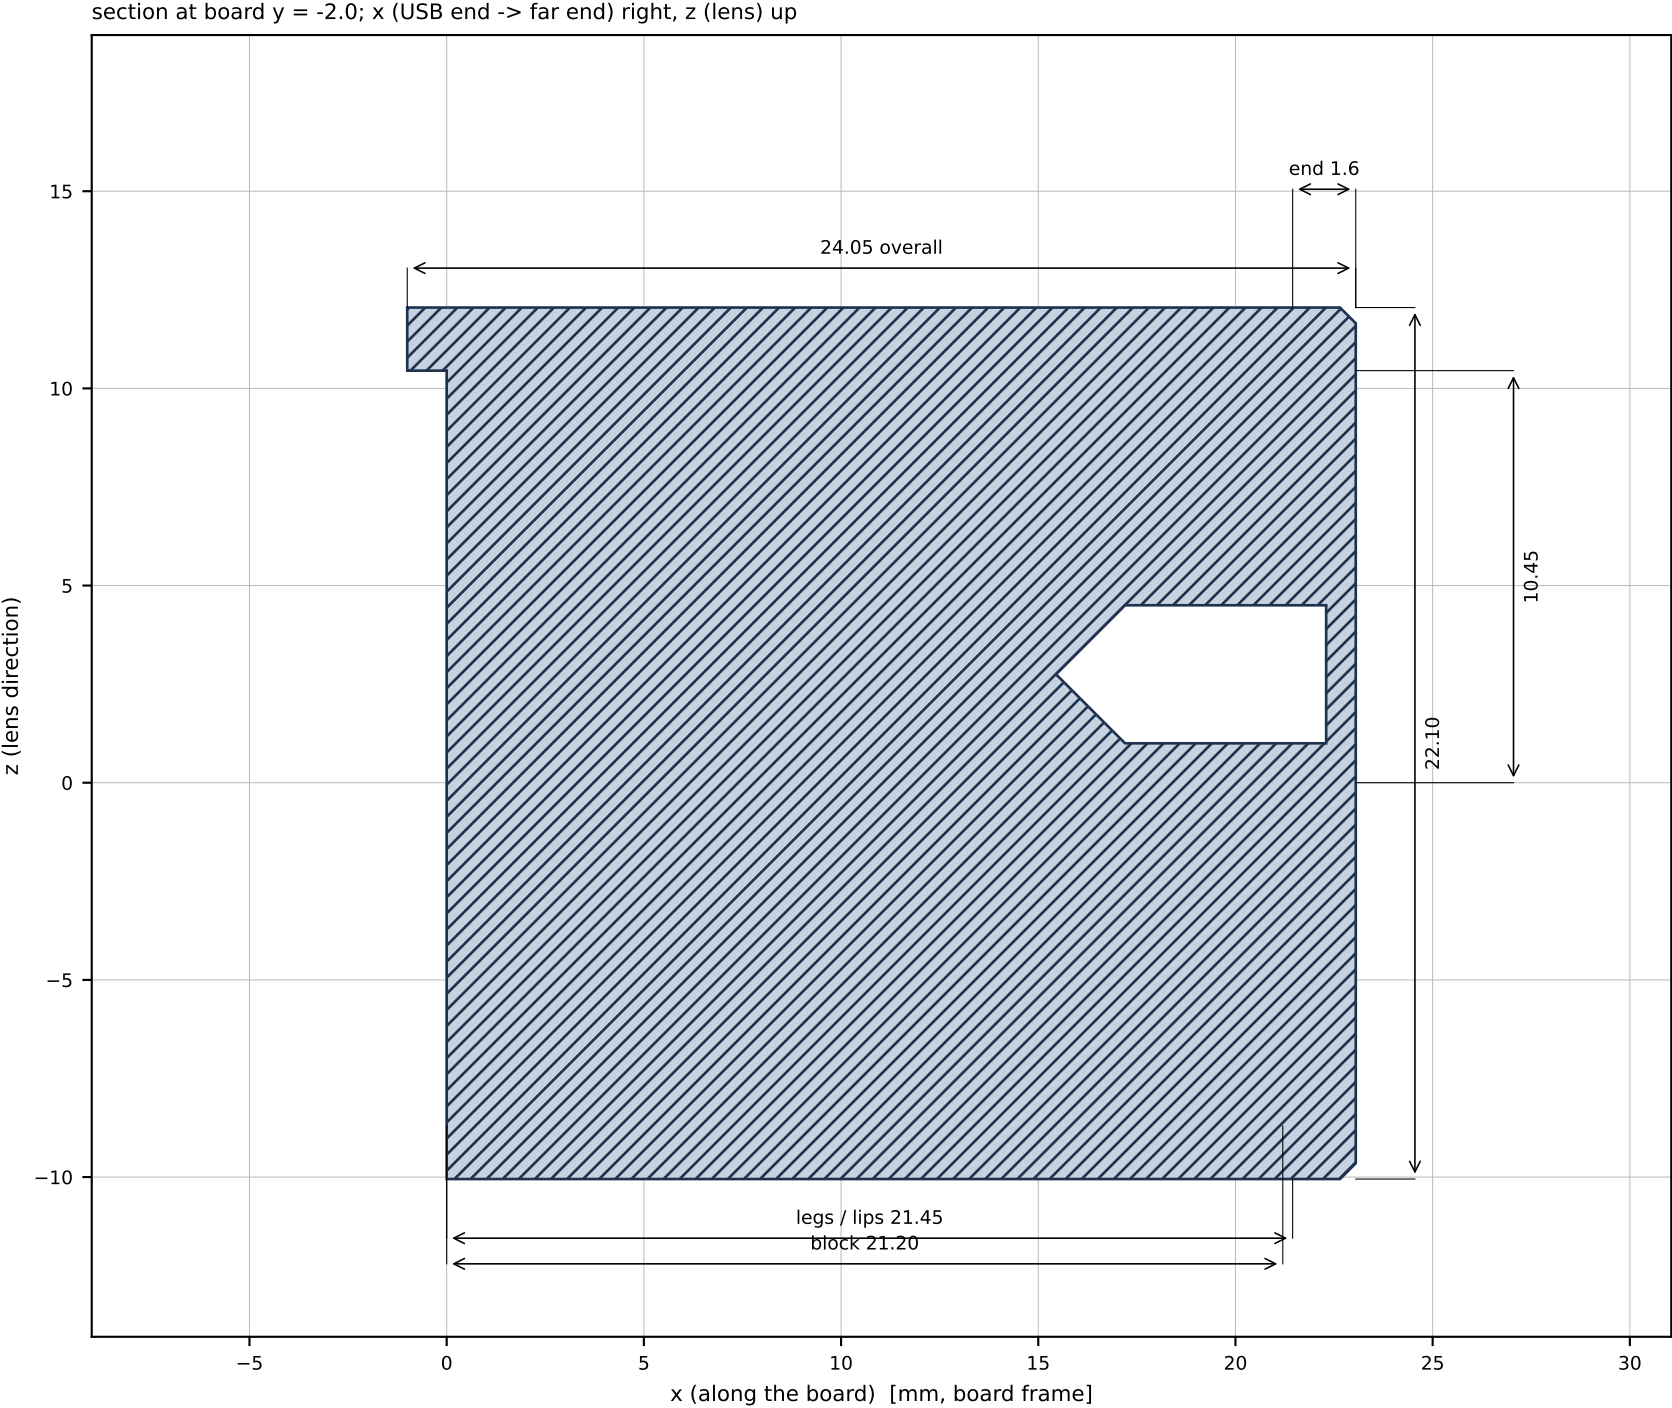


E. Plan through the block and lips (z = -5): block between the header lanes, lips at the legs

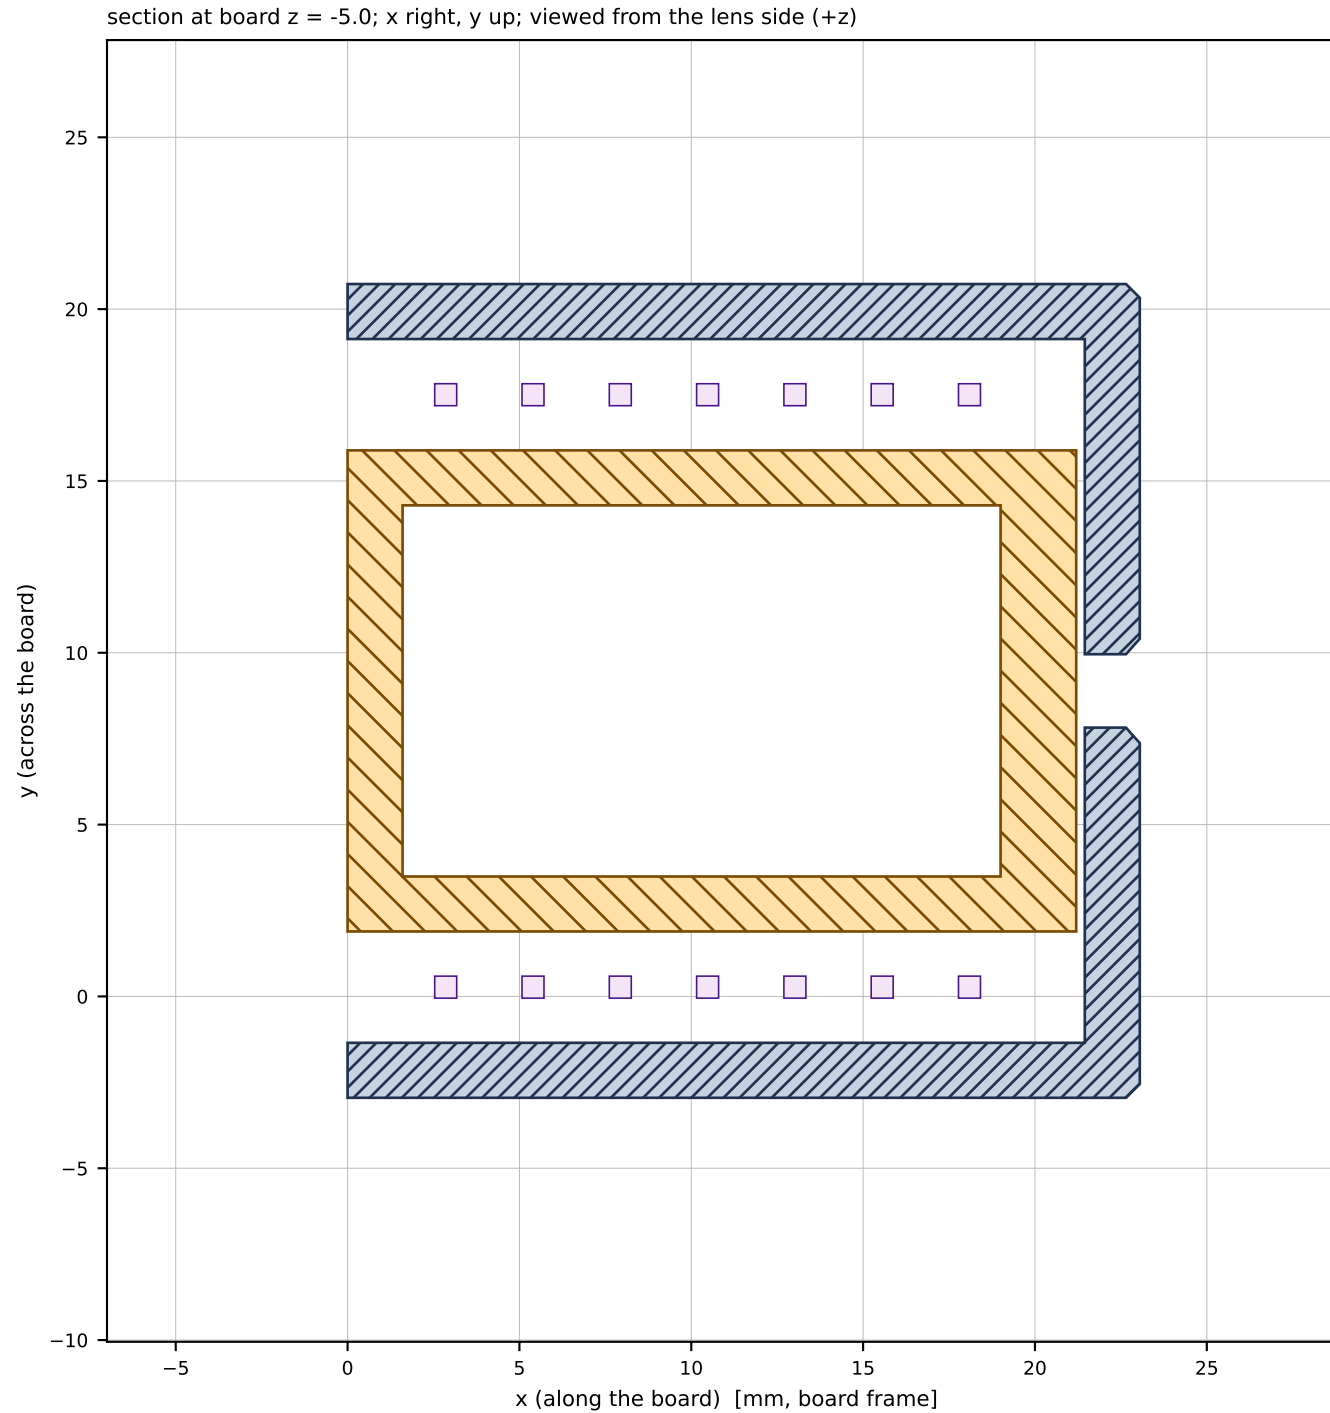

F. Plan through the PCB (z = 0.8): channel, grip ribs, end wall

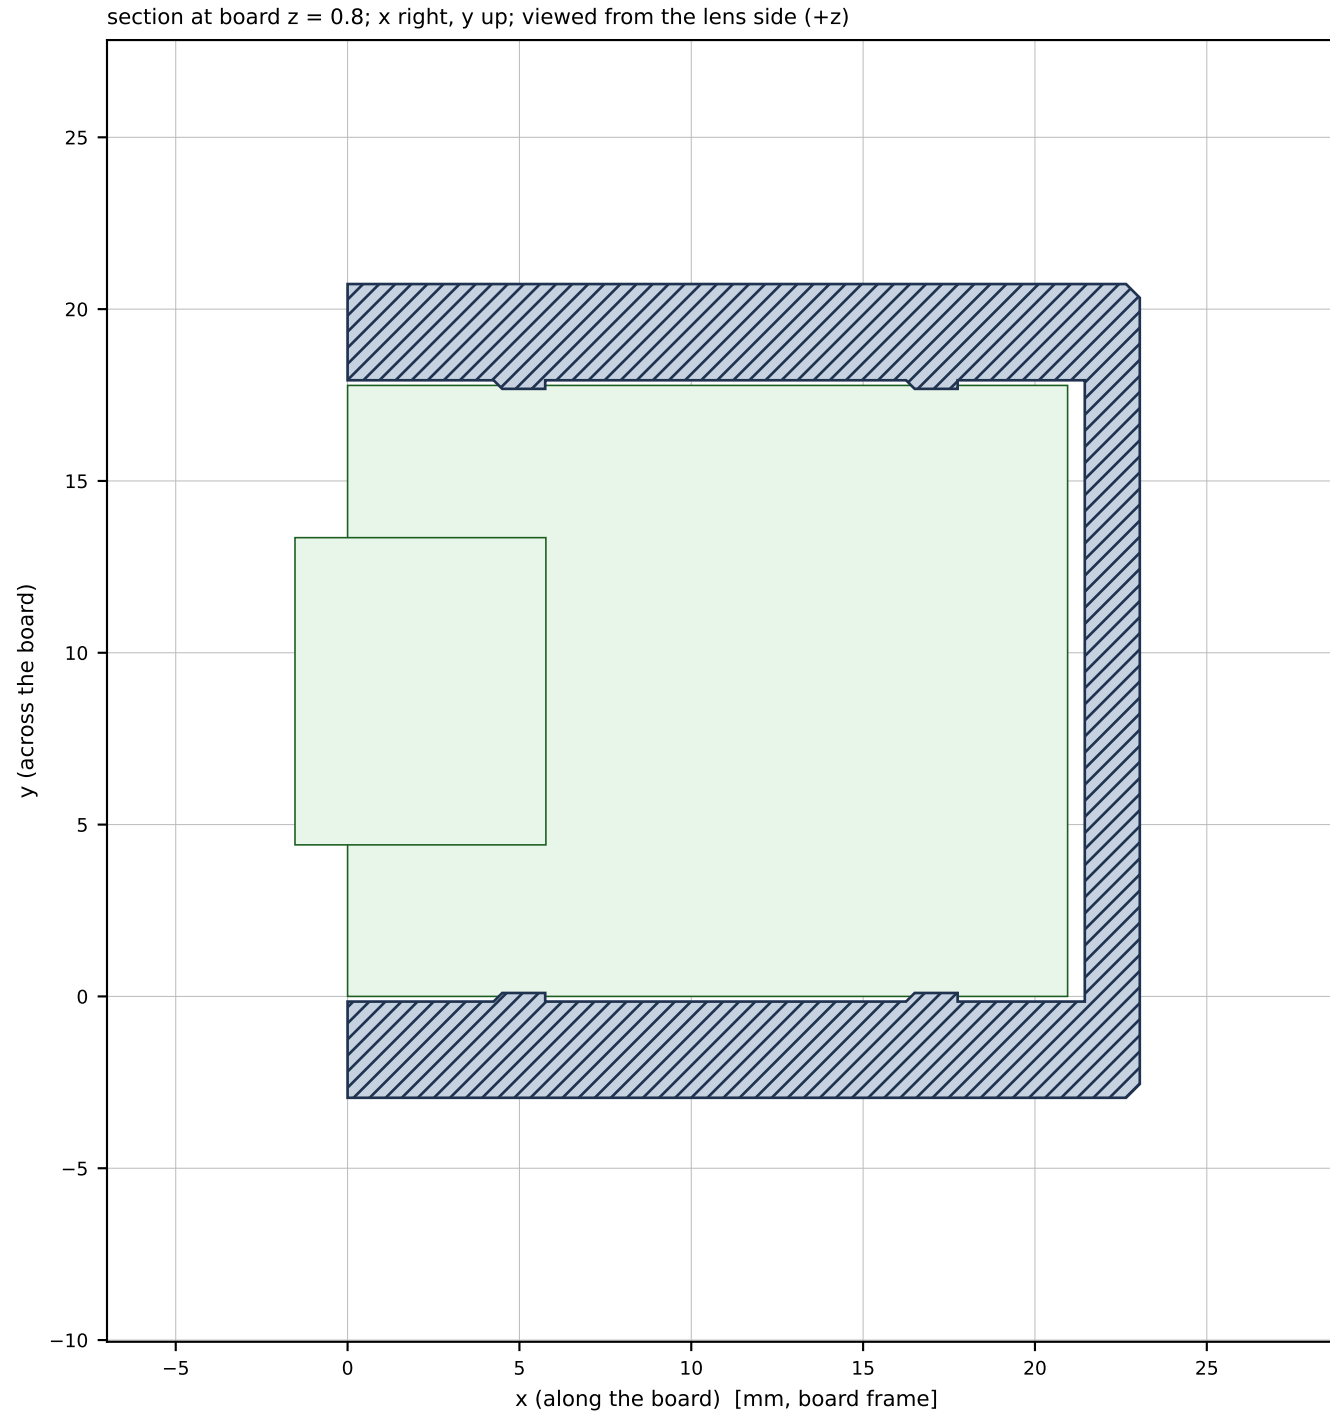

G. Plan through the front face ($z = 11$): keyhole, ears

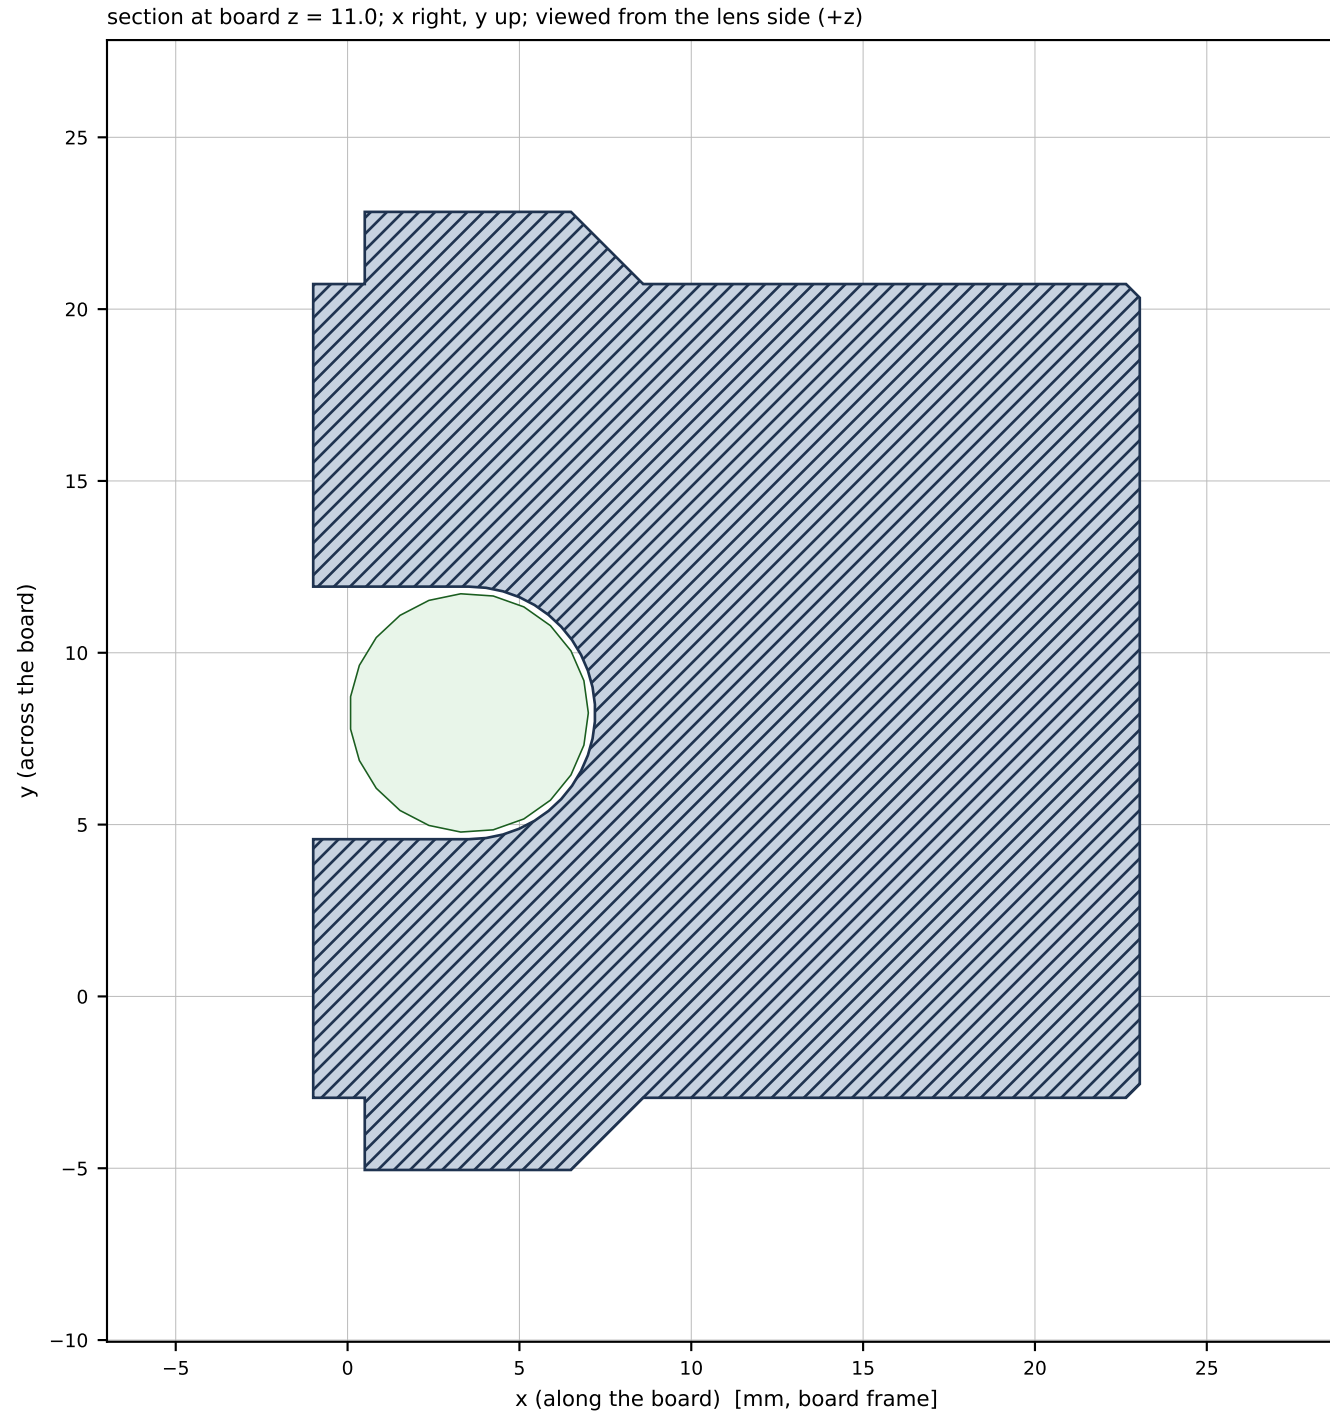

H. Plan just under the face ($z = 9$): sensor plate, card, flex, coax window

