

burda "easy fashion" E 988 Download patterns

A Tunic, B Dress

Burda sizes 34, 36, 38, 40, 42, 44

Length from waist: A, 48 cm (19");
B, 108 cm (42½")

Fabric and notions

11 A, Tunic on page 39

Silk, 140 cm (55") wide: sizes 34, 36: 2.05 m (2¼ yds); sizes 38, 40: 2.10 m (2⅜ yds); sizes 42, 44: 2.15 m (2⅜ yds).

0.50 m (⅝ yd) Vilene/Pellon G 785, 90 cm (36") wide.

Elastic, 7 mm (¼") wide, approx. 0.65 m (26").

7 small, fabric-covered buttons. 3 small sew-on snap fasteners. Sewing thread.

Approx. 40 large and 40 smaller sew-on "gems".

11 B, Dress on page 18

Fabric I, crepe georgette (patchwork print), 135 cm (53") wide: 2.90 m (3¼ yds) for all sizes;

Fabric II, crepe georgette (zebra print),

135 cm (53") wide: 0.45 m (½ yd);

Fabric III, crepe georgette (floral print),

140 cm (55") wide: 0.40 m (½ yd).

0.50 m (⅝ yd) Vilene/Pellon G 785, 90 cm (36") wide.

7 small, fabric-covered buttons. 3 small sew-on snap fasteners. Sewing thread.

Recommended fabric: Lightweight dress fabrics.

Printing paper pattern (for DIN A / 8¼ x 11½ inch paper)

The pattern pieces are printed on 32 sheets, each framed by a thin line. Wait until all sheets have been printed. Lay the sheets in the correct positions (see extra sheet with overview of printed sheets). Cut each sheet along the thin lines at the top and right edges. Begin with the lower left sheet and glue all sheets together, exactly on the thin lines. Now cut out the pattern pieces.

Important: Seam and hem allowances are not included on the pattern pieces.

Cut out the pattern pieces


All pattern information can be found in the pattern overview, above. Cut out the pattern pieces along the lines for your size, noting the

Cutting layouts

Sizes 34 to 44


A, Tunic

Silk, 140 cm wide

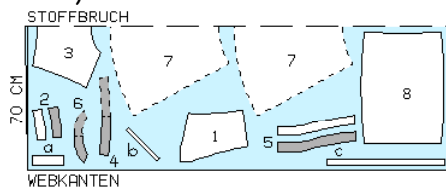

B, Dress

Fabric I, 135 cm wide

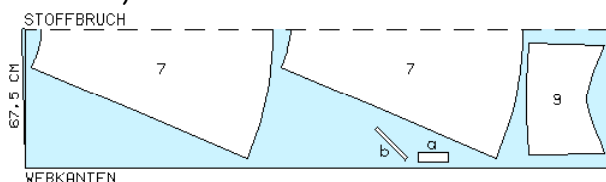

Copyright 2009 by Verlag Aenne Burda

A: Pieces 1 to 8,
B: Pieces 1 to 7 and 9,

Size 34 x x x x x x x x x x x x


Size 36 o o o o o o o o o o o o

Size 38 - - - - -

Size 40 - - - - -

Size 42 - - - - -

Size 44 - - - - -

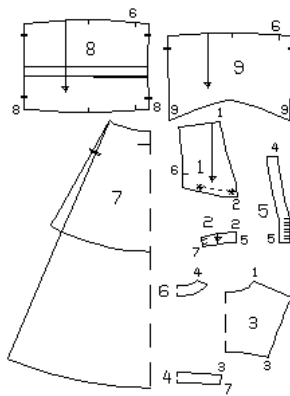

differing lines and markings for views A and B. The markings for the loops on pattern piece 5 apply for sizes 34 to 40. For sizes 42 to 44, make new markings as follows: Mark upper loop at seam mark (corner formed by front and neck edges). The marking for lowest loop applies for all sizes. Mark remaining loops, evenly spaced, between upper and lower loops.

Important: No pattern pieces are given for the loops, underlap, and facing strip for the casing (sleeve, view A). These pieces can be drawn directly on the fabric, following the measurements given under "Cutting".

Cutting

The cutting layouts below show how the pattern pieces should be laid on the fabric. Make sure that the straight grain line marked on each pattern piece lies parallel to the selvedges or the fold of the fabric.



Tunic, view A:

Silk:

- | | |
|---------------------------|----|
| 1 Front | 2x |
| 2 Front waistband | 4x |
| 3 Back, on fold | 1x |
| 4 Back waistband, on fold | 2x |
| 5 Front neck band | 4x |
| 6 Back neck band, on fold | 2x |
| 7 Skirt, on fold | 2x |
| 8 Sleeve | 2x |

- a) Left slit underlap (skirt) 17 cm (6¾") long, 6 cm (2½") wide (including allowances),
b) Bias strip for 7 button loops, a total of 21 cm (8¼") long, 2 cm (¾") wide (incl. allowances),

B, Dress, Fabric II, 135 cm wide

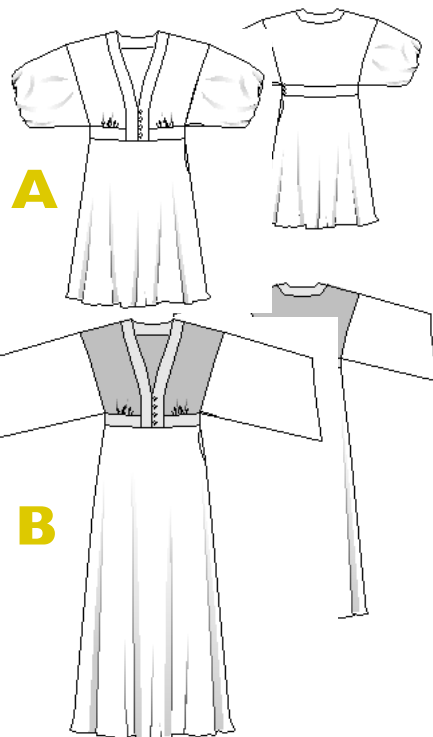

- c) 2 facing strips for casings on sleeves, size 34: 56 cm (22¼"); sizes 36, 38: 57 cm (22½"); size 40: 58 cm (23"); size 42: 59 cm (23¼"); size 44: 60 cm (23¾") long, all 3 cm (1¼") wide, (including allowances).

Dress, view B:

Fabric I, patchwork print:

- | | |
|------------------|----|
| 7 Skirt, on fold | 2x |
| 9 Sleeve | 2x |

- a) Left slit underlap (skirt), see view A,
b) Bias strip for 7 button loops, see view A,

Fabric II, zebra print:

- | | |
|---------------------------|----|
| 2 Front waistband | 4x |
| 4 Back waistband, on fold | 2x |
| 5 Front neck band | 4x |
| 6 Back neck band, on fold | 2x |

Fabric III, floral print:

- | | |
|-----------------|----|
| 1 Front | 2x |
| 3 Back, on fold | 1x |


Seam and hem allowances

Use a ruler and tailor's chalk to mark the following seam and hem allowances on the fabric, along the edges of the paper pattern pieces: 1.5 cm (⅝") for seam and hem allowances. Cut out fabric pieces along these lines.

Interfacing

Pieces which are shaded gray in the cutting layout must also be cut from interfacing, along the same straight grain as the fabric pieces. Iron interfacing pieces to the wrong side of the outer neck band and waistband pieces.

B, Dress, Fabric III, 140 cm wide




Fold fabric as shown in cutting layout, right side facing in.

Transfer pattern markings to fabric pieces

Lay or fold interfaced pieces together again, right sides facing. Pin paper pattern pieces to these fabric pieces again.

Transfer all pattern outlines (seam and hem lines) and pattern lines and markings (except grain lines) to wrong side of fabric, using a tracing wheel and Burda dressmaker's carbon paper, following manufacturer's instructions. Hand-baste along loop markings and along fold line on sleeve (view A) to make these lines and markings visible on right side of fabric.

Sewing




When basting and stitching the seams, the right fabric sides should be facing. Tie-off beginning and end of seams with backstitching.

A, Tunic

1. Gathering front pieces:

To gather the lower edge of each front piece, first machine baste (longest stitch setting) on both sides of marked seam line, from * to *. Hold bobbin threads of machine basting in one hand and slide front piece together along these threads until edge matches upper edge of front waistband piece. Knot gathering threads (1). Distribute gathering evenly.

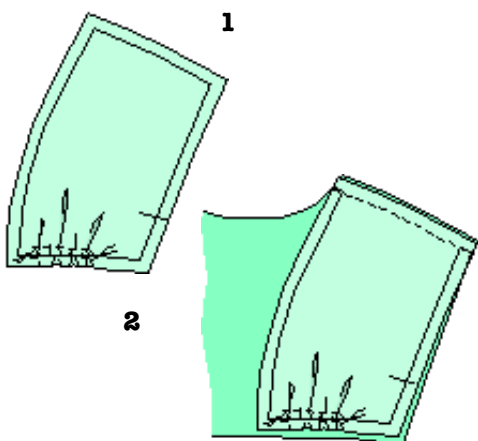


2. Shoulder seams:


Lay front pieces on back piece, right sides facing. Pin shoulder seams (2). Trim allowances to 1 cm ($\frac{3}{8}$ " wide, finish edges together, and press allowances toward back.

3. Attaching sleeves:

Pin each sleeve to armhole edge, right sides facing. The seam marks (6) on sleeve and front piece must match. The seam mark on sleeve cap must meet shoulder seam. Stitch sleeve in place, beginning and ending exactly at marked sleeve seam (3). Press allowances of sleeve attachment seams away from

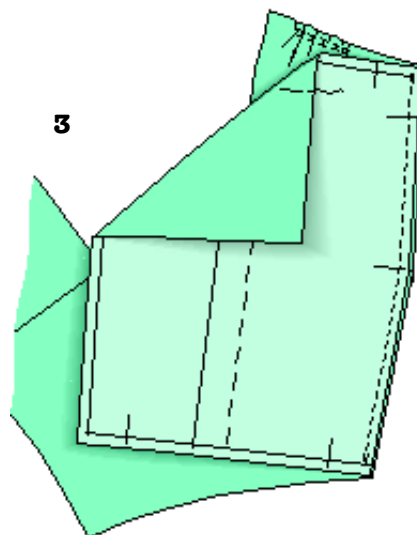


sleeves. Fold allowance at sleeve seam edge up, to wrong side of sleeve, at last stitch, and pin in place (4).



4. Button loops:

Fold bias strip in half lengthwise, right side facing in. Stitch 5 mm (a scant $\frac{1}{4}$ ") from fold edge. Do not cut threads too short. Thread threads through eye of darning needle and knot securely (5). Push needle, eye end first, through the fabric tube to turn it right side out (6). Cut into 7 equal pieces and lay aside (to be used later for button loops).






5. Waistband:

Lay interfaced right front waistband piece on right side edge of interfaced back waistband piece, right sides facing. Stitch right side seam (7). Stitch right side seam on waistband pieces with no interfacing, as mirror image of interfaced waistband unit. Press seams open.






Pin three button loops to left side edge of interfaced left front waistband piece, between marked seam marks, with ends of loops lying on seam allowance (8). Stitch left waistband edge exactly along marked seam line, thereby catching the loop ends. Pin upper edges of interfaced waistband pieces to lower edges of bodice front and back pieces. The side edges of bodice front and back meet over right side seam of waistband. The allowances of waistband pieces extend past left side edges of front and back. Baste waistband pieces in place (9). Pin each waistband piece with no interfacing to corresponding interfaced waistband piece, right sides facing – bodice front and back pieces lie between waistband pieces. Stitch along upper edges of waistband pieces, catching bodice front and back pieces in the seams. Trim seam allowances. Turn allowances on left front (10) and back edges to wrong side and press. Pin fold edges at each left side edge of waistband exactly together and edge-stitch together. Baste front and lower waistband edges together (11).

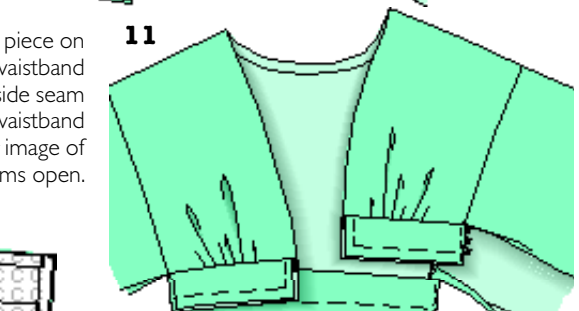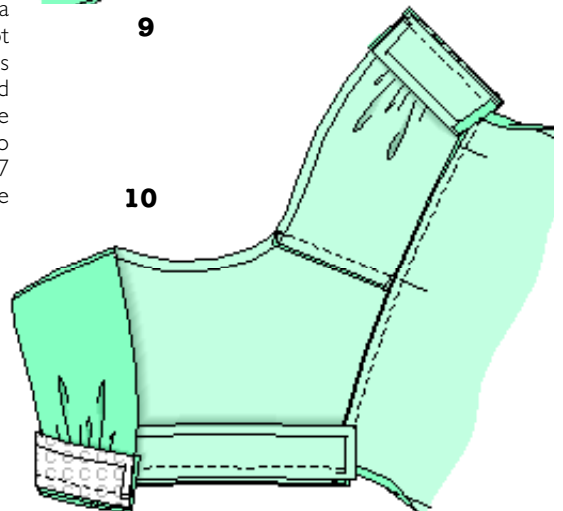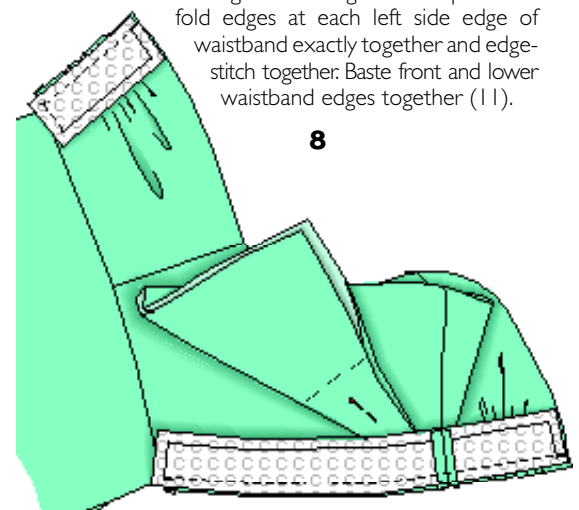

6. Neck bands:

Stitch shoulder seams on interfaced neck band pieces and on neck band pieces with no interfacing (12). Press seams open. Pin interfaced neck band unit to front edges of waistband, and front and neck edges of bodice, right sides facing, matching shoulder seams and seam lines. Stitch. Trim seam allowances and clip curves. Press allowances toward neck band. Pin the remaining 4 loops to right front edge of neck band, between seam marks. On neck band unit with no interfacing, trim allowance on inner edge to 7 mm ($\frac{1}{4}$ " wide and press this allowance to wrong side. Lay band with no interfacing on interfaced band, right sides facing, and pin together along front and neck edges. Stitch. Trim seam allowances and clip curves (13). Turn band right side out and press seamed edges. Pin

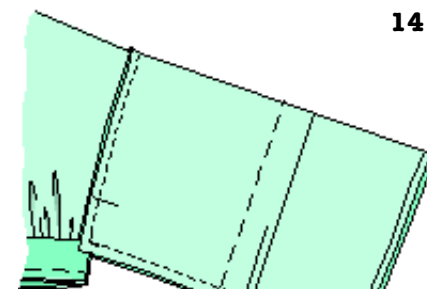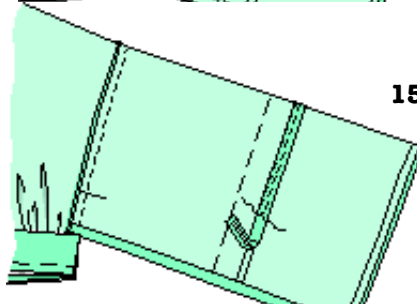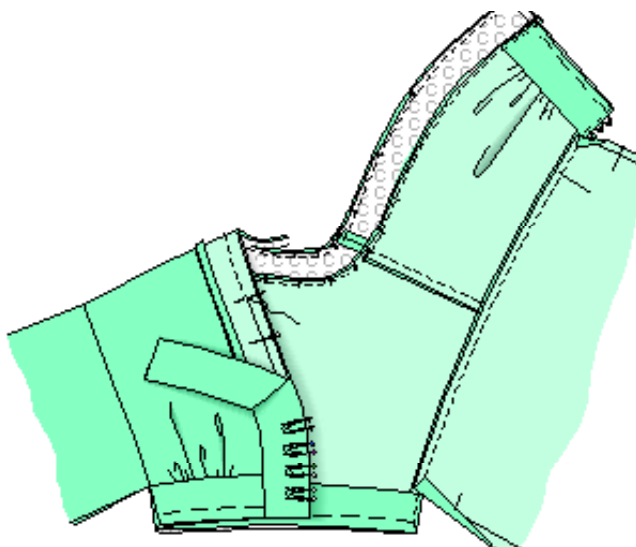**12****14****15****13**

inner edge of band over attachment seam. Working from the outer side, topstitch the band close to the attachment seam, thereby catching the inner edge.

7. Lower sleeve seams, casing for elastic:

Fold each sleeve in half lengthwise, right side facing in. Pin left lower sleeve seam between slit marks. Pin right lower sleeve seam from sleeve attachment seam to lower edge. Stitch (14). Press seams open. On each facing strip for casing, press long edges to wrong side, 7 mm ($\frac{1}{4}$ " wide. Pin each facing strip to wrong side of sleeve, over marked casing for elastic, wrong sides facing. Turn ends of strip under at sleeve seam so that fold edges meet. Edgestitch long edges of casing strip in place (15). Cut elastic into two equal pieces. Pull each piece into casing. Sew ends of each elastic together for a finished circumference as follows, for

size 34: 26 cm ($10\frac{1}{4}$ "); size 36: 27 cm ($10\frac{3}{4}$ "); size 38: 28 cm (11"); size 40: 29 cm ($11\frac{1}{2}$ "); size 42: 30 cm (12"); size 44: 31 cm ($12\frac{1}{4}$ ").


**16**

Fold edge of each sleeve to inside along marked fold line – do not press fold – and pin to sleeve attachment seam (16). Stitch to seam allowances, close to sleeve attachment seam, stitching as close to waistband attachment seams as possible. Finish edges of allowances together. On left sleeve, sew slit edges of inner and outer sleeve halves together by hand.


On left sleeve, sew slit edges of inner and outer sleeve halves together by hand.

8. Skirt:

Stitch side seams on skirt, leaving slit open in left side seam. Press seams open. Finish edges of hem and seam allowances. Pin skirt to lower edge of waistband, right sides facing, matching seam lines and right side seams. Slit allowances extend past left side edges of waistband. Stitch (17). Finish edges of allowances together and press toward skirt. Fold slit allowances to inside and press slit edges. Sew slit allowances to skirt attachment seam.

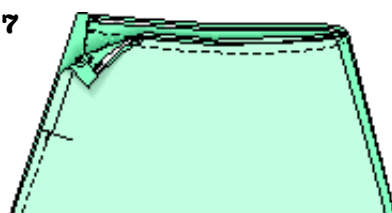17**9. Left slit underlap:**


On fabric strip for left slit underlap, press upper narrow edge to wrong side, 1 cm ($\frac{3}{8}$ ") wide. Fold underlap strip in half lengthwise, wrong side facing in, and press. Finish open edges together. Pin underlap under slit edge of skirt back so that the fold edge extends 2.5 cm (1") past slit edge and upper edge of underlap meets waistband attachment seam. Edgestitch back slit edge to underlap (18).

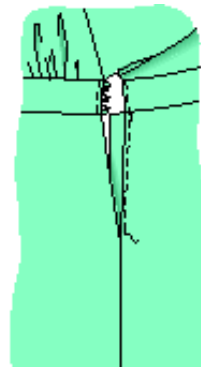**18****10. Hem:**

Press hem allowance to inside. Stitch along fold edge with closely spaced zigzag stitching. Trim hem allowance directly next to zigzag stitching (19).

11. Buttons and snaps:

Sew buttons to left front band and to left back edge of waistband to match button loops. Sew 3 snap fasteners to inside front slit edge of skirt and to underlap on back slit edge to close skirt slit.

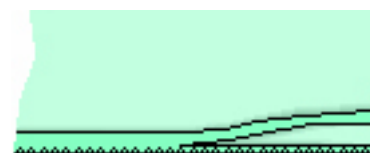19

12. Sew "gems" to front band as shown.

B, Dress

Sew dress as described for view A, steps 1 to 6.

13. Sleeve hems, lower sleeve seams:

Press hem allowance on lower edge of each sleeve to wrong side. Stitch along fold edge with closely spaced zigzag stitching. Trim hem allowance directly next to zigzag stitching (as shown in illustration 19). Fold sleeve in half lengthwise, right side facing in. Pin lower sleeve seams, pinning right lower sleeve seam from sleeve attachment seam to lower edge and left lower sleeve seam from slit mark to lower edge. Stitch. Trim allowances to 7 mm ($\frac{1}{4}$ ") wide and finish edges. At lower edges of sleeves, turn ends of allowances under diagonally and sew fold edges together by hand. Press slit allowances to inside.

Finish sewing dress as described for view A, steps 8 to 11.