
DESK CONNECTOR


RJ45 8P8C to the LoctekMotion control box

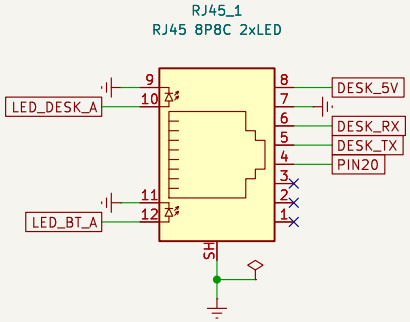

pins 1–3 unused — the control box only uses 4..8


LED INDICATORS

LEDs are inside the jack, series limited

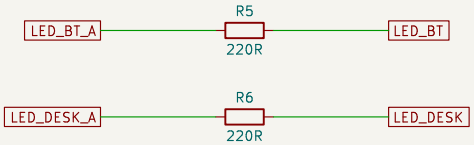


5 V INPUT

PTC, reverse block, bulk for the radio's start–up surge

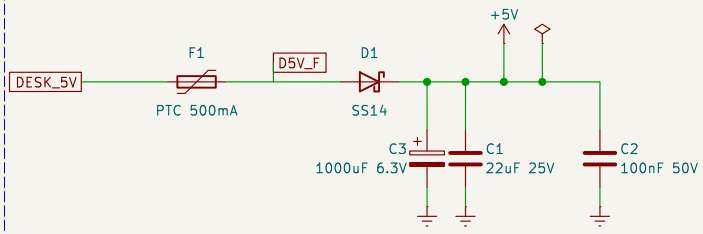

RX LEVEL SHIFT


5 V desk –> 3.3 V ESP, clamped

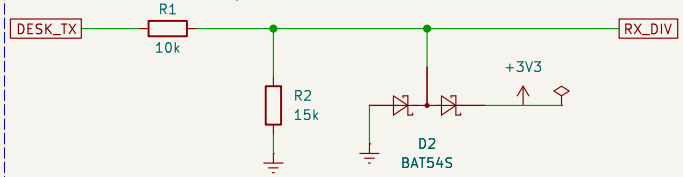

R1/R2 divide, D2 clamps what is left to the 3V3 rail


TX AND WAKE

series limit, 3.3 V needs no divider

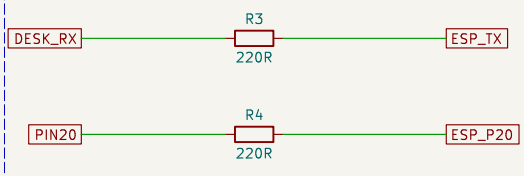

ESP32 DevKit V1 30–pin socket


pin names as silkscreened beside the holes

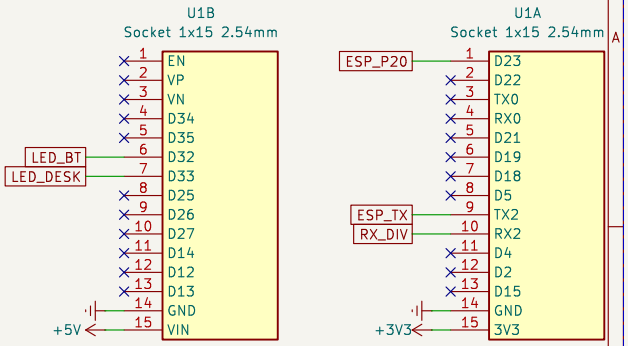

RX2 = GPIO16 TX2 = GPIO17 D23 = GPIO23

MOUNTING

4x M3, 71.8 x 28.8 pattern — H3/H4 sit under the module



no test pads: every net is already on a through–hole pad

ESP32 DevKit V1 30–pin carrier, RJ45 to the control box

Wouter ten Brinke

Sheet: /

File: tab5–desk–ctrl.kicad_sch

Title: FlexiSpot / LoctekMotion BLE desk companion

Size: A4	Date:	**Rev: rev2**
KiCad E.D.A. 9.0.6		Id: 1/1