


DESK CONNECTOR


RJ45 8P8C to the LoctekMotion control box

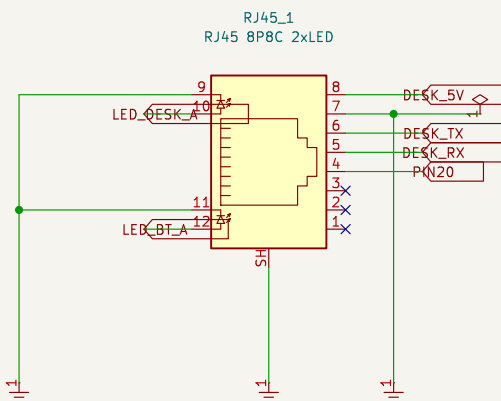

pins 1-3 unused – the control box only uses 4..8


LED INDICATORS

LEDs are inside the jack, series limited

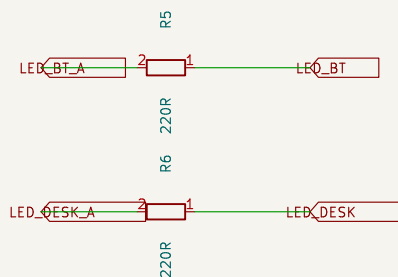


5 V INPUT

PTC, reverse block, bulk

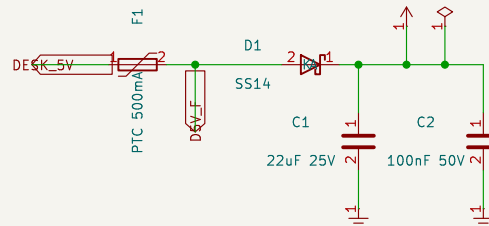

RX LEVEL SHIFT


5 V desk -> 3.3 V ESP, clamped

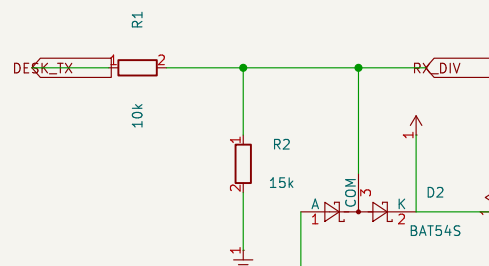

R1/R2 divide, D2 clamps what is left to the 3V3 rail


TX AND WAKE

series limit, 3.3 V needs no divider

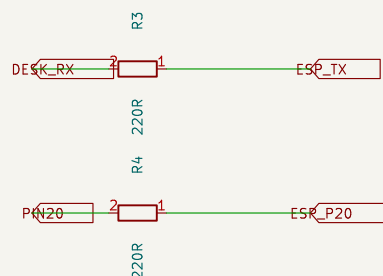


ESP32 DevKit V1 30-pin socket

pin names as silkscreened beside the holes

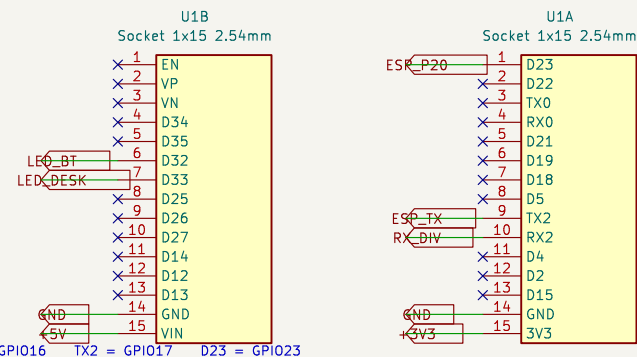

MOUNTING

4x M3, 51.8 x 29.2 pattern – H3/H4 sit under the module



no test pads: every net is already on a through-hole pad

ESP32 DevKit V1 30-pin carrier, RJ45 to the control box

Wouter ten Brinke

Sheet: /

File: tab5-desk-ctrl.kicad_sch

Title: FlexiSpot / LoctekMotion BLE desk companion

Size: A4

Date:

KiCad E.D.A. 9.0.6

Rev: rev1

Id: 1/1