2025-26
PRODUCT CATALOGUE

O.G. HEAVY DUTY

OPERATIONALLY GENIUS HEAVY DUTY

Your family's air-care expert

Air-Conditioners

ABOUT US

The world contains an infinite number of spaces. O.G. HEAVY DUTY believes that the air in each of them should be ideally suited to the environment they support. Thus, we make it possible to manage the air- to control its temperature, humidity and flow.

O.G. HEAVY DUTY has been supplying a wide range of products to india with some of its greatest technological innovations, creating symphonic, harmony and comfortable world for mankind since last 30 years of experience & expertise.

This is to improve people's lives with the air O.G. HEAVY DUTY creates.Comfortable air fills every space in the city where people live, work and enjoy.

Not only will you be comfortable, but you will be healthy,
study and work will progress, and everyone will smile.
We believe in the potential of air, pursue it, add new value,
and deliver unprecedented air to the people.

BRAND VISION Life at home has always been at the heart of our business, and it's why we are committed to being the best , in constant pursuit of improving life at home.
The values that we hold high at O.G. HEAVY DUTY underscore how we will serve our Customers to position the company for future growth.
We put honesty, accountability, and ethics first.

BRAND MISSION Putting the needs of others first isn't easy, but that's exactly what caring is. We are a company committed to always doing the right thing. We constantly seek to develop, improve and sustainably grow.

Remarks :
1. The above design and specifications are subject to change without prior notice for product improvement.
2. The values given in the table for the noise level reflect the levels in anechoice chamber.

Window Air Conditioner

O.G. HEAVY DUTY

OPERATIONALLY GENIUS HEAVY DUTY

Your family's air-care expert

How does Ionic/Anion Technology work?

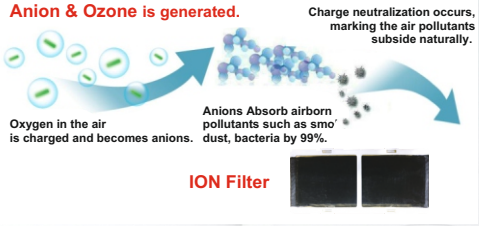

ION Filter

Sleep mode

Dehumidification

100% COPPER

ENERGY Efficient

FEATURES

Super-quality Internal Threaded Copper Pipe

Superior inner-grooved copper tube that enables refrigerant flow much faster in the copper tube, enhance heat-exchange efficiency with the traditional smooth copper tube.

Elaborate Designing
Highly efficient Refrigeration

Adopted world-famous compressor such as Mitsubishi, Hitachi, Toshiba, Emerson, Tecumseh, Kulthorn etc, enable high efficiency cooling

- Fuzzy Logic
- Detachable Grill
- Auto Restart
- Lateral Swing
- Self Diagnostic

Remarks :

1. The above design and specifications are subject to change without prior notice for product improvement.
2. The values given in the table for the noise level reflect the levels in anechoice chamber.

www.ogheavyduty.in

O.G. HEAVY DUTY

OPERATIONALLY GENIUS HEAVY DUTY

Your family's air-care expert

Split Air Conditioner

On-Off Series

New Technology

- Big Suction
- Optimized airflow design

Integrated Evaporator

Compact design minimizes IDU size but enhances heat exchange greatly.

iT'S Time to

Turn on the

Comfort...

OV Panel

FEATURES

4 Way Air flow Aerodynamic
Heavy Duty Dompressor, Smart Airflow
anti Mildew, Rapid Cooling, R-32 Refrigerant
230 Volt/1 phase /50 Hz Power Supply
Coppler Type Condenser

DX Panel

FEATURES

4 Way Air flow Aerodynamic
Heavy Duty Dompressor, Smart Airflow
anti Mildew, Rapid Cooling, R-32 Refrigerant
230 Volt/1 phase /50 Hz Power Supply
Coppler Type Condenser

Auto clean | Cool-air-flow prevention | Freeze prevention | 8/24-Hour OFF Timer | Auto Restart | 0.5W standby | Sleep mode | Hidden LED Display* | Dehumidification | 100% COPPER | Energy Efficient

Remarks :

1. The above design and specifications are subject to change without prior notice for product improvement.
2. The values given in the table for the noise level reflect the levels in anechoice chamber.

www.ogheavyduty.in

Split Air Conditioner
Inverter Series

O.G. HEAVY DUTY

OPERATIONALLY GENIUS HEAVY DUTY

Your family's air-care expert

VARIABLE SPEED *technology*

Powerful ECO Friendly Refrigerant
R-32
Available in Selected Models

Anti-bacteria Filter

Optional

The filter is made of quality static fibre which can absorb the tiny particle and dust in the air, including the scurf of pets and mildew. It also contains active environmental-friendly component which can keep the best air quality.

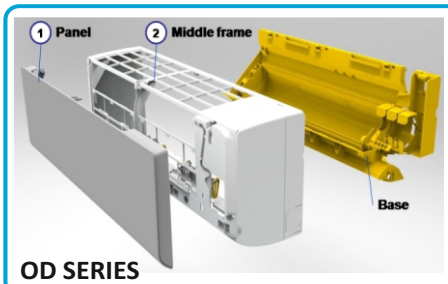

OD SERIES

- Two- box structure, fashionable design
- Integrated design of base and Air guiding frame :

(1) Structure strength increased.
(2) Quality more stable
(3) Manufacturing Efficiency increase,
(4) Performance increase
(5) More Convenient for after-sale service

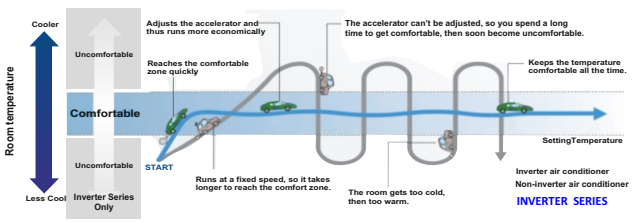

Tooth-Shape Inner-Grooved Copper Tube



By adopting newly tooth-shape design high efficiency groove inner brass screw technology to enlarge the area between refrigerant and brass, the efficiency of heat exchange can be improved about 30-50%.

Also available in OA/OD panel

Remarks :
1. The above design and specifications are subject to change without prior notice for product improvement.
2. The values given in the table for the noise level reflect the levels in anechoice chamber.

www.ogheavyduty.in

Split Air Conditioner
Mega Split

O.G. HEAVY DUTY

OPERATIONALLY GENIUS HEAVY DUTY

Your family's air-care expert

Anti-bacteria Filter

Optional

The filter is made of quality static fibre which can absorb the tiny particle and dust in the air, including the scurf of pets and mildew. It also contains active environmental-friendly component which can keep the best air quality.

3 TON



Integrated Evaporator

Compact design minimizes IDU size but enhances heat exchange greatly.

New Technology

- Big Suction
- Optimized airflow design

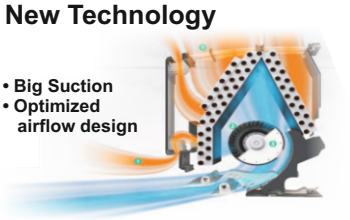

Remarks :
1. The above design and specifications are subject to change without prior notice for product improvement.
2. The values given in the table for the noise level reflect the levels in anechoice chamber.

www.ogheavyduty.in

O.G. HEAVY DUTY

OPERATIONALLY GENIUS HEAVY DUTY

Your family's air-care expert

Heating & Cooling Air Conditioner

Super-quality Internal Threaded Copper Pipe

Superior inner-grooved cooper tube that enable refrigerant flow much faster in the cooper tube, enhance heat-exchange efficiency with the traditional smooth cooper tube.

Elaborate Designing Highly efficient Refrigeration

Adopted world-famous compressor such as Mitsubishi, Hitachi, Toshiba etc, enable high efficiency cooling and long service for air conditioner unit.

Integrated Evaporator

Compact design minimizes IDU size but enhances heat exchange greatly.



MODEL			OG-CS- 53H3A	OG-CS-80H3A
Power Source			1 Phase, 220 V, 50 Hz	1 Phase, 220 V, 50 Hz
		Ton	1.5	2.3
Capacity	Cooling	w	5270	8050
	Heating		5390	8350
Power Input		w	1590/1650	2290/2460
Curent		A	6.8/7.0	9.5/10.6
Damnation WxHxD	Indoor Unit	mm	900x230x291	1120x312x229
Damnation WxHxD	Outdoor Unit	mm	840x540x300	895x650x368
Air Flow	Indoor Unit	CMH	900	1200
Sound Level (H/M/L)	Indoor Unit	dB	45	55
Refrigerant Piping	Liquid Line	mm	6.35	9.53
	Gas Line	mm	12.7	15.88
Compressor			Rotary	Rotary
Refrigerant Type			R-22	R-22

Remarks :
1. The above design and specifications are subject to change without prior notice for product improvement.
2. The values given in the table for the noise level reflect the levels in anechoice chamber.

www.ogheavyduty.in

O.G. HEAVY DUTY

OPERATIONALLY GENIUS HEAVY DUTY

Your family's air-care expert

Technical Specification

Wall Mounted Split Air Conditioner

Inverter Series

Model			OG-13IN5	OG-19IN3	OG-19IN5	OG-25IN3	OG-25IN5
	Capacity @ Full Load	W	3450	5000	5080	6050	5900
	Capacity @ Half Load	W	1725	2500	2540	3025	2950
Cooling	Input Power @ Full Load	W	810	1650	1320	1985	1550
	Input Power @ Half Load	W	325	615	445	715	530
	Rated current	A	3.71	7.05	6.04	8.9	7.9
	Measured ISEER	Kwh/Kwh	5.14	3.81	5.10	3.95	5.1
Indoor air flow (Hi/Mi/Lo)		m3/h	550	1075	1075	1080	1250
Indoor noise level (Hi/Mi/Lo)		dB(A)	44/40/36	49.5/47/43	49.5/47/43	53/50/46	50/56/52
Indoor unit	Dimension(W*D*H)	mm	840×210×280	940×235×315	940×235×315	940×235×315	1070×235×315
Outdoor unit	Dimension(W*H*D)	mm	740x525x239	910x368x650	825x620x310	840x300x600	910x368x650
Refrigerant type			R-32	R-32	R-32	R-32	R-32
	Liquid side/ Gas side	mm(inch)	6.35/9.52	6.35/12.7	6.35/12.7	6.35/12.7	6.35/12.7
Refrigerant piping	Max. refrigerant pipe length	m	25	30	30	25	25
	Max. difference in level	m	10	20	20	10	10
Connection wiring			4x1.5(Optional)	4x1.5(Optional)	4x1.5(Optional)	4x1.5(Optional)	4x1.5(Optional)

On-Off Series

MODEL			OG-12FS3	OG-183SF	OG-184SD	OG-243SA	OG-36MS
Power Source			1 Phase, 220 V, 50 Hz	1 Phase, 220 V, 50 Hz	1 Phase, 220 V, 50 Hz	1 Phase, 220 V, 50 Hz	3 Phase, 415V, 50 Hz
		Ton	1	1.5	1.5	2	3
Nominal Cooling Capacity		W	3300	4950	5120	6250	10500
Power Input		W	855	1290	1274	1770	4250
Measured ISEER		W/W	3.86	3.84	4.02	3.53	NA
Curent		A	3.9	6.2	5.8	8.1	5 (Per Phase)
Exterior Dimensions	Indoor Unit	mm	840x187x270	980x235x315	1025x240x320	1025x240x320	1260x360x280
WxHxD	Outdoor Unit	mm	840x540x300	840x540x300	895x650x368	895x650x368	965x356x705
Air Flow	Indoor Unit	CMH	1050	1050	1100*	1200	1400
Sound Level (H/M/L)	Indoor Unit	DB	46	48	52	48	56
Refrigerant Piping	Liquid Line	mm	6.35	6.35	6.35	6.35	9.5
	Gas Line	mm	12.7	12.7	12.7	15.88	15.88
Compressor			Rotary	Rotary	Rotary	Rotary	Rotary
Refrigerant Type			R-32	R-32	R-32	R-32	R-22/R32

Remarks :
1. The above design and specifications are subject to change without prior notice for product improvement.
2. The values given in the table for the noise level reflect the levels in anechoice chamber.

O.G. HEAVY DUTY

OPERATIONALLY GENIUS HEAVY DUTY

Your family's air-care expert

Technical Specification

Window Air Conditioner

On-Off Series

Model		OG-12WA3	OG-18WA5	OG-19WA5	OG-19WA3	OG-25WA3
Power Source		1 Phase, 220 V, 50 Hz	1 Phase, 220 V, 50 Hz	1 Phase, 220 V, 50 Hz	1 Phase, 220 V, 50 Hz	1 Phase, 220 V, 50 Hz
	Ton	1.1	1.5	1.5	1.6	2.0
Capacity Cooling	w	3350	5150	4900	5400	5950
Input Power	w	1147	1540	1375	1830	1900
Measured ISEER		2.92	3.34	3.55	2.95	3.13
WxHxD	mm	600 X 385 X 525	660 X 430 X 710	660 X 410 X 770	730 X 430 X 770	730 X 430 X 770
Air Flow	m3/h	600	950	950	950	950
Sound Level (H/M/L)	dB	48	54	54	56	54
Refrigerant Charge	g	R-32	R-32	R-32	R-22	R-32
Operation Temp Range	C°	18-52	18-52	18-52	18-52	18-52
Application Area	M2	10-15	16-25	20-30	16-25	20-30
Compressor		Rotary	Rotary	Rotary	Reciprocating	Rotary

Inverter Series

Model		OG-12WIN5	OG-18WIN3	OG-18WIN5
Power Source		1 Phase, 220 V, 50 Hz	1 Phase, 220 V, 50 Hz	1 Phase, 220 V, 50 Hz
	Ton	1.0	1.5	1.5
Capacity Cooling	W	3450	4950	5000
Input Power	W	1045	1800	1590
Measured ISEER		3.51	3.13	3.53
WxHxD	mm	660 X 430 X 710	660 X 430 X 710	660 X 430 X 710
Air Flow	m3/h	800	950	800
Sound Level (H/M/L)	dB	52	54	54
Refrigerant Charge	g	R-32	R-32	R-32
Operation Temp Range	C°	18-52	18-52	18-52
Application Area	M2	10-15	16-25	16-25
Compressor		Rotary	Rotary	Rotary

Remarks :
1. The above design and specifications are subject to change without prior notice for product improvement.
2. The values given in the table for the noise level reflect the levels in anechoice chamber.

O.G. HEAVY DUTY

OPERATIONALLY GENIUS HEAVY DUTY

Your family's air-care expert

Floor Standing Type Air Conditioner

FEATURES

- The product has the popular appearance design : The widely use plate air-conditioner employ the PC materials (Acrylics) with high glossiness in the surface : graceful pattern has good dimension effects.
- Ultra-quietness : The indoor unit uses the latest optimization design of air ducts and the minimum noise in the low wind operation is only 36 db.
- The high-quality brass pipe, blue hydrophilic aluminum foil high-fficienc evaporator : large diameter, direct twist, low-noise and cross flow wheel.

OG-48FCC

SPECIFICATION

MODEL			OG-24FCC (R-22 / R-410A)	OG-48FCC (R-22 / R-410A)
Power Source			1 Phase, 220 V, 50 Hz	3 Phase, 380-440 V, 50 Hz
		Ton	2.0	4.0
Capacity **Nominal**	Cooling	**W**	**6915**	48000
Input	Cooling	**W**	**2223**	**6100**
Current		**A**	**9.5**	8.3 (Per Phase)
Exterior dimensions	Indoor Unit	**mm**	**547 x 1755 x 330**	**610x1930x380**
(WxHxD)	Outdoor Unit	**mm**	**880 x 650 x 335**	**905 X 1145 X 355**
Net Weight	Indoor Unit	**kg**	38	56
	Outdoor Unit	**kg**	68	**98**
Air Flow	Indoor Unit	**CFM**	529	1180
Sound Level (H/M/L)	Indoor Unit	**dB**	48	55
Refrigerant Piping	Liquid Line	**mm**	9.5	9.5
	Gas Line	**mm**	15.8	19.05

SCROLL COMPRESSOR

Optional

COMFORTABLE FUNCTIONS

COMFORTABLE AIR FLOW FUNCTIONS

Maintenance & Prevention Funtions

CONVENIENT & ECONOMY FUNCTIONS

Remarks :

1. The above design and specifications are subject to change without prior notice for product improvement.
2. The values given in the table for the noise level reflect the levels in anechoice chamber.

www.ogheavyduty.in

O.G. HEAVY DUTY

OPERATIONALLY GENIUS HEAVY DUTY

Your family's air-care expert

Cassette Type Air-conditioner

FOCUS FEATURES

3 fan speed, meet for different requirement.



Built-in water pump, water head up to 1200mm.



Fire resistance design, the E-box with galvanized steel built-in body easy for maintenance.

Add four interfaces in body, can be connected with duct to another room.

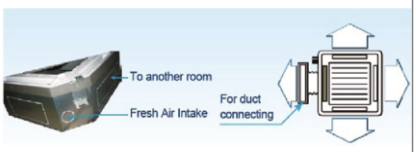

New streamlined fan design.

SUPERIOR TECHNOLOGY

- Capacity Range 1.0 Tr To 5.0 Tr • Fresh Air Provision
- 4-way Uniform Air Flow • Cordless Remote Control Scroll/Rotory/Reciprocating Compressor High Efficiency and Hydrophilic Aluminum fins - Improved life of coils
- Alarm functions Trouble shooting mechanism
- Phase protection Systems in-buit

SPECIFICATION

MODEL	OGC-12C	OGC-18C	OGC-18L	OGC-24	OGC-30	OGC-36	OGC-48	OGC-60
Capacity Cooling Nominal Btu/hr	12000	18000	18000	23700	30000	36000	48000	60000
Electrical Date								
Voltage, Frequency, Phase V ~, Hz Ph	220, 50, 1	220, 50, 1	220, 50, 1	220, 50, 1	220, 50, 1/400, 50, 3	400, 50, 3	400, 50, 3	400, 50, 3
Input Watt	1350	1850	1850	2150	4200	2700	4650	5650
Performance								
Air Flow Volume (Hi/Lo) M3/h	830/730	930/730	1000/830	1050/900	1050/900	1600/1420	1750/1500	1900/1750
Noise Level (Hi/Lo) dB(A)	39/36	43/40	43/40	43/40	43/40	47/44	47/44	52/48
Dimension & Weight								
Indoor Unit WxHxD mm	580x254x580	580x254x580	840x230x840	840x230x840	840x230x840	840x310x840	840x310x840	840x310x840
Panel	650x30x650	650x30x650	950x40x950	950x40x950	950x40x950	950x40x950	950x40x950	950x40x950
Outdoor Unit	772x540x254	845x680x310	845x680x310	845x680x310	845x680x310	990x960x360	990x960x360	950x1260x360

ALSO AVAILABLE IN R-410A

Remarks :
1. The above design and specifications are subject to change without prior notice for product improvement.
2. The values given in the table for the noise level reflect the levels in anechoice chamber.

OPERATIONALLY GENIUS HEAVY DUTY

Your family's air-care expert

One Way Cassette

On-Off Series



Even Air Distribution

4 Way Air Flow

SPECIFICATION

Model			OG-52OWC	OG-70OWC
Power supply			1phase, 220-240V, 50Hz	
Cooling 1	Capacity	kW	5.2	7.0
	Input	W	1750	2250
Heating 2	Capacity	kW	N/A	N/A
	Input	W	N/A	N/A
Indoor fan motor	Type		AC	
	Quantity		1	
Airflow rate (H/M/L)		m3/h	792/688/549	933/749/592
Sound pressure level (H/M/L)3		dB(A)	42/40/36	44/41/37
Refrigerant type			R-410A / R-32	
Dimension (WxHxD) Indoor / Panel		mm	1275x189x450 / 1350x25x505	
Dimension (WxHxD) Outdoor		mm	840x540x300	895x650x368
Net weight Indoor / Outdoor		kg	18.8/35	19.5/55
Pipe connections	Liquid pipe	mm	06.35 / 09.52	
	Gas pipe	mm	12.70 / 15.88	
	Drain pipe	mm	25	

FOCUS FEATURES

- Slim & Compact Indoor unit
- Long Air Throw for more comfort
- Multi way ven setup
- Air Purification
- Heat & Cool (Optional)

Cool-air-flow prevention

Freeze prevention

8/24-Hour OFF Timer

Auto Restart

Sleep mode

Dehumidification

100% COPPER

Cool-air-flow prevention

Remarks :

1. The above design and specifications are subject to change without prior notice for product improvement.
2. The values given in the table for the noise level reflect the levels in anechoice chamber.

www.ogheavyduty.in

O.G. HEAVY DUTY

OPERATIONALLY GENIUS HEAVY DUTY

Your family's air-care expert

Duct Type Air-Conditioner

SLIM DUCT FAN COIL UNIT

High Static Pressure Duct

FOCUS FEATURES



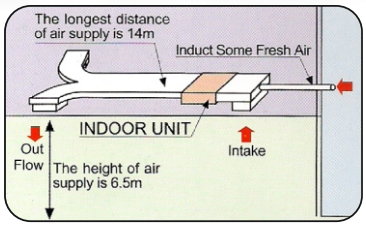

- Maximum duct lenght of 14 m
- High blowing pressure of Indoor unit - 196 Pa
- Fresh Air Provision
- Low noise levels, as low as 44 dB
- **Cordless / Corded Remote Control**
- Cooling only and Heating/Cooling options
- Single Phase Prevention and Reverse Phase Protection system
- High EER, Energy Saving design
- Special cataphoric treatment - for extra life span
- Cooling only and Heating / Cooling options

Super-quality Internal Threaded Copper Pipe

Superior inner-grooved cooper tube that enable refrigerant flow much faster in the cooper tube, enhance heat-exchange efficiency with the traditional smooth cooper tube.

Elaborate Designing Highly efficient Refrigeration

Adopted world-famous compressor such as Mitsubishi, Hitachi, Toshiba etc, enable high efficiency cooling and long service for air conditioner unit.

Scroll Compressor

OPTIONAL

SPECIFICATION

MODEL			OG-MTB-18C	OG-MTB-24C	OG-MHC-36C	OG-MHC-48C	OG-MHC-60C	OG-MHC-96C
Capacity Cooling Nominal		Btu/h r	**18000**	**24000**	**36000**	48000	60000	96000
Electrical Date								
Voltage, Frequency, Phase V~, Hz Ph			**220 v/50hz/1P**	**220 v/50hz/1P**	**380 v/50hz/3P**	**380 v/50hz/3P**	**380 v/50hz/3P**	**380 v/50hz/3P**
Input Watt			**2100**	**2550**	**4100**	5000	6000	10000
Performance								
Air Flow Volume		M3/h	**1000**	**1320**	**1810**	2070	2700	5000
External Static Pressure Indoor		Pa	**42**	**45**	**50**	70	70	70
Noise Level		dB(A)	**42**	**45**	**46**	**47**	**50**	**54**
Dimension & Weight								
Indoor Unit	WxHxD	mm	**935 x 260 x 597**	**935 x 272 x 597**	1000x298x800	1000x298x800	1295x298x800	1650x520x850
Outdoor Unit	WxHxD	mm	**790 x 540 x 245**	**840 x 690 x 330**	**965x356x705**	**905x1145x355**	**905x1145x355**	**905x1145x355 X 2**
Weight	Indoor/Outdoor	kg	**28 / 58**	**28 / 58**	58/98	58/98	58/125	105/125x2

AVAILABLE IN R-22 / R-410A

Remarks :
1. The above design and specifications are subject to change without prior notice for product improvement.
2. The values given in the table for the noise level reflect the levels in anechoice chamber.

www.ogheavyduty.in

O.G. HEAVY DUTY

OPERATIONALLY GENIUS HEAVY DUTY

Your family's air-care expert

Survivor Air Conditioner

Air Conditioning Solution for Dusty Area

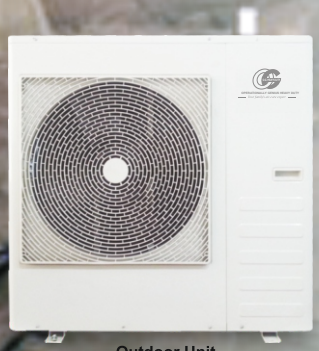

Outdoor Unit

Super-quality Internal Threaded Copper Pipe

Superior inner-grooved cooper tube that enable refrigerant flow much faster in the cooper tube, enhance heat-exchange efficiency with the traditional smooth cooper tube.



Elaborate Designing Highly efficient

Adopted world-famous compressor Enable high efficiency cooling and long service for air conditioner unit.

FEATURES

- Specially design of dusty area
- High CFM of IDU
- Biggest Outdoor in Industry
- 20 micron air filter
- Remote control Opration
- Work up to 52°C

SPECIFICATION

MODEL		OG-SV24
Cooling Capacity **Nominal**	Btu/h**r**	24000
Voltage Supply		**220v/50hz/1P / 380-415v/50hz/3P**
Input Cooling	W	2550
Current Cooling	A	**11.5 / 4.2**
Indoor Dimensions (HxWxD)	mm	444 x 1378 x 229
Outdoor Dimensions (HxWxD)	mm	**990 x 1010 x 350/895 x 650 x 368**
Net Weight Idu/Odu	kg	**IDU 30 - ODU 78/62**
Air Flow	m3/h	1850
Idu/Odu Sound Level (H/M/L)	dB	56/60
Refrigerant Charge		R-22
Operation Temp Range	C°	52°C

Remarks :

1. The above design and specifications are subject to change without prior notice for product improvement.
2. The values given in the table for the noise level reflect the levels in anechoice chamber.

www.ogheavyduty.in

O.G. HEAVY DUTY

OPERATIONALLY GENIUS HEAVY DUTY

Your family's air-care expert

Our Valuable Customers

Remarks :

1. The above design and specifications are subject to change without prior notice for product improvement.
2. The values given in the table for the noise level reflect the levels in anechoice chamber.

www.ogheavyduty.in

OPERATIONALLY GENIUS HEAVY DUTY

Your family's air-care expert

COOLON (INDIA) PVT. LTD.

(AN ISO 9001 : 2015 CERTIFIED COMPANY)

Head Office : D-14, Rajan Babu Road, Adarsh Nagar, Delhi-110033

Contact No. : 011-35727834
+91 - 8368729268
+91 - 989 177 4713
+91 - 8860549936

www.ogheavyduty.in

Distributor / Dealer

Remarks :
1. The above design and specifications are subject to change without prior notice for product improvement.
2. The values given in the table for the noise level reflect the levels in anechoice chamber.