

Majorana zero modes in silicon: quantified failure of the conduction band and a conditional hole-based route

W. T. Trevena*

June 2026 — draft v1

Abstract

We assess the feasibility of Majorana zero modes (MZMs) in silicon within a validated Bogoliubov–de Gennes framework subjected to three adversarial review rounds. Conduction-band wires fail independently on three axes: spin–orbit coupling (best intrinsic topological gap $\sim 1.5\,\mu\text{eV}$; engineered SOC of $\alpha \gtrsim 0.02\,\text{eV}\,\text{\AA}$ required), a $g=2$ ceiling forbidding induced gaps above $116\,\mu\text{eV}$ at attainable fields (quantifying the optimal-coupling rule of Cole *et al.*), and valley physics—where we prove an exact two-band equivalence for smooth interfaces and show that each single-atomic interface step acts as a near- π Josephson junction ($\Delta\varphi = 2k_0a/4 \approx 0.85\pi$) whose bound state caps the topological gap at $\sim 18\%$ from the very first step. For the valence band we derive the gate-field covariation of $(\alpha, \hat{g}, m^*)$ from a four-band Luttinger–Kohn fin model: the field that builds direct-Rashba SOC (α up to $0.054\,\text{eV}\,\text{\AA}$, spin–orbit lengths 32–101 nm, matching FinFET measurements) suppresses the wire-axis g below 1.1 while raising g_z to 2.4–4.2. Field-orientation maps then select the viable designs: a thick boron-doped superconducting-silicon (Si:B) parent with tilted field supports 10–19 μeV using only measured Si:B critical fields, and a 10–20 nm Si:B film is orbitally consistent with Pauli limiting, supporting 21–27 μeV ; an Al-film parent would support 34–55 μeV (metallization-renormalized) if a hard-gap Al/Si-hole interface existed. Transport calculations show our spectral disorder thresholds are conservative, identify an abrupt class-D breakdown mode, and warn that step-disordered wires become Anderson insulators whose hard-looking transport gaps mask degraded local protection. Quasiparticle poisoning restricts the measured-field all-silicon stack to detection (not parity-coherent) experiments unless the parent gap is engineered. Two measurements decide the platform: the parallel critical field of thin Si:B films, and the wire-axis hole g -tensor in device geometry.

1 Introduction

Semiconductor–superconductor hybrid nanowires remain the most studied route to MZMs [1, 2, 3], and a decade of experiments—from the first InSb signatures [4] through the disorder-driven retractions and reappraisals [5] to protocol-based standards [6]—has made one lesson clear: material quality and honest accounting of trivial explanations dominate the problem. Silicon, the most controllable semiconductor in existence, has been conspicuously absent from this program, for reasons usually stated qualitatively: weak spin–orbit coupling (SOC), a small g -factor, and conduction-band valley degeneracy.

*Analysis, verification, and manuscript preparation were assisted by AI agents (Claude, Anthropic), including three adversarial numerical-review rounds documented in the repository’s corrections log. All quantitative claims regenerate from committed code.

This paper makes those reasons quantitative, finds that one of them hides a qualitatively new failure mechanism, and shows that none of them applies to silicon *holes*. Our contributions: (i) a quantified electron verdict (Secs. 3.1, 3.2); (ii) an exact unitary equivalence making smooth-interface valley splitting benign under the physical inter-valley pairing channel, and the identification of single-atomic interface steps as near- π Josephson junctions that destroy protection from the first step (Sec. 3.3); (iii) a Luttinger–Kohn (LK) derivation of the gate-field covariation of hole parameters, which erodes free-parameter optimism but preserves a viable design (Sec. 4); and (iv) orientation- resolved feasibility maps for two silicon-compatible parents—laser-doped superconducting Si:B [18, 19, 21, 22] and Al films—including thin-film design targets, metallization renormalization, and quasiparticle-poisoning limits (Sec. 4.2). Throughout, spectral diagnostics are cross-checked by recursive-Green’s-function transport (Sec. 5).

2 Model and methods

We use the standard single-channel BdG Hamiltonian

$$H = \left(\frac{\hbar^2 k^2}{2m^*} - \mu + V(x) \right) \sigma_0 + \alpha k \sigma_z + E_Z \sigma_x \quad (\text{normal part}), \quad \Delta i \sigma_y \quad (\text{pairing}), \quad (1)$$

discretized with exact particle–hole symmetry by construction, topological for $E_Z^2 > \Delta^2 + \mu^2$. Validation (repository Fig. 1): gap closing at the analytic boundary; end-localized zero modes; exponential length splitting; finite-wire vs analytic bulk-gap agreement. Valley physics uses an $8N$ basis with *inter-valley* singlet pairing $\Delta(\nu_x \otimes i\sigma_y)$ —the physical zero-momentum channel since the relevant valleys are time-reversed partners—with arbitrary complex valley-orbit (VO) profiles $\lambda(x)$ and a gauge-covariant phase-locked Dresselhaus-type SOC option. Hole parameters derive from a four-band LK model of the fin cross-section (validated against exact [100] bulk masses) with vertical field, bare (κ) and orbital Zeeman terms. Transport uses a dimension-generic RGF with Ando wave-matched normal leads and an $E = 0$ reflection invariant $\text{sign det } r$ (kwant-equivalent; validated against closed-chain spectra to 10^{-13}). A test suite pins every exact claim. All caricature choices (GL/Zee-man-linear parent gaps, iid onsite disorder with correlation length dx , hard-wall LK geometry) are stated where used.

3 Conduction band: three independent failures

3.1 Spin–orbit shortfall

Maximizing the topological gap over $(\mu, B \leq 2 \text{ T})$ at measured intrinsic Rashba strengths gives $0.16 \mu\text{eV}$ (typical, $\alpha = 10^{-4} \text{ eV \AA}$) to $1.5 \mu\text{eV}$ (optimistic, 10^{-3}): below dilution-fridge protection scales and destroyed by any realistic disorder. Reaching a robust $20 \mu\text{eV}$ requires $\alpha \approx 0.015$ (idealized) to $0.021 \text{ eV \AA}$ (with parent-gap suppression $\Delta(B)$)—an optimistic lower bound given unmodeled orbital and metallization corrections. Micromagnet arrays [8, 9] reach this scale in principle, and a 2025 InAs experiment measured synthetic $\alpha = 0.022 \text{ eV nm}$ [10], so “engineered-electron silicon” is marginal rather than absurd—but the valley physics below stacks on top of it.

3.2 The $g = 2$ catch-22

Since $E_Z(2 \text{ T}) = 116 \mu\text{eV}$ for $g = 2$, any induced gap $\Delta \geq 116 \mu\text{eV}$ can never reach the topological phase at attainable fields; in the SOC-limited regime relevant to engineered devices, increasing

interface transparency *reduces* the achievable gap, with an optimal parent gap $\Delta_0 \approx 98 \mu\text{eV}$ once $\Delta(B)$ suppression is included. This sharpens, for $g = 2$, the weak-coupling optimum identified by Cole, Das Sarma and Stanescu [7]. Pauli-limited parents satisfy the constraint automatically (Sec. 4.2).

3.3 Valley physics: an exact equivalence and step junctions

Equivalence theorem. With inter-valley pairing and *any* uniform VO phase, the wire maps unitarily onto two decoupled bands at $\mu \mp |\lambda|$ with pairing $\pm\Delta$ (verified to $3 \times 10^{-10} \mu\text{eV}$ for valley-scalar and phase-locked Dresselhaus SOC alike): smooth interfaces are benign, and valley splitting $\gtrsim 100 \mu\text{eV}$ buys single-valley topology, as the simple wedge picture suggests.

Step junctions. Real interfaces are stepped, and each single-atomic step shifts the VO phase by $\Delta\varphi = 2k_0(a/4) \approx 0.85\pi$ —accidentally close to π in silicon. A controlled comparison (same-sign staircase vs sign-randomized steps of equal magnitude) shows net phase *winding* is irrelevant at realistic densities; the damage is per-step junction physics: a single step binds a subgap state at $4.0 \mu\text{eV}$ (18% of the $22 \mu\text{eV}$ clean gap), deepening to a Kitaev domain-wall zero mode at $\Delta\varphi = \pi$ [Fig. 1(b)]. Ensembles at 50 nm step spacing retain only $\sim 0.7\text{--}2.3 \mu\text{eV}$ (median, L -dependent upper bounds). Bunched double-height steps ($\Delta\varphi = 1.7\pi \equiv -0.3\pi$) are $\sim 2\times$ milder—step-bunched vicinal surfaces are preferable—while VO-amplitude suppression near steps [12] worsens the damage; wires laid along step edges avoid it entirely ($|\cos \chi|$ scaling). Smooth phase gradients are a real but subdominant second channel, suppressed at large valley splitting. Transport (Sec. 5) adds a warning: step-dense wires become Anderson insulators whose end-to-end transport gap *grows* with length ($0.5/5.6/23 \mu\text{eV}$ at $L = 1.5/3/6 \mu\text{m}$) while localized subgap states persist—a hard-looking transport gap does not certify protection. The falsifiable consequence: induced-gap hardness in proximitized Si *electron* devices should degrade with miscut/step density from the very first step, testable by gap spectroscopy on standard miscut wafer series; holes are immune by construction.

4 Valence band

4.1 Luttinger–Kohn constraints: the α – g covariation

Quasi-1D hole channels in Si FinFETs have measured strong, gate-tunable SOC [15, 17, 14] and anisotropic g -tensors [16]. Our four-band LK fin model reproduces the measured spin-orbit-length window ($l_{so} = 32\text{--}101 \text{ nm}$) and yields the constraint the free parameter box hides [Fig. 2]: the vertical field that builds α (up to $0.054 \text{ eV \AA}$) suppresses the wire-axis g_x from 1.1 to 0.5 while raising g_z to 2.4–4.2, with $m^* \approx 0.44$ and the SOC axis in-plane transverse. A seven-geometry bracket (7–16 nm cross sections, 3–30 MV/m) keeps $g_x \in [0.4, 1.1]$: the measured $g_{xx} \approx 1.9\text{--}2.3$ [16] is *not* reproducible in four-band hard-wall LK, so all platform numbers below are carried under both the LK and empirical tensors; resolving the discrepancy requires six-band $k \cdot p$ with device electrostatics (top remaining theory item).

4.2 Parents, orientation, and the surviving designs

Field-orientation maps [Fig. 3] under both g -tensors and two parents give the design rules: (i) an **Al film** parent is locked to in-plane fields but strong— $34\text{--}55 \mu\text{eV}$ metallization-renormalized—if a hard-gap Al/Si-hole interface can be fabricated (none exists); (ii) a **thick Si:B** parent [18, 19, 20, 21] is orientation-tolerant and, using only measured critical fields ($B_{c2} \approx 0.1\text{--}0.4 \text{ T}$, orbital-limited), supports $10\text{--}19 \mu\text{eV}$ at fields tilted toward out-of-plane (riding g_z); the in-plane wire-axis direction

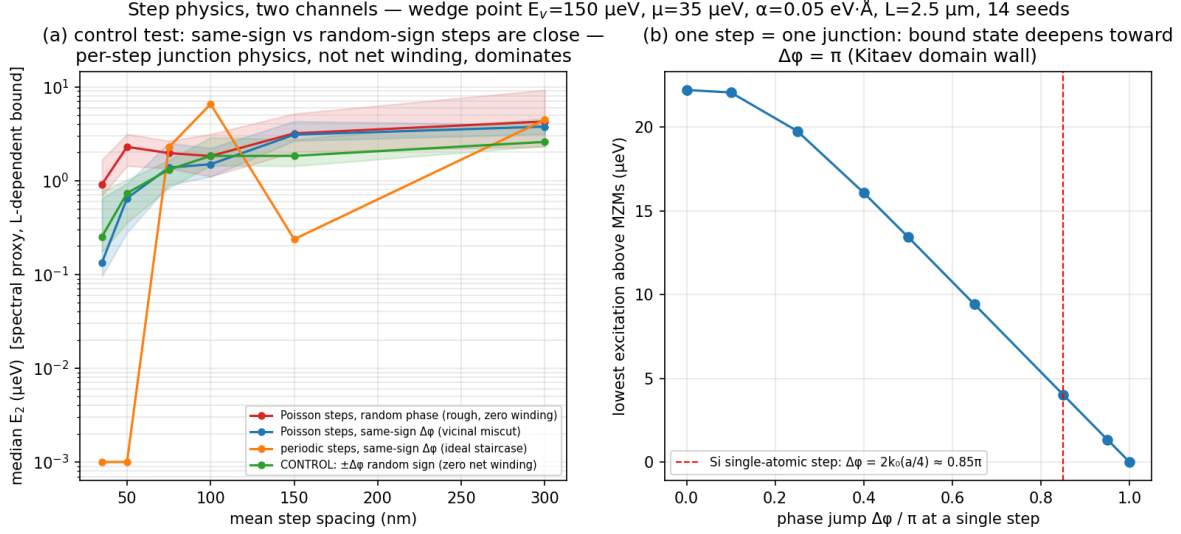


Figure 1: Step physics in the inter-valley-paired electron wire. (a) Controlled scenario comparison at fixed jump magnitude: same-sign (vicinal) and sign-randomized (zero-winding control) staircases are statistically indistinguishable—per-step junction physics, not winding, dominates. (b) A single VO phase step is a Josephson-like junction; the Si single-step value 0.85π sits near the Kitaev domain-wall point π .

is g -starved ($3\text{--}9\text{ }\mu\text{eV}$). (iii) The **thin-film Si:B** route turns the “Pauli-limited” hypothesis into a fabrication target: with coherence lengths from measured perpendicular critical fields ($\xi = 29\text{--}57\text{ nm}$), films of $d \lesssim 18\text{--}36\text{ nm}$ have parallel orbital critical fields above the Pauli limit $B_P = 1.11\text{ T}$, and $d = 10\text{--}20\text{ nm}$ films support $21\text{--}27\text{ }\mu\text{eV}$ (modulo unmodeled $T_c(d)$ suppression). Quasiparticle poisoning bounds the role of the measured-field stack: at operating fields the Si:B parent gap is $29\text{--}33\text{ }\mu\text{eV}$, so $x_{qp} = 10^{-6}$ requires $T_{\text{eff}} \leq 25\text{--}29\text{ mK}$ (Al reference: 130 mK)—a detection platform, not a parity-coherent qubit, absent parent-gap engineering.

5 Transport-level verification

RGF transmission with normal leads validates the clean wire (transport gap 37.3 vs bulk $36.8\text{ }\mu\text{eV}$) and provides sign $\det r$ as a topological invariant. Under onsite disorder the spectral proxy (third-smallest $|E|$) is *conservative* at moderate strength (localized states carry no current): the engineered-electron case’s half-gap threshold moves from $W \approx 410$ to $\approx 548\text{ }\mu\text{eV}$, and breakdown is abrupt—a class-D zero-energy transmission anomaly coinciding with invariant sign flips—rather than a soft closing [Fig. 5]. The same machinery extended to eight-orbital valley cells yields the Anderson-insulator warning of Sec. 3.3.

6 Discussion

Two measurements now decide the silicon question. First, the **parallel critical field of thin ($\leq 20\text{ nm}$) laser-doped Si:B films**: if it approaches the Pauli limit, as measured coherence lengths permit, the all-silicon hole stack supports $\gtrsim 20\text{ }\mu\text{eV}$ gaps in a CMOS-compatible, same-crystal materials system; if films remain orbital-limited at $\sim 0.4\text{ T}$, the stack is capped near $10\text{--}15\text{ }\mu\text{eV}$ and

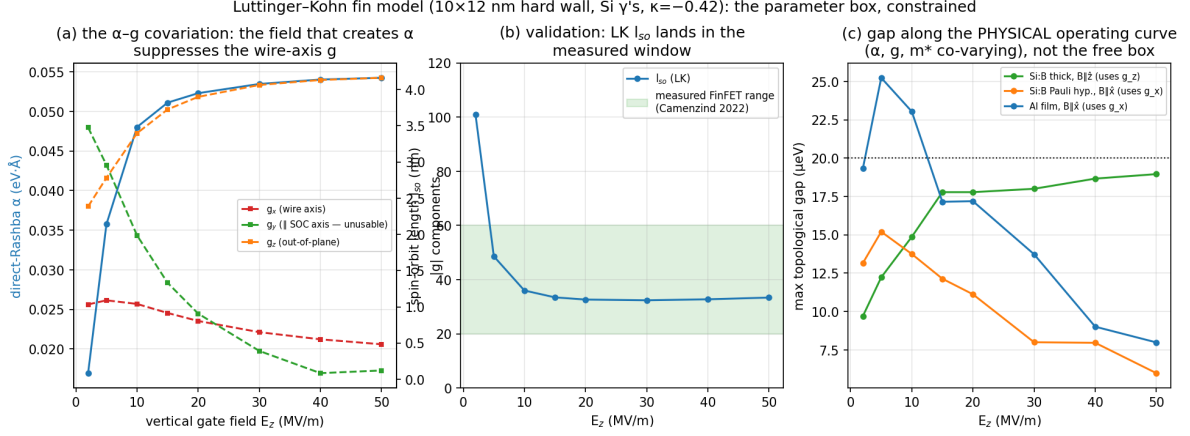


Figure 2: Luttinger–Kohn constraint on the hole platform: (a) α – g covariation under the gate field; (b) validation of l_{so} against FinFET measurements; (c) accessible gap along the physical operating curve for three parent/orientation scenarios.

detection-only. Second, the **wire-axis hole g -factor and SOC axis** in the actual gated geometry: our LK bracket and the published FinFET values differ by $2\times$ along the one direction that matters for film parents. Both measurements are standard characterization, neither requires a working topological device, and the electron-side miscut prediction offers a third, independent test of the framework. We caution that the step-junction mechanism, the orientation maps, and all platform numbers inherit the stated caricatures (single channel, hard-wall LK, parent-gap models, iid disorder), and that this work’s verification relied on documented adversarial AI review rounds; the corrections log accompanies the code.

Repository

All results regenerate from the committed code (`run_analysis.py`, `transport.py`, `transport_valley.py`, `lk_holes.py`, `qp_poisoning.py`, `tests.py`); figures and the numerical ledger are under `output/`.

References

- [1] A. Kitaev, Phys.-Usp. **44**, 131 (2001).
- [2] R. M. Lutchyn, J. D. Sau, S. Das Sarma, Phys. Rev. Lett. **105**, 077001 (2010).
- [3] Y. Oreg, G. Refael, F. von Oppen, Phys. Rev. Lett. **105**, 177002 (2010).
- [4] V. Mourik *et al.*, Science **336**, 1003 (2012).
- [5] H. Pan, S. Das Sarma, Phys. Rev. Research **2**, 013377 (2020).
- [6] M. Aghaee *et al.* (Microsoft Quantum), Phys. Rev. B **107**, 245423 (2023).
- [7] W. S. Cole, S. Das Sarma, T. D. Stanescu, Phys. Rev. B **92**, 174511 (2015).
- [8] M. Kjaergaard, K. Wölms, K. Flensberg, Phys. Rev. B **85**, 020503(R) (2012).
- [9] S. Turcotte *et al.*, Phys. Rev. B **102**, 125425 (2020).

Field-orientation maps ($\mu=0$): star = in-plane along wire; triangle = out-of-plane.
 LK says: out-of-plane B (g_z) with a thick parent; the in-plane/wire direction is g-starved.

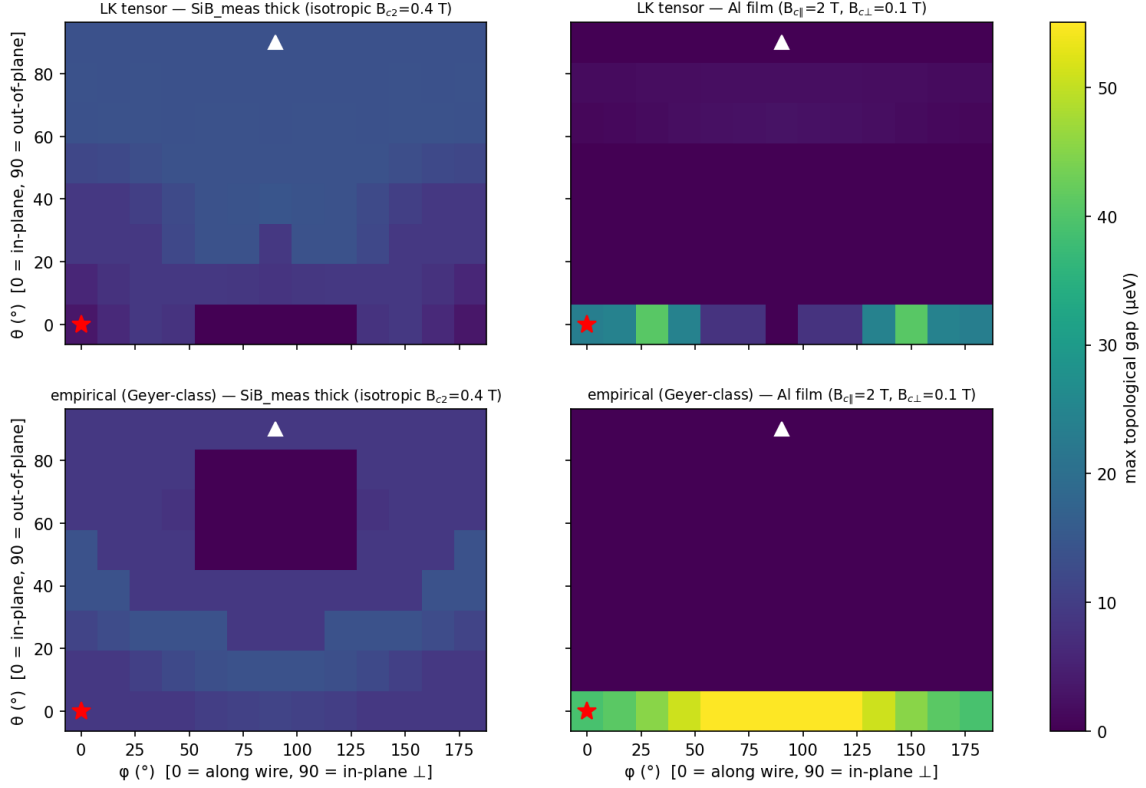


Figure 3: Maximum topological gap vs field orientation for LK (top) and empirical (bottom) hole g -tensors, with thick measured-Si:B (left) and Al-film (right) parents. Star: in-plane along the wire; triangle: out-of-plane.

- [10] arXiv:2505.06040 (2025).
- [11] M. P. Losert *et al.*, Phys. Rev. B **108**, 125405 (2023).
- [12] A. Hosseinkhani, G. Burkard, Phys. Rev. B **100**, 125309 (2019).
- [13] J. Osca, D. Ruiz, L. Serra, Phys. Rev. B **89**, 245405 (2014).
- [14] S. Bosco, B. Hetényi, D. Loss, PRX Quantum **2**, 010348 (2021).
- [15] L. C. Camenzind *et al.*, Nat. Electron. **5**, 178 (2022).
- [16] S. Geyer *et al.*, Nat. Phys. (2024).
- [17] B. Voisin *et al.*, Nano Lett. **16**, 88 (2016).
- [18] E. Bustarret *et al.*, Nature **444**, 465 (2006).
- [19] C. Marcenat *et al.*, Phys. Rev. B **81**, 020501(R) (2010).
- [20] J. E. Duvauchelle *et al.*, arXiv:1508.04075 (2015).
- [21] arXiv:2404.02748 (2024).

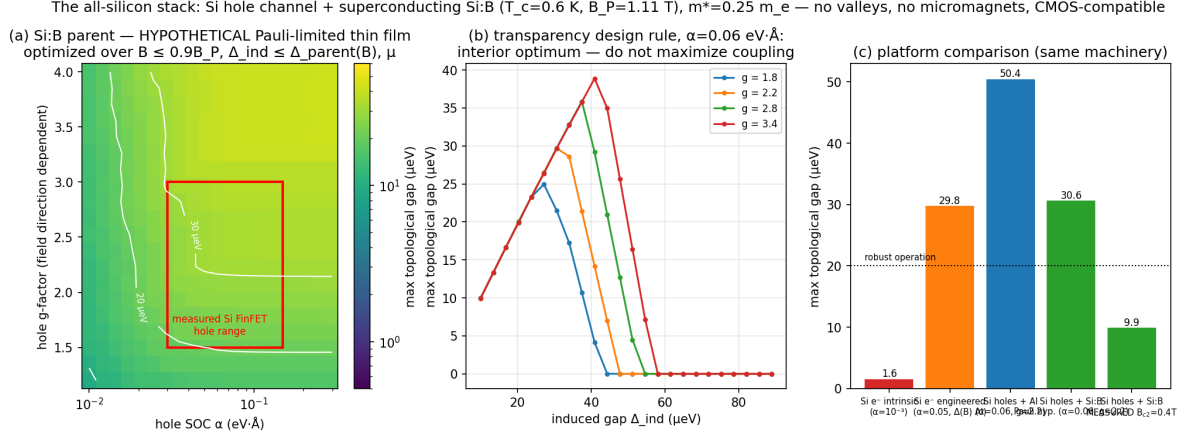


Figure 4: The all-silicon stack under the (hypothetical) Pauli-limited Si:B parent: (a) gap over the empirical (α, g) box; (b) the transparency design rule (interior optimum); (c) platform comparison including the measured-field Si:B scenario.

[22] arXiv:2108.03031 (review).

[23] F. Maier, J. Klinovaja, D. Loss, Phys. Rev. B **90**, 195421 (2014).

[24] C. Reeg, D. Loss, J. Klinovaja, Phys. Rev. B **97**, 165425 (2018).

[25] B. Nijholt, A. R. Akhmerov, Phys. Rev. B **93**, 235434 (2016).

Fig 12 — transport gap of the engineered-Si wire ($\alpha=0.05$ eV·Å, $\Delta=50$ μeV , $B=1.5$ T, $\mu=0$, $L=2$ μm , $dx=2.5$ nm; normal leads $\mu_{\text{lead}}=2000$ μeV)

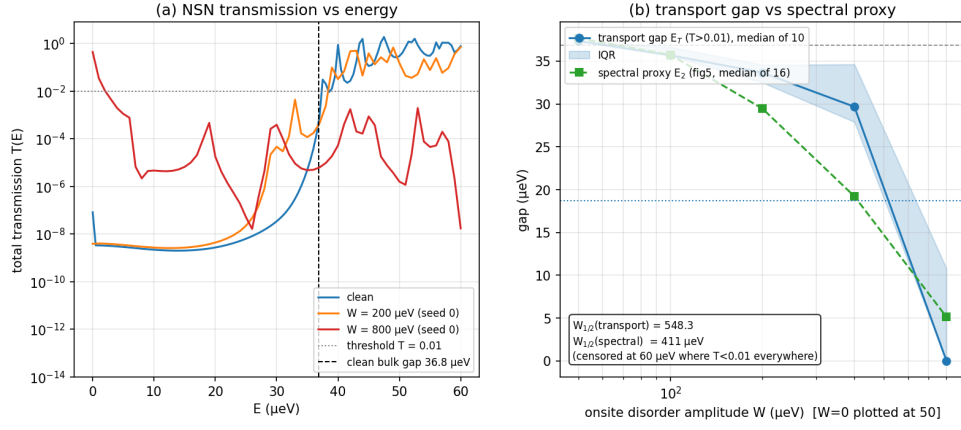


Figure 5: Transport vs spectral disorder thresholds (engineered-electron case): (a) transmission spectra; (b) median transport gap vs disorder with the spectral proxy overlaid.