



博点玻璃

Bodian glass

enterprise profile

About the company | company product |
enterprise advantage | enterprise future



Foshan Bodian Glass Co. , Ltd. was established in 2018, the company is located in Nanhai District, Foshan City, Guangdong Province, Shishan Town. In the early days of our company, we have introduced a series of advanced glass processing equipments, such as tempering furnace, edge grinder, drilling machine, hollow wire, etc. , with all-round, large production capacity, flexible and changeable service capacity.


The company focuses on the production and processing of insulating glass, toughened glass glass, laminated glass and process glass. The products are widely used in home decoration, construction and other fields. All glass products produced by the Chinese Safety Glass Certification Center of inspection, and made the“National compulsory product certification” or“3C” certification. Bodian glass not only serves the domestic market, but also actively expands the international market, providing one-stop glass solutions for global customers.

Production base and technical strength

Bodian glass has two production bases, covering a total area of 15,000 square meters, equipped with advanced production equipment, including five hollow glass production lines, CNC bending machine, high precision CNC cutting machine, automatic grinding machine and SouthTech steel furnace. These modern facilities ensure that the company can efficiently and stably produce high-quality glass products that meet international standards.



SOUTH TECH Steeler furnace

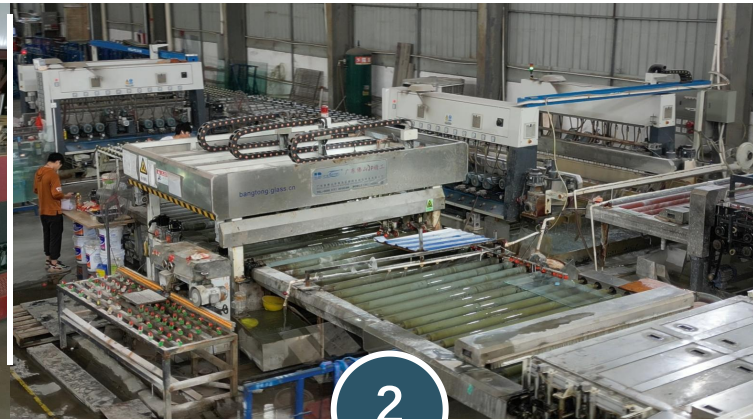

Automatic edge grinding machine



Hollow glass production line

High quality raw materials



Glass original piece

We are all using Xinyi, South Glass and other big brand original film, Usually with higher strength, good flatness and uniformity, thickness, and low iron content, can reduce the risk of self-explosion.

butyl rubber

As the first dense process in the manufacturing of insulating glass, the sealing material mainly plays the role of water vapor sealing. High quality butyl glue has very low water vapor transmittance.



Silicone glue

We all use the first-line brand silicone treasure silicone gel. High quality silicone gel has good weather resistance, vibration resistance, and adhesion to a variety of materials, making it an ideal choice for hollow glass external sealing.



A team full of vigor and innovation spirit

Have a young and experienced team. The team has more than 80 people, and the average age of the team is only 29 years old, which is full of vigor and innovation. The dynamic and experienced expertise of young people help companies stay ahead in a competitive market, while also providing more diverse and high-quality services to their customers.

The company believes that employees are not only producers, but also a member of the corporate family. Therefore, Bodian Glass focuses on personal development, provides training and learning opportunities, and encourages employees to improve their skills and expertise.





Domestic to international

The company in the domestic market has a solid foundation for customers around the country to provide quality glass products and services. With the advancement of globalization, but also actively expand overseas markets. Products exported to Australia, Africa, the Middle East, Cambodia, Vietnam and other countries.

Offline to online

Offline with perfect sales and service, network, to provide customers with direct product display. With the development of e-commerce, the company also actively lays out online platforms, expands sales channels through the Internet, and provides convenient online consultation and customer service.

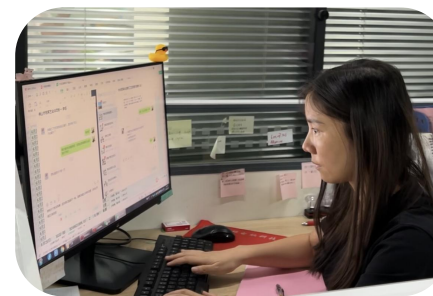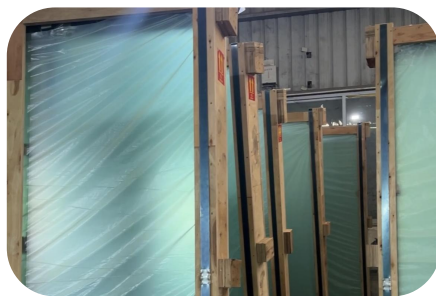

Home decoration to engineering

Focus on the field of home decoration, to provide customized doors and Windows glass products. For engineering projects, the company with rich experience and technical strength, can undertake various scales of glass engineering, including curtain wall, glass guardrail, glass handrail, decorative glass, etc.

tempering glass



Widely used in indoor separation, broken, furniture, automobile manufacturing, manufacturing, electronic equipment and other fields. And environments that require heat and impact resistance.

hollow glass



Mainly used for building curtain wall, doors and Windows, cold storage, sound insulation wall, etc. The sound insulation effect has higher requirements for the place is particularly applicable.

Adhesive glass



Commonly used in banks, jewelry stores, museums, glass guardrails, sunroom awning and other high-security demand places of windows and display cabinets.

Craft glass



Used for screen, table top, shower partition, floor, lighting, hotel decoration, add visual beauty and artistic atmosphere of the building.

Broken bridge aluminum balcony window

Product characteristics

- **Heat insulation and insulation:** Modern glass technologies, such as double or three layers of glass and glass, can effectively heat insulation and insulation, reduce indoor and outdoor temperature exchange, and improve energy efficiency.
- **Sound insulation:** Special treatment of sound insulation glass can reduce the introduction of external noise and create a quiet living environment.
- **Safety:** insulating glass has higher strength and impact resistance, can improve the safety of the balcony, prevent accidental injury.





glass curtain wall

- **Thermal insulation:** through the use of hollow glass or low radiation (Low-E) glass, glass curtain wall can effectively reduce heat transfer, improve the energy efficiency of building .
- **security:** tempered glass or laminated glass is widely used in curtain wall, to ensure that when the impact will not easily broken, even broken will form smaller pieces, reduce the damage to the human body.
- **Wind pressure resistance:** the influence of glass curtain wall should be considered in the design of wind pressure to ensure that it can be stable under strong wind.
- **UV protection:** Low-E glass and other special coated glass can block most of the ultraviolet light and protect indoor people and items from ultraviolet damage.

1



Stair handrail

The stair handrails made of toughened glass materials are durable and strong, able to withstand daily use and impact, and are not easy to deform and wear. Transparent and bright, increase the sense of space, can be combined with a variety of decoration style, its unique transparency and aesthetic is loved by everyone

2



Office partition

The glass partition provides good permeability, helps enhance the space feeling and the daylighting effect in the office, adds the shutter, the concealment effect is better, through uses the insulating glass or other special sound insulation material, can provide a certain degree of sound insulation, creating a quiet working environment.

Glass guardrail



Glass greenhouse



sunlight room





Glass wardrobe



Glass wine cabinet



shower room

Foshan Shadi Airport



Product Configuration:
10LOW-钢+12A+10白钢
6LOW-钢+12A+6白钢
Project Glass Quantity:
5000 square meters
project address:
Guangdong, Foshan

Huge industrial park in Panyu County



Product Configuration:
8超白LOW-E钢+12A+6白钢
+1.52pvb+6白钢
6超白LOW_E钢+12A+6白钢
Project Glass Quantity:15000
square meters
project address: Guangdong,
Foshan



**Zhuhai Golden
Bay aviation
new city**

Product Configuration:

8双银LOW-E钢+12A+8超白钢

6双银LOW-E钢+12A+6超白钢

Project Glass Quantity: 21000 square
meters

project address: Guangdong, Zhuhai

Product Configuration:

8LOW-钢+12A+8白钢

6LOW-钢+12A+6白钢

Project Glass Quantity: 10000 square
meters

project address: Guangdong, Foshan



**Foshan
European
industrial park**

Shenzhen Bright Science City



Product Configuration:
8LOW-E钢+12A+8超白钢
6LOW-E钢+12A+6超白钢
Project Glass Quantity:
16000 square meters
project address:
Guangdong, Shenzhen




Shenzhen Guangqi Future Center





Product Configuration:
6白钢+12A+6LOW-E+1.52pvb+6白钢
6白钢+12A+6LOW-E+1.52pvb+6白钢 (弯弧)
Project Glass Quantity:28000 square meters
project address: Guangdong, Shenzhen


Open frame curtain wall

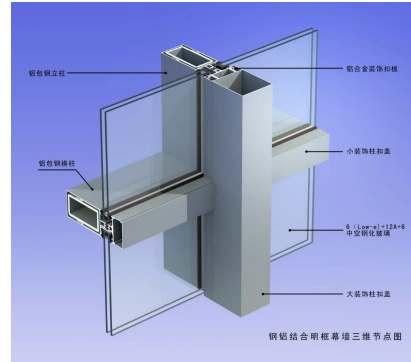


System a curtain wall series

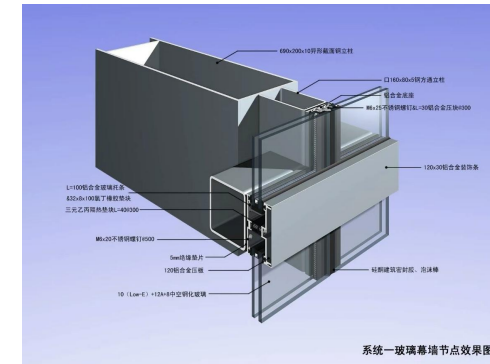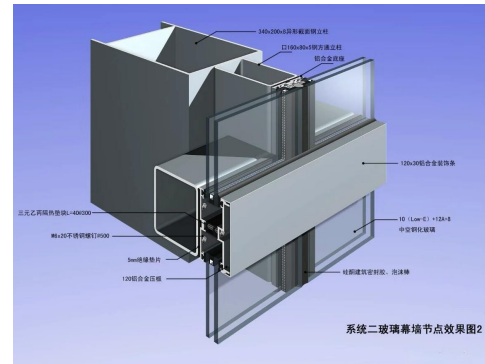



Hidden Frame of the main building

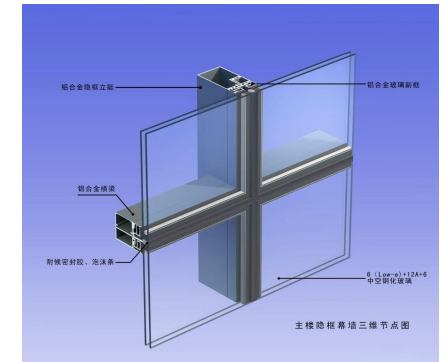


Hidden frame curtain wall

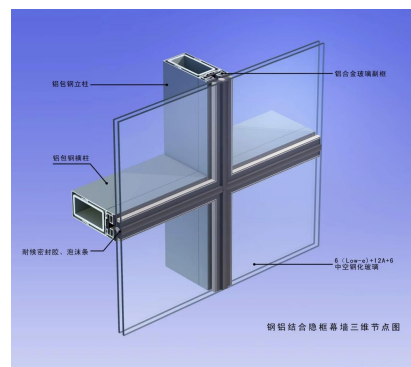

System II curtain wall series

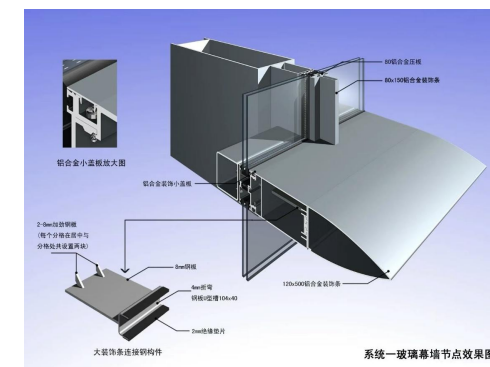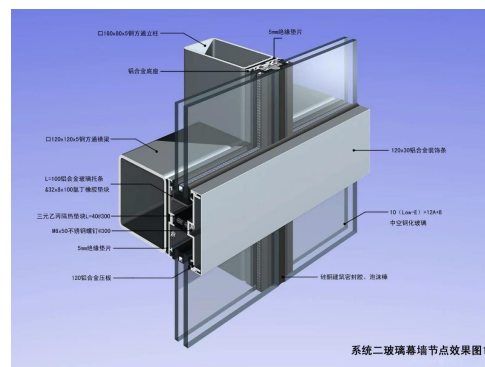

Skirt floor clear frame

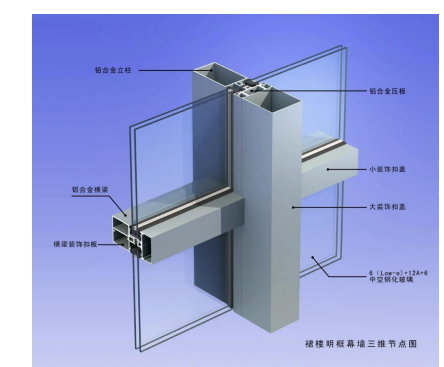

Selection of curtain wall glass

1. Glass varieties: different glass varieties may have different performance characteristics, such as shading type, high-permeability type.
2. Substrate color: substrate color will affect the appearance of glass and transparency, can choose transparent, color, etc. .
3. Reflective color: reflective color will affect the external visual effect of the glass and the ability to reflect light.
4. Use: according to the use of glass scene (such as shading, high-permeability, etc.) , select the corresponding glass varieties.
5. U value ($\text{W/m}^2 \cdot ^\circ\text{C}$ -RRB-): it indicates the heat insulation performance of glaThe the loUer u value, the better the heat insulation performance. Different gas filling (e. g. air, argon, chlorine) will affect the U value.
6. Shading coefficient: the solar energy transmission ratio and visible light transmission ratio of the glass are considered to reflect the shading effect of the glass.

玻璃品种	基片颜色	反射颜色	用途	可见光(%)			太阳能(%)		U 值(W/m ² ·℃)				遮阳系数	相对增热(W/m ²)
				透射比	反射比		透射比	反射比	冬季夜间	冬季白天	夏季白天	夏季夜间		
					室外	室内			空气	氩气	空气	氩气		
CF811-58S+12A+6C	透明	浅灰(暖)	遮阳型	52	14	13	33	26	179	1.49	1.91	1.57	0.44	292
CEB12-48S+12A+6C	透明	银灰	遮阳型	43	47	39	28	49	163	1.31	1.65	1.26	0.37	244
CEB12-60S+12A+6C	透明	银灰	遮阳型	55	27	17	34	35	1.70	1.38	1.75	1.38	0.44	294
CEB13-63S+12A+6C	透明	蓝色	遮阳型	57	24	15	37	30	1.75	1.44	1.84	1.48	0.49	323
CEB14-50S+12A+6C	透明	浅灰	遮阳型	46	18	11	30	26	1.81	1.51	1.95	1.61	0.41	275
CEB14-60S+12A+6C	透明	浅灰(冷)	遮阳型	55	15	11	35	23	180	1.50	1.93	1.59	0.47	315
CEB21-58M+12A+6C	魔鬼绿	绿色	遮阳型	44	11	13	21	10	1.77	1.47	1.94	1.62	0.32	216
CEB22-48M+12A+6C	魔鬼绿	亮绿	遮阳型	37	35	37	18	20	1.64	1.31	1.71	1.36	0.27	182
CEB22-60M+12A+6C	魔鬼绿	绿色	遮阳型	46	20	17	21	14	1.66	1.33	1.75	1.40	0.31	211
CEB23-63M+12A+6C	魔鬼绿	蓝绿色	遮阳型	50	20	14	24	14	1.76	1.46	1.91	1.58	0.35	236
CEB24-50M+12A+6C	魔鬼绿	灰绿色	遮阳型	41	14	11	19	11	1.81	1.51	1.99	1.68	0.30	207
CEB24-60M+12A+6C	魔鬼绿	灰绿	遮阳型	48	13	10	24	10	1181	1.51	1.99	1.67	0.35	238
CEI11-38S+12A+6C	透明	银灰	遮阳型	35	28	21	21	32	1.71	1.39	1.79	1.43	0.30	202
CEI13-69S+12A+6C	透明	浅蓝色	高透型	62	16	12	38	28	1.71	1.40	1.79	1.42	0.50	328
CEI16-50S+12A+6C	透明	蓝灰色	遮阳型	45	32	15	28	38	1.71	1.40	1.78	1.41	0.38	252
CEI21-38M+12A+6C	魔鬼绿	亮绿	遮阳型	32	23	20	14	15	1.69	1.37	1.82	1.48	0.24	163
CEI23-69M+12A+6C	魔鬼绿	浅蓝绿	遮阳型	55	14	13	25	12	1.72	1.41	1.84	1.51	0.36	240
CEI26-50M+12A+6C	魔鬼绿	浅蓝绿	遮阳型	39	25	15	18	16	1.71	1.40	1.84	1.50	0.28	194

热工参数表 Thermal parameter table

普通白玻参数 (C)												
序号	玻璃制品结构	可见光 (%)			太阳能 (%)			K值 (W/K)		遮阳系数SE	得热因子	相对热增益 (W/)
		透过率	反射率		透过率	反射率	吸收率	冬天空气	夏天空气			
			外表面	内表面								
1	4C	90	7	7	86	7	8	5.40	5.46	1.01	0.88	661
2	5C	90	7	7	83	6	11	5.38	5.43	0.99	0.86	664
3	6C	89	7	7	81	6	13	5.35	5.39	0.97	0.84	654
4	8C	89	7	7	79	6	15	5.30	5.34	0.96	0.83	644
5	10C	87	7	7	75	6	19	5.24	5.28	0.92	0.80	624
6	12C	87	7	7	74	6	21	5.19	5.23	0.91	0.79	616
超白玻参数 (CH)												
序号	玻璃制品结构	可见光 (%)			太阳能 (%)			K值 (W/ K)		遮阳系数SE	得热因子	相对热增益 (W/)
		透过率	反射率		透过率	反射率	吸收率	冬天空气	夏天空气			
			外表面	内表面								
1	5CH	91	8	8	90	8	2	5.38	5.43	1.04	0.91	701
2	6CH	91	8	8	90	8	2	5.35	5.40	1.04	0.91	699
3	8CH	91	8	8	89	8	4	5.30	5.35	1.04	0.90	696
4	10CH	91	8	8	88	7	4	5.24	5.29	1.03	0.90	692
5	12CH	90	7	7	88	7	5	5.20	5.24	1.03	0.89	688
F绿参数 (GF)												
序号	玻璃制品结构	可见光 (%)			太阳能 (%)			K值 (W/K)		遮阳系数SE	得热因子	相对热增益
		透过率	反射率		透过率	反射率	吸收率	冬天	夏天			
1	2GF	86	7	7	69	5	25	5.95	5.36	0.88	0.77	598
2	3GF	83	6	7	61	5	34	5.92	5.33	0.82	0.71	559
3	4GF	80	6	6	54	5	41	5.88	5.31	0.76	0.66	523
4	5GF	77	6	6	48	5	47	5.85	5.28	0.72	0.63	495
5	6GF	75	6	6	44	5	52	5.81	5.25	0.69	0.60	474
6	8GF	70	6	6	36	4	60	5.74	5.19	0.63	0.55	437
7	10GF	65	5	5	30	4	66	5.67	5.13	0.59	0.51	409
8	12GF	60	5	5	25	4	71	5.61	5.07	0.56	0.48	389
水晶灰参数 (LH)												
序号	玻璃制品结构	可见光 (%)			太阳能 (%)			K值 (W/K)		遮阳系数SE	得热因子	相对热增益 (W/)
		透过率	反射率		透过率	反射率	吸收率	冬天空气	夏天空气			
			外表面	内表面								
1	4LH	72	7	7	66	7	28	5.40	5.46	0.85	0.74	579
2	5LH	68	7	7	61	6	33	5.38	5.43	0.81	0.71	554
3	6LH	64	6	6	57	6	38	5.35	5.36	0.77	0.67	530
4	8LH	56	6	6	48	5	46	5.30	5.34	0.71	0.62	488
5	10LH	50	6	6	42	5	53	5.25	5.24	0.66	0.57	456
6	12LH	44	6	6	36	5	59	5.19	5.24	0.61	0.53	427
欧洲灰参数 (EH)												
序号	玻璃制品结构	可见光 (%)			太阳能 (%)			K值 (W/K)		遮阳系数SE	得热因子	相对热增益 (W/)
		透过率	反射率		透过率	反射率	吸收率	冬天空气	夏天空气			
			外表面	内表面								
1	4EH	56	6	5	55	5	39	5.40	5.45	0.76	0.66	522
2	5EH	50	5	5	49	5	46	5.38	5.44	0.71	0.62	491
3	6EH	45	5	5	44	5	52	5.82	5.25	0.69	0.60	474
4	8EH	35	5	5	34	4	62	5.30	5.35	0.59	0.51	414
5	10EH	26	4	4	26	4	70	5.24	5.28	0.53	0.46	375
6	12EH	21	4	4	20	4	76	5.20	5.24	0.42	0.42	347

Noun explanation

名词解释:

可见光透射比 (TVIS)

在可见光光谱 (波长: 380-780nm) 范围内, 透过玻璃光强度的百分比。

可见光反射比 (RVIS)

在可见光光谱 (波长: 380-780nm) 范围内, 玻璃表面反射光强度的百分比。

太阳能透射比 (TSOL)

在太阳光谱 (300nm 至 2500nm) 范围内, 直接透过玻璃的太阳能强度对入射太阳能强度的比值。它包括了紫外线、

可见和近红外能量的透射强度, 但不包括玻璃吸收直接入射的太阳光能量后向外界的二次传递的能量部分。

太阳能反射比 (RSOL)

在太阳光谱 (300nm 至 2500nm) 范围内, 玻璃反射的太阳能强度对入射太阳能强度的比值。

太阳得热系数 (SHGC)

透过玻璃的太阳辐射总能量入射太阳辐射能之比, 也称太阳因子 (Solar Factor)。其实它就是太阳能总透射比 g, 中国基础标准中采用 g 表示, 建筑热工应用标准中多用 SHGC。g=0.87Sc (式中 0.87 为标准 3mm 透明玻璃的太阳能总透射比)。

传热系数 (K 值 /U 值)

K 值 (或 U 值) 即玻璃的传热系数, 表示热量通过玻璃中心部位而不考虑边缘效应, 稳态条件下, 玻璃两面单位空气, 温度差, 单位时间内, 通过单位面积的热量。单位是瓦每平方米每开尔文 (W/m.K)。K 值的测量有欧洲 EN673 标准 (ISO10292)、美国 NFRC100、美国 ASHRAE 标准。中国采用 JGJ《门窗幕墙热工性能计算》标准。对同一款产品, 我国标准的 K 值与美国标准的 U 冬季值相等或相当, 欧洲标准的 U 值最小。

太阳红外热能总透射比 (G)

在太阳光谱的近红外波段 790-2500 纳米范围, 直接透过玻璃的太阳辐射强度和玻璃吸收太阳能再经二次传热透过的部分之和与该波长范围入射太阳辐射强度的比值, 以百分比表示。该部分太阳能进入室内后直接引起物体升温, 是夏季空调制冷的主要负荷。太阳红外热能总透射比是衡量 Low-E 玻璃隔热性能最直接和最准确的指标, 越低越好。光热比可见光透射比与太阳能总透射比的比值。光热比 LSG= 透光率 T/ 太阳能总透射比 g

太阳光谱构成

太阳光主要由可见光、紫外线和红外线构成。能量分布为: 可见光 47%、紫外线 2%、红外线 51%

热工参数表 thermal parameter table

单银LOW-E中空玻璃										
产品名称	反射颜色	可见光		U值				遮阳系数		
		透过	反射	冬天		夏天		RC (美标)		JGJ
				NFRC	JGJ	NFRC	JGJ			
L140(6+12A+6C)	金色	27	30	44	1.8	1.81	1.8	1.84	0.32	0.33
S140(6+12A+6C)	银灰	36	29	9	1.8	1.81	1.8	1.83	0.34	0.35
LC140(6+12A+6C)	茶色	40	18	15	1.82	1.83	1.82	1.85	0.37	0.38
SP50(6+12A+6C)	银灰	40	32	13	1.76	1.7	1.76	1.78	0.36	0.37
B146(6+12A+6C)	银灰	40	28	13	1.74	1.76	1.75	1.77	0.37	0.38
B150(6+12A+6C)	蓝灰	44	18	9	1.84	1.84	1.84	1.88	0.42	0.4
S150(6+12A+6C)	银灰	44	29	12	1.76	1.77	1.75	1.78	0.39	0.41
S151(6+12A+6C)	蓝灰	45	28	12	1.76	1.74	1.78	1.75	0.39	0.4
B151(6+12A+6C)	浅蓝灰	45	22	10	1.81	1.80	1.80	1.8	0.43	0.42
B157(6+12A+6C)	浅蓝灰	52	21	11	1.79	1.80	1.80	1.82	0.48	0.46
S160(6+12A+6C)	浅灰	53	22	10	1.8	1.81	1.8	1.83	0.45	0.47
B160(6+12A+6C)	蓝灰	53	17	9	1.84	1.84	1.84	1.88	0.49	0.48
B161(6+12A+6C)	浅蓝灰	54	16	10	0.43	0.50	1.83	1.8	0.5	0.51
B153(6+12A+6C)	浅灰	55	14	11	1.84	1.84	1.86	1.86	0.47	0.49
B170A(6+12A+6C)	浅蓝	64	11	11	1.73	1.7	1.71	1.72	0.55	0.53
B170(6+12A+6C)	蓝灰	64	11	11	1.84	1.84	1.84	1.88	0.54	0.56
B180(6+12A+6C)	中性	72	10	11	1.85	1.85	1.89	1.89	0.67	0.65
B182(6+12A+6C)	中性	72	10	13	1.79	1.78	1.77	1.8	0.64	0.62
B181(6+12A+6C)	无色	78	12	12	1.86	1.86	1.87	1.84	0.68	0.69
BTN0080 (6+12A+6C)	中性	74	11	12	1.85	1.85	1.85	1.84	0.7	0.73
BTB0070 (6+12A+6C)	蓝色	65	12	11	1.84	1.84	1.84	1.83	0.58	0.61
BTB0060 (6+12A+6C)	蓝色	54	18	9	1.84	1.84	1.84	1.83	0.51	0.53
BTB0050 (6+12A+6C)	蓝色	45	19	9	1.84	1.84	1.84	1.83	0.42	0.45
STS0060 (6+12A+6C)	浅灰	55	24	11	1.78	1.79	1.77	1.77	0.47	0.5
STS0050 (6+12A+6C)	银灰	45	32	13	1.76	1.77	1.75	1.75	0.4	0.43
STS0040 (6+12A+6C)	银灰	37	30	9	1.8	1.81	1.8	1.79	0.36	0.38
BTN0380 (6+12A+6C)	浅灰	52	8	10	1.85	1.85	1.85	1.84	0.5	0.52
BTB0370 (6+12A+6C)	蓝灰	47	9	11	1.84	1.84	1.84	1.83	0.42	0.44
BTB0360 (6+12A+6C)	蓝灰	39	12	8	1.84	1.84	1.84	1.83	0.37	0.39
BTB0350 (6+12A+6C)	蓝灰	32	12	9	1.84	1.84	1.84	1.83	0.32	0.34
STS0360 (6+12A+6C)	灰色	38	14	11	1.78	1.79	1.77	1.77	0.35	0.37
STS0350 (6+12A+6C)	灰色	32	18	12	1.76	1.77	1.75	1.75	0.31	0.33
STS0340 (6+12A+6C)	灰色	26	18	8	1.8	1.81	1.8	1.79	0.28	0.29
BTN2380 (6+12A+6C)	灰色	36	6	10	1.85	1.85	1.85	1.84	0.41	0.42
BTN2370 (6+12A+6C)	灰色	32	6	10	1.84	1.84	1.84	1.83	0.35	0.36
BTN2360 (6+12A+6C)	灰色	26	7	8	1.84	1.84	1.84	1.83	0.31	0.32
BTN2350 (6+12A+6C)	灰色	22	8	8	1.84	1.84	1.84	1.83	0.27	0.29
STS2360 (6+12A+6C)	灰色	27	9	10	1.78	1.79	1.77	1.77	0.29	0.31
STS2350 (6+12A+6C)	灰色	22	11	12	1.77	1.77	1.75	1.75	0.26	0.27
STS2340 (6+12A+6C)	灰色	18	10	8	1.8	1.81	1.8	1.79	0.24	0.25
双银LOW-E中空玻璃										
产品名称	反射颜色	可见光		U值				遮阳系数		
		透过	反射	冬天		夏天		RC (美标)		JGJ
				NFRC	JGJ	NFRC	JGJ			
DTB0140(6+12+6C)	灰色	42	23	20	1.68	1.68	1.67	1.66	0.33	0.35
D3(6+12+6C)	蓝灰	43	28	27	1.72	1.68	1.7	1.66	0.25	0.28
D155(6+12A+6C)	蓝色	51	26	26	1.62	1.63	1.55	1.58	0.31	0.33
D2(6+12+6C)	浅灰	54	9	11	1.74	1.71	1.72	1.7	0.37	0.4
DPE66A-T(6+12+6C)	水晶灰	60	10	11	1.62	1.56	1.61	1.58	0.38	0.4
DB0171(6+12A+6C)	蓝灰	63	15	15	1.66	1.66	1.58	1.63	0.46	0.51
D1(6+12+6C)	中性	65	11	12	1.7	1.65	1.69	1.64	0.41	0.45
DE75A-T(6+12+6C)	中性	67	11	13	1.65	1.6	1.64	1.62	0.44	0.46
DB0179(6+12A+6C)	中性	70	11	12	1.65	1.66	1.59	1.62	0.48	0.51

单片阳光控制镀膜

产品编号	反射颜色	可见光			U值				遮阳系数	
		透过	反射		冬天		夏天		NFRC	JGJ
			室外	室内	NFRC	JGJ	NFRC	JGJ		
TY130	银灰	30	28	21	4.97	4.64	4.34	4.48	0.45	0.43
TG30	土豪金	25	14	25	5.37	5.2	5.3	5.36	0.46	0.44
TLB135	蓝色	38	27	5	4.76	4.72	4.68	4.69	0.5	0.49
TY140	灰色	40	22	10	5.11	4.76	4.5	4.64	0.52	0.51
TP140	灰色	42	14	18	0.53	0.61	4.87	5.3	0.58	0.56
TN145	蓝灰	43	29	20	5.92	5.34	5.8	5.78	0.62	0.61
TY148	蓝色	47	16	16	5.18	4.82	4.57	4.72	0.60	0.59
TLG145	金色	48	20	12	5.25	5.2	5	5.18	0.61	0.62
TH50	天蓝	48	20	21	5.81	5.61	5.03	5.2	0.63	0.62
TY150	灰色	50	22	18	5.46	5.05	4.87	5.02	0.65	0.64
TP150	蓝灰	51	20	20	0.60	0.70	5.16	5.7	0.67	0.65
TS60	银灰	58	25	24	5.75	5.18	5.55	5.67	0.74	0.73
TN159	灰色	59	21	22	5.98	5.4	5.88	5.9	0.76	0.75
TS70	银灰	65	30	30	5.78	5.21	5.65	5.68	0.82	0.81
TY165	浅灰	65	17	20	5.72	5.27	5.15	5.3	0.81	0.8
TY230	绿色	25	21	21	4.97	4.64	4.34	4.48	0.4	0.37
TY240	绿色	33	17	10	5.11	4.76	4.5	4.64	0.44	0.42
TY250	绿色	42	16	17	5.46	5.05	4.87	5.02	0.51	0.49
TY265	绿色	54	14	19	5.73	5.27	5.16	5.3	0.59	1.58
TY365	水晶灰	47	12	19	5.73	5.28	5.16	5.74	0.66	0.67
TY350	水晶灰	37	14	17	5.46	5.05	4.87	5.74	0.55	0.55
TY340	水晶灰	29	14	10	5.11	4.76	4.5	5.74	0.46	0.46
TY330	水晶灰	21	17	21	4.97	4.64	4.34	5.74	0.42	0.41
TY2365	欧洲灰	32	8	18	5.73	5.28	5.16	5.74	0.61	5.74
TY2350	欧洲灰	25	9	17	5.46	5.05	4.88	5.74	0.51	0.51
TY2340	欧洲灰	20	9	10	5.12	4.76	4.76	5.74	0.44	0.43
STY2330	欧洲灰	15	10	20	4.97	4.64	4.64	5.74	0.4	0.38

中空结构阳光控制镀膜

TY130(6+12A+6C)	银灰	27	28	24	2.44	2.41	2.56	2.62	0.35	0.35
TY140(6+12A+6C)	灰色	35	23	15	2.48	2.46	2.61	2.67	0.42	0.42
TY150(6+12A+6C)	灰色	45	23	21	2.6	2.56	2.73	2.8	0.54	0.54
TY165(6+12A+6C)	浅灰	59	20	23	2.68	2.64	2.82	2.88	0.7	0.69
TY230(6+12A+6C)	绿色	23	21	23	2.44	2.41	2.56	2.62	0.28	0.28
TY240(6+12A+6C)	绿色	30	17	15	2.48	2.46	2.61	2.67	0.32	0.32
TY250(6+12A+6C)	绿色	38	15	21	2.6	2.56	2.73	2.8	0.38	0.38
TY265(6+12A+6C)	绿色	49	16	22	2.68	2.64	2.82	2.88	0.46	0.46
TY0365 (6+12A+6C)	水晶灰	43	13	22	2.68	2.64	2.82	2.79	0.54	0.54
TY0350 (6+12A+6C)	水晶灰	33	15	21	2.6	2.56	2.73	2.7	0.43	0.44
TY0340 (6+12A+6C)	水晶灰	26	15	15	2.49	2.46	2.61	2.58	0.35	0.35
TY0330 (6+12A+6C)	水晶灰	19	17	23	2.44	2.41	2.56	2.52	0.3	0.31
TY2365 (6+12A+6C)	欧洲灰	29	8	22	2.68	2.64	2.82	2.79	0.4	0.4
TY2350 (6+12A+6C)	欧洲灰	23	9	21	2.6	2.56	2.73	2.7	0.38	0.38
TY2340 (6+12A+6C)	欧洲灰	18	9	15	2.49	2.46	2.61	2.58	0.31	0.31
TY2330 (6+12A+6C)	欧洲灰	13	10	23	2.41	2.75	2.51	2.82	0.28	0.29

三银LOW-E中空玻璃

DDCLR-6-PTE65A-T(6+12+6C)	浅蓝	57	9	14	1.62	1.55	1.6	1.57	0.31	0.34
DDCLR-6-PTE75A-T(6+12+7C)	中性绿	67	13	15	1.61	1.54	1.6	1.57	0.35	0.39

说明：1、以上数据由“Windows5.2”软件，根据中国JGJ/T151-2008以及美国NFRC100-2001标准条件计算得出。
2、以上数据仅供参考，如有变动恕不另行通知。最终实际参数以我司针对该项目产品提供的参数表为准。



中国国家强制性产品认证证书
CERTIFICATE FOR CHINA COMPULSORY PRODUCT CERTIFICATION

证书编号: 2019051302032146

委托人名称、地址: 佛山市博点玻璃有限公司
广东佛山市南海区狮山镇北园中路23号(车间二)(住所申报)

生产者(制造商)名称、地址: 佛山市博点玻璃有限公司
广东佛山市南海区狮山镇北园中路23号(车间二)(住所申报)

生产企业名称及地址: 佛山市博点玻璃有限公司(工厂代码: E008970)
广东佛山市南海区狮山镇北园中路23号(车间二)(住所申报)

产品名称和系列规格型号: 硅酮胶密封槽扣式双道密封建筑(安全)中空玻璃
(以上产品的关键原材料必须由本证书附表所列的制造商制造)

产品标准和技术要求: GB/T1944-2012<<中空玻璃>>

上述产品符合国家强制性产品认证实施规则CNCA-C13-01:2014<<强制性产品认证实施规则 安全玻璃>>的要求,特此证明。

发证日期: 2023年8月29日 有效期至: 2024年11月28日

本证书首次颁发日期: 2019年11月29日

证书有效期内本证书的有效性依据发证机构的定期监督获得保持。

本证书的相关信息可通过国家认监委网站www.cnca.gov.cn查询。

证书签发人:



中国国检测控股集团股份有限公司
中国·北京·朝阳区管庄东里 100024 网址: www.ctcac.cn 查询电话: +86-10-51167395, 7396

A 0151070

Insulating glass
product certification

Warranty certificate
for ten years



EEZAIA00200 No. 4400240008301850

中国人民财产保险股份有限公司 产品责任保险(1995版) 保险单(电子保单)

保险单号: PZA120244001000001947

鉴于投保人已向本保险人投保产品责任保险(1995版),并投本保险合同约定交付保险费,保险人同意按照《中国人民财产保险股份有限公司产品责任保险条款(1995版)》及附加险条款的约定承担保险责任,特立本保险单为凭。

投保人信息	投保人名称	佛山市博点玻璃有限公司	统一社会信用代码/组织机构代码	91 440605 MA53X28N3U
	联系人姓名	郭双连	联系电话	137****1098
被保险人信息	投保人地址	佛山市南海区狮山镇北园中路23号(车间五)(住所申报)		邮编
	被保险人名称	佛山市博点玻璃有限公司	统一社会信用代码/组织机构代码	91 440605 MA53X28N3U
	联系人名称	郭双连	联系电话	137****1098
	被保险地址	佛山市南海区狮山镇北园中路23号(车间五)(住所申报)		邮编
营业性质	生产			
承保区域	中国境内(港、澳、台除外)			
预计销售额	CNY: 500000.00		产品单价	元
保障内容	按照《产品责任保险条款(1995版)》:			
	保障项目:产品责任(1995版); 保险金额: ¥5,000,000.00元,累计责任限额:¥1,000,000.00元,每次事故每人人身伤亡责任限额:¥50,000.00元,每次事故免赔额:¥3,000.00元,每次事故人身伤亡责任限额:¥250,000.00元,每次事故财产损失限额:¥500,000.00元,每次事故财产损失责任限额:¥250,000.00元,每次事故免赔率:10.00%;			
保险费	人民币(大写)捌仟元整 ¥8000.00元(其中:不含税保险费总计: 7547.17元,增值税额总计: 452.83元);			
保险期间	共12个月,自2024年03月15日零时起,至2025年03月14日二十四时止			
保险合同争议解决方式	☒ 诉讼 ☐ 提交 仲裁委员会仲裁			
司法管辖	中国境内(港、澳、台除外)			

1. 兹经双方同意修正:

1. 本保险仅在下列条件下适用于在本保险单明细表中列明的追溯期开始后发生的事故引起的“人身伤害”和“财产损失”:

(1)由于“人身伤害”和“财产损失”引起的任何索赔,必须在本保险单有效期内以书面形式向任一被保险人提出第一次索赔;

(2)任何被保险人在本保险单生效之日时发生的事故都不知情或不能合理预见;

2. 本保单中“任何索赔”和“全部索赔”含义如下:

(1)任何个人或组织寻求损失补偿的“任何索赔”,在任一被保险人或公司收到书面通知后(以先收到者为),视为该索赔已经提出;

(2)同一个人或组织在任一事故中向任何被保险人第一次提出索赔时,即被视为“全部索赔”已经提出;

(3)任何个人或组织在任一事故中向任何被保险人第一次提出索赔时,即被视为“全部索赔”已经提出;

Claim Made Basis Clause

It is hereby agreed and amended:

1. This insurance applies to "bodily injury" and "property damage" resulting from an occurrence which first commences on and after the retroactive date designated in schedule, only if:

(1)A claim for damage because of "bodily injury" and "property damage" is first made in writing against any insured during the policy period and

(2)Any insured did not know or could not have reasonably foreseen such occurrence at the effective date of this Policy.

2. As used in this endorsement:

(1)"A claim" by a person or organization seeking damage will be deemed to have been made when written notice of such claim is received by any insured or by the Company, whichever comes first;

(2)"All claim" for damage because of "bodily injury" to the same person as a result of an occurrence, will be deemed to have been made at the time the first of those claims is made against any insured;

(3) "All claim" for damage because of "property damaged" causing loss to the same person or

中国国检测控股集团股份有限公司
国家安全玻璃及石英玻璃质量检验检测中心
检测报告


报告编号: QZ2022E09A19338 第1页共5页

生产企业	佛山市博点玻璃科技有限公司			
生产地址	广东佛山市南海区狮山镇西村华凤村民小组“芦荻园”地段厂房3(住所申报)			
样品名称	普通钢化玻璃			
样品描述	610mm×610mm×8mm 6块 1930mm×864mm×8mm 4块 1830mm×1220mm×8mm 4块 520mm×300mm×8mm 4块			
检测类别	CCC认证检测 (型式试验)	收样日期	样品状态	满足检测要求
检测依据	各检测项目检测依据详见检测报告			
判定依据	GB 15763.2-2005《建筑用安全玻璃 第2部分:钢化玻璃》 CNCA-C13-01:2014《强制性产品认证实施规则 安全玻璃》			
检测项目	抗冲击性、落锤冲击性能、碎片状态			
检测结论	*经检测,所检项目均符合GB 15763.2-2005《建筑用安全玻璃 第2部分:钢化玻璃》标准要求。依据CNCA-C13-01:2014《强制性产品认证实施规则 安全玻璃》,检测结论为合格。检测结果见第2页至第4页。*			
附注	(此处空白)			

批准: 审核: 编制: 签发日期: 2022年08月29日

检测机构地址: 北京市朝阳区管庄东里1号 电话: 010-51167363

Toughened glass 3C
test report

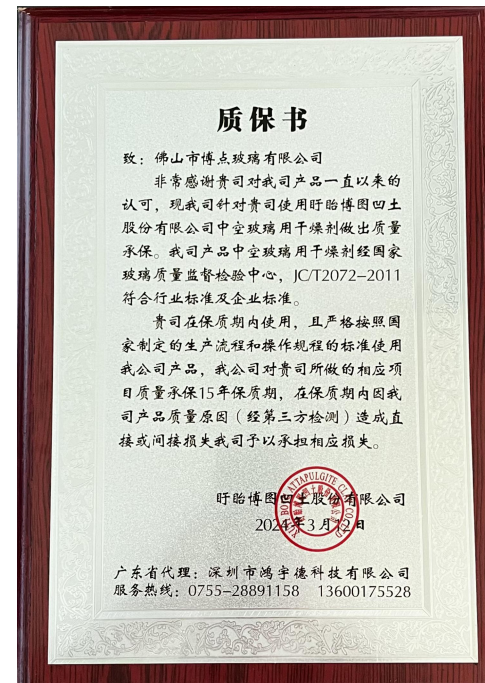

Chengdu Guibao Science & Technology Co., Ltd

Our product 882 sealant has been tested by the National Testing center, in line with the national standard: 882 (GB/T29755-2013), industry standards and enterprise standards. Project quality coverage 15 years shelf life.

Xuyi Botu concave earth Co., LTD

Our products hollow glass desiccant by the national glass quality supervision and inspection center, JC/T2072-2011 in line with industry standards and enterprise standards, project quality underwriting 15 years shelf life.

1



Foshan safe production
Association

2



China door and window
industry high-quality
growth forum
organizing committee

3




Chinese architectural
glass and Industrial
glass association

4



Guangdong Door and
Window association

Ai Shang Mei
doors and
Windows

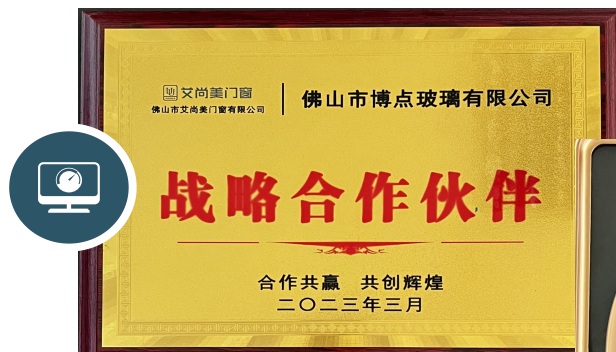


Pearl creation
exhibition



boss doors
and Windows



Chibang door
and window

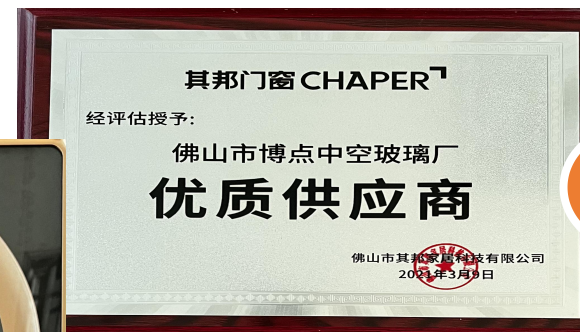

Alvi doors
and Windows



Ai Shang Mei
doors and
Windows



To still sunshine
doors and
Windows



Chibang
door and
window



Mei Jia
Deschamps doors
and Windows



boss doors and
Windows

M Bos 博仕门窗

Alvi doors and
Windows



Yaffe door and
window



Yu Jingxuan
doors and
Windows



View door and
window



Contact Us

Add: No.23, North Garden Road, Shishan Town, Nanhai District,
Foshan City, Guangdong ProvinceBodian Glass Co., LTD

Contact: 13723810568

wechat:



whatsapp:

