

1. Description

1.1. Project

Project Name	TestingCode
Board Name	NUCLEO-F072RB
Generated with:	STM32CubeMX 4.15.1
Date	07/03/2016

1.2. MCU

MCU Series	STM32F0
MCU Line	STM32F0x2
MCU name	STM32F072RBTx
MCU Package	LQFP64
MCU Pin number	64


3. Pins Configuration

Pin Number LQFP64	Pin Name (function after reset)	Pin Type	Alternate Function(s)	Label
1	VBAT	Power		
2	PC13	I/O	GPIO_EXTI13	B1 [Blue PushButton]
3	PC14-OSC32_IN *	I/O	RCC_OSC32_IN	
4	PC15-OSC32_OUT *	I/O	RCC_OSC32_OUT	
5	PF0-OSC_IN *	I/O	RCC_OSC_IN	
6	PF1-OSC_OUT *	I/O	RCC_OSC_OUT	
7	NRST	Reset		
12	VSSA	Power		
13	VDDA	Power		
16	PA2 *	I/O	USART2_TX	USART_TX
17	PA3 *	I/O	USART2_RX	USART_RX
18	VSS	Power		
19	VDD	Power		
21	PA5 **	I/O	GPIO_Output	LD2 [Green Led]
22	PA6	I/O	SPI1_MISO	
23	PA7	I/O	SPI1_MOSI	
31	VSS	Power		
32	VDD	Power		
46	PA13 *	I/O	SYS_SWDIO	TMS
47	VSS	Power		
48	VDDIO2	Power		
49	PA14 *	I/O	SYS_SWCLK	TCK
55	PB3	I/O	SPI1_SCK	
60	BOOT0	Boot		
61	PB8	I/O	I2C1_SCL	
62	PB9	I/O	I2C1_SDA	
63	VSS	Power		
64	VDD	Power		

** The pin is affected with an I/O function

* The pin is affected with a peripheral function but no peripheral mode is activated

4. Clock Tree Configuration

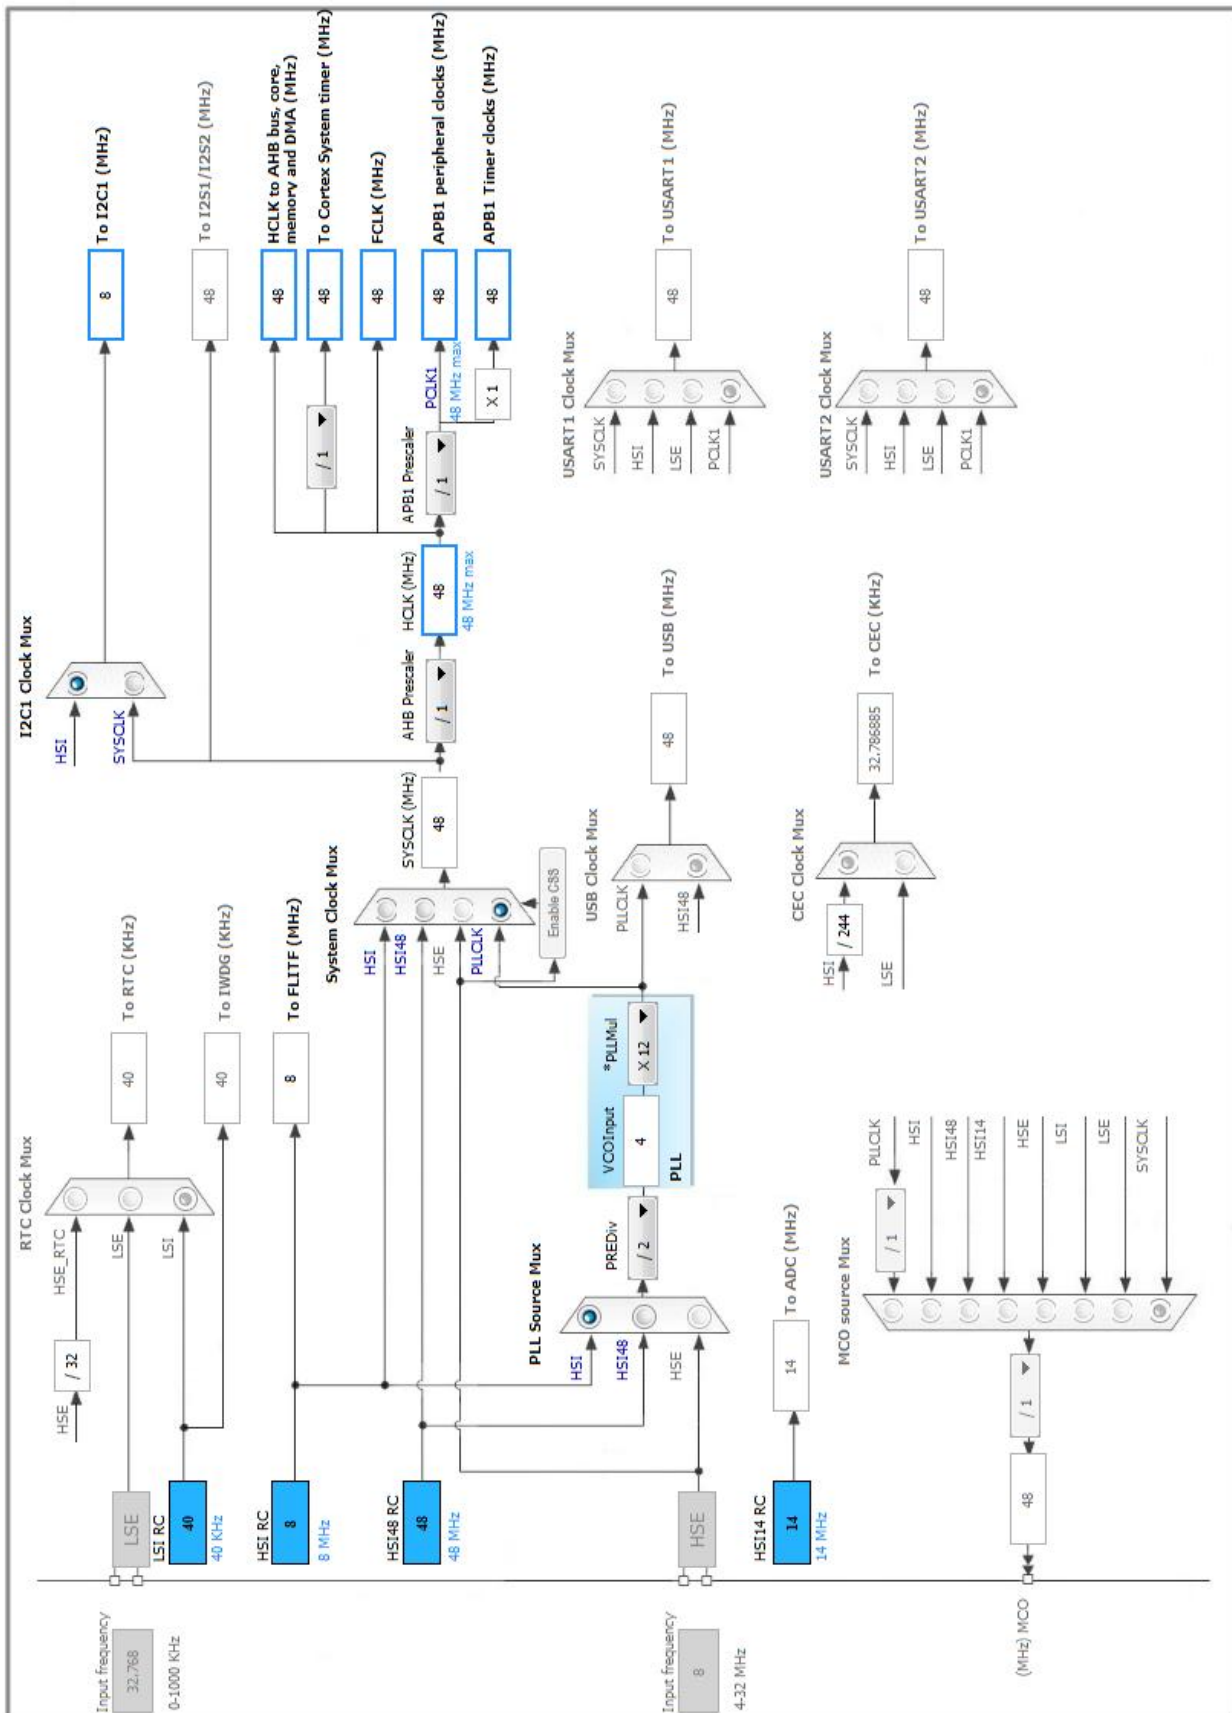

5. IPs and Middleware Configuration

5.1. I2C1

I2C: I2C

5.1.1. Parameter Settings:

Timing configuration:

I2C Speed Mode	Standard Mode
I2C Speed Frequency (KHz)	100
Rise Time (ns)	0
Fall Time (ns)	0
Coefficient of Digital Filter	0
Analog Filter	Enabled
Timing	0x2000090E

Slave Features:

Clock No Stretch Mode	Disabled
General Call Address Detection	Disabled
Primary Address Length selection	7-bit
Dual Address Acknowledged	Disabled
Primary slave address	0

5.2. SPI1

Mode: Full-Duplex Master

5.2.1. Parameter Settings:

Basic Parameters:

Frame Format	Motorola
Data Size	4 Bits
First Bit	MSB First

Clock Parameters:

Prescaler (for Baud Rate)	4 *
Baud Rate	12.0 MBits/s *
Clock Polarity (CPOL)	Low
Clock Phase (CPHA)	1 Edge

Advanced Parameters:

CRC Calculation	Disabled
NSSP Mode	Enabled
NSS Signal Type	Software

5.3. SYS

Timebase Source: SysTick

* User modified value

6. System Configuration

6.1. GPIO configuration

IP	Pin	Signal	GPIO mode	GPIO pull/up pull down	Max Speed	User Label
I2C1	PB8	I2C1_SCL	Alternate Function Open Drain	Pull-up	High *	
	PB9	I2C1_SDA	Alternate Function Open Drain	Pull-up	High *	
SPI1	PA6	SPI1_MISO	Alternate Function Push Pull	No pull-up and no pull-down	High *	
	PA7	SPI1_MOSI	Alternate Function Push Pull	No pull-up and no pull-down	High *	
	PB3	SPI1_SCK	Alternate Function Push Pull	No pull-up and no pull-down	High *	
Single Mapped Signals	PC14-OSC32_IN	RCC_OSC32_IN	n/a	n/a	n/a	
	PC15-OSC32_OUT	RCC_OSC32_OUT	n/a	n/a	n/a	
	PF0-OSC_IN	RCC_OSC_IN	n/a	n/a	n/a	
	PF1-OSC_OUT	RCC_OSC_OUT	n/a	n/a	n/a	
	PA2	USART2_TX	Alternate Function Push Pull	No pull-up and no pull-down	Low	USART_TX
	PA3	USART2_RX	Alternate Function Push Pull	No pull-up and no pull-down	Low	USART_RX
	PA13	SYS_SWDIO	n/a	n/a	n/a	TMS
	PA14	SYS_SWCLK	n/a	n/a	n/a	TCK
GPIO	PC13	GPIO_EXTI13	External Event Mode with Rising edge trigger detection *	No pull-up and no pull-down	n/a	B1 [Blue PushButton]
	PA5	GPIO_Output	Output Push Pull	No pull-up and no pull-down	Low	LD2 [Green Led]

6.2. DMA configuration

nothing configured in DMA service

6.3. NVIC configuration

Interrupt Table	Enable	Preenmption Priority	SubPriority
Non maskable interrupt	true	0	0
Hard fault interrupt	true	0	0
System service call via SWI instruction	true	0	0
Pendable request for system service	true	0	0
System tick timer	true	0	0
PVD and VDDIO2 supply comparator interrupts through EXTI lines 16 and 31	unused		
Flash global interrupt	unused		
RCC and CRS global interrupts	unused		
I2C1 event global interrupt / I2C1 wake-up interrupt through EXTI line 23	unused		
SPI1 global interrupt	unused		

* User modified value

7. Power Consumption Calculator report

7.1. Microcontroller Selection

Series	STM32F0
Line	STM32F0x2
MCU	STM32F072RBTx
Datasheet	025004_Rev4

7.2. Parameter Selection

Temperature	25
Vdd	3.6

8. Software Project

8.1. Project Settings

Name	Value
Project Name	TestingCode
Project Folder	C:\Users\Towa5\Desktop\WorkShopTestingCode\TestingCode
Toolchain / IDE	MDK-ARM V5
Firmware Package Name and Version	STM32Cube FW_F0 V1.6.0

8.2. Code Generation Settings

Name	Value
STM32Cube Firmware Library Package	Copy all used libraries into the project folder
Generate peripheral initialization as a pair of '.c/.h' files	No
Backup previously generated files when re-generating	No
Delete previously generated files when not re-generated	Yes
Set all free pins as analog (to optimize the power consumption)	No