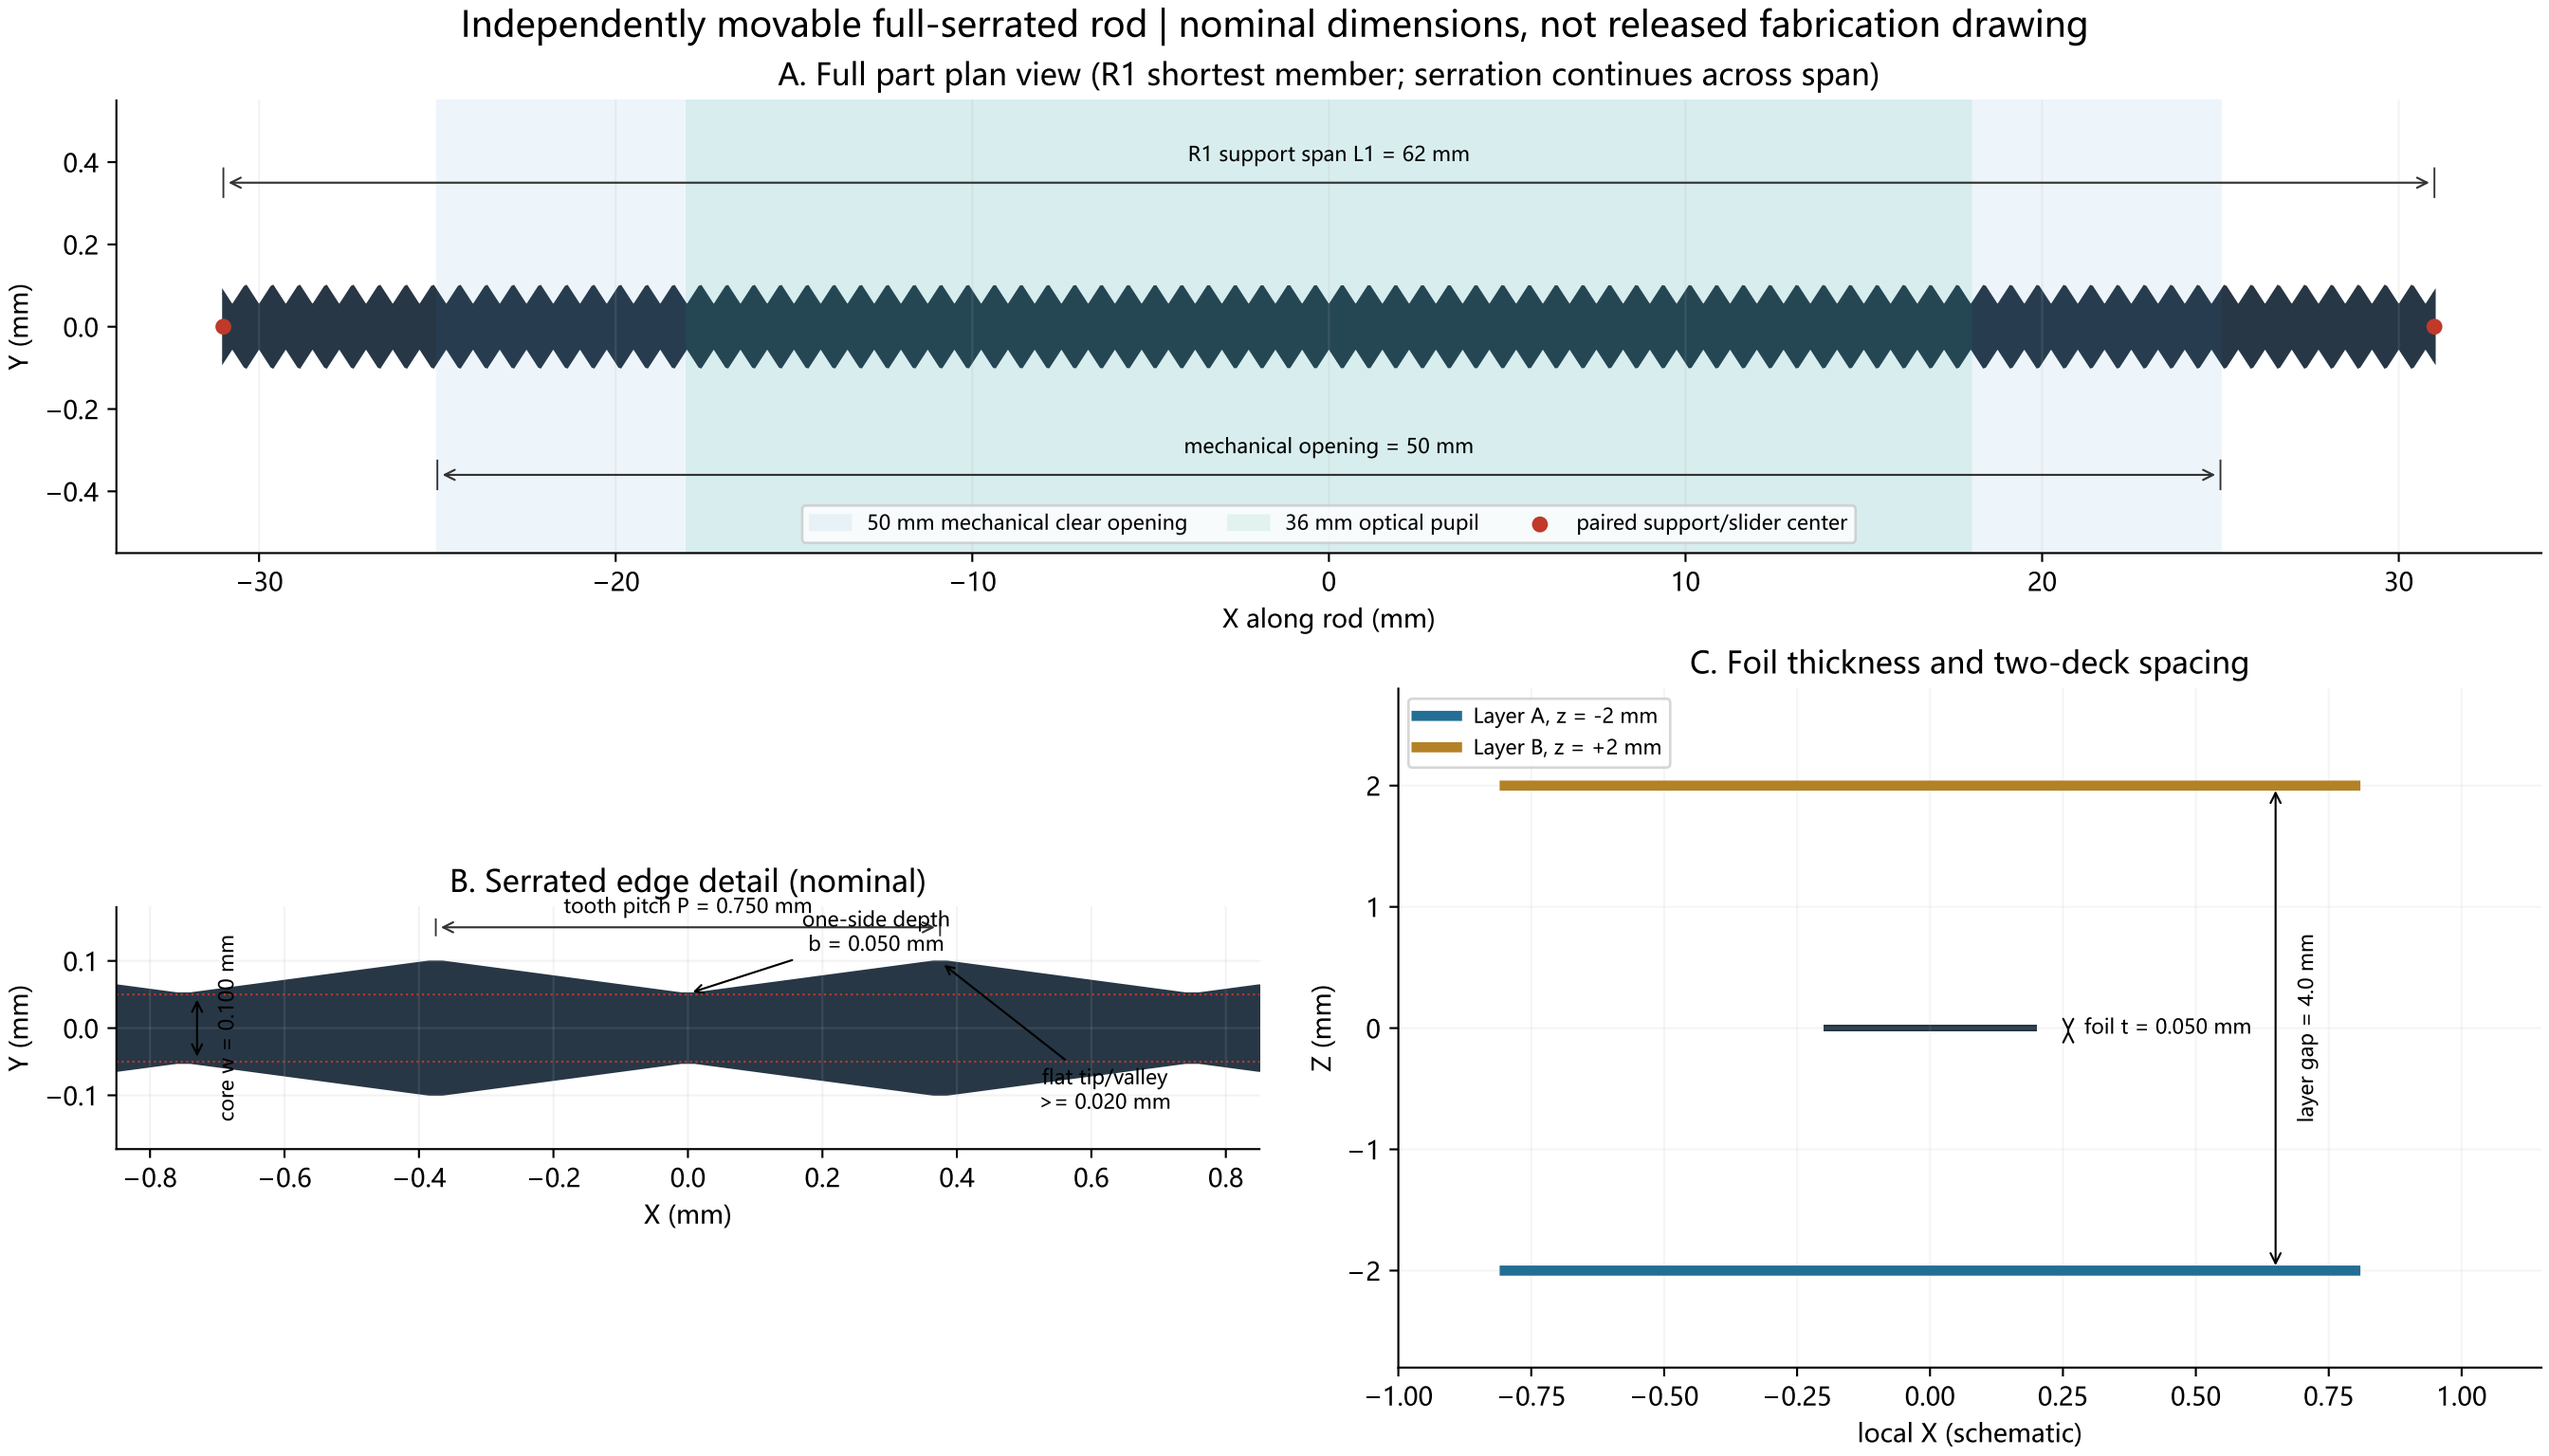

Independently movable full-serrated rod | nominal dimensions, not released fabrication drawing
A. Full part plan view (R1 shortest member; serration continues across span)
R1 support span L1 = 62 mm
mechanical opening = 50 mm
50 mm mechanical clear opening
36 mm optical pupil
paired support/slider center
Y (mm)
X along rod (mm)
B. Serrated edge detail (nominal)
tooth pitch P = 0.750 mm
one-side depth
b = 0.050 mm
core w = 0.100 mm
flat tip/valley
>= 0.020 mm
Y (mm)
X (mm)
C. Foil thickness and two-deck spacing
Layer A, z = -2 mm
Layer B, z = +2 mm
foil t = 0.050 mm
layer gap = 4.0 mm
Z (mm)
local X (schematic)