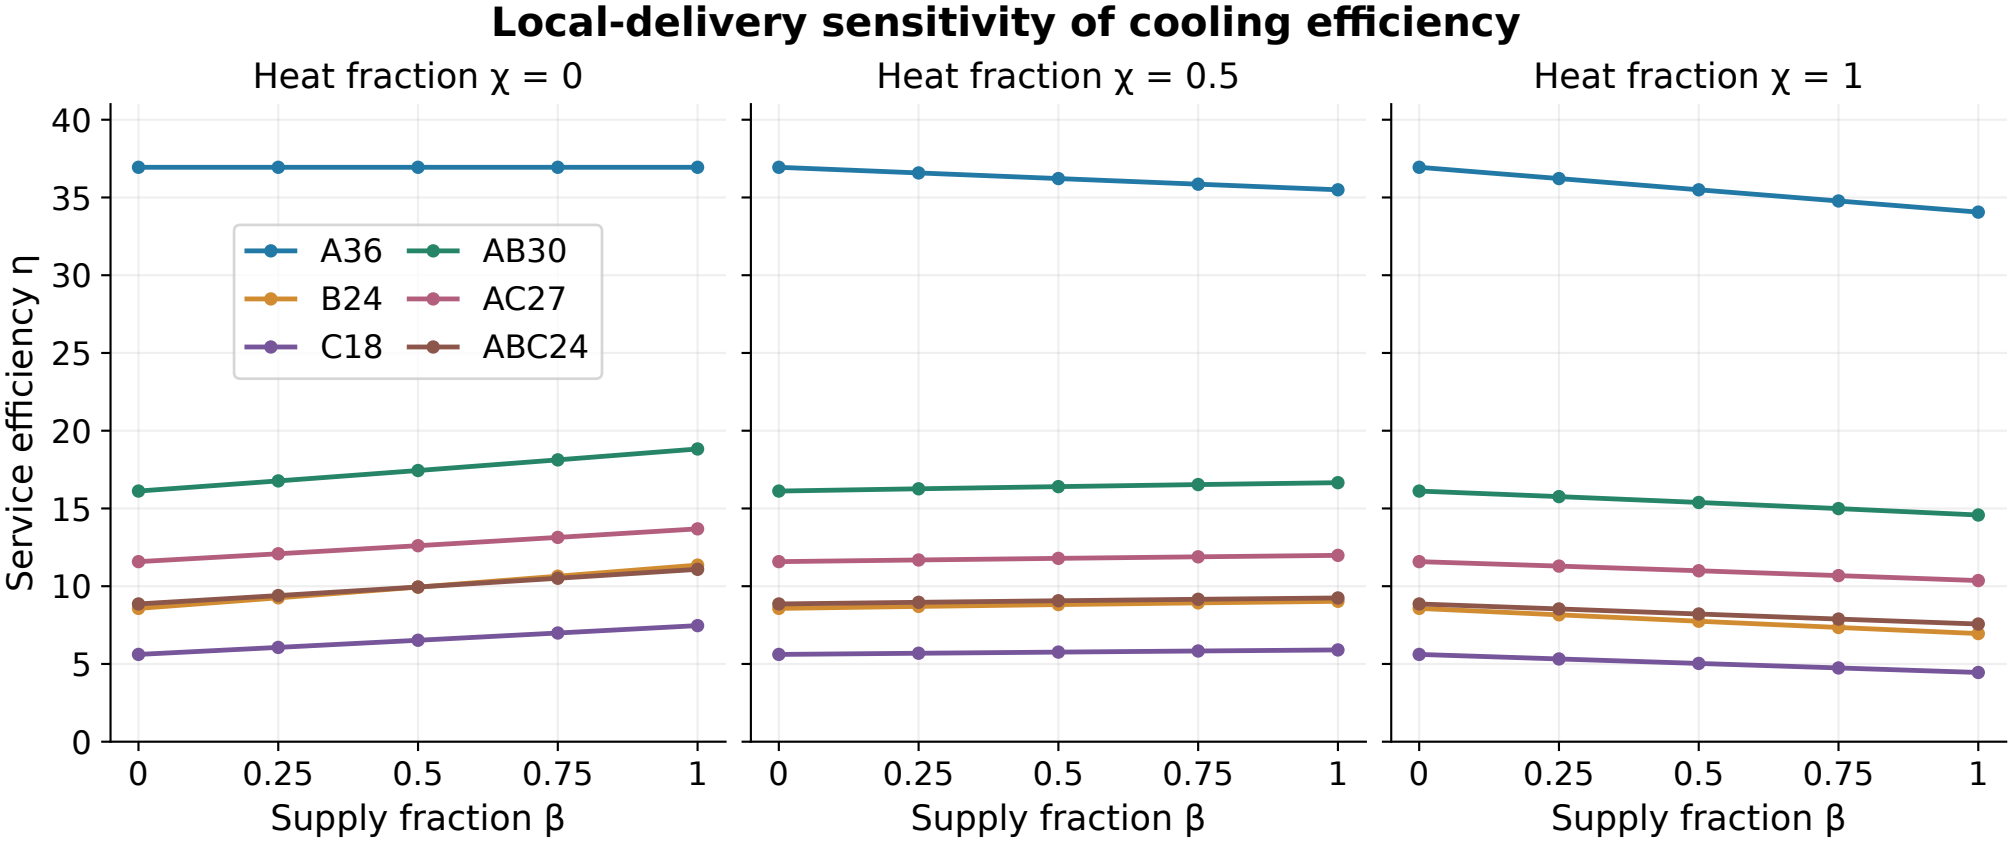
Local-delivery sensitivity of cooling efficiency
Heat fraction χ = 0
Heat fraction χ = 0.5
Heat fraction χ = 1
Service efficiency η
A36
AB30
B24
AC27
C18
ABC24
0
5
10
15
20
25
30
35
40
0
0.25
0.5
0.75
1
Supply fraction β
Six equal-coverage benchmarks; unchanged bulk trajectories. Nominal: β = 0.5, χ = 1.
β and χ are assumed delivery parameters. η unit: person·°C·h/kWh.