


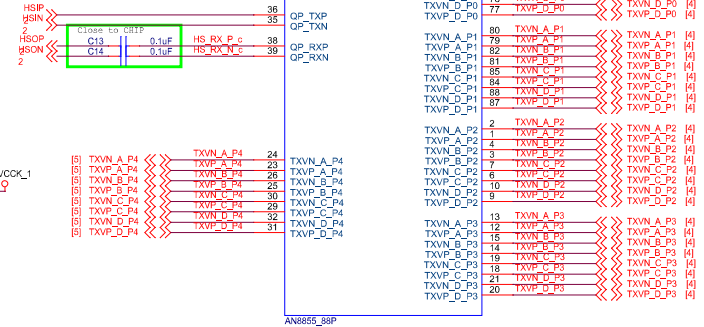





HW Trap	AN8855M	Default	Setting
GPIO_2	Must floating/Pull down	1'b0	1'b0
GPIO_3	spi_adr mode 1'bc:3-byte (default) 1'bl:4-byte	1'b0	1'b0
GPIO_4 GPIO_5	boot mode[1:0]{GPIO5, GPIO4} 2'b0X: boot up from SPI FLASH.	2'b00	2'b01
GPIO_6	Must floating/Pull up	1'b1	1'b1


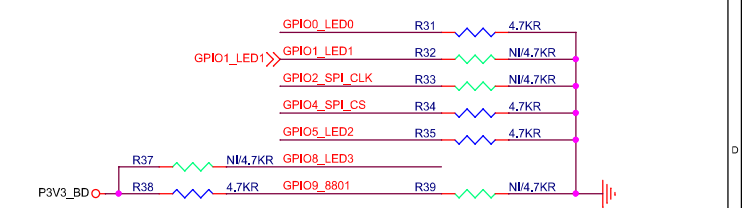


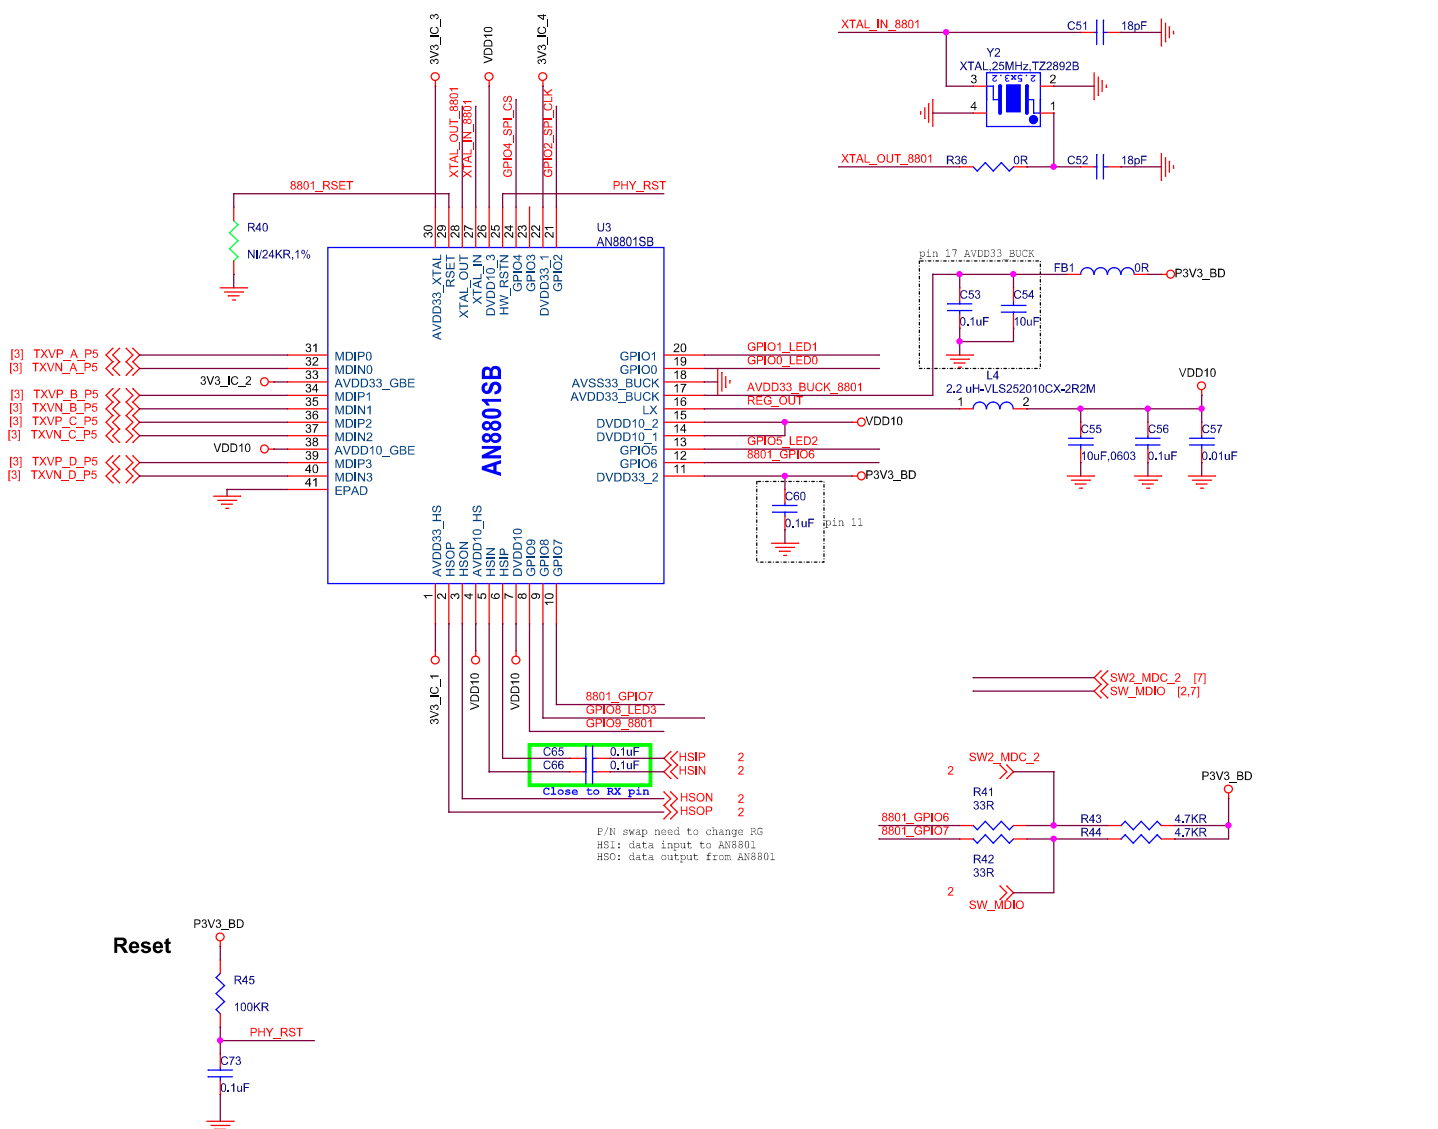




Power Decoupe Cap


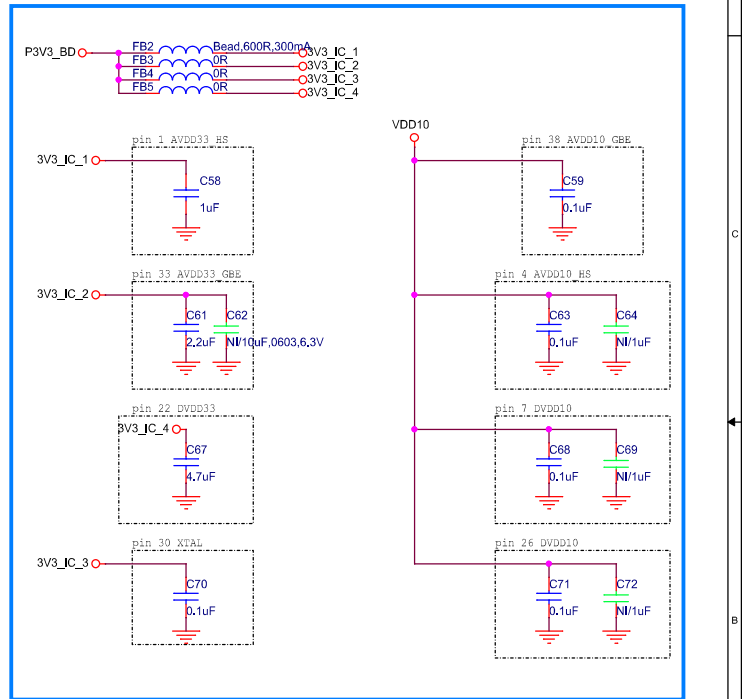


Title		<Title>
Size	A3	Document Number
Date:	Tuesday, May 26, 2026	Sheet 3 of 7

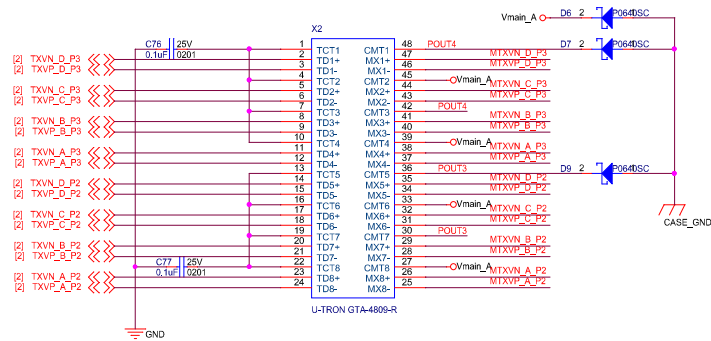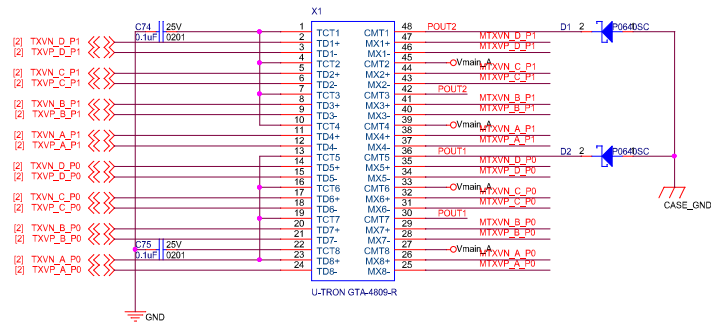




POUT1 << POUT1 [4]
POUT2 << POUT2 [4]
POUT3 << POUT3 [4]
POUT4 << POUT4 [4]

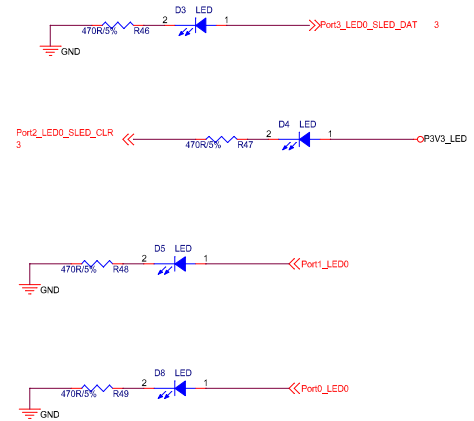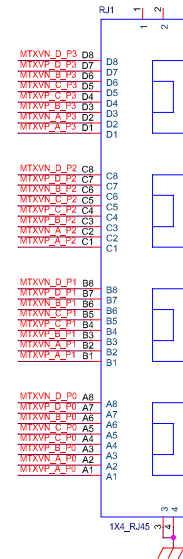

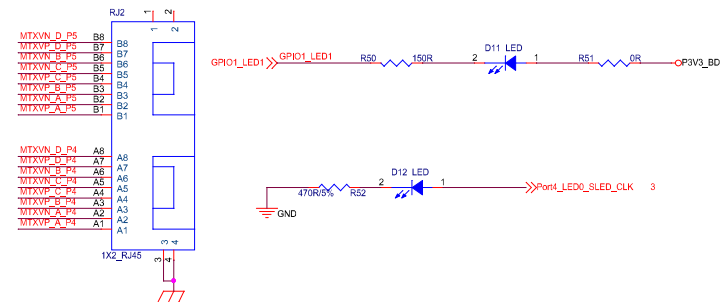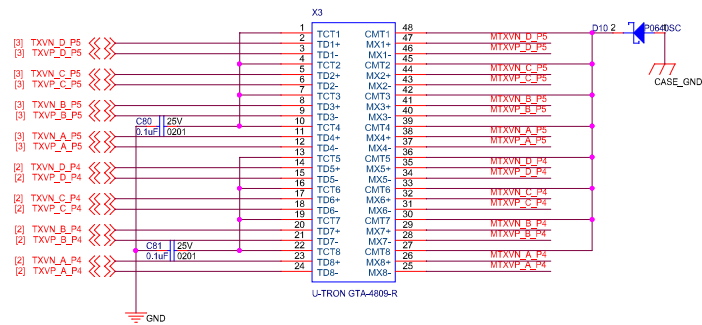

NI & Green Part = not install



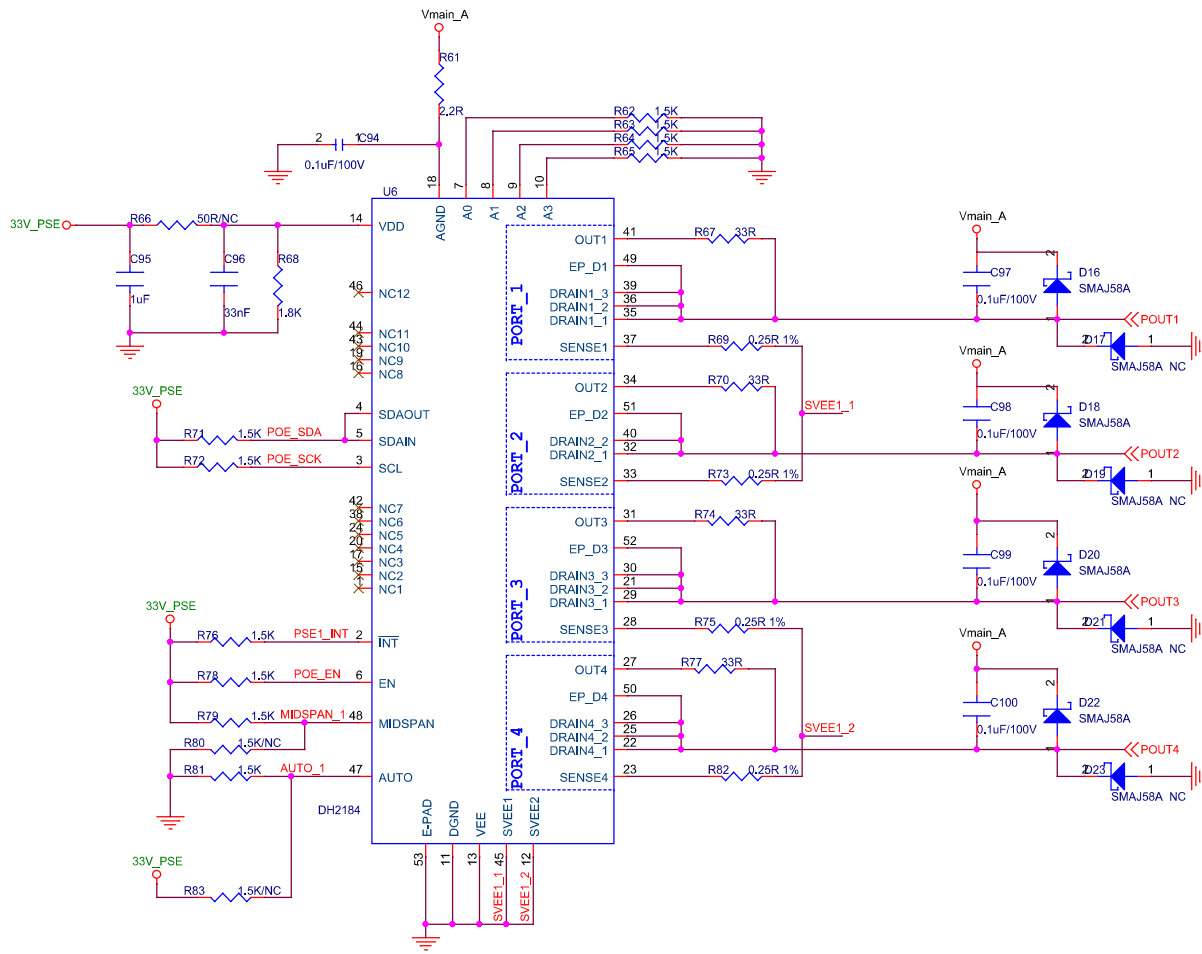

POUT1 << POUT1 [4]
POUT2 << POUT2 [4]
POUT3 << POUT3 [4]
POUT4 << POUT4 [4]

Title		<Title>
Size A3	Document Number	<Doc>
Date:	Thursday, April 16, 2026	Sheet 7 of 7

Rev <RevCode>