


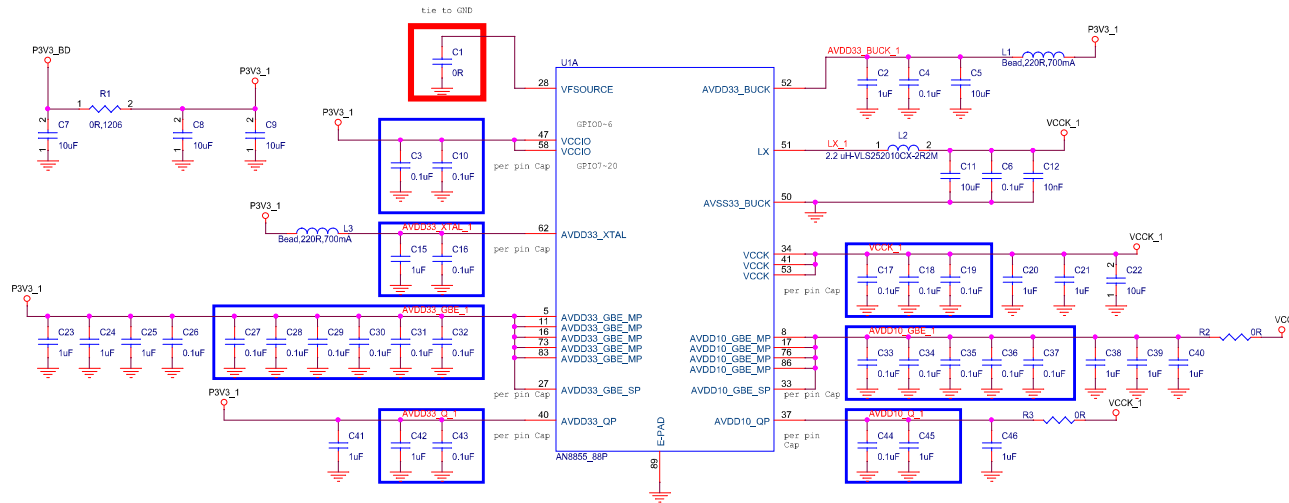

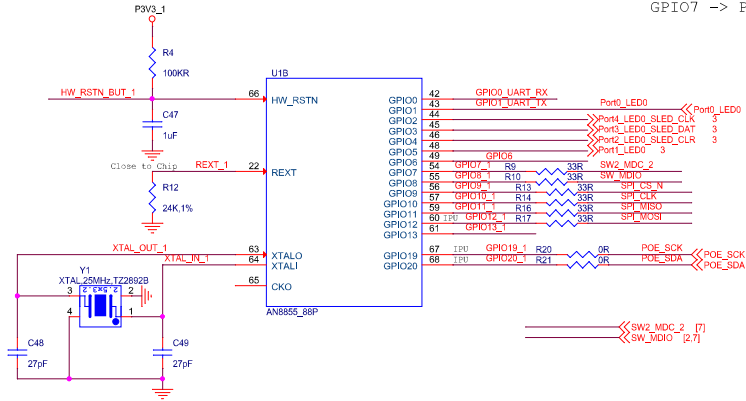






GPIO2 -> Port4, PD, LED High Active
 GPIO3 -> Port3, PD, LED High Active
 GPIO4 -> Port2, PU, LED Low Active
 GPIO5 -> Port1, PD, LED High Active
 GPIO7 -> Port0, PD, LED High Active


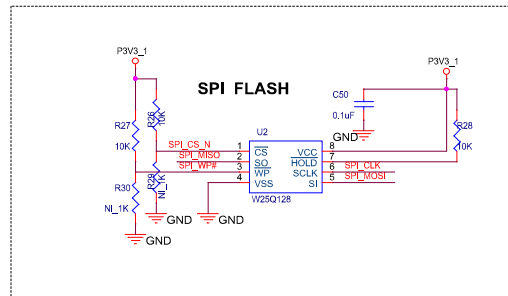




HW Trap	AN8855M	Default	Setting
GPIO_2	Must floating/Pull down	1'b0	1'b0
GPIO_3	spi adr mode 1'b0:3-byte (default) 1'b1:4-byte	1'b0	1'b0
GPIO_4 GPIO_5	boot mode[1:0](GPIO5, GPIO4) 2'b0X: boot up from SPI FLASH.	2'b00	2'b01
GPIO_6	Must floating/Pull up	1'b1	1'b1



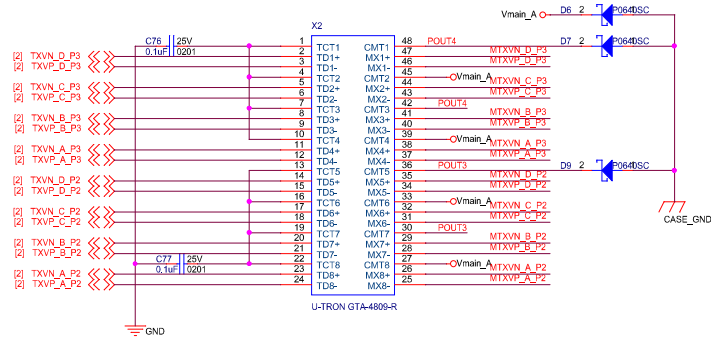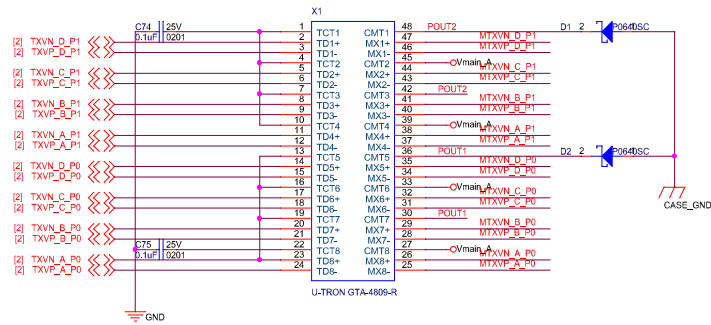




POUT1 << POUT1 [4]
POUT2 << POUT2 [4]
POUT3 << POUT3 [4]
POUT4 << POUT4 [4]

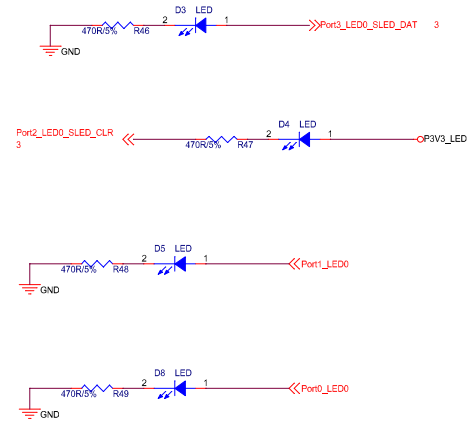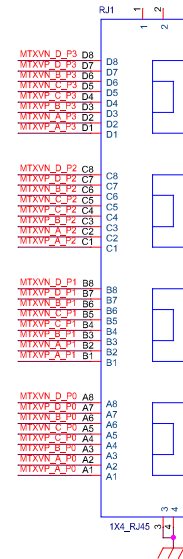

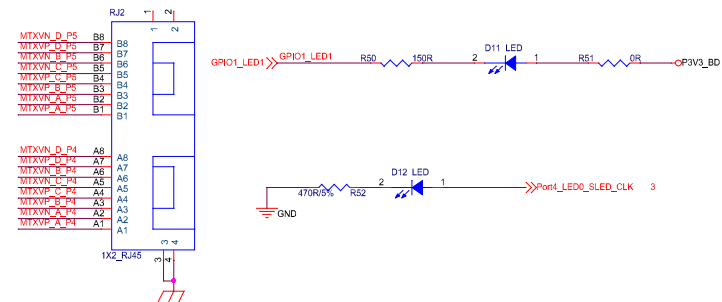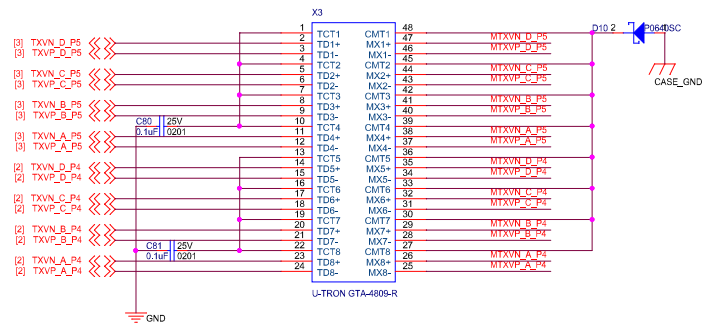

NI & Green Part = not install

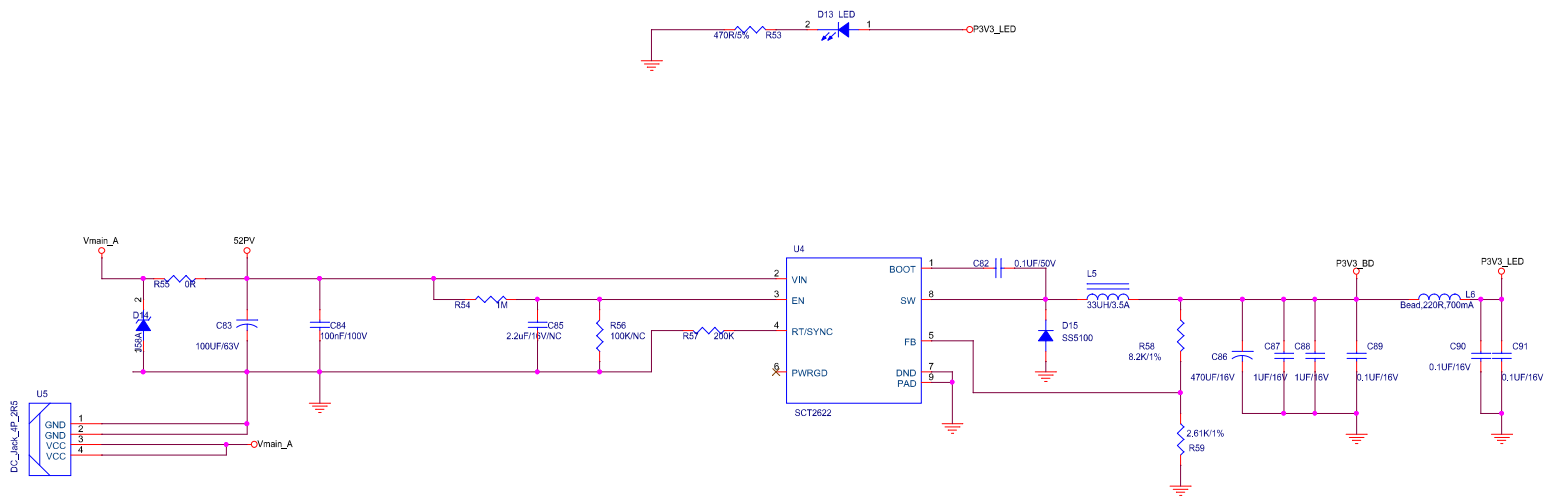

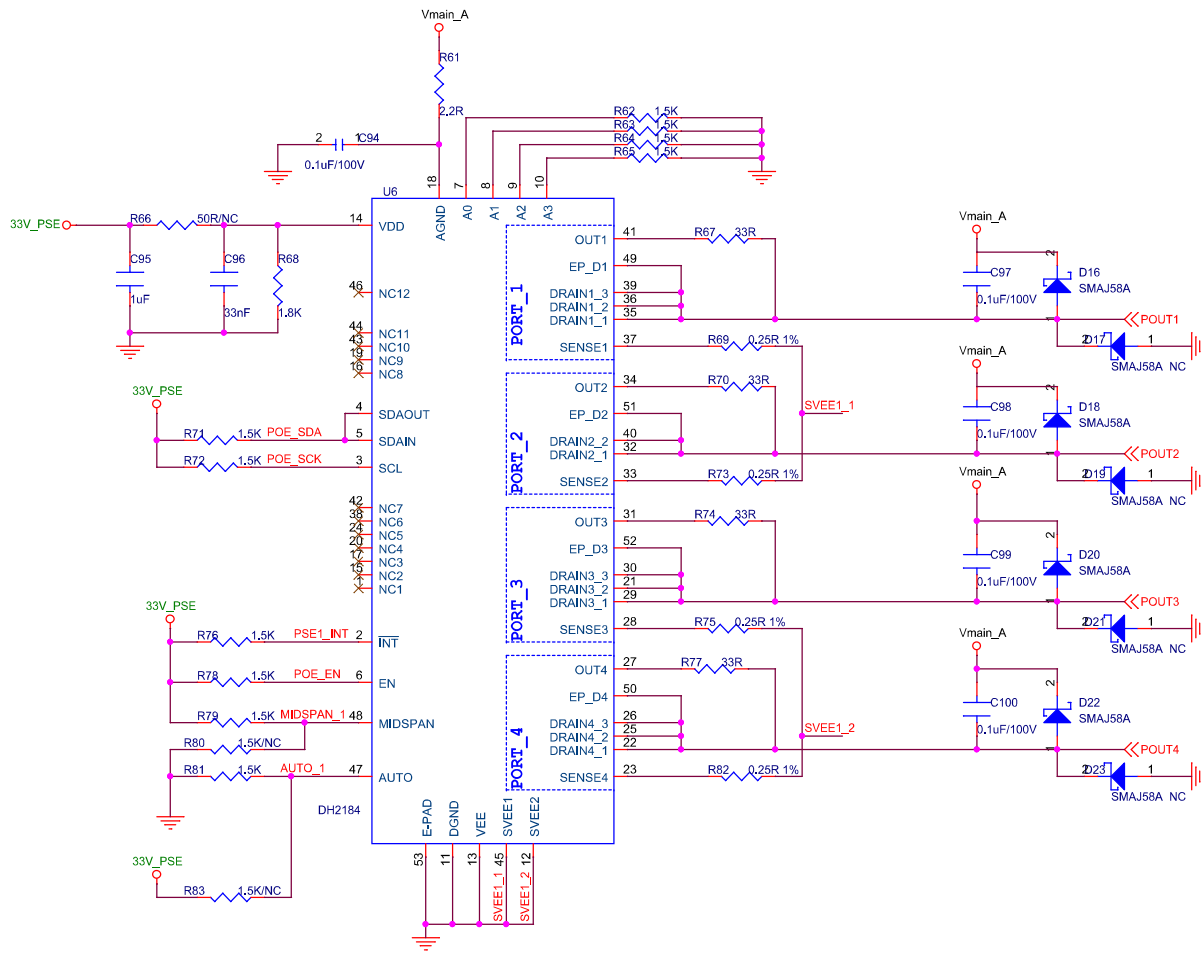

POUT1 POUT1 [4]
POUT2 POUT2 [4]
POUT3 POUT3 [4]
POUT4 POUT4 [4]

Title			<Title>
Size	Document Number	Rev	
A3	<Doc>	<RevCode>	
Date:	Thursday, April 16, 2026	Sheet	7 of 7