

# **System-Level Design Exploration of an FM Radio Receiver**

Michael Wurm



## **MASTERARBEIT**

eingereicht am  
Fachhochschul-Masterstudiengang

Embedded Systems Design

in Hagenberg

im August 2021

Advisor:  
**DI (FH) Dr. Florian Eibensteiner**

© Copyright 2021 Michael Wurm

This work is published under the conditions of the *Creative Commons License Attribution-NonCommercial-NoDerivatives 4.0 International* (CC BY-NC-ND 4.0)—see <https://creativecommons.org/licenses/by-nc-nd/4.0/>.

# Declaration

I hereby declare and confirm that this thesis is entirely the result of my own original work. Where other sources of information have been used, they have been indicated as such and properly acknowledged. I further declare that this or similar work has not been submitted for credit elsewhere. This printed copy is identical to the submitted electronic version.

Hagenberg, August 23, 2021

Michael Wurm

# Contents

<b>Declaration</b>	iv
<b>Preface</b>	viii
<b>Abstract</b>	ix
<b>Kurzfassung</b>	x
<b>1 Introduction</b>	1
1.1 Motivation . . . . .	1
1.2 Choice of Application . . . . .	2
1.3 Objective . . . . .	2
<b>2 Signal Processing Theory</b>	3
2.1 Overview . . . . .	3
2.2 Receiver Types . . . . .	4
2.2.1 Superheterodyne Receiver . . . . .	4
2.2.2 Direct-Conversion Receiver . . . . .	5
2.3 Down-Conversion . . . . .	5
2.3.1 Mathematical Description . . . . .	6
2.4 Sampling Theorem . . . . .	7
2.5 Sample Rate Reduction . . . . .	8
2.6 Frequency Modulation in Broadcasting . . . . .	9
2.6.1 Mathematical description . . . . .	9
2.6.2 Frequency Band . . . . .	10
2.6.3 Frequency Spectrum of a Broadcast FM Channel . . . . .	11
2.7 Algorithms for Digital FM Demodulation . . . . .	12
2.7.1 Baseband Delay Demodulator . . . . .	13
2.7.2 Frequency Discriminator . . . . .	13
2.7.3 Phase-Locked Loop . . . . .	14
2.8 Demodulation of Broadcast FM . . . . .	15
2.8.1 Mono Audio . . . . .	15
2.8.2 Stereo Audio . . . . .	15
<b>3 System Design Process</b>	17
3.1 General . . . . .	17

3.1.1	The SIMILAR Process . . . . .	17
3.1.2	Design for Reuse . . . . .	20
3.1.3	Validation and Verification . . . . .	20
3.2	System Design Targeting FPGAs . . . . .	21
3.2.1	V-Modell . . . . .	21
3.2.2	High-Level Synthesis . . . . .	22
3.2.3	Direct Implementation . . . . .	23
3.2.4	Implementation with Tool Support . . . . .	23
3.2.5	Level of Abstraction . . . . .	24
<b>4</b>	<b>High-Level Synthesis</b>	<b>26</b>
4.1	Introduction . . . . .	26
4.2	State Of The Art . . . . .	27
4.3	Workflow . . . . .	28
4.4	Coding . . . . .	30
4.4.1	Data Types . . . . .	30
4.4.2	Optimization Directives . . . . .	31
4.4.3	Interfaces . . . . .	31
4.5	Testbench . . . . .	32
4.5.1	General . . . . .	32
4.5.2	C Simulation . . . . .	33
4.5.3	C/RTL Co-Simulation . . . . .	34
<b>5</b>	<b>System Architecture and Concept</b>	<b>35</b>
5.1	Overview . . . . .	35
5.2	The Project . . . . .	36
5.3	System Concept . . . . .	37
<b>6</b>	<b>Implementation</b>	<b>39</b>
6.1	Digital Signal Processing Chain . . . . .	39
6.2	Matlab Model . . . . .	41
6.2.1	Transmitter . . . . .	41
6.2.2	Fixed Point Arithmetic . . . . .	44
6.2.3	Receiver . . . . .	44
6.2.4	Analysis . . . . .	45
6.3	GNU Radio . . . . .	46
6.3.1	Introduction . . . . .	46
6.3.2	Transmitter . . . . .	46
6.3.3	Receiver . . . . .	47
6.3.4	System Level Integration for Verification . . . . .	48
6.4	VHDL . . . . .	48
6.4.1	Testbench Simulator and Framework . . . . .	48
6.4.2	Testbench Architecture . . . . .	49
6.4.3	Testing Strategies . . . . .	50
6.4.4	Unit Tests . . . . .	52
6.5	High-Level Synthesis . . . . .	52
6.5.1	Testbench . . . . .	52

6.5.2	Design for Reuse . . . . .	52
6.5.3	TODO: Other Stuff... . . . . .	53
6.6	Common Testbench . . . . .	53
6.6.1	Architecture (same tb for VHDL and HLS-generated HDL) . . . . .	53
<b>7</b>	<b>Deployment on Hardware</b>	<b>54</b>
7.1	GNU Radio . . . . .	54
7.1.1	Ettus Research USRP b200mini . . . . .	54
7.1.2	RTL-SDR . . . . .	54
7.2	FPGA Hardware Platform . . . . .	55
7.3	System-On-Chip Design . . . . .	55
7.3.1	Architecture . . . . .	55
7.3.2	Functionality . . . . .	56
7.3.3	Software . . . . .	57
<b>8</b>	<b>Comparison and Results</b>	<b>58</b>
8.1	Demodulated Signal . . . . .	58
8.2	Functionality . . . . .	58
8.3	Code Development . . . . .	58
8.4	Simulation . . . . .	58
8.5	Useability . . . . .	58
8.6	Applicability . . . . .	58
8.7	Advantages / Disadvantages . . . . .	58
8.8	Hardware Utilization . . . . .	58
8.9	Latency . . . . .	58
8.10	Lines of Code . . . . .	58
<b>9</b>	<b>Conclusion and Prospect</b>	<b>59</b>
<b>A</b>	<b>Technical Details</b>	<b>60</b>
<b>B</b>	<b>Supplementary Materials</b>	<b>61</b>
B.1	PDF Files . . . . .	61
B.2	Media Files . . . . .	61
B.3	Online Sources (PDF Captures) . . . . .	61
<b>List of Abbreviations</b>		<b>62</b>
<b>References</b>		<b>63</b>
Literature	. . . . .	63
Media	. . . . .	65
Online sources	. . . . .	65

# Preface

# Abstract

This should be a 1-page (maximum) summary of your work in English.

# Kurzfassung

An dieser Stelle steht eine Zusammenfassung der Arbeit, Umfang max. 1 Seite. ...

# Chapter 1

## Introduction

### 1.1 Motivation

In the master's degree program Embedded Systems Design a wide range of topics relate to digital signal processing, chip design and software development. All of these disciplines find their application in an embedded system. Multiple different methods of implementation are introduced for each topic and their usage is tested in practical sessions. However, in the setting of a university course it is not always possible to look at the currently handled topic as a part of a larger, integrated system. Instead, it is often treated as a standalone part that fulfills its own, specific functionality. Therefore, one of the main motivation points of this thesis is to combine several disciplines and multiple implementation methods into a single system design, and treat it in this common project context.

In a more general perspective, the current electronics market situation is a huge motivational factor as well. Smart devices, smart sensors, Internet of Things (IoT) and many similar terms are well-known and are becoming more and more present in the publics' daily lives. In some degree, all of these devices represent embedded systems, since they all consist of processing units, combined with sensors and interfaces to communicate with their outside world. In the future, the number of devices and the range of applications in this area is going to grow from todays' point of view. This will require a lot of engineering work to advance the state of technology we have today and explore new areas of application.

Since the development of an embedded system combines so many disciplines, it is of advantage to have knowledge of as many as possible of them. However, not only understanding single parts, but to have an overview and understanding of the entire, integrated system and the interaction between those single parts is important in an embedded system.

Those major reasons lead to the choice of topic for this thesis - understanding all the single parts by themselves, while maintaining the understanding over an integrated embedded system that fulfills a task as a whole.

## 1.2 Choice of Application

In order to elaborate on the theoretical topics of this thesis, a comprehensive practical project is developed along with it. The project of choice is a digital FM broadcast radio receiver. It combines several disciplines that appear in the master's program Embedded Systems Design, such as digital signal processing (DSP), software development and system design and thus is a perfect candidate for this project.

FM broadcast radio is chosen as the input signal, because it is a common radio frequency signal that is available almost everywhere. Furthermore, the demodulated signal is an audio signal, usually music or speech, that can be listened to. This is subjectively more attractive than a generic data stream. Additionally, it is a comparably simple signal to demodulate, but still requires several techniques of signal processing to decode it.

## 1.3 Objective

The main objective of this thesis is to elaborate a system design for an embedded system, that combines all the knowledge of different disciplines and topics which are accumulated over the time of the university program, in a single project. This includes the development of a system model in a tool like Matlab, the practical usage and implementation of DSP in an FPGA, the development of a digital receiver and the deployment on actual hardware.

The receiver implementation on the FPGA is to be done in two variants. The first variant is traditional, manually written hardware description language (HDL) in the programming language VHDL, as it has been done for years. For the second variant, high-level synthesis (HLS) is employed, to generate the low-level HDL from high-level C++ code. These two methods are implemented and compared on the basis of usability and some metrics.

In the view of a system design approach, another focus is put on a sustainable testing and development strategy for the entire system. Above mentioned implementation variants should optimally share as much as possible of testing and verification code, in order to save time and effort in implementation. Also, as many tasks as possible should be automated by scripts, to save time in manual labor for the engineers working on the development. All that enables an efficient development cycle of the product.

By the end of this thesis, the implementation of an FM radio receiver in multiple methods and abstraction levels should be achieved, as well as a good understanding of the overall system level design. Knowledge of each methods' preferred field of application, efficiency and application should be gained.

## Chapter 2

# Signal Processing Theory

This chapter describes techniques of signal processing, which are required to receive and decode an FM broadcast radio signal. The entire signal processing chain from the antenna, through the analog front-end, to the digital processing parts is explained. However, the main focus is put on the digital signal processing part, since this is a major part of the practical implementation of this thesis.

### 2.1 Overview

Wireless transmission systems usually transmit their signals over the air. Various frequency bands and different types of modulation are being used for this purpose. The choice of frequency, as well as the choice of the modulation type, have impacts on the transmission characteristics. Depending on these choices, positive effects can be achieved in the amount of data that can be sent over the transmission channel, for example. Another advantage is the ability to adapt the ongoing transmission to the changing characteristics of the channel. This is especially useful for mobile receivers, since the signals' path is inherently changing over time there, which leads to challenging conditions for the receiver. Additionally, varying signal strength, or multipath propagation may occur. Multipath propagation is caused by reflections of the signal, which - for example - can occur on a house facade, or a large vehicle that is passing by. The receiver then gets a signal, that is a summation of the direct path and the reflected path - a signal from multiple paths. Besides that, environmental impacts, such as rain or fog have an effect on the transmission channel and thus the received signal.

Many more factors could be listed, and elaborations over the various modulation types fill entire books. However, with all these different facts, there are things that they all have in common. On the transmitter side, all these signals are transmitted in a band-limited, high frequency signal. The band limitation needs to be given at the transmitting antenna, to minimize interference to other bands in the frequency spectrum. The frequency needs to be high, to radiate the signal by an antenna. On the receiver side, once the signal reaches the antenna of a receiver, there are further similarities. The antenna signal needs to be amplified and filtered at first. Both steps depend on the antenna characteristics, but usually the received signal is of relatively low power,



**Figure 2.1:** High-level block diagram of a signal processing chain.

and the antenna receives a wider range of frequencies than required. The filter therefore selects the frequency area that is of interest. Another reason for the filter is to avoid spectral replicas in the subsequent modulation, or down-conversion. Here, the front-end often down-converts to a low intermediate frequency (IF), instead of directly going to baseband. The intermediate frequency is then shifted down to baseband by a modulator later in the digital domain, which brings advantages in the downstream processing chain. These three steps - amplification, filtering and down-conversion to an IF - are often done in the analog domain, since digital circuits cannot work with such high frequencies. After the analog signal is down-converted to baseband, it needs to be digitized. This is done by an analog-digital-converter (ADC). After the signal is processed to digital baseband, the received signal can finally be decoded to get the actual data content. This decoding process depends on the respective modulation type that is used.

The block diagram in Fig.2.1 gives a high-level overview of a receiver structure.


## 2.2 Receiver Types

Multiple different receiver architectures exist and are implemented in receivers. Two common examples are explained in the following sections.

### 2.2.1 Superheterodyne Receiver

The superheterodyne receiver is often referred to as *superhet*, or *super* in the literature. The main characteristic of a superhet is, that it converts the radio-frequency (RF) antenna signal to an IF in a first stage, instead of going to baseband directly.

The IF is usually set to a fixed frequency, which results in the advantage, that the subsequent IF filter can be optimized, since it does not have to be adapted in frequency. Therefore, a superhet receiver is able to select narrow band signals, even if the bands' surrounding frequencies are being used by other signals. This is one of the superhets' main advantages. A disadvantage is that the signal noise around the image frequency band is translated into the IF output band. Thus, the filter requirements are relatively high, since they need to deliver a strong attenuation in order to suppress noise outside

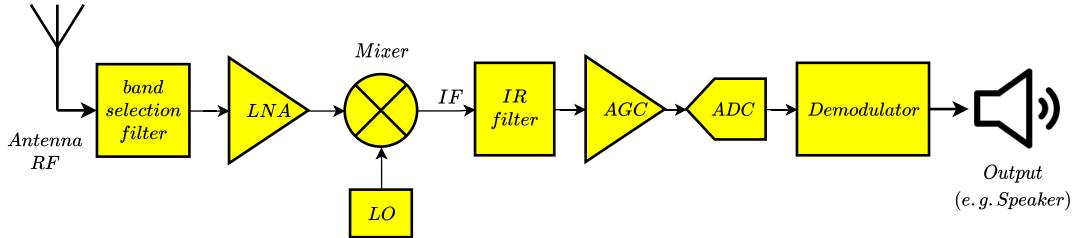

**Figure 2.2:** Block design of a superheterodyne receiver [20, Fig.2.1]

the desired band.

Fig.2.2 shows a block diagram of a superhet receiver. The antenna signal first runs through a band selection filter. It selects the desired frequency band and filters out any unwanted signals outside of this band. A low-noise amplifier (LNA) may be used to boost the signal strength. The next step is the mixer, which is fed by a local oscillator (LO). This shifts, or down-converts, the antenna signal down to the IF. Afterwards, the IF signal is amplified and filtered again to remove the side-products of the mixer, namely the image replicas. Thus, it is also called an image rejection filter. The demodulator stage can now perform any further signal processing on the signal, until the required signal is retrieved [20].

The depicted block diagram may represent an FM broadcast receiver, where an audio output is generated from the antenna input.

### 2.2.2 Direct-Conversion Receiver

A direct-conversion receiver, as its name suggests, converts an RF signal to baseband directly. It can also be called homodyne, synchrodyne, or zero-IF receiver.


In order to achieve direct down-conversion, the local oscillator of the mixer needs to be set exactly to the center frequency of the desired signal. The main advantage of direct-conversion receivers is, that their output is an image-free signal. This is due to the properties of the mixer. The strongest disadvantages are the LO leakage, which leads to a DC offset at the mixer output, and the flicker noise, also called  $1/f$ -noise, which induces strong noise at low frequencies [20]. These effects are not explained into more detail here, since this is not the focus of this thesis.

## 2.3 Down-Conversion

The process of down-conversion is a technique of amplitude modulation (AM). It is used to convert an RF signal to a signal of lower frequency, while preserving its information content. This is the explanation in the time domain. However, it may be easier to look at the process in the frequency domain. In the frequency domain, the band-limited RF signal is shifted down to a lower frequency. This lower frequency can either be zero, i.e.



**Figure 2.3:** Block design of a direct-conversion receiver [20, Fig.2.3].

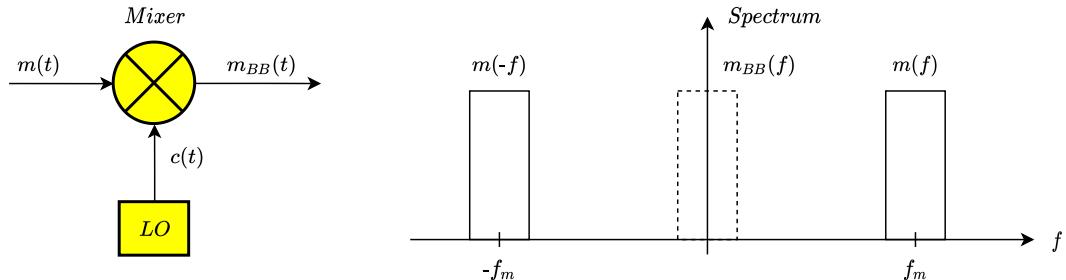

**Figure 2.4:** Block diagram and signal spectrum of down-conversion.

baseband, or an intermediate frequency, such as in the application of a superheterodyne receiver. In order to achieve this, the incoming signal needs to be multiplied with a carrier signal, that is generated locally in the receiver, by a local oscillator (LO). Depending on the frequency  $f_{LO}$  of this local carrier, the resulting signal will be shifted to baseband, or an IF. Note, that in the case of down-conversion, the local oscillator frequency  $f_{LO}$  is interchangeably denoted as carrier frequency  $f_c$ .

A block diagram, as well as the signal spectrum of the process is shown in Fig.2.4. In this example, the frequency of the LO is set to shift the signal from  $f_m$  to baseband.

### 2.3.1 Mathematical Description

The procedure that is used for down-conversion is an amplitude modulation (AM). The equation for a generic AM signal is  $S_{AM}(t) = A_m m(t) \cdot A_c c(t)$ , where  $m(t)$  represents the message signal, and  $c(t)$  is the high-frequency carrier. Their respective amplitudes are  $A_m$  and  $A_c$ . This equation is depicted as a block diagram and signal spectrum in Fig.2.4, where  $S_{AM}$  is denoted as the baseband signal  $m_{BB}$  of the original signal  $m$ . The signal  $m(t)$  is a baseband signal. It may be antenna signal that was filtered by a bandpass filter. The received signal is a real signal, and thus its negative frequency



**Figure 2.5:** Signal spectrum, explaining the process of down-conversion.

spectrum is an exact mirror of the positive frequencies. This fact can be explained in two simple equations.

It is well-known that the real signal  $\cos(wt) = \frac{1}{2}(e^{jw} + e^{-jw})$ , which follows from  $e^{jw} = \cos(wt) + j\sin(wt)$ . Looking at the frequencies of the first equation, the negative and positive parts can be seen.

The process of down-conversion is described in the following formulas. The denotation of the subscripts is assuming a direct conversion to baseband.

$$m_{BB}(t) = A_m m(t) \cdot A_c c(t) \quad (2.1)$$

Assuming that  $m(t) = \cos(\omega_m t)$ ,  $c(t) = \cos(\omega_c t)$  and  $A_m = A_c = 1$ ,

$$m_{BB}(t) = \cos(\omega_m t) \cdot \cos(\omega_c t) \quad (2.2)$$

follows. By applying the mathematical theorem

$$\cos(\alpha) \cdot \cos(\beta) = \frac{1}{2} \cdot [\cos(\alpha - \beta) + \cos(\alpha + \beta)] \quad (2.3)$$

the final formula of the conversion can be represented as

$$m_{BB}(t) = \frac{1}{2} \cdot [\cos((\omega_m - \omega_c)t) + \cos((\omega_m + \omega_c)t)] \quad (2.4)$$

The graphical representation in the frequency spectrum is shown in Fig.2.5. As mentioned above, the assumption is a direct conversion to baseband, so  $w_m = w_c$ . Looking at the positive original part, it is shown that only half of its energy is translated into the desired baseband. However, half of the energy of the original negative part is also shifted to baseband. The superposition of the two parts results in an amount of energy that is again equal to the original signal.

## 2.4 Sampling Theorem

Signal processing is often done in the digital domain, using digital signals. A digital signal is obtained by sampling an analog signal in a periodic interval, the so-called



**Figure 2.6:** Frequency spectrum of the sampled baseband signal with its replicas at integer multiples of  $f_s$  [23].

- A)  $f_s > 2f_{signal}$ :  $f_s$  is high enough and thus meets the theorem.
- B)  $f_s = 2f_{signal}$ :  $f_s$  exactly meets the theorem.
- C)  $f_s < 2f_{signal}$ :  $f_s$  is too low and thus creates overlaps of the replicas - aliasing.

sampling frequency  $f_s$ . The sampling frequency needs to meet the sampling theorem, in order to correctly represent the analog signal. The sampling theorem, by Nyquist and Shannon mainly consists of the following formula.

$$f_s > 2 \cdot f_{signal} \quad (2.5)$$

In words: The sampling frequency must be higher than twice the frequency of the signals' highest frequency content. Any digital signal processing technique must hold the specification of the sampling theorem [3, chpt. 4.2]. In case the theorem is violated, the effect of aliasing occurs on the generated signal. The sampling process introduces spectral replicas at integer multiples of the sampling frequency  $f_s$ . These replicas overlap, if  $f_s$  does not meet the theorem, which results in signal distortion. Fig.2.6 illustrates the effect of aliasing in the frequency spectrum [23].

## 2.5 Sample Rate Reduction

Sample rate reduction is also called downsampling. Downsampling is a way to reduce the amount of data that needs to be processed, without losing any of the signals' information. In some applications, the digital signal is oversampled by a large factor. However, if the frequency spectrum of the desired signal is a narrow band, a high oversampling rate is not necessary and the signal can be downsampled without losing any information content. To guarantee this, the Nyquist sampling theorem must still be met after the downsampling process.

A lower sample rate is especially useful for efficient filter design. Factors such as the transition bandwidth or the width of the passband are important there. Short transition bandwidths, or a narrow passband require a high filter order to fulfill the specifications. This translates into a high computational effort. In such cases, it is of advantage to downsample the input, in order to create better conditions for the filter design. Down-sampling spreads the spectrum of interest, in terms of the relative bandwidth between passband and sampling frequency. Therefore, the filter can be designed with wider transition bandwidth and passband, which significantly reduces the required filter order.

As an example, assuming the signal of interest has a bandwidth of 20 kHz. The Nyquist theorem thus requires a remaining sampling rate of at least twice the signals' frequency, so 40 kHz. The signal is sampled with an oversampling factor of 10 - meaning a sample rate of 200 kHz. A downsampling factor of 4 is now applied, which results in a sample rate of 50 kHz. The resulting signal is now downsampled and can be processed at this lower data rate, while none of the original data content is lost.

The process consists of two parts: filtering and skipping samples. Let us assume downsampling by a factor of  $M = 4$ . In the first step, a low-pass filter with a normalized cut-off frequency of  $1/M$  is applied. This is required in order to avoid aliasing later in the process. The second step simply skips a number of  $M-1$  samples in the sequence.

More detailed information can be found in [3, chpt. 6.9], [13, chpt. 4.1] and [23, chpt. 10.2.2].

## 2.6 Frequency Modulation in Broadcasting

Frequency modulation (FM) is a widely used standard to transmit data streams. The probably best known usecase therefor is commercial broadcast radio, where an audio stream is transmitted. Devices to receive these streams are available for low prices to the public.

This section describes the main properties of broadcast FM, such as the mathematical description, frequency bands that are used, or the specific frequency parts within a channel spectrum.

### 2.6.1 Mathematical description

The mathematical description of an FM baseband signal can be described with the formulas presented in this section. FM encodes the information content in its instantanious frequency. This means that the measured frequency at any moment in time represents a specific value of a transmitted message. For a general classification, FM belongs to the group of angle, or phase modulated signals (PM). The simple reason therefor is, that a frequency has a direct relationship to an angle, if the signal is seen on a unit circle.

The instantanious frequency  $f_i$  of an FM signal can be described as

$$f_i = f_c + \Delta f \cdot m(t) \quad (2.6)$$

where  $f_c$  is the carrier- or center frequency,  $\Delta f$  is the maximum frequency deviation and  $m(t)$  is the information or message signal that is to be transmitted. Simply looking at this equation, the frequency deviation, which is sometimes also called the swing, varies in the range between  $f_c \pm \Delta f$ . Considering the relationship between frequency and angle, as described above, and after some simple substitutions which will not be described into detail here, the equation for a generic frequency modulated wave is the following

$$s(t) = A_c \cos\left(2\pi f_c t + 2\pi k_f \int m(t) dt\right) \quad (2.7)$$

where  $A_c$  is the amplitude of the resulting FM signal and  $k_f$  is the frequency sensitivity factor. This sensitivity factor has a direct relationship with the modulation index  $\beta$ .

$$\beta = \frac{\Delta f}{f_m} = \frac{k_f A_m}{f_m} \quad (2.8)$$

where  $f_m$  is the highest existing frequency, or the bandwidth of the information signal. Formula (2.7) describes a frequency modulated signal with a generic message signal  $m(t)$ . A widely used example application of FM is broadcast radio, where audio streams are transmitted. An audio stream can be described as a cosine wave. Therefore, the information signal that is to be transmitted in broadcast radio can be represented as a cosine wave in the form of

$$m(t) = A_m \cos(2\pi f_m t). \quad (2.9)$$

By inserting this message signal into the generic FM formula (2.7), the final equation for an FM signal transforms into the following form.

$$y(t) = A_c \cos\left(2\pi f_c t + \beta \sin(2\pi f_m t)\right) \quad (2.10)$$

Several formulas, as well as their derivations are described according to [18, pg.54-55].

### 2.6.2 Frequency Band

The frequency band that is used for FM broadcasting is defined worldwide and spans from 87.5 to 108 MHz. However, some countries only partially use the band [2, RR5-39]. The range is located within the so-called Very-High-Frequency (VHF) band, which is open to the public in terms of usage. This means, that any transmitter may use the specified frequency range freely. Austria allowed the legal usage in 2006 [6]. However, the transmission power needs to be limited, so that neighboring receivers are not disturbed in receiving any existing channels. The European Commission specifies the power limit as 50 nW of effective radiated power (ERP) [7]. Another limitation is, that a transmitter must be capable to transmit on multiple center frequencies within the broadcasting band. It must not be fixed to a single center frequency. Through this specification, a transmitter is capable of switching its transmission center frequency, in order to avoid interference with another transmitters signal.

In a practical usecase this means that a transmitter needs to select a channel or frequency range, that is not already occupied by an official transmitter. If a free range is found, the transmitter may start sending an FM signal with the mentioned power limitations [1].



**Figure 2.7:** Allocation of frequencies in an FM channel [24].

### 2.6.3 Frequency Spectrum of a Broadcast FM Channel

The entire FM broadcasting band from 87.5 to 108 MHz divides into multiple channels which can be used. In Europe, the European Telecommunications Standards Institute (ETSI) sets the respective standards for the usage of these frequencies. The main specifications for a single FM broadcasting channel are explained in this section.

Each channel may allocate a bandwidth of 200 kHz. Within one of these channels, the maximum deviation from the center frequency shall not exceed 75 kHz. This leaves a guard band of 25 kHz on either side, to minimize interference with adjacent channels. Center frequencies may be allocated on multiples of 100 kHz. However, neighboring channels need to be considered therefore, since this may result in an overlap in the spectrum.

Fig.2.7 shows the frequency spectrum of a single channel, located at its carrier- or center frequency. For a better overview, only the positive spectrum part is shown. The negative part is an exact mirror, because the transmitted and received signals from the antenna are real signals - they do not have an imaginary part. The spectrum consists of multiple parts. Therefore, it is also referred to as ‘multiplex signal’ in the literature. Several parts are described in the following paragraphs [1][16][33].

#### Mono Audio Part

The mono audio stream is located between 30 Hz and 15 kHz. This signal is built by the sum of the left and right audio channels. The upper limit at 15 kHz is chosen to maintain a sufficient spacing to the first subcarrier. For audio streaming, as in FM broadcasting, this is not a limitation, since it is unlikely to have frequencies higher than 15 kHz in an audio stream. Also, this already reaches the upper limit of the human ears’ bandwidth, so higher spectral parts will not be heard anyway.

### Pilot Tone

The first subcarrier is allocated at an offset of 19 kHz from the center frequency. This subcarrier is also called the 'pilot tone', since it is a continuous signal. It is independent of any varying message signal content. The pilot tone is used for stereo audio demodulation. To regenerate a stereo audio signal, the left and right audio channels need to be recovered correctly.

### Stereo Audio Difference

A signal that is constructed by the difference between the left and right audio channel is modulated on a 38 kHz subcarrier. This subcarrier is an integer multiple of the pilot tone at 19 kHz, for practical reasons. However, the 38 kHz carrier is suppressed and thus not visible in the received spectrum. The modulation technique that is used for this spectral part is called dual-sideband suppressed-carrier (DSB-SC). Even though the carrier is suppressed, it can still be recovered, because it is phase coherent with the 19 kHz pilot tone per definition.

The bandwidth for this difference-signal spans 15 kHz on either side of the subcarrier. It is used to generate a stereo audio signal, in combination with the mono signal. This process is explained into more detail in chapter 2.8.

### Additional Services

Considering all these parts in the spectrum, there is still free bandwidth available to use up to the maximum channel bandwidth of 100 kHz in one sideband. Because of that, additional services were added to the pure audio transmission, to provide additional data services and information.

Services that were implemented are the Data Radio Channel (DARC), which is mostly used in Japan and the USA, the Subsidiary Communication Authorization (SCA) and the Radio Data System (RDS) [22]. Out of these, RDS is the most significant service in Europe. It is used to transmit additional information about the channel, such as the radio stations' name, the currently playing songs' title or traffic information.

## 2.7 Algorithms for Digital FM Demodulation

An FM signal that is received, for example from an antenna, needs to be demodulated in order to decode its actual data content. In general, an FM demodulator serves the purpose to transform a frequency modulated signal (FM) into an amplitude modulated signal (AM), so that AM signal processing techniques can be applied afterwards.

The radio frequency antenna signal usually needs to be amplified, bandpass-filtered, and down-converted to baseband, using subsampling and quadrature-mixing, or similar strategies. This part of the signal processing chain is assumed to be working correctly and is out of the scope of this chapter. The FM signal that is evaluated here is assumed to be a quadrature-mixed signal in baseband, which means that inphase and quadrature (I/Q)

signals are available. In the following sections, two digital FM demodulator variants are described.


### 2.7.1 Baseband Delay Demodulator

TODO

see /home/mike/Dropbox/Studium/ma\_semester\_4\_SS21/ma/literature/FmDemodulator.pdf

### 2.7.2 Frequency Discriminator

A frequency discriminator generates an output that is directly proportional to the frequency of the input FM signal. In other words, it converts FM to AM. The discriminator consists of two main parts - a differentiator and an envelope detector. Different strategies can be implemented for both parts. A block diagram for a frequency discriminator with its two main parts is shown in Fig.2.8.

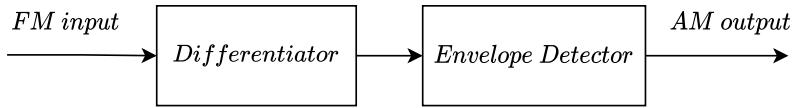

**Figure 2.8:** Frequency discriminator block diagram [25].

#### Differentiator

The differentiator already converts the FM signal into an AM signal, but still leaves an FM content. The transformation that happens here can be expressed in a formula, by simply differentiating Eq.(2.7). This operation, with some additional simple algebraic transformations, results in

$$\frac{ds(t)}{dt} = A_c 2\pi \left[ f_c + k_f m(t) \right] \sin \left( \omega_c t + 2\pi k_f \int m(t) dt - pi \right) \quad (2.11)$$

This formula shows the AM and an FM contents clearly. The FM part is described by the sine function, with its argument. The more important part is the AM part, which resembles the message signal. It is described by the term within the square brackets.

A time-domain example for this signal is shown in the top left diagram in Fig.2.9.

An important requirement for the differentiator is, that the input signal is of a constant amplitude [21]. The transmitted signal is subject to random additive noise on the transmission channel. The differentiator would deliver wrong results because of this noise, when subtracting two consecutive samples, as described in Eq.(2.14). To achieve a constant amplitude, the received complex baseband signal  $s(t)$  can be normalized to a value of one.

$$s_{norm} = \frac{s}{|s|} = \frac{A(n) e^{j\phi_{FM}(n)}}{|A(n) e^{j\phi_{FM}(n)}|} = e^{j\phi_{FM}(n)} \quad (2.12)$$

$$e^{j\phi_{FM}(n)} = |1| \quad (2.13)$$

In a hardware implementation, a differentiation is simply performed by subtracting two consecutive samples, like

$$\frac{ds(t)}{dt} = s(t) - s(t - \Delta t) \quad (2.14)$$

where  $\Delta t$  is the inverse of the sample frequency.

### Envelope Detector

The differentiated signal still consists of a FM part, as explained above, using Eq.(2.11). In order to remove this high-frequency part and extract the low-frequency envelope, the signal needs to be fed into an envelope detector. A block diagram is shown in Fig.2.8.

The method implemented in Fig.2.9 is one of the most simple ones and is usually referred to as ‘Asynchronous Half-Wave Envelope Detector’ [32]. It consists of a thresholding unit to remove negative values and a conventional lowpass filter. In analog implementations, the thresholding unit is a diode. The cutoff frequency of the lowpass needs to be adapted to the envelope signals’ maximum frequency. It needs to be able to follow the signal, but also sufficiently smooth out the rectified signal.

Different methods may be implemented for the envelope detector. For example, an ‘Asynchronous Full-Wave Envelope Detector’ can be used. Therefor, the previous method only needs to swap the thresholding unit with an unit that calculates the absolute value. In that architecture, a full-wave rectification is performed on the signal, which significantly improves the envelope detection accuracy [32]. The envelope is followed more exactly, because of the higher power that is available in the signal, since the entire signal is taken into account, and not only the positive half, as in the previous half-wave method.

#### 2.7.3 Phase-Locked Loop

A Phase-Locked Loop (PLL) can also be used to transform an FM signal to an AM signal. A PLL is a feedback loop that is usually used to generate an output signal that has a fixed phase reference to its input. In the case of FM demodulation, the loop filter in the feedback branch is configured to be able to follow the frequency variations on the input, which is directly related to the encoded information. The output of the PLL directly delivers an AM signal, which corresponds to the transmitted information. [21]

FM demodulation with a PLL is not described into more detail, since this thesis is focussing on the concept of an entire system architecture.



**Figure 2.9:** Time-domain signals in envelope detection [37].

## 2.8 Demodulation of Broadcast FM

This section describes the demodulation of the information content of an FM broadcast channel, as it is used in commercial FM radio broadcasting. The assumption here is, that the actual FM demodulation, as described in chapter 2.7 is already done correctly, including the de-emphasis of the signal. So at this point the FM signal is converted to an AM signal. Thus, traditional AM DSP techniques can be employed to decode the FM broadcast channel.

A frequency spectrum of the multiplex signal of an FM channel is shown in Fig.2.7.

### 2.8.1 Mono Audio

The first part of the channel frequency spectrum is the mono audio signal. It is the summation signal of the left and right audio channel. Thus, it contains enough information to replay an audio stream in mono quality. A mono receiver can thus simply replay the so-called multiplex signal that is produced by the FM demodulator, without any further filtering or processing. The 19 kHz pilot tone, and any higher frequency components, will not be audible by most people, because it is outside of the range of a human ear. Besides that, any used speaker may also be unable to produce a frequency in this range.

Consequently, in order to demodulate this spectral part, a lowpass filter is required. The filter needs to have a cutoff frequency of 15 kHz, to allow the entire mono audio spectrum to pass. Sufficient attenuation must be available before 19 kHz, in order to suppress the pilot tone.

### 2.8.2 Stereo Audio

The demodulation of an FM channel to recover a stereo audio signal, requires a more sophisticated approach and multiple steps in signal processing. Two parts need to be combined in order to achieve stereo. The sum and the difference of the left and right au-

dio channel signals - the mono and the stereo difference part, respectively. The following equations need to be applied, to compute a left and a right channel.

$$\begin{aligned}(L + R) + (L - R) &= (2)L \\ (L + R) - (L - R) &= (2)R\end{aligned}\quad (2.15)$$

where  $(L + R)$  represents the mono part and  $(L - R)$  the stereo difference.

The block diagram in Fig.2.10 illustrates the signal processing chain for stereo audio. In the block diagram,  $x(t)$  represents the multiplex signal from the FM demodulator. The signals  $x_l(t)$  and  $x_r(t)$  describe the left and right audio signal, respectively.



**Figure 2.10:** Block diagram of FM stereo audio demodulation [37].

The central branch selects the pilot tone at 19 kHz with a bandpass filter. This bandpass needs to have a frequency response that is sharp enough to have a sufficient attenuation at  $\pm 4$  kHz, since this is where the mono and difference signals' frequency spectra are allocated. Afterwards, the pilot tone frequency is doubled to achieve a 38 kHz subcarrier. This guarantees a phase-coherency between pilot and subcarrier, which is required to correctly shift the difference signal down to baseband.

The frequency doubling can be implemented with multiple methods. The pilot tone can be modulated by simply multiplying it with itself. Another option is to use a PLL and configure it to generate the double frequency at its output. The PLL lock indicator can then be re-used as an indicator, whether a pilot tone is existent.

In the upper branch, a bandpass filter selects the difference signal with ranges from 23 to 53 kHz. It is then modulated to baseband by the previously generated 38 kHz subcarrier. Subsequently, a lowpass limits signal bandwidth to 15 kHz, which removes the generated modulation artifacts.

The lower branch lowpass-filters the summation, or mono signal, as described in paragraph 2.8.1.

The rightmost part in the diagram performs the combination of the mono and the difference signal, according to Eq.(2.15).

## Chapter 3

# System Design Process

The process of system design is a central topic in the development of any product. This chapter describes general techniques for system design. However, they can also be directly applied to FPGA design. Additionally, tools that are specifically used in FPGA design are introduced.

### 3.1 General

The following sections describe a generalized approach to system design. A process called SIMILAR is explained, as well as selected topics that are relevant. The researched information for this section is mainly based on [4].

#### 3.1.1 The SIMILAR Process

The SIMILAR process provides a general approach to problem solving. It can be applied to any kind of problem that can be of technical, as well as non-technical nature, in order to successfully achieve the specified requirements. The concept was developed by A.T. Bahill and B. Gissing, who evaluated and compared multiple existing processes to find their similarities.

The acronym SIMILAR consists of the following components.

- State the Problem
- Investigate Alternatives
- Model the System
- Integrate Components
- Launch the System
- Assess Performance
- Re-evaluate

Each of these terms represents a separate step in the process diagram shown in Fig.3.1. The steps can be seen as iterative and parallel, as the process runs during the product development cycle.



**Figure 3.1:** The SIMILAR process in a graphical representation [4].

### State the Problem

The very first step of the process is to state the problem that is to be solved. This can be the initial definition of a new product, but can also be the definition of an improvement that is to be made for an existing product. Because of that, input for the problem statement can be generated by various parties, such as customers, product developers, regulatory agencies or manufacturers, just to name a few. In the process diagram, all these possible input parties are labeled as stakeholders.

Generally speaking, the problem statement serves the purpose to build a common understanding of the problem between a stakeholder and the developer. In case there is a mismatch, an engineer may spend valuable time to develop a sophisticated solution to a problem that was not even a requirement. Thus, any time spent to develop this feature is worthless, which highlights the importance of a correct problem statement.

An important guideline for the specification of this problem statement is, that each requirement is described in the way of *what* needs to be done, not *how* it needs to be done.

The problem statement is updated and improved by the Re-evaluate step, which is described later.

### Investigate Alternatives

In almost any kind of problem, there are multiple ways in order to achieve a successful solution. However, some solutions may be preferred over others because of certain criteria that are evaluated. Such criteria may be cost, risk, schedule or performance. Based on the combined evaluation of these factors, a decision in favor of one selected alternative is made. This part of the process is also called concept exploration.

It is important to note that this step is a repeated, iterative step. This is necessary, since there may only be a few known facts available at the initial investigation. Further design steps, such as a first estimation of the intended design implementation, simulation results, or a prototype can provide more data and facts. These can be used to re-evaluate the alternatives and consequently optimize the design process.

### Model the System

Based on the previous steps, a model for the system is developed here. This includes a process model, that is used for strategic planning towards cost reduction, optimization of the implementation effort, or the schedule of subprojects, and a product model, which supports trade-offs and the identification of risks, or helps to explain the system as a whole.

Typically, a coarse model is created for almost all alternative designs that were found in the previous step. A more detailed model is developed for the single, selected design. The model itself may be represented in many different ways, such as state machines, block diagrams, flow diagrams, simulations or object-oriented diagrams.

### Integrate Components

This step combines multiple single components into a larger, integrated system, which can then be treated as a whole. In order to be able to do that, interfaces between the components and subsystems need to be defined. Optimally, these interfaces are designed in a way that the amount of data that needs to be exchanged is kept to a minimum. It is of advantage, if a subsystem only transfers finished products that it produced to another subsystem. The aim to develop simple interfaces is of special advantage in systems that include a feedback loop. There, managing the feedback loop connections is easier if there is a clear interface, so the loop can be connected around an entire subsystem, instead of interconnecting within the subsystems.

### Launch the System

The system launch actually runs the system in a defined environment, so that it can perform what it is intended and designed to do. The defined environment can be the final, operational environment, or just a simulation which provides an output that is detailed enough for an evaluation. In a product that involves hardware development, this step may include the installation of commercial off-the-shelf products with a modified prototype software. However, since the SIMILAR process is applicable for any kind of

problem, this might also be a business process, where the launch step may be the roll-out of the subprocesses and tasks in the respective departments of a company.

### Assess Performance

This step is all about measurements. The performance of a system can only be evaluated, if it can be measured by using different metrics. Evaluation criteria are used, based on the measurements of the technical performance, which can help to find trade-offs or to mitigate risk in design and manufacturing.

### Re-evaluate

The re-evaluate step is a central building block in the SIMILAR concept. All of the other steps have a connection to it, in the form of a feedback loop. However, depending on the nature of the project and the point in the timeline of its life cycle, not all of these loops may be exercised all the time. The idea of re-evaluation and the subsequent improvement of a process is a widely applied and well-known concept. Its main function is to observe an output and to use this information to improve the systems' input.

#### 3.1.2 Design for Reuse

A design principle that is often used is design for reuse. It enables a faster and more efficient development of products, which leads to an overall decrease in development cost. Additionally, the product is likely less error-prone, since the reused parts of the system are already tested at this point. After all these positive arguments, there is a counter argument to it, though: designing a system with reusable subsystems comes with cost. Additional effort is required to design the subsystems in a way so that they can be reused in another project. However, this additional effort may potentially already be paid off, when a single subsystem can be reused in a future product and thus, it is worth the effort.

#### 3.1.3 Validation and Verification

The terms validation and verification are closely related, but have a different meaning in system design. Verification tests the properties of the developed product against the previously determined specification and requirements. It strives to build the *system right*. Validation on the other hand tries to build the *right system*. It proves that the product does what it is intended to do. This is important in order to develop the product according to what the customer actually needs. To avoid to divert from these customer needs, validation is done throughout the products' development cycle, from the beginning to the end. Various artifacts can be collected during the process, in order to have a traceable documentation of the decisions that were made.

Validation may also fail, which means that the chosen system may be the wrong system for the respective customers needs. As an example, the system may be very sensitive to variations of a parameter that a customer cannot influence. Another example is when a system is more sensitive to certain parameters than to its inputs. In both cases,

the system may be the wrong system for the specific problem and should urgently be re-evaluated.

In order to expose such failures as early as possible, any test engineer should be instructed to always keep an eye on the process of validation, which means to check if the team is building the *right system*. Therefore, a test engineer should be familiar with the problem statement.

## 3.2 System Design Targeting FPGAs

A wide range of system-level design approaches are available that are targeting FPGAs. In this section, some selected approaches are described. The research for this section is mainly based on [12].

### 3.2.1 V-Modell


The development of a product requires an organized approach, in order to successfully achieve the requirements. The common term for such an organized approach is the process model, which represents a guideline on how to organize and structure the development cycle.

A well-known process model is the so called V-Model. It is based on the similarly well-known Waterfall Model, and has its name because of the distinct V-shape of its process diagram, as it is shown in Fig.3.2. One of the main characteristics of the V-Model is, that one phase needs to be completed before the following phase can start. This classifies the model as a static process model and is one of the main disadvantages at the same time, because it makes the model inflexible to adaptions of the requirements. The advantages however are that it is easy to install and apply, each phase has its specific deliverables, good results can be achieved for large projects with simple requirements and the early test phases.

The disadvantages of inflexibility towards changes of requirements and the fact, that it is difficult to consider all eventualities in the creation of the V-model, led to the innovation of modern process models, which are iterative and thus more flexible.

The V-model applies to general software development, or project development, but can directly be mapped to FPGA development. The model is covered in this thesis section, because it shows the clear testing structure of module tests (unit tests), integration tests and system tests, which is especially important in projects that target hardware, such as FPGA projects.

Furthermore, the V-model diagram in Fig.3.2 shows the difference between validation and verification, as it is explained in the previous section 3.1.3.

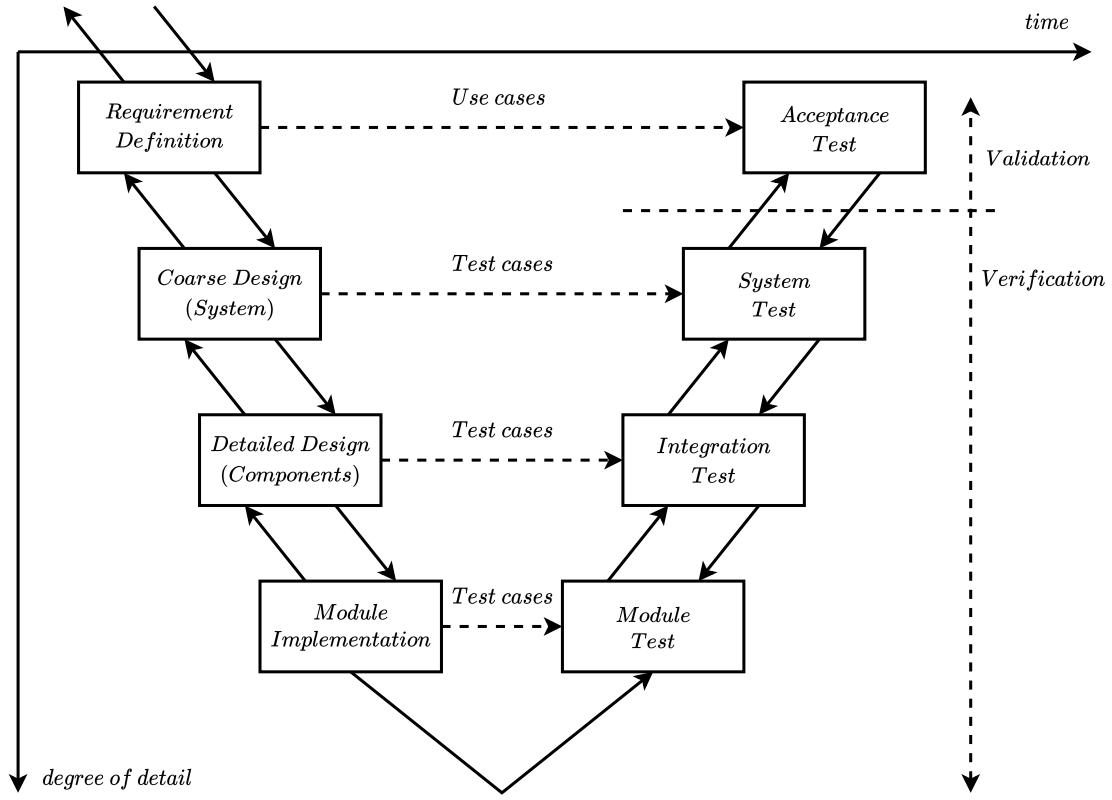

**Figure 3.2:** The V-Modell process diagram [12, Abbildung 3.5].

### 3.2.2 High-Level Synthesis

High-Level Synthes (HLS) is an FPGA design methodology that provides a high level of abstraction, and thus can be seen as a system level design method. Different languages are used for HLS - two well-known languages are SystemC, which is a library for C++ to provide modelling and simulation features, and plain C++. A comprehensive list of available HLS tools and languages can be found in Section 3.3 of [9].

The main idea of HLS is, that the hardware design can be written in abstract modules, that represent the actual functional meaning of a feature or algorithm, rather than the complex, low-level hardware details. HLS achieves this by allowing to develop the code in a high-level language, such as C++. This high-level code is then automatically transformed into hardware description language (HDL) by the respective HLS tool.

In this thesis, only the HLS of plain C++ is covered. SystemC is not discussed, since it may potentially be less important in the future. In the latest Xilinx HLS tools 'Vitis HLS' and 'Vivado HLS', the language SystemC is already deprecated [31].

HLS is described into more detail in Chapter 4.

### 3.2.3 Direct Implementation

The implementation of low-level hardware description language (HDL) in the register transfer level (RTL) is denoted as 'direct', or 'manual' implementation in this thesis.

Two commonly used languages therefor are VHDL and Verilog. Both have similar features to describe hardware in the signal level, with parallel structures and timing-dependent architectures. The languages can describe a design in a hierarchical order, so that the separate modules can be constructed in a way that an overview of the functionality of the system remains given. Synthesis, as well as simulation is supported, which allows efficient development of RTL designs.

### 3.2.4 Implementation with Tool Support

The implementation of FPGA designs with tool support focuses on the development as a model-based approach, that is often featured by a graphical programmers interface. This is often used for prototyping in an early phase of product development. A well-known example for such a model-based approach is Matlab, and its graphical tool Simulink.

Matlab can be used to describe and develop hardware-oriented algorithms, since it supports various library functions, such as the fixed point representation of numbers. A major advantage is, that fast prototyping of an algorithm, as well as a fast simulation of the system is achievable. Simulink is a graphical editor, that allows to connect functional blocks in a block diagram and create a system in that way. Multiple toolboxes support additional blocks, that abstract complex functionalities, so that a fast prototyping is possible here as well.

A powerful feature of Matlab and Simulink is, that it can be used similar to an HLS tool. Matlab code, as well as Simulink block diagrams can be transformed into low-level RTL code for an FPGA design.

#### Simulink System Generator

A full system-level design approach can be covered with the Simulink System Generator. This includes the high-level development of the system as a block diagram in Simulink, the automated generation of low-level RTL code for the FPGA hardware, and the verification in simulation and in hardware, in the form of hardware-in-the-loop. This workflow is supported for Xilinx FPGAs and is specifically targeting system design engineers, who work in rapid prototyping to generate hardware utilization estimates for the final products' hardware.

Fig. 3.3 shows this entire design approach in a block diagram. The abbreviation ISE stands for Integrated Software Environment, and is Xilinx' development environment that includes the FPGA synthesis tool. ModelSim is a HDL simulator software, that is developed by Mentor Graphics.



**Figure 3.3:** Capabilities of the Simulink System Generator [12, Abbildung 5.11].


### Simulink HDL Coder

The Simulink HDL Coder tool can generate VHDL or Verilog code from Matlab functions or Simulink block diagrams and state diagrams. The generated code can be used in Xilinx, as well as Intel/Altera FPGA hardware. This allows prototyping of algorithms, while continuously having detailed information of the target implementation, such as an estimate of the hardware logic utilization, or even the critical path in the logic.

#### 3.2.5 Level of Abstraction

Multiple implementation methods are introduced in above sections, which all have different levels of abstraction. VHDL and Verilog require, or allow, a very detailed description of the RTL code, while SystemC, C++, or Matlab and Simulink provide a high level of abstraction. In Fig.3.4, the various implementation methods are compared. The respective level of abstraction is higher towards the upper end, while the level of detail increases towards the bottom of the figure.

In conclusion, it is an engineers' choice which implementation method to use in order to develop a product. A trade-off between optimization and the level of abstraction is likely to be made. The decision may not always be obvious, but should be based on the fundamental requirements of the final product.

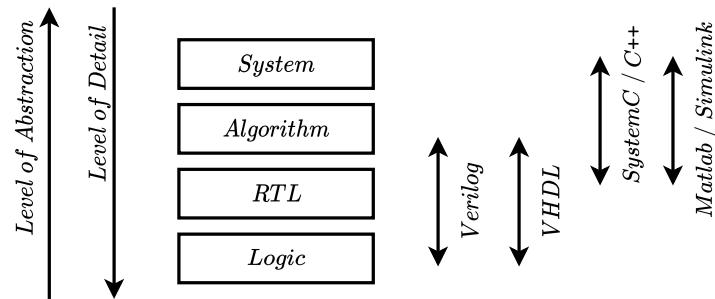

**Figure 3.4:** Abstraction levels of the implementation methods [12, Abbildung 5.1].

## Chapter 4

# High-Level Synthesis

This chapter covers High-Level Synthesis in general, but also describes details that specifically apply to Xilinx. The main sources of information for this chapter are found in [14] and [15].


### 4.1 Introduction

In software development, engineers are used to writing code in a high-level language, such as C or C++. With these languages, specific hardware details are abstracted and thus, very little knowledge of the target hardware is required. The compiler takes over these details as it transforms the code by using the underlying, supported instruction set of the target hardware. This has been the standard for many years by now. In the earlier times however, it was common practise to develop programs in the low-level assembly language. The supported instruction set of the target CPU had to be implemented directly by the software engineer.

A direct comparison can be drawn to FPGA design. An FPGA engineer historically develops code in the register-transfer level (RTL), which is common practise until today. This can be compared to developing software in the assembly language. However, the recent development towards automation and code generation brought up High-Level Synthesis (HLS). There, the FPGA design can be described in a high-level language, such as C or C++, which is convenient and allows to focus on the algorithm, rather than hardware details. This high-level code is then transformed into the low-level RTL automatically, by the HLS tool.

The usage of HLS tries to bring software- and hardware development closer together and tries to make these two worlds more similar. In software development, there are different compilers for multiple processor architectures, which can be used to port a program to another target hardware. The idea of HLS is to create the same level of abstraction - write code in a high-level language, which is agnostic of its target hardware architecture.

A major achievement in the usage of HLS is the shorter development time. The time

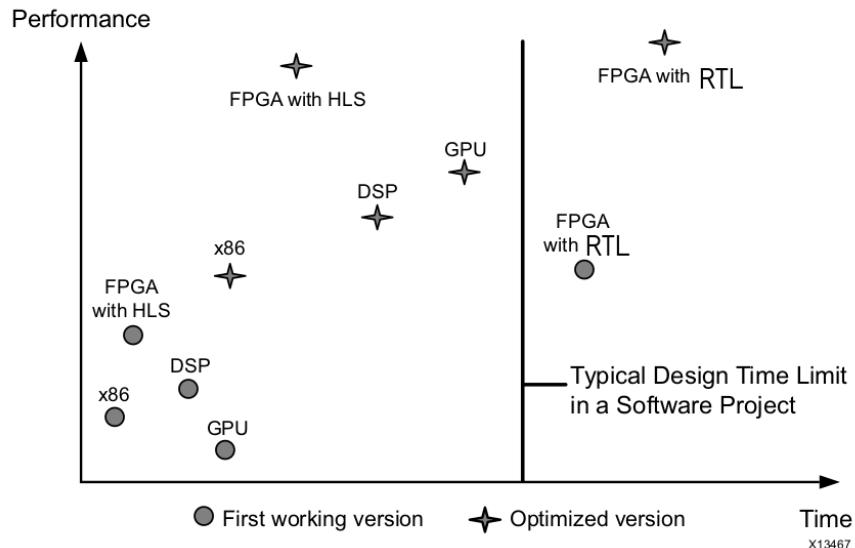

**Figure 4.1:** Design Time vs. Application Performance, if the same functionality is implemented in different methods for various targets [14, Figure 1-1].

that it takes to develop a first working version of the intended design can be significantly reduced, compared to the development in RTL code directly. This is especially important when an FPGA design is combined with a software part, like in a System On Chip, since software development is comparably fast. Fig.4.1 schematically displays the difference in development time, over performance and degree of optimization, when the same functionality of a prototype is implemented in different methods for various targets. The compared targets are an x86 processor CPU, a digital signal processor (DSP), a graphics processing unit (GPU) and the FPGA design in RTL or HLS implementation. It is clearly visible, that the FPGA design with the HLS design approach achieves a first working prototype much earlier than the direct RTL approach.

## 4.2 State Of The Art

Information for this section is found in [5], [17] and [19].

HLS has been developed over 20 years ago, but has not been able to replace the manual, traditional implementation of RTL, using VHDL and Verilog, so far. Unfortunately, no published numbers about the market share of HLS in relation to traditional implementations could be found during the research in this thesis. However, according to the given sources it is becoming more and more popular in recent years. This is mainly based on the fact that the HLS tools keep producing results of better quality as they are developed further. This especially regards the efficiency of the produced RTL code, the useability of the tools, as well as the better understandable correlation between the high-level code and the generated RTL code.

Xilinx is the largest manufacturer of FPGAs globally and therefore its tool 'Xilinx HLS' is widely used. Intel, the second largest FPGA manufacturer, also has its HLS tool called 'Intel oneAPI' [28]. Both companies are conducting serious effort to push the HLS implementation method. Xilinx recently open-sourced the code for the front-end of their HLS compiler. The front-end processes the HLS code, specifically C++, and creates an intermediate representation from it. The company expects to expand the community engagement and the encouragement of innovation, driven by users, with this step. Also Intel with its oneAPI toolkit is trying to introduce a wider usage of HLS to the community.

In terms of language support, several tools settle for C++. Intel oneAPI uses library APIs and DPC++ (Data-Parallel C++), which is an extension to the ISO C++ standard. Xilinx also decided in favor of the C++ language for their tools 'Vivado HLS' and 'Vitis HLS'. In older versions, SystemC was supported for synthesis as well, but is now deprecated in the respective latest versions [31].

Summing up, HLS is gaining more and more attention as it becomes more efficient. Its usage is being promoted and pushed forward with serious effort by the major FPGA chip manufacturers and tool vendors.

### 4.3 Workflow

This section describes the workflow for Xilinx HLS, as it is recommended in the user guide *Introduction to FPGA Design with Vivado High-Level Synthesis* [14].

Generally, as the user guide states, the quality and the correctness of the generated output can only be as good as its input. Consequently, it is very important to follow the design recommendations and adhere to specific rules in order to produce a high-quality input software.

The following list presents the main steps that are required in the implementation workflow of an HLS IP core project.

- **Software Testbench**

The developed HLS IP code needs to be verified and checked for correct functionality in a software testbench, before it gets processed to RTL code. This can be done by using conventional software development tools. Xilinx specifically recommends dynamic code checker tools like *valgrind* or *Coverity*. They support a developer in finding memory leaks, out-of-bounds memory access, uninitialized variables and similar issues. Furthermore, the application of code coverage tools like *gcov* is recommended as well. In that way, the percentage of executed code lines of testbench and HLS code can be measured, to ensure a sufficient level of testing. The software testbench is also called 'C Simulation'.

The implementation of the HLS IP code is subject to restrictions. As an example,

dynamic memory allocation is not supported, since the entire code must be analyzable at runtime to be processed into RTL code. In contrast, the testbench code does not have any restrictions. Anything that is supported in C/C++ may be used here.

- **Co-Simulation**

Co-Simulation serves the purpose to verify the correct functionality of the generated RTL code. It is not the goal to verify the algorithm, though. This is already done in the previous C simulation step. However, the issue is that the C simulation is executed like a regular program, which means it is executed sequentially, instruction by instruction and thus parallelism cannot be represented.

This is where the Co-Simulation becomes necessary. The RTL code is simulated with an HDL simulator software, which can actually simulate the parallelism as it exists in the FPGA hardware. In that way it can be ensured, that the user did not break the functional correctness of the algorithm, by giving wrong parallelization guidance to the HLS tool.

The external simulator software has to run the complex HDL simulation and return data results, which is a time consuming task. Therefore, the execution time of this simulation type is expected to be approximately 10.000 times slower, compared to the C simulation.

- **Integration of the generated IP**

At this point, the developed HLS code is fully verified and can successfully be transformed into working RTL code. Xilinx HLS exports the generated RTL code in an IP structure that is supported by its IP integrator tool, that is used in Vivado or Vitis. Therefore, the developed IP core can be imported to the block design as another processing block, get connected with other IPs, and in that way get integrated into a larger design.

- **Synthesize FPGA bitstream**

Like in any other FPGA development cycle, the created block design can now be synthesized. This generates a bitstream file, which can be programmed into an actual FPGA hardware. Depending on the architecture of the system, the developed IP may now interface with the on-chip CPU, in the example of a System-On-Chip.

These steps represent the standard workflow for the development of an integrated HLS IP. A successful deployment on hardware can be achieved if they are completed accurately. There may be more and deeper knowledge necessary, in order to use this design approach. This thesis however focuses on system design, not on HLS specifically, and thus a comprehensive study of the referenced literature is recommended.

## 4.4 Coding

This section gives a brief overview of some HLS-specific C++ features that are supported with Xilinx tools. More detailed information can be found in the respective user guide [15].

### 4.4.1 Data Types

HLS supports special data types, which are not available in standard C++. The focus of these data types is mainly to support an optimized translation into RTL, which requires the least amount of logic cells in the FPGA.

Standard C++ only supports variables in the bitwidth of byte-boundaries, so in multiples of 8 bit. However, this may be inefficient to fit into the available FPGA target hardware. One example therefor is the DSP48 macro that Xilinx FPGAs have built-in. They support the multiplication of only up to 18 bit. In an example application, the reachable number range of a variable might be limited to 17 bit for the multiplication. However, in order to represent that, using a 32 bit data type would be necessary in standard C++. The HLS compiler does not have this prior knowledge of the number range limit and would thus implement a 32 bit multiplication, which is a waste of resources in this case. Because of this reason, a major feature of HLS is the possibility to define data types with arbitrary bitwidths. In that way, the above example can be optimized to use a data type that has a bitwidth of 17 bit, which is exactly the bitwidth that is required for the application. This results in a lower logic utilization, which in turn results in a higher maximum clock frequency that can be used. Consequently, more functionality can be implemented in the FPGA device. The referenced user guide shows a design example where an area reduction of 75% is achieved by just reducing the bitwidths.

The argumentation is equally valid for integer data types, as well as fixed point data types. In calculations it is often necessary to represent fractional numbers. In standard C++, floating point data types are used therefor. However, floating point operations require a large amount of logic to implement and thus, HLS provides fixed point data types. These can be instantiated in arbitrary bitwidths, where integer and fractional bitwidths can be specified separately. The fixed point format is often described in the format 'integer.fractional', like '2.14', which represents a 16 bit fixed point data type that has 2 integer bits and 14 fractional bits.

An example for the usage of integer and fixed point data types is given in the following code section.

```

1 #include <ap_int.h>
2 #include <ap_fixed.h>
3
4 ap_int<9> custom_integer_var1;           // 9 bit integer, signed
5 ap_uint<17> custom_integer_var2;          // 17 bit integer, unsigned
6
7 ap_fixed<16,2> custom_fixedpoint_var1;   // 16 bit fixed point, 2.14 format, signed
8 ap_ufixed<14,4> custom_fixedpoint_var2;  // 12 bit fixed point, 4.10 format, unsigned

```

#### 4.4.2 Optimization Directives

The HLS code can be instrumented with optimization directives. This is used to provide the HLS compiler with additional information and to instruct it on how to implement certain parts of the code in RTL.

Directives can be applied to interfaces, functions, loops, arrays or code regions. They can be written in a Tcl file that is provided to the HLS project, or in the design code directly, in the form of a pre-processor pragma. Both variants have their advantages and disadvantages.

Examples for such directives are optimization strategies for throughput and dataflow optimization, such as pipelining or loop unrolling. Also the implementation of the required interface types, such as various AXI interfaces, is controlled with directives.

Since this topic is very comprehensive, it cannot be covered into more detail here. For further information, refer to the user guide [15].

#### 4.4.3 Interfaces

Interfaces are an important asset to any IP design, since this is where they communicate with their surroundings. This may be another IP that processes data, but may also be a CPU that reads status information or configures the IPs' settings.

Xilinx HLS implements two different types of interfaces: block-level, and port-level interfaces. The block-level interface is a general interface to the IP, that can provide a handshaking functionality for when it is idle and ready to start a new operation, or when the operation is completed. The port-level interfaces on the other hand are specific to input and output ports. They can also provide handshaking functionality, such as data-valid indicators, acknowledge signals, or implement a FIFO for the IOs. However, port-level interfaces can also be implemented as AXI interfaces, such as AXI4-Stream, AXI4-Lite Slave or an AXI4 Master. This is an especially useful function, since the implementation of the actual interface logic is abstracted from the user. Additionally, software drivers are automatically generated along with the respective interfaces, which provides a fast and simple integration into a larger system.

The following code example shows the specification of an AXI4-Lite memory-mapped slave interface. The provided registers are separated into config registers and status registers. The config is readable and writeable, while the status registers are implemented as read-only, which requires less logic in the RTL implementation.

Another code example demonstrates the equally simple definition of an AXI4-Stream interface.

```

1  #include <hls_stream.h>
2
3  void hls_ip_top_level(hls::stream<uint32_t>& sample_in,
4                         hls::stream<uint32_t>& audio_out) {

```

**Program 4.1:** Implementation of an AXI4-Lite memory-mapped slave with read-only and read-write registers.

```

1  typedef struct {
2      ap_int<NUM_LEDS> led_ctrl;
3      uint8_t code;
4  } config_t;
5
6  typedef struct {
7      uint32_t uptime;
8      uint32_t result;
9  } status_t;
10
11 void hls_ip_top_level(config_t& config,
12                         status_t* status) {
13     #pragma HLS INTERFACE s_axilite port = status bundle = API
14     #pragma HLS INTERFACE s_axilite port = config bundle = API
15
16     if (config.code == 0xFF) {
17         status->result = 0;
18         ...
19     }
20     ...
21 }
22

5     #pragma HLS INTERFACE axis port = sample_in
6     #pragma HLS INTERFACE axis port = audio_out
7 }
```

## 4.5 Testbench

The general significance of the simulation testbench for a HDL design is explained here, as well as the different levels of abstraction in which a HLS testbench can be executed. These different levels of abstraction in the testbench execution are a major difference between a VHDL testbench and an HLS testbench. The most important impact thereof is the execution speed - the time it takes to simulate a number of test cases on the DUT.

Section 4.3 above already mentioned the topics of testbenches and simulation types. The following descriptions shall be seen as a comprehensive extension around these topics.

### 4.5.1 General

In the development of software that runs on a CPU, the tool of step-by-step debugging is commonly used during the development process. Various verification and testing libraries exist, in order to create unit tests, for example. The advantage is, that the code that is developed there, can be compiled and run on the target CPU directly, while

maintaining the direct instruction-by-instruction representation of the code.

However, in the development of hardware with any HDL, this is not possible. HDL languages provide a syntax and semantic representation that allow to create parallel structures and a dependency on timing, such as a system clock. The design is based on signals that perform logic operations and transfer values into registers. Thus, HDL code is often called register-transfer level, or short, RTL code. Before this code can be run on the target hardware, i.e. an FPGA, it needs to run through a process called synthesis. In synthesis, the HDL code is translated into a netlist and is consequently mapped into hardware logic cells that are available in the target device. Various optimizations are done during this process, so that the direct connection to the code representation is lost. Additionally, it is impossible to access every single signal within the design during debugging on the hardware, which is probably also one of the main issues. Synthesis tools like Xilinx Vivado provide support to make debugging possible in hardware, but require a large effort to implement them, especially in terms of synthesis time. Another big factor that speaks against debugging in hardware generally, is that the process of synthesis takes a comparably large amount of time to transform code into the target technology. Each time the code is adapted, the entire synthesis process needs to be started over again. Because of all of these reasons, debugging HDL code step-by-step as in software is not possible.

Thus, in order to allow debugging and verification of HDL code, the technology of simulation was invented. Here, the HDL is also translated into a netlist that represents all the parallel processes just like in hardware, but the subsequent step of synthesis is not taken. Therefore, simulation comes to a result much faster. Since HDL designs actually only consist of electrical wires and some basic block primitives, like flipflops or lookup tables, it is difficult to verify correct values. They would need to be compared in their binary bit-pattern format, at the correct point in time. Of course the HDL language provides support with different datatypes, that abstract the binary number representation and make the numbers human-readable. However, it remains an enormous effort to manually write testing code to verify a bus interface, for example. In order to simplify such complex operations, various testbench frameworks and libraries are available to developers.

#### 4.5.2 C Simulation

In C Simulation, the HLS compiler is used to create an executable binary that includes the testbench code, as well as the IP design of the DUT. This binary can be run just like any other program. The most important note here is, that the HLS code is *not* transformed into RTL at this point. Instead, the HLS code is treated as a regular C++ code, that uses some libraries, like the fixed-point library. This means, that the HLS IP cores' top-level function is used as a regular function call in the testbench.

The main advantage of this type of simulation is the major increase of execution speed. The reason for this speed-up is the abstraction of timing, such as clock cycles or similar constraints. In fact, there is absolutely no timing information that needs to be

taken into account in this simulation.

#### 4.5.3 C/RTL Co-Simulation

This type of simulation actually transforms the HLS IP code into RTL code, such as Verilog or VHDL, for the testbench. This is done in three steps.

- **Create input vectors**

In this first step, the above explained, regular C simulation is executed. Hereby, the inputs that are sent to the DUT are stored as 'input vectors'.

- **Perform RTL simulation**

Next, the previously generated input vectors are applied to the DUT. At this point, the DUT is already translated into RTL code, so the code that is used here is either VHDL or Verilog code. The default simulator is the Vivado Simulator (XSim). However, various other simulators like ModelSim are supported. The generated outputs of this step are stored as 'output vectors'.

- **Verify the results**

The final verification step sources the output vectors back to the C testbench, which compares the outputs with the expected results.

This type of simulation takes a significantly longer time to execute, because timing information now actually needs to be considered for the RTL code.

## Chapter 5

# System Architecture and Concept

This chapter introduces the FM radio receiver project that is implemented as a major part of this thesis. It specifically talks about the system level approach that is taken in the implementation of the project. The main concept, as well as the architecture are explained.

### 5.1 Overview


In the development of a project that includes multiple functional parts, it is always of advantage to start with a system level overview. Major decisions can be made at this stage, before any implementation has begun. This can have a direct impact on the efficiency of the entire development, which consequently has an impact on the final quality of the product. A thorough system level design can also prevent from issues that would otherwise arise while the development is already ongoing. As an example it could turn out that one of the functional parts is not able to fit into the integrated system, in the way it is implemented. This leads to the necessity to re-engineer this entire functional block. As a result, it takes more effort to implement the functionality, which directly correlates with the development cost and the time-to-market, in order to deliver the final product. Summing up, a comprehensive system level architecture and concept can pave the way for a successful implementation of a project from start to finish.

In order to create a system level design, considerations around the high-level, final goal of the product are a good starting point. This includes the definition of its functional range. Once this is done, the target system or target hardware should be considered, because there are various ways to implement a certain functionality. All of these variants will eventually result in the same output, but will, however, heavily differ in their implementation effort, efficiency, or their applicability for the products' aim in general. Thus, things like the available hardware platform, implementation time, degree of optimization, output quality, and similar things are important factors at this stage. Of course, there are many more factors to consider when a product is to be developed. However, only a subset of these is covered here, since this chapter is focused on how this thesis' accompanying project was developed and is thus written in that context.

## 5.2 The Project

The aim of this thesis is develop a system architecture and concept, that allows the implementation of an FM radio receiver in multiple different ways, while providing an elegant way to compare the different solutions. The final goal thereby is always the same, that is: Listen to the music of a radio station that is transmitted over FM broadcast radio.

A very high-level overview of the entire system is given by the block diagram in Fig.5.1. It shows the front end, which processes the received antenna signal, so that it can be used in the FM radio receiver block. The radio receiver itself is implemented in multiple different variants. The produced audio output is sent to a speaker, since the ultimate goal is to listen to a radio stations' audio signal.

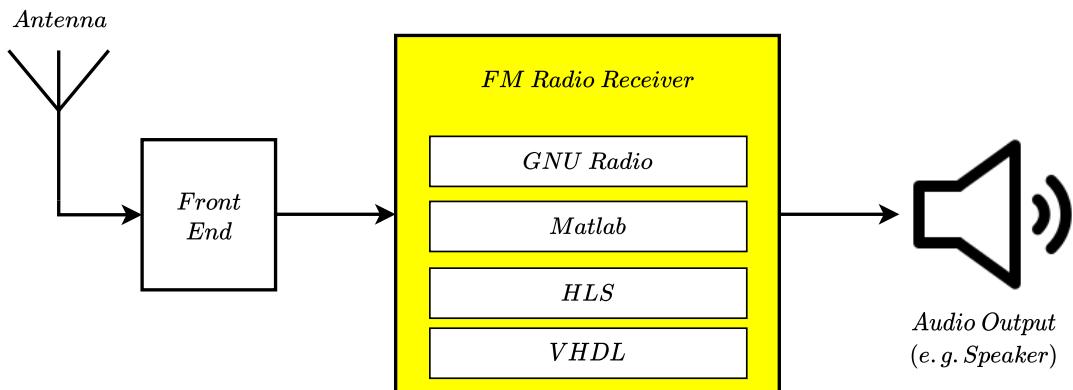

**Figure 5.1:** High-level overview of the system.

In the context of a system level design approach, several steps are necessary to find a solution that is ready to be implemented. As a very first step, the inner workings of an FM receiver need to be understood. This mainly regards the signal processing theory, to be able to decode the signal that is received by the antenna. Chapter 2 describes this part into detail.

As already mentioned above, multiple ways of technology and implementation can lead to a similar result. Thus, the next step is to define a set of possible ways which will actually be implemented. For this thesis, the decision was made to implement the FM radio receiver by using the following methods.

- **GNU Radio**

GNU Radio is a free and open-source software development toolkit to implement a software-defined radio. The implementation is done by connecting functional blocks in a block design. This abstracts the inner workings of each functional block and thus provides an implementation approach on a very high level of abstraction. GNU Radio supports interfaces to external RF hardware [34].

- **Matlab**

Matlab is a software platform that can work with matrices and compute numerical solutions. Matlab also includes various toolboxes, that support developers with

complex calculations and tasks on datasets. This includes a range of toolboxes for signal processing, such as filter designers or FFT functions, as well as convenient ways to visualize data [30].

- **FPGA: C++ High-Level Synthesis**

In order to use an FPGA, a hardware design needs to be developed for it. This can be done using high-level synthesis. This thesis focuses in C++ and does not implement a SystemC variant, because Xilinx has deprecated SystemC support for synthesis in their latest HLS tools. This, and the details of High-level synthesis (HLS) are explained in Chapter 4.

- **FPGA: VHDL**

Similar to the HLS approach, this is a variant to write a hardware design for an FPGA. The language VHDL is used in this approach.


In order to implement an FM radio receiver, all of the listed methods require deep knowledge about the necessary details of signal processing. However, the implementation of the various different methods require more or less knowledge and effort on the exact underlying implementation of each signal processing part. This depends on their respective level of abstraction.

### 5.3 System Concept

The overall system concept has to be developed in a way, to fit the respective projects' needs and requirements. There should be a clear structure, in order to help to create a working system successfully. This structure should include a description of the data source, the data processing blocks and stages, commonly used parameters, as well as a strategy to verify the correct functionality of the system. A good system structure tries to share as many parts as possible in the system. This is to minimize the points of failure, as well as to reduce the effort of implementation.

In the apparent projects' case, a single block of the system is implemented in multiple ways, which should, however, all compute an equal output. Thus, it is of advantage to define the data source to be common for all of these variants, to create a unified situation at the input. Additionally, the data source may be chosen to be recorded, to have a known, reproducible set of input data. This significantly eases the verification of the functionality in the final step, since all variants are expected to create the same output in the optimum, fully functioning case. Not only the data source is important to be common, but also the way of verification. In order to achieve that, the verification block needs to be able to compare multiple data outputs with the verification data, which is chosen to serve as the reference.

An example of a system concept and its architecture is developed and shown in Fig.5.2. Here, a common data source is provided by the block called *Front End*. It records data from an antenna and saves it to a file, in a format that the consequent blocks require at their input. Therefore, a reproducible input is ensured. Within the *FM Radio Receiver* block, all the different implementation variants are shown in parallel. They all work on this common input source and generate their respective output. This

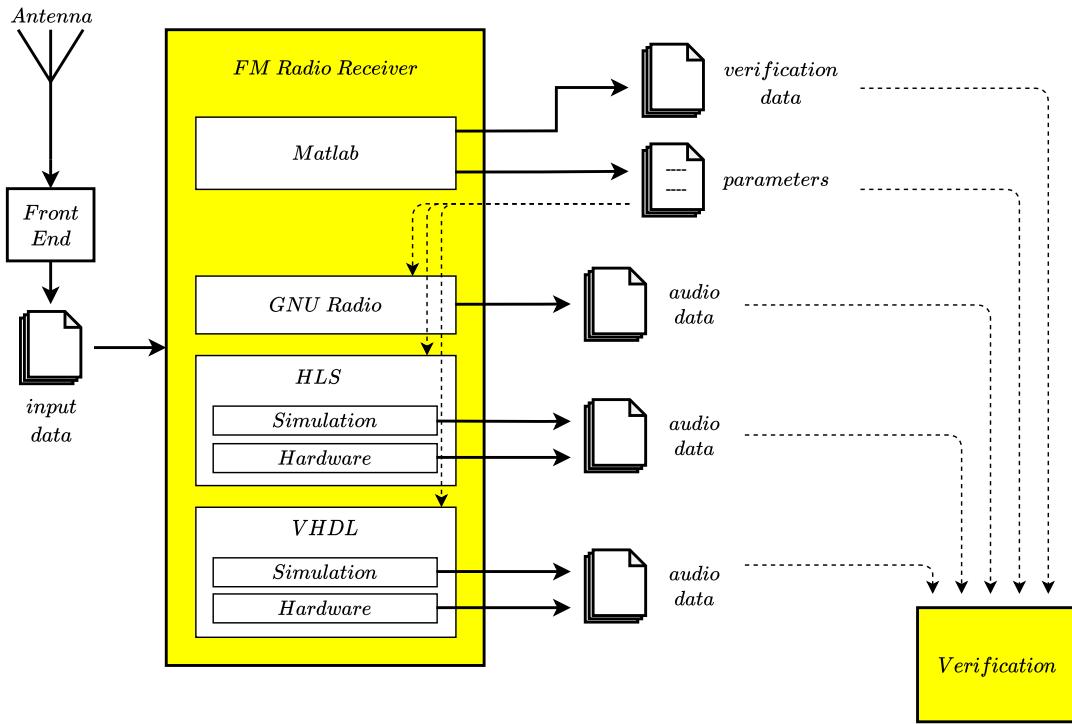

**Figure 5.2:** Block diagram of the overall system concept.

output data is again written to a file. Hereby it is important to note, that the output of the *Matlab* implementation is chosen to be the 'golden reference model' of correct output. Its output is used as the verification data later in the process. This is because *Matlab* was used to research decoding algorithms and to develop the DSP chain, which is used in the *GNU Radio*, *HLS* and *VHDL* implementations. In addition to the verification data, the *Matlab* model also writes common parameters to a file. These parameters are directly used in the other implementations, to ensure a common setup. The final block is the *Verification* entity, which compares the output files of all the variants, with respect to the chosen model parameters.

A major point in this system concept is, that it works independently of the respective implementation methodology. This is especially important, since there is no possible way to run all these different variants in a single verification environment. Instead, each methodology writes an output file, which is a supported functionality that is available anywhere.

# Chapter 6

## Implementation

This chapter describes the most important details of each implementation variant. The implementation variants in High-Level Synthesis and VHDL are highlighted especially, since they are the main focus of this thesis.

### 6.1 Digital Signal Processing Chain

The theory behind the demodulation of an FM signal is already explained in Chapter 2. The demodulation of an FM broadcast channel specifically, is described in Section 2.8. In this section however, the DSP chain is described into more detail and with more information, as it is implemented in the various methods.

Fig.6.1 displays the detailed DSP chain as a block diagram.

The following list explains implementation details about the respective DSP blocks.

- **Data Source**

Matlab is used to generate the data source file, which is used as an input to the system. An audio file is read and modulated as an FM channel signal.

- **FM Demodulator**

The FM demodulator is implemented as a Baseband Delay Modulator, as described in Section 2.7.1.

- **De-Emphasis Filter**

The above described Matlab source generation does not include an Emphasis filter. Thus, a de-emphasis filter is not implemented as it is not required.

- **Downsample**

Downsampling is implemented in a simplified version, without an anti-aliasing filter. It is not required, because of the following explanation. At this point the sampling frequency is set to 960 kHz. The input is band-limited at 75 kHz, which is the maximum frequency in an FM channel, as explained in Section 2.6.3. Thus, the input has an oversampling rate of 12.8, while downsampling is only performed with a factor of 8.

- **Filters**

Several filters are implemented as FIR filters. The 15 kHz lowpass (LP) filter is instantiated twice, with the exact same coefficients.

- **Filter Group Delay Compensation**

FIR filters introduce a delay on the output signal, with respect to the input. The group delay in number of samples can be computed with the following formula.

$$\text{group delay} = \frac{\text{filter order}}{2} = \frac{(N \text{ coefficients} - 1)}{2} \quad (6.1)$$

This is due to the property of the FIR filters' linear phase response [10]. Since phase is directly proportional to time, the term *group delay* is often used. This delay needs to be accounted for, depending on where the signal is used subsequently.

Looking at the block diagram, the group delay needs to be compensated at two places.

- **Between the branches *Recover LR diff* and *Recover Mono*:**

The *Mono* branch only contains a single LP filter, while the *LR diff* branch contains two filters, namely a BP and an LP filter. The latter branches' signal is therefore delayed, with respect to the *Mono* branch.

The issue here is, that both signals are added and subtracted at the end of the processing chain, to compute the left and right channel signals, respectively. Thus, they need to be aligned in time at that point. Consequently, a delay block needs to be inserted in the *Mono* branch, to compensate the group delay of the BP.


- **Between the branches *Recover LR diff* and *Recover Carriers*:**

Both branches only contain a single BP filter. However, they have properties, like the transition bandwidth and the passband. Thus, their filter order may be different as well, which leads to a non-matching group delay. Since the two signals are multiplicated in the subsequent mixer, and an important factor is the phase-coherency of the recovered carrier (as explained in Section 2.8), the group delay compensation becomes necessary here.

To overcome the issue at this point in the actual hardware implementation, the filters were manually 'tuned' to have a matching order.

- **Carrier Recovery**

The 38 kHz carrier can be recovered from the 19 kHz pilot tone. It is important that the recovered carrier is phase-coherent with the received input, as described in Section 2.8. This can be achieved, by simply multiplying the pilot tone with itself, which is the way it is implemented here.

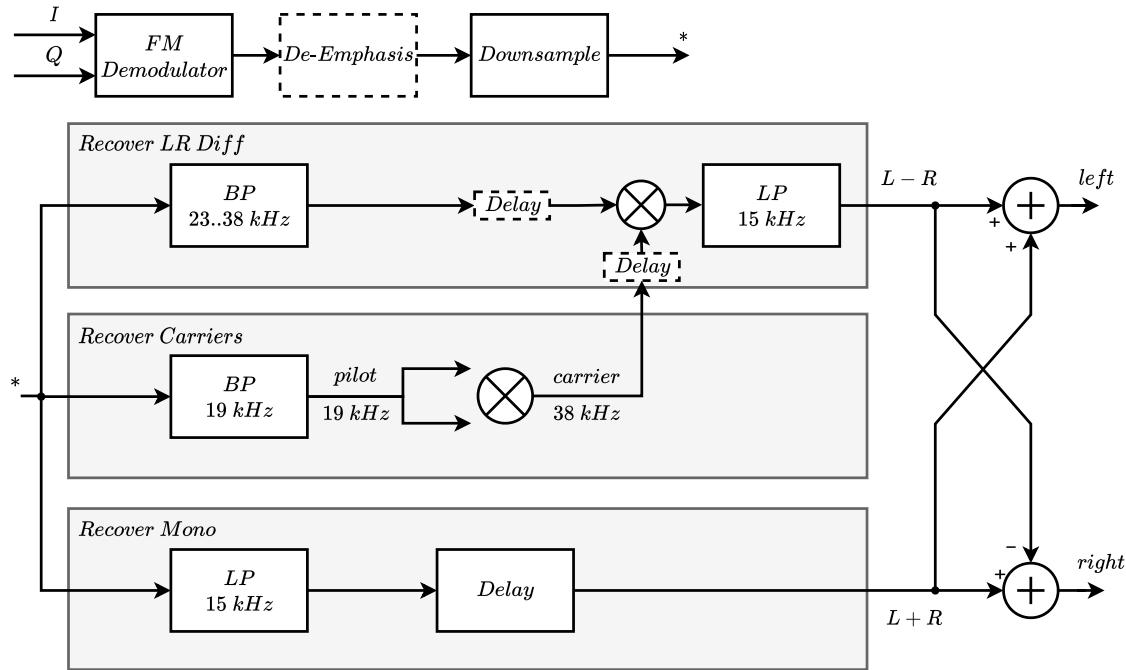

**Figure 6.1:** Detailed block diagram of the digital signal processing chain.

Several of the listed details are implemented, in order to achieve a successful demodulation of the FM signal.

## 6.2 Matlab Model

Matlab is used to create a model of the receiver, which is used as a reference for the other implementation variants. Here, DSP algorithms are tested and evaluated, to find a method that is suitable to implement in hardware, specifically in an FPGA.

The Matlab script consists of a transmitter, the receiver model, and additional code for analysis.

### 6.2.1 Transmitter

The transmitter is implemented to provide a reproducible source of data, which can be used to feed the receiver. Another option would be to use external hardware as a software-defined radio and record some antenna data. However, the main advantage of a locally implemented transmitter over a recording is, that the raw data input is known. Thus, the expected output of the receiver model is this raw data, that was previously modulated by the local transmitter. In the case of a recording, the original data is not known, which does not allow to actually verify the receiver.

In the implemented version, an audio file is modulated into the FM channel. The audio file contains data that represents speech with the words '*Left channel... Right*

*channel...’* In terms of audio channels, the words exactly match the respective channels’ output - the first part is modulated on the left audio channel only, while the second part only targets the right audio channel. This is particularly useful for verification, especially to verify the functionality of channel separation. From the experience during development, the channel separation is a good indicator of whether the system is functioning correctly. This left-right indication also simplifies the verification process, because a developer can recognize it with their visual and acoustic senses. It is possible to audibly verify it by listening to the output. It is also possible to just visually inspect the output data, where a clear separation is visible between the channels.

The transmitter is implemented according to the structure that is depicted as a block diagram in Fig.6.2. To facilitate an easy understanding of the block diagram, it is of advantage to keep in mind that it exactly resembles the frequency spectrum that is previously shown in Fig.2.7.


The transmitter reads an audio file, including a left and a right channel in the first step. The audio file contains data in a sample rate of 48 kHz. Next, the sample rate is increased by an oversampling factor of 20, to achieve a sufficient sample rate for the subsequent DSP procedures.

The achieved sample rate of 960 kHz could actually be chosen much lower, since an FM channels’ maximum frequency is 75 kHz (see 2.6.3), and according to the Nyquist theorem the sample rate thus only needs to have 150 kHz (see 2.4). However, the higher rate was chosen, mainly because a higher number of signal samples beautify any plots that are created during analysis. Since a thorough optimization of the DSP chain is not the focus of this thesis, this was an acceptable trade-off.

The next step is the pre-emphasis filter, which is implemented, but is disabled in the receiver. This is done to reduce some complexity in the hardware implementation. The following stage generates the Mono and LR Diff signals, by simply calculating the summation and difference of the left and right channels, respectively.

The next section in the block diagram represents multiple processes in parallel. The LR Diff part is shifted to 38 kHz in the spectrum. This is done by modulating the signal with its sub-carrier of 38 kHz. A subsequent BP filter serves to remove the artifacts of the modulation, such as the image replica. It band-limits the spectrum of the LR Diff part between 23 and 53 kHz. The BP filter introduces a constant group delay of the signal. In order to maintain the alignment of all signals, this side-effect needs to be accounted for and be compensated in the other signal branches. Thus, the Mono signal, as well as the Pilot Tone need to be delayed by the amount of samples defined by the BP filters’ group delay. The subsequent amplifier blocks create the defined proportions of the sub-band, such as 90% for the audio parts, and 10% for the Pilot Tone [8].

One part in this block diagram is the so-called Hinz Triller, which was part of the Autofahrer-Rundfunk-Information service (ARI, German for Automotive-Driver’s-Broadcasting-Information). It was used as an indicator for traffic announcements. It is

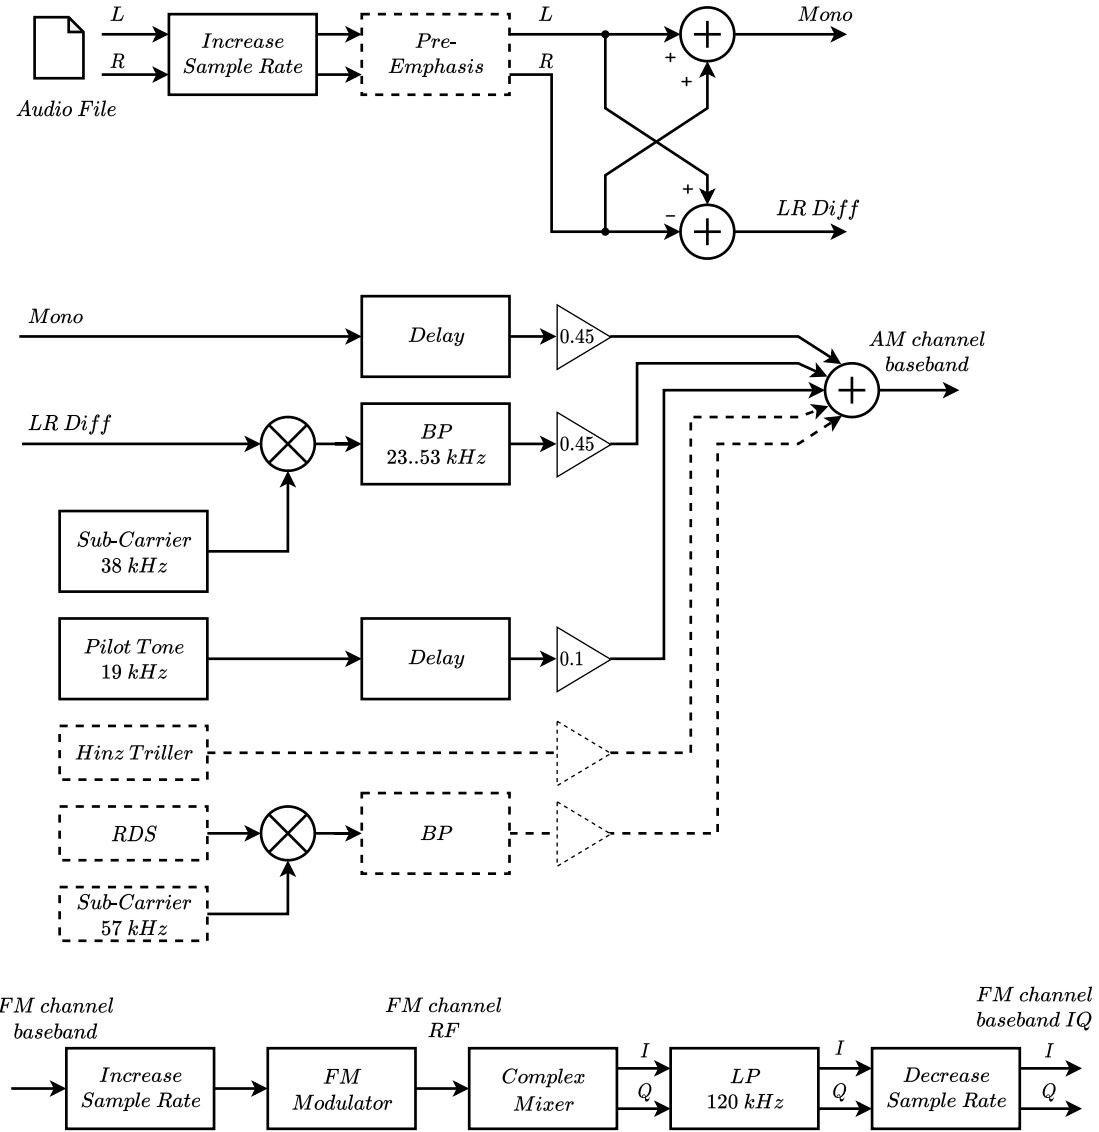

**Figure 6.2:** Block diagram of the implemented transmitter in Matlab.

now obsolete and is replaced by the more modern Radio Data System (RDS). However, the Hinz Triller is still transmitted in many radio stations and can often be heard before and after the traffic announcements [39]. In the implemented transmitter, the Hinz Triller is implemented, but is disabled, since it only represents a temporarily transmitted signal.

The Radio Data System (RDS) signal is not implemented in the transmitter, since it consists of a comprehensive protocol and multiple steps of modulation, such as differentially-coded BPSK [11] and is therefore too time-consuming to implement. Furthermore, it would not contribute any additional value to this project, since this is not the main focus.

At this point in the DSP chain, the signal resembles the frequency spectrum that is displayed in Fig.2.7.

In the final chain of DSP blocks, the sample rate is increased again, to be able to frequency-modulate the signal. The resulting frequency modulated signal represents the signal that is received by an antenna - the RF signal of an FM channel. This signal is then processed by a complex baseband mixer, which results in inphase-, and quadrature components in the baseband. An LP filter band-limits the signal and removes artifacts of the mixer. As a final step, the sample rate is decreased again, back to the chosen sampling rate of 960 kHz. This signal can now be processed in a digital FM receiver.

### 6.2.2 Fixed Point Arithmetic


The target hardware platform of the FM radio receiver project is an FPGA. These are devices that have a limited number of logic cells, which can be used to implement logical and computational functions. Any kind of computation can be implemented within these logic cells. However, depending on its detailed implementation, the amount of required logic cells may differ by a large factor. In order to overcome this issue, mathematical operations are often implemented in fixed point arithmetic, rather than floating point. This is due to the fact, that fixed point operations can be implemented with much less logic cells than floating point operations. The reason therefor is, that the bitwidth of input and output numbers is previously known in fixed point. Floating point calculations do not have this assumption and thus need to be more flexible, which requires a larger amount of logic cells.

The Matlab model is therefore developed by keeping in mind this limitation. Matlab provides special datatypes for fixed point number representation. However, these were not used in this implementation. Instead, everything is calculated in floating point representation, using the standard *double* datatype. Then, in certain positions in the DSP chain, the numbers are rounded to the resolution of a fixed point datatype. A fixed point format of *2.14*, meaning 2 bit for integer- and 14 bit for fractional number representation is chosen. This is sufficient for the FM receiver and could potentially be lowered to a lower bitwidth. Again, an optimization of the DSP chain is not the focus of this thesis.

Summing up, the Matlab model is not implemented in fixed point arithmetic, but is implemented in a way, that is close enough to the hardware implementation. Therefore, it can serve as a reference for the hardware implementation.

### 6.2.3 Receiver

The receiver is implemented, following the block diagram in Fig.6.1. Further assumptions and simplifications, such as the fixed point arithmetic are described into detail above.

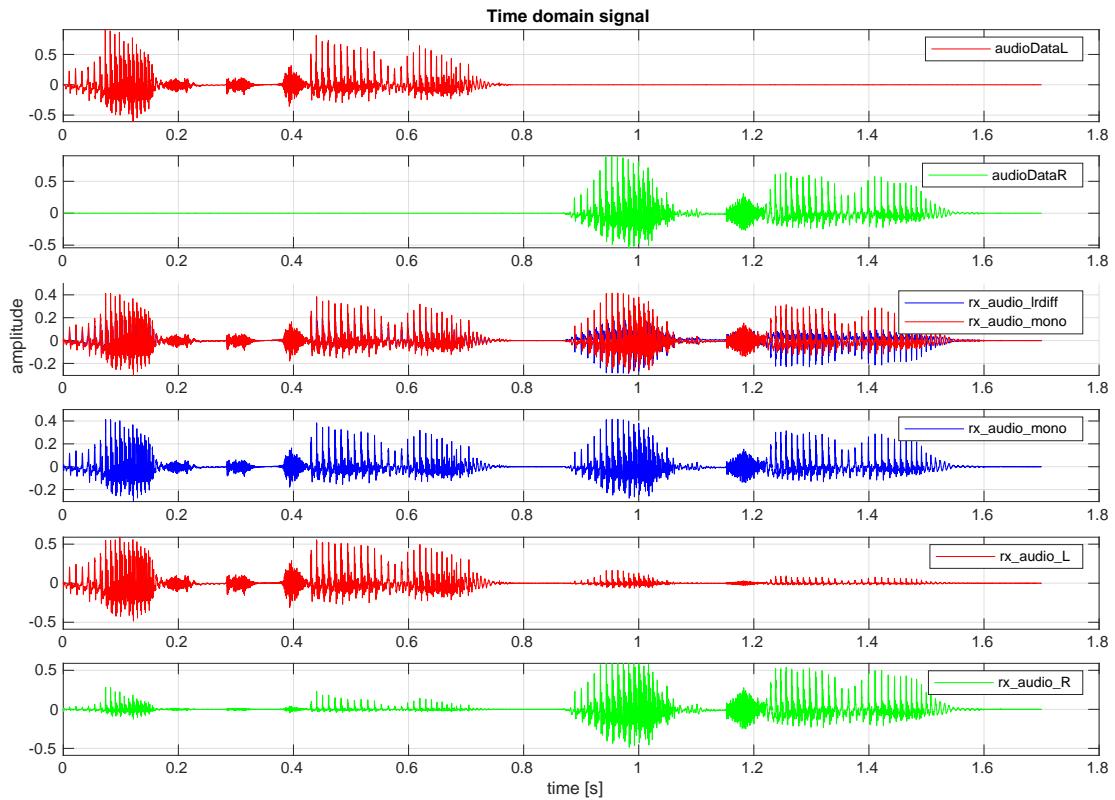


**Figure 6.3:** Matlab analysis in the time domain.

#### 6.2.4 Analysis

The Matlab implementation also includes a comprehensive range of analysis, especially in terms of visual plots. These plots are useful during the development of new DSP algorithms, in order to verify the correct thereof.

An example of a plot that is created by the analysis is depicted in Fig.6.3. The diagram shows the respective signals in the time domain. Above two timelines display the input data, as it is read from the input audio file. The two diagrams in the center plot the Mono and LR Diff signals. The bottom diagrams then represent the result after the entire signal processing chain. It can be seen that the DSP chain is not able to demodulate the original signal without any error. However, the result shows a clear separation of the left and right channels, as resembles the original input very closely, which is good enough for this case study.

Further analysis is done in the frequency domain, especially in order to better understand the modulation of the different spectral parts in the FM channel. An example thereof is shown in Fig.6.4. The spectrum of an FM channel multiplex signal, as it is generated by a transmitter before the modulation, is shown in this diagram. The spectrum after the demodulation through a receiver is shown in the lower diagram. Spectral parts, such as the pilot tone at 19 kHz, or the LR Diff part around 38 kHz can be seen

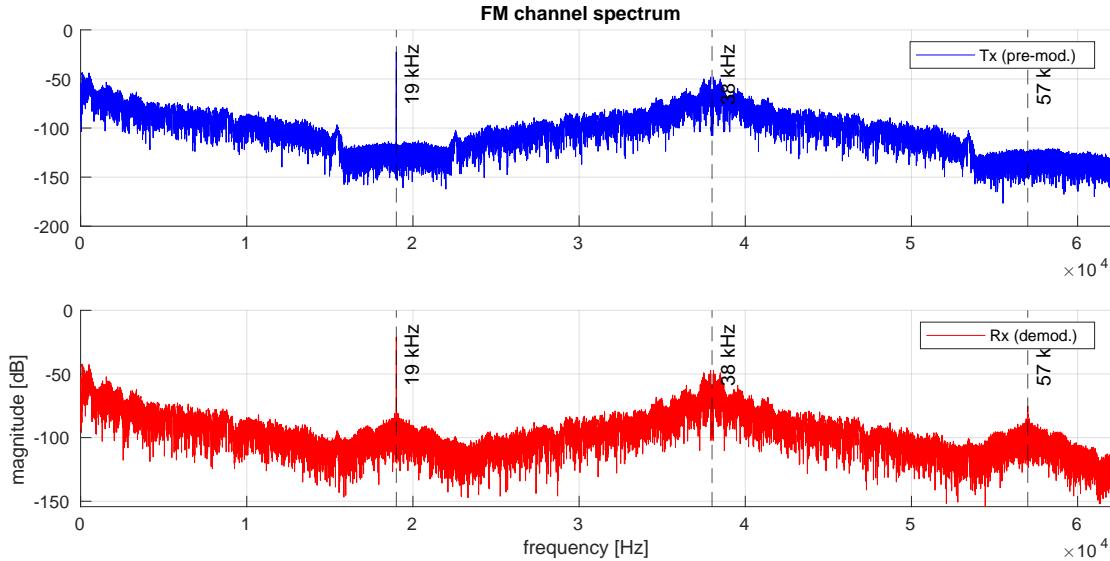

**Figure 6.4:** Matlab analysis in the frequency domain.

clearly. The demodulated spectrum shows an artifact at 57 kHz, which does not exist in the original transmitter spectrum. This is an artifact of the demodulation process, specifically the frequency-shift of the LR Diff part to baseband. The artifact is very low in energy, because it is attenuated by a BP filter in the down-conversion process, and can thus be ignored for further processing, even though it can still be seen in the spectral analysis.

### 6.3 GNU Radio

This section describes the implementation in GNU Radio. A transmitter, as well as a receiver are implemented using this software. Both can be deployed on actual hardware, so a continuous transmitter or receiver is built in a real environment.

#### 6.3.1 Introduction

GNU Radio is a free and open-source software development toolkit to implement a software-defined radio. The implementation is done by connecting functional blocks in a block design. This abstracts the inner workings of each functional block and thus provides an implementation approach on a very high level of abstraction. GNU Radio supports interfaces to external RF hardware [34].


#### 6.3.2 Transmitter

GNU Radio provides a comprehensive set of DSP blocks, which are available to build various functionalities. Multiple blocks are connected to a block diagram, that is very similar to the one in Fig.6.2. The USRP device is used to broadcast the RF signal over the air.

Again, an audio file is used as an input, which is modulated as an FM channel signal. The entire multiplex signal is then modulated onto an actual carrier frequency of 99 MHz, that is within the FM radio broadcast band. This entire DSP chain is being run in the GNU Radio software, on a host PC. Only the final signal - FM modulated, and on a carrier of 99 MHz - is then sent to the USRP device in the form of digital signal samples. The USRP hardware then transmits the signal via its antenna.

Special care needs to be taken when transmitting signals over the air. The frequency spectrum is strongly limited by the radio regulations and may be monitored by the authorities. Please make sure to adapt your setup to the respective local regulations, to avoid any legal issues. Some of the regulations are mentioned in 2.6.2, but may differ in various countries, however.

Fig.6.5 shows a block diagram of the transmitter application.

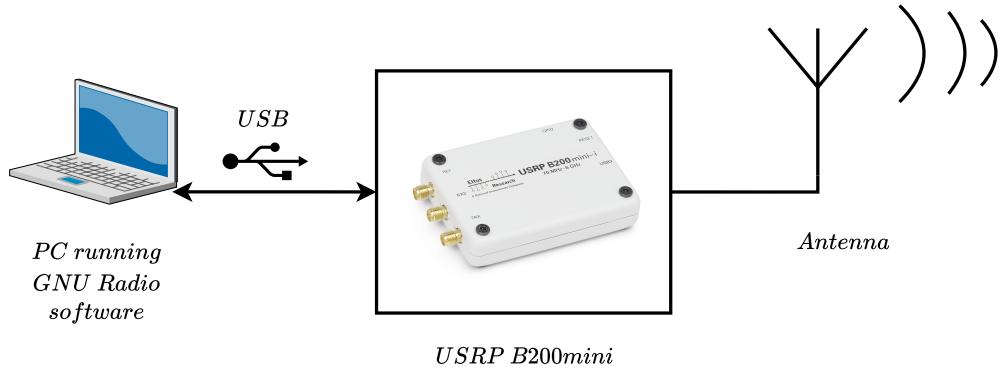


**Figure 6.5:** Block diagram of the GNU Radio transmitter setup.

### 6.3.3 Receiver

The receiver is also implemented, by using standard DSP blocks that are available in GNU Radio. The implemented structure however does not represent a stereo receiver. Instead, a mono receiver is implemented. The antenna signal is FM-demodulated, decimated and then directly sent to the speakers as the output, without any further processing. This simple receiver was intended as a proof-of-concept and a first example of the cooperation of the external hardware and the GNU Radio software. Thus, the mono receiver was sufficient, as the focus of the GNU Radio application is put on the transmitter side.

This receiver works with both devices, the USRP b200mini and the RTL-SDR. Fig.6.6 shows a block diagram of the receiver application.

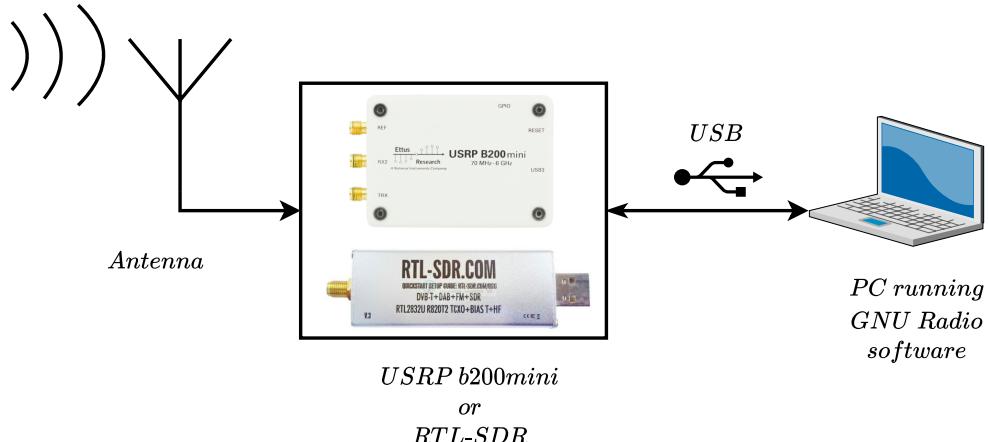

**Figure 6.6:** Block diagram of the GNU Radio receiver setup.

### 6.3.4 System Level Integration for Verification

The usage of a software like GNU Radio in combination with external hardware is an interesting tool for a use-case like this project. An FM receiver is to be implemented in multiple different versions. All of them need to be verified somehow - this is where the SDR transmitter created with GNU Radio and external hardware opens up an entire new possibility from the viewpoint of system level design integration.

Previously it was explained that it is not possible to use recorded antenna data for verification. The reason was, that the underlying original data is not known and therefor a comparison of the original versus the received, decoded data is not feasible. Consequently, the Matlab transmitter model was justified by the fact, that its originally encoded audio data is well-known.

However, with the current approach of using a GNU Radio SDR transmitter, the encoded data *is* well-known, because it is generated locally. Thus, the SDR can be used to transmit a verification signal. This signal could be recorded to file by another SDR, or sourced into the DUT (device under test) directly.

## 6.4 VHDL

In this section, the most important details of the VHDL implementation are described. This implementation variant is one of the two major implementation focus points of this thesis.

### 6.4.1 Testbench Simulator and Framework

The HDL compiler and the testbench framework that are used in this project are introduced here.

### Simulator GHDL

Multiple different simulators are available on the market, such as Mentor Graphics ModelSim or QuestaSim, Synopsys VCS or the Cadence Simulator. The issue with most simulators is, that they are subject to a license fee, depending on the required set of features, or simulation speed.

However, there are simulators available, that are free to use. An example therefore is GHDL, which is an analyzer, compiler and simulator for VHDL and is developed as an open-source project. GHDL translates the VHDL code to a binary file that contains machine code, which can be executed. This is supported for all common operating systems such as Linux, Windows and macOS. The simulator further supports a VPI (Verilog Procedural Interface), which can be used to control the simulator [29].

### Testbench framework cocotb

The testbench framework cocotb is developed as a free, open-source project. It can be used to verify VHDL and SystemVerilog RTL code, in combination with an external simulator. Various different simulators can be used with cocotb - amongst others, GHDL is supported. The interface that is used to the simulator is the industry-standard VPI.

One of the main advantages of cocotb is, that test cases for the respective RTL code are written in the language Python. It is therefore also called a co-simulation framework. Using Python provides a large factor of flexibility and possibilities, since it is a comprehensive language, considering all its extension libraries. Additionally, Python may be more familiar to engineers in comparison to VHDL and thus, writing testbenches is made simpler with cocotb.


The test cases in Python are implemented as coroutines. By the way, this is where cocotb gets its name from. It is constructed by the words *COroutine*, *COsimulation* and *TestBench* [27].

Fig.6.7 gives an overview of how cocotb interfaces with a simulator. The Python test cases are shown as a list of coroutines, which are managed by a scheduler. This Python code interfaces with the simulator through standard interfaces like VPI. The block called *GPI* is developed by cocotb and abstracts the different simulator interfaces, such as VPI, VHPI or FLI. In the simulator, the device under test (DUT) is instantiated. The RTL simulation itself is managed by the simulators' scheduler.

#### 6.4.2 Testbench Architecture

The architecture for this testbench is created under the assumptions and according to the guidelines that are developed in Chapter 5.

Fig.6.8 shows a block diagram of the implemented architecture. The split between the Python environment and the VHDL implementation is clearly visible but is represented from the developers perspective. The actual simulator interfaces, as described in

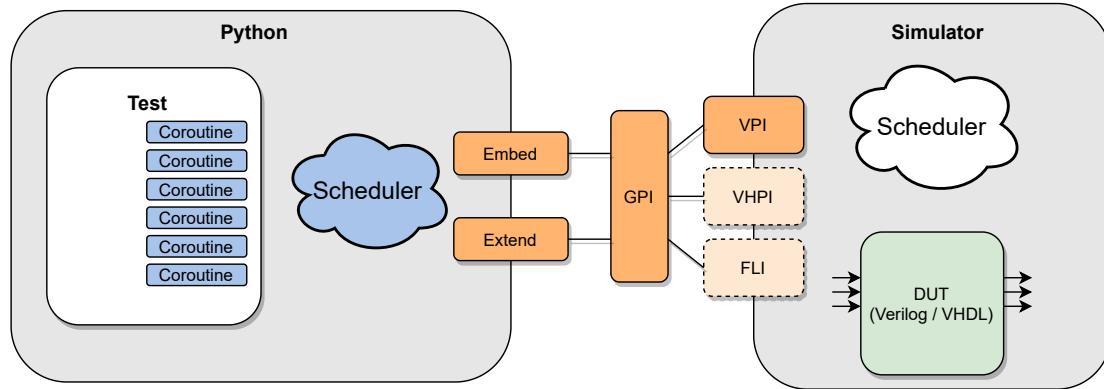

**Figure 6.7:** Block diagram of the interface between cocotb and a simulator [27].

6.4.1, are hidden to maintain the overview of the implemented architecture.

The test cases are using the external verification data, that was previously generated by the Matlab model. This data is supplied to the input of the DUT. The DUTs' input and output is implemented as an AXI Stream interface, which is an interface that features a valid-, as well as a ready-signal along with the data. The cocotb framework supports both an AXI Stream Master, and an AXI Stream Slave class, to write and read the input and output, respectively. In that way, the interface signals are abstracted to simple read- and write-function calls in the Python code, while the actual signal handling is done in the mentioned cocotb library classes. A clock generator class is also available from cocotb, which is used to provide the system clock to the DUT.

The Python classes `tb_analyzer_helper`, `tb_data_handler` and `fm_receiver_model` are implemented to create a better structure of the testbench and to provide code that is reusable for the testbench of the HLS implementation. The `tb_analyzer_helper` class provides functions to analyze the data, such as comparison against defined error thresholds or the creation of graphical plots with Python's matplotlib library. The `tb_data_handler` only works as a data storage class, that encapsulates the data that is captured from the DUT. The class called `fm_receiver_model` serves as the 'golden model reference' that is used to compare the DUT against. Internally, it loads the Matlab verification data. This could be implemented differently, since Python can be used to actually implement an FM receiver including the entire DSP functionality, just like in Matlab. Because the Matlab model already exists, this is not done here - loading the Matlab data is sufficient as it is been seen as 'the single source of truth' in this project.

At the end of the test cases, the DUTs' output data is written to a file. This data is later used to directly compare the different implementation variants against each other.

#### 6.4.3 Testing Strategies

Common strategies for testing are unit tests and integration tests, which represent different levels of testing. Unit tests specifically target a single unit, while integration tests



**Figure 6.8:** Block diagram of the implemented testbench architecture.

verify the combination of multiple units as a whole. Both of these strategies are important. Given all unit tests being successful, it is ensured that all these single units are implemented correctly. However, their combination and interaction may still be subject to error - this is where integration tests unfold their potential. Implementation errors in the glue logic between the units, as well as the interaction of the respective interfaces can be found in these integration tests.

The testbench architecture presented above represents an integration test, since the DUT is tested as an entire block. The advantage thereof is, that it tests the DUT in the same way as it will be integrated within the target hardware, the FPGA. However, in case the DUT fails to produce a correct output in the integration test, it is not always visible where exactly the error is located. The source of error may be hidden anywhere within the nested and interconnected units. Thus, in addition to the DUTs' interfaces, further signals are logged from the inside of the DUT. These internal signals can be accessed through the Python testbench.

In this context, there are further keywords that need to be mentioned - black box testing and white box testing. These are testing strategies, and describe how the DUT is treated. In the case of black box, the DUTs internals, such as implementation details, are not known. Thus, only the exposed interfaces can be tested. In the white box as a contrary, every detail of the internal structure is known. Thus, even single signals can be accessed, which is what is done in this Python testbench. The advantage of the white box is, that these internals can be tested. However, any time the implementation changes, even if it is just the naming of a signal, the testbench code needs to be adapted as well. In black box testing, the testbench code is independent of the detailed implementation of the DUT, as long as it maintains its required behaviour at the exposed interfaces. However, the disadvantage is that internal states cannot be observed.

The Python testbench that is implemented combines the advantages of both worlds and uses black box testing, as well as white box testing.

#### 6.4.4 Unit Tests

A unit test only targets a single unit, or module, of the system, as the name already describes. This is in the contrary to an integration test, which tests the combination of several units into an integrated system, as explained above.

In this project, the only module that has its dedicated unit test is the FIR filter. The reason therefor is, that it is the most complex unit within the entire design and is used in multiple instances. All the other design units mostly consist of simple delay lines, additions or subtractions and thus a special unit test is not implemented.

### 6.5 High-Level Synthesis

The implemented testbench structure, as well as some specific implementation details are explained here.

#### 6.5.1 Testbench

A testbench is equally important in the HLS implementation, as it is for the VHDL implementation. The HDL code for the IP is written in C++ and thus the testbench is also written in this language. The execution of the testbench is done in the Xilinx HLS software.

#### 6.5.2 Design for Reuse

testbench is using Firmware code! → enables reuse and early testing on the code, before a hardware prototype exists

6. Implementation 53

6.5.3 TODO: Other Stuff...

6.6 Common Testbench

6.6.1 Architecture (same tb for VHDL and HLS-generated HDL)

## Chapter 7

# Deployment on Hardware

This chapter describes the additional parts of implementation that are necessary in order to run the implemented FM radio on actual hardware.

### 7.1 GNU Radio

The GNU Radio implementations, both receiver and transmitter, are used in combination with external hardware. The specific hardware that is used is briefly described here.

In order to interface with the real world, two different hardware devices are used. Both devices are supported by GNU Radio and are briefly described here.

#### 7.1.1 Ettus Research USRP b200mini

The USRP b200mini is a device that can be used to create a software-defined radio. It resembles the size of a business card and is developed by Ettus Research. A signal range from 70 MHz to 6 GHz can be covered by the front end. The board further features a Xilinx Spartan-6 FPGA that is user-programmable, which makes the device very flexible for various applications with the received signal [36].

GNU Radio supports this device with the blocks *UHD: USRP Sink* and *UHD: USRP Source*. Therefore, it can be used as both a receiver and a transmitter.

#### 7.1.2 RTL-SDR


The RTL-SDR is a cheap USB dongle, that was originally developed as a DVB-T TV tuner. It is based on the RTL2832U chipset, which includes an 8-bit ADC and a digital signal processor. The device delivers IQ data via the USB interface [38].

Based on its hardware, the RTL-SDR can only be used as a receiver.

## 7.2 FPGA Hardware Platform

The ZedBoard is a development board that is developed by Xilinx. It is specifically designed around the Xilinx Zynq-7000 SoC, which contains a dual-core ARM Cortex A9 processor and a programmable logic fabric, the FPGA. The board further offers a range of features from external DDR3 memory, over various connectors, such as RJ45 Ethernet, USB, 3.5 mm audio, HDMI, Pmod, to buttons, LEDs and a display.

The most important features for this project are the audio line-out connector and the SD card port. Additionally, the LEDs are used to display various status information during runtime of the FM receiver.

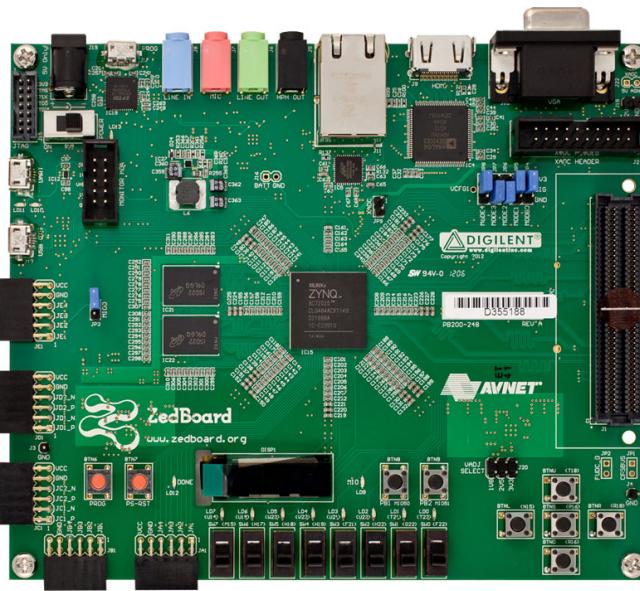


**Figure 7.1:** The ZedBoard PCB [26].

## 7.3 System-On-Chip Design

Chapter 6 already described the development of the main IP core, which is the FM radio receiver in the VHDL and HLS variants. In order to embed these IPs on the actual FPGA, or rather SoC hardware, a significant additional amount of implementation is necessary. This section describes these additional parts of the implementation, which specifically enable and support the deployment on the SoC.

### 7.3.1 Architecture

The block diagram in Fig.7.2 shows the implemented architecture that is used in the SoC. The various design domains in and around the SoC are depicted in different visual representations. The FPGA domain blocks are highlighted in gray, with the main IPs

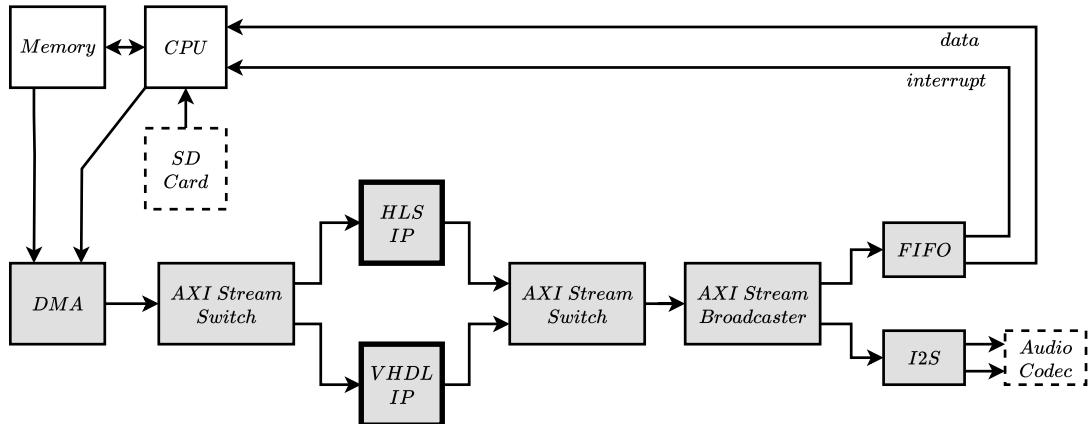

**Figure 7.2:** Block diagram of the Vivado implementation.

being surrounded by emphasized lines. The processor system domain is shown as white blocks. Blocks that are external to the SoC are drawn with dashed lines.

### 7.3.2 Functionality

The FM receiver IP is the main functionality of the design. However, the design around it needs to function properly in order for the IP to work correctly, which is explained in the following passage.

The CPU is the main actor that determines any actions on the system. First, it reads a file from the external SD card and stores this data in a dedicated area in the memory. Next, the DMA is configured and its data transfer mode is initiated, so that the DMA starts to transfer data from the mentioned memory area towards the FPGA. The DMA is configured in a mode that creates a continuous transfer, by looping through the data - once the end is reached, the transfer starts at the beginning of the memory area. Any data connection in the following processing chain is implemented as an AXI stream bus. The first block after the DMA is an AXI Stream Switch. It can switch its single input to be forwarded to either of the outputs. The switch is configured by the CPU, to enable one output at a time. Consequently, one of the FM radio receiver IPs is provided with data. The IP processes this data to produce an audio output, which is delivered to another AXI Stream Switch. It fulfills the function to either select the output of above or below IP, in coordination with the first switch, obviously. The next block is an AXI Stream Broadcaster, which takes a single stream input and simply duplicates it at its output, so that the outputs are an exact copy of the input stream. One of these duplicates is sourced to an AXI-Stream-To-I2S converter, which generates the I2S signals for the external audio codec chip. The second duplicate is connected to a FIFO, which simply stores the generated output data. Once the FIFO is almost full, it asserts an interrupt to the CPU, which triggers it to read out the entire FIFO buffer. The CPU then stores this data on the external SD card again. In that way, the loop of data is closed, which enables the verification of the respective IPs' correct functionality. Therefore, this system design can be described as a hardware-in-the-loop

system, in the point of view of the FPGA IPs. This ability refers to the knowledge gained with the SIMILAR concept, that is introduced in Section 3.1.1. Specifically, this implemented system design enables the application of the steps 'Assess Performance' and 'Re-evaluate', since the IPs' performance can be measured and their design can be re-evaluated.

It is to note, that Xilinx provides all the AXI infrastructure IPs, and thus the only self-implemented IPs are the FM radio receivers, as well as the I2S interface. Nevertheless, the correct design and implementation of the architecture still needs to be formulated by the user.

### 7.3.3 Software

Xilinx FreeRTOS, drivers for IPs, libraries to interface with e.g. SD card, etc  
--> look at software which parts may be interesting to highlight

## Chapter 8

# Comparison and Results

8.1 Demodulated Signal

8.2 Functionality

8.3 Code Development

8.4 Simulation

8.5 Useability

8.6 Applicability

8.7 Advantages / Disadvantages

easy and much faster to get complex HDL code, such as image/video processing, through libraries like OpenCV.

However, it may be less optimized.

A developer still needs to have a strong hardware background, to be able to understand what is being generated in hardware from x lines of code in HLS/Cpp.

8.8 Hardware Utilization

8.9 Latency

8.10 Lines of Code

## Chapter 9

# Conclusion and Prospect

## Appendix A

### Technical Details

# Appendix B

## Supplementary Materials

List of supplementary data submitted to the degree-granting institution for archival storage (in ZIP format).

### B.1 PDF Files

Path: /

thesis.pdf . . . . . Master/Bachelor thesis (complete document)

### B.2 Media Files

Path: /media

- \*.ai, \*.pdf . . . . . Adobe Illustrator files
- \*.jpg, \*.png . . . . . raster images
- \*.mp3 . . . . . audio files
- \*.mp4 . . . . . video files

### B.3 Online Sources (PDF Captures)

Path: /online-sources

Reliquienschrein-Wikipedia.pdf [35]

# List of Abbreviations

<b>ADC</b>	Analog Digital Converter
<b>AM</b>	Amplitude Modulation
<b>AXI</b>	Advanced Extensible Interface
<b>BP</b>	Bandpass (Filter)
<b>CI</b>	Continuous Integration
<b>CPU</b>	Central Processing Unit
<b>DC</b>	Direct Current
<b>DMA</b>	Direct Memory Access
<b>DSB-SC</b>	Dual-Sideband Suppressed-Carrier
<b>DUT</b>	Device Under Test
<b>ERP</b>	Effective Radiated Power
<b>FM</b>	Frequency Modulation
<b>FPGA</b>	Field-programmable Gate Array
<b>HDL</b>	Hardware Description Language
<b>HLS</b>	High-Level Synthesis
<b>IF</b>	Intermediate Frequency
<b>IO</b>	Input and Output
<b>IoT</b>	Internet of Things
<b>IP</b>	Intellectual Property
<b>IQ, I/Q</b>	Inphase and Quadrature components
<b>LED</b>	Light Emitting Diode
<b>LP</b>	Lowpass (Filter)
<b>LSB</b>	Least Significant Bit
<b>LNA</b>	Low Noise Amplifier
<b>LO</b>	Local Oscillator
<b>PM</b>	Phase Modulation
<b>RTL</b>	Register Transfer Level
<b>RDS</b>	Radio Data System
<b>SDR</b>	Software Defined Radio
<b>SoC</b>	System On Chip
<b>USB</b>	Universal Serial Bus
<b>VHDL</b>	Very High Speed Integrated Circuit Hardware Description Language
<b>VHF</b>	Very High Frequency

# References

## Literature

- [1] European Broadcasting Union (EBU). “Low-power FM modulators in Europe”. EBU-R120-2007 (2007), p. 5. URL: <https://tech.ebu.ch/docs/r/r120.pdf> (cit. on pp. 10, 11).
- [2] International Telecommunication Union (ITU). *Radio Regulations Articles, Edition of 2020*. eng. Vol. I-EA5. 2020. ISBN: 978-92-61-30301-3 (cit. on p. 10).
- [3] Silvia Maria Alessio. *Digital Signal Processing and Spectral Analysis for Scientists : Concepts and Applications*. eng. 1st ed. 2016.. Signals and Communication Technology. 2016. ISBN: 3-319-25468-5 (cit. on pp. 8, 9).
- [4] A. Terry Bahill. *Tradeoff Decisions in System Design*. eng. 1st ed. 2017.. 2017. ISBN: 3-319-43712-7 (cit. on pp. 17, 18).
- [5] Brian Bailey. “The Evolution Of High-Level Synthesis”. *Semiconductor Engineering* (Aug. 27, 2020). URL: <https://semiengineering.com/the-evolution-of-high-level-synthesis/> (visited on 07/21/2021) (cit. on p. 27).
- [6] Innovation und Technologie Bundesministerium für Verkehr. “Frequenznutzungsverordnung 2013 - FNV 2013”. BGBl. II Nr. 63/2014, Anlage 2 (2014), p. 99. URL: [https://www.ris.bka.gv.at/Dokumente/Bundesnormen/NOR40219692/I\\_390\\_2016\\_Anlage\\_2.pdf](https://www.ris.bka.gv.at/Dokumente/Bundesnormen/NOR40219692/I_390_2016_Anlage_2.pdf) (cit. on p. 10).
- [7] European Commission. “Commission Decision on harmonisation of the radio spectrum for use by short-range devices”. 2006/771/EC (Aug. 13, 2019), p. 11. URL: [https://eur-lex.europa.eu/eli/dec/2006/771\(2\)/2019-08-13](https://eur-lex.europa.eu/eli/dec/2006/771(2)/2019-08-13) (cit. on p. 10).
- [8] Leonard Feldman. *FM Multiplexing for Stereo*. Vol. FMS-1. 62-13498 (cit. on p. 42).
- [9] *FPGAs for Software Programmers*. eng. 1st ed. 2016.. 2016. ISBN: 3-319-26408-7 (cit. on p. 22).
- [10] Orhan Gazi. *Understanding Digital Signal Processing*. eng. 1st ed. 2018.. Springer Topics in Signal Processing. 2018. ISBN: 981-10-4962-9 (cit. on p. 40).
- [11] Liang Ge, EK Tan, and Joe Kelly. “Introduction to FM-Stereo-RDS Modulation” (2016). URL: <https://www3.advantest.com/documents/11348/7898f05e-0a52-4e68-9221-3b8b75595436> (visited on 07/14/2021) (cit. on p. 43).

- [12] Ralf Gessler. *Entwicklung Eingebetteter Systeme : Vergleich von Entwicklungsprozessen für FPGA- und Mikroprozessor-Systeme Entwurf auf Systemebene*. ger. 2014. ISBN: 9783834820808 (cit. on pp. 21, 22, 24, 25).
- [13] E. S Gopi. *Multi-Disciplinary Digital Signal Processing : A Functional Approach Using Matlab*. eng. 2018. ISBN: 9783319574301 (cit. on p. 9).
- [14] Xilinx Inc. *Introduction to FPGA Design with Vivado High-Level Synthesis*. UG998. Version v1.1. Jan. 22, 2019. URL: [https://www.xilinx.com/support/documentation/sw\\_manuals/ug998-vivado-intro-fpga-design-hls.pdf](https://www.xilinx.com/support/documentation/sw_manuals/ug998-vivado-intro-fpga-design-hls.pdf) (cit. on pp. 26–28).
- [15] Xilinx Inc. *Vivado Design Suite User Guide - High-Level Synthesis*. UG902. Version v2018.2. July 2, 2018. URL: [https://www.xilinx.com/support/documentation/sw\\_manuals/xilinx2018\\_2/ug902-vivado-high-level-synthesis.pdf](https://www.xilinx.com/support/documentation/sw_manuals/xilinx2018_2/ug902-vivado-high-level-synthesis.pdf) (cit. on pp. 26, 30, 31).
- [16] European Telecommunications Standards Institute. “Transmitting equipment for the Frequency Modulated (FM) sound broadcasting service; Harmonised Standard covering the essential requirements of article 3.2 of Directive 2014/53/EU”. v2.1.1.ETSI EN 302 018 (Apr. 2017) (cit. on p. 11).
- [17] Kevin Krewell. “Xilinx Opens Up Vitis HLS Tool for FPGAs”. *EE Times* (Mar. 10, 2021). URL: <https://www.eetimes.com/xilinx-opens-up-vitis-hls-tool-for-fpgas/> (visited on 07/21/2021) (cit. on p. 27).
- [18] Mohammad A Matin. *Communication Systems for Electrical Engineers*. eng. SpringerBriefs in Electrical and Computer Engineering. 2018. ISBN: 978-3-319-70129-5 (cit. on p. 10).
- [19] Roberto Millón, Fernando Frati, and Enzo Rucci. “A Comparative Study between HLS and HDL on SoC for Image Processing Applications”. *Elektron* 4 (Dec. 2020), pp. 100–106 (cit. on p. 27).
- [20] Fábio Passos. *Automated Hierarchical Synthesis of Radio-Frequency Integrated Circuits and Systems : A Systematic and Multilevel Approach*. eng. 1st ed. 2020. 2020. ISBN: 978-3-030-47247-4 (cit. on pp. 5, 6).
- [21] Franz Schnyder and Christoph Haller. “Implementation of FM Demodulator Algorithms on a High Performance Digital Signal Processor”. diploma thesis. HSR Hochschule für Technik Rapperswil, Elektrotechnik. URL: <https://www.veron.nl/wp-content/uploads/2014/01/FmDemodulator.pdf> (visited on 07/06/2021) (cit. on pp. 13, 14).
- [22] Rohde & Schwarz. “Messungen an FM-Sendern für Abnahme, Inbetriebnahme oder Wartung”. 7BM105\_0D (Sep-13). URL: [https://cdn.rohde-schwarz.com/pws/dl\\_downloads/dl\\_application/application\\_notes/7bm105/7BM105\\_0D.pdf](https://cdn.rohde-schwarz.com/pws/dl_downloads/dl_application/application_notes/7bm105/7BM105_0D.pdf) (visited on 07/05/2021) (cit. on p. 12).
- [23] K.S Thyagarajan. *Introduction to Digital Signal Processing Using MATLAB with Application to Digital Communications*. eng. 2019, pp. 39–44. ISBN: 9783319760292 (cit. on pp. 8, 9).

## Media

- [24] *Basisbandsignal eines UKW-Rundfunkprogrammes*. URL: [https://de.wikipedia.org/wiki/UKW-Rundfunk#Technische\\_Details](https://de.wikipedia.org/wiki/UKW-Rundfunk#Technische_Details) (visited on 07/05/2021) (cit. on p. 11).
- [25] *Frequency Discriminator Block Diagram*. URL: [https://www.tutorialspoint.com/analog\\_communication/analog\\_communication\\_fm\\_demodulators.htm](https://www.tutorialspoint.com/analog_communication/analog_communication_fm_demodulators.htm) (visited on 12/16/2020) (cit. on p. 13).
- [26] Xilinx Inc. *Xilinx ZedBoard Product*. URL: <https://www.xilinx.com/products/boards-and-kits/1-8dyf-11.html> (visited on 07/20/2021) (cit. on p. 55).


## Online sources

- [27] cocotb contributors. *Welcome to cocotb's documentation!* Version ec99a877. URL: <https://docs.cocotb.org/en/v1.5.2/> (visited on 07/15/2021) (cit. on pp. 49, 50).
- [28] Intel Corporation. *Intel oneAPI Overview*. URL: <https://software.intel.com/content/www/us/en/develop/tools/oneapi.html> (visited on 07/21/2021) (cit. on p. 28).
- [29] Tristan Gingold and contributors. *About GHDL*. Version 18104277. URL: <https://ghdl.readthedocs.io/en/latest/about.html#what-is-ghdl> (visited on 07/15/2021) (cit. on p. 49).
- [30] The MathWorks Inc. *MATLAB Overview*. URL: <https://www.mathworks.com/products/matlab.html> (visited on 07/09/2021) (cit. on p. 37).
- [31] Xilinx Inc. *SystemC Design Entry for HLS is deprecated in 2020.2*. URL: <https://www.xilinx.com/support/answers/73613.html> (visited on 07/20/2021) (cit. on pp. 22, 28).
- [32] Rick Lyons. *Digital Envelope Detection: The Good, the Bad, and the Ugly*. Apr. 3, 2016. URL: <https://www.dsprelated.com/showarticle/938.php> (visited on 07/06/2021) (cit. on p. 14).
- [33] Electronics Notes. *Broadcast VHF FM Tutorial & Basics*. URL: <https://www.electronics-notes.com/articles/audio-video/broadcast-audio/vhf-fm-frequency-modulation-basics.php> (visited on 07/05/2021) (cit. on p. 11).
- [34] GNU Radio project. *About GNU Radio*. URL: <https://www.gnuradio.org/about/> (visited on 07/09/2021) (cit. on pp. 36, 46).
- [35] *Reliquienschrein*. Sept. 2018. URL: <https://de.wikipedia.org/wiki/Reliquienschrein> (visited on 02/28/2019).
- [36] Ettus Research. *Product USRP B200mini-i*. URL: <https://www.ettus.com/all-products/usrp-b200mini-i-2/> (visited on 07/14/2021) (cit. on p. 54).
- [37] Carsten Roppel. *Analoge Modulationsverfahren und Rundfunktechnik; Begleitmaterial zum Buch 'Grundlagen der digitalen Kommunikationstechnik, Übertragungsstechnik - Signalverarbeitung - Netze'*. Aug. 24, 2010. URL: [https://www.hs-schmalkalden.de/fileadmin/portal/Dokumente/Fakult%C3%A4t\\_ET/Personal/Roppel/Buch/Analoge\\_Modulationsverfahren.pdf](https://www.hs-schmalkalden.de/fileadmin/portal/Dokumente/Fakult%C3%A4t_ET/Personal/Roppel/Buch/Analoge_Modulationsverfahren.pdf) (visited on 07/06/2021) (cit. on pp. 15, 16).

- [38] RTL-SDR. *About RTL-SDR*. URL: <https://www rtl-sdr com/about-rtl-sdr/> (visited on 07/14/2021) (cit. on p. 54).
- [39] Wikipedia. *Autofahrer-Runkfunk-Information: Hinz Triller*. URL: <https://en wikipedia org/wiki/Autofahrer-Rundfunk-Informationssystem,%20https://de wikipedia org/wiki/Autofahrer-Rundfunk-Information> (visited on 07/09/2021) (cit. on p. 43).

# Check Final Print Size

— Check final print size! —

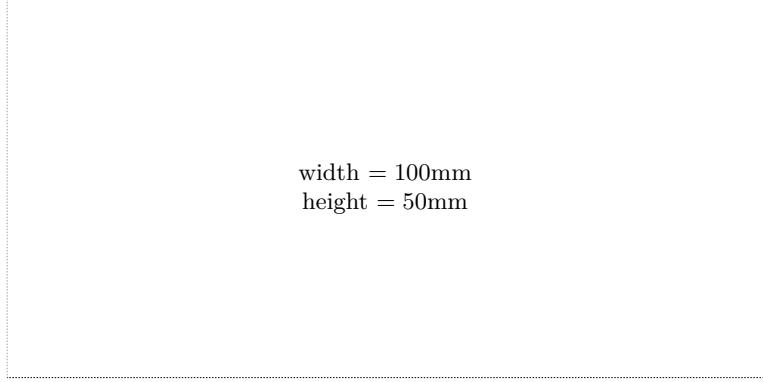

width = 100mm  
height = 50mm

— Remove this page after printing! —