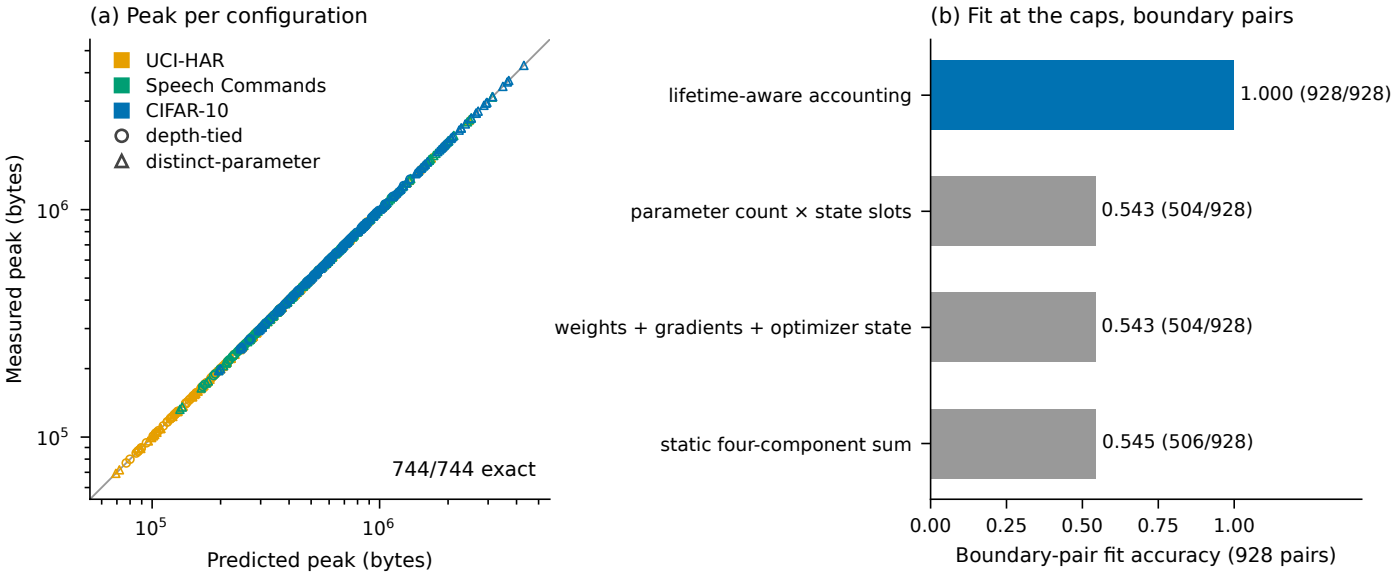
(a) Peak per configuration
UCI-HAR
Speech Commands
CIFAR-10
depth-tied
distinct-parameter
Measured peak (bytes)
10^6
10^5
744/744 exact
10^5
10^6
Predicted peak (bytes)
(b) Fit at the caps, boundary pairs
lifetime-aware accounting
1.000 (928/928)
parameter count × state slots
0.543 (504/928)
weights + gradients + optimizer state
0.543 (504/928)
static four-component sum
0.545 (506/928)
0.00
0.25
0.50
0.75
1.00
Boundary-pair fit accuracy (928 pairs)