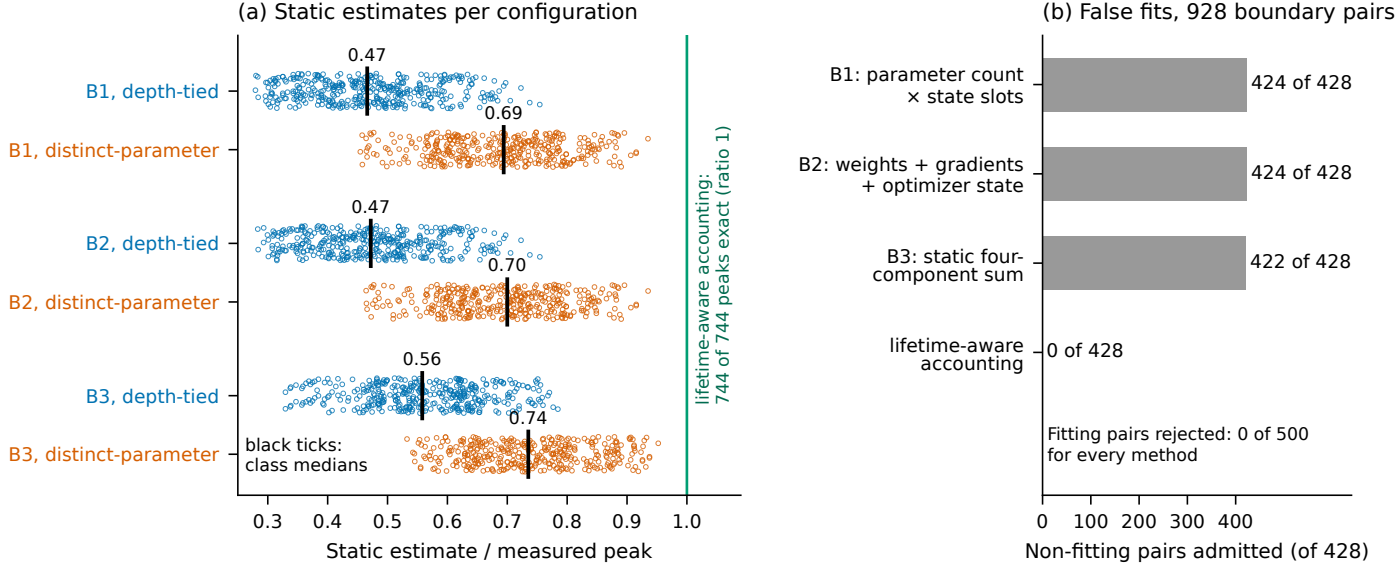
(a) Static estimates per configuration
B1, depth-tied
B1, distinct-parameter
B2, depth-tied
B2, distinct-parameter
B3, depth-tied
B3, distinct-parameter
0.47
0.69
0.47
0.70
0.56
0.74
black ticks:
class medians
lifetime-aware accounting:
744 of 744 peaks exact (ratio 1)
0.3
0.4
0.5
0.6
0.7
0.8
0.9
1.0
Static estimate / measured peak
(b) False fits, 928 boundary pairs
B1: parameter count
× state slots
424 of 428
B2: weights + gradients
+ optimizer state
424 of 428
B3: static four-
component sum
422 of 428
lifetime-aware
accounting
0 of 428
Fitting pairs rejected: 0 of 500
for every method
0
100
200
300
400
Non-fitting pairs admitted (of 428)