

TCP / IP

Vint Cerv
1969

brainymotion

smart trainieren.
sicher können.

IP v4
IP v6

1968

IP Adresse

32 Bit

172. 16. 10. 12 / 24
8 8 8 8
Netzwerkanteil

Hostanteil

Modul 4: Network Infrastructure Fundamenatls

Lesson 1: IPv4 Fundamentals



IPv4 Fundamentals



Overview of IPv4 settings



1/24
Defining Subnets

172.16 - 172.31
192.168.
10.




Public, private and APIPA addresses

IANA


169.254.

The TCP/IP Protocol Suite

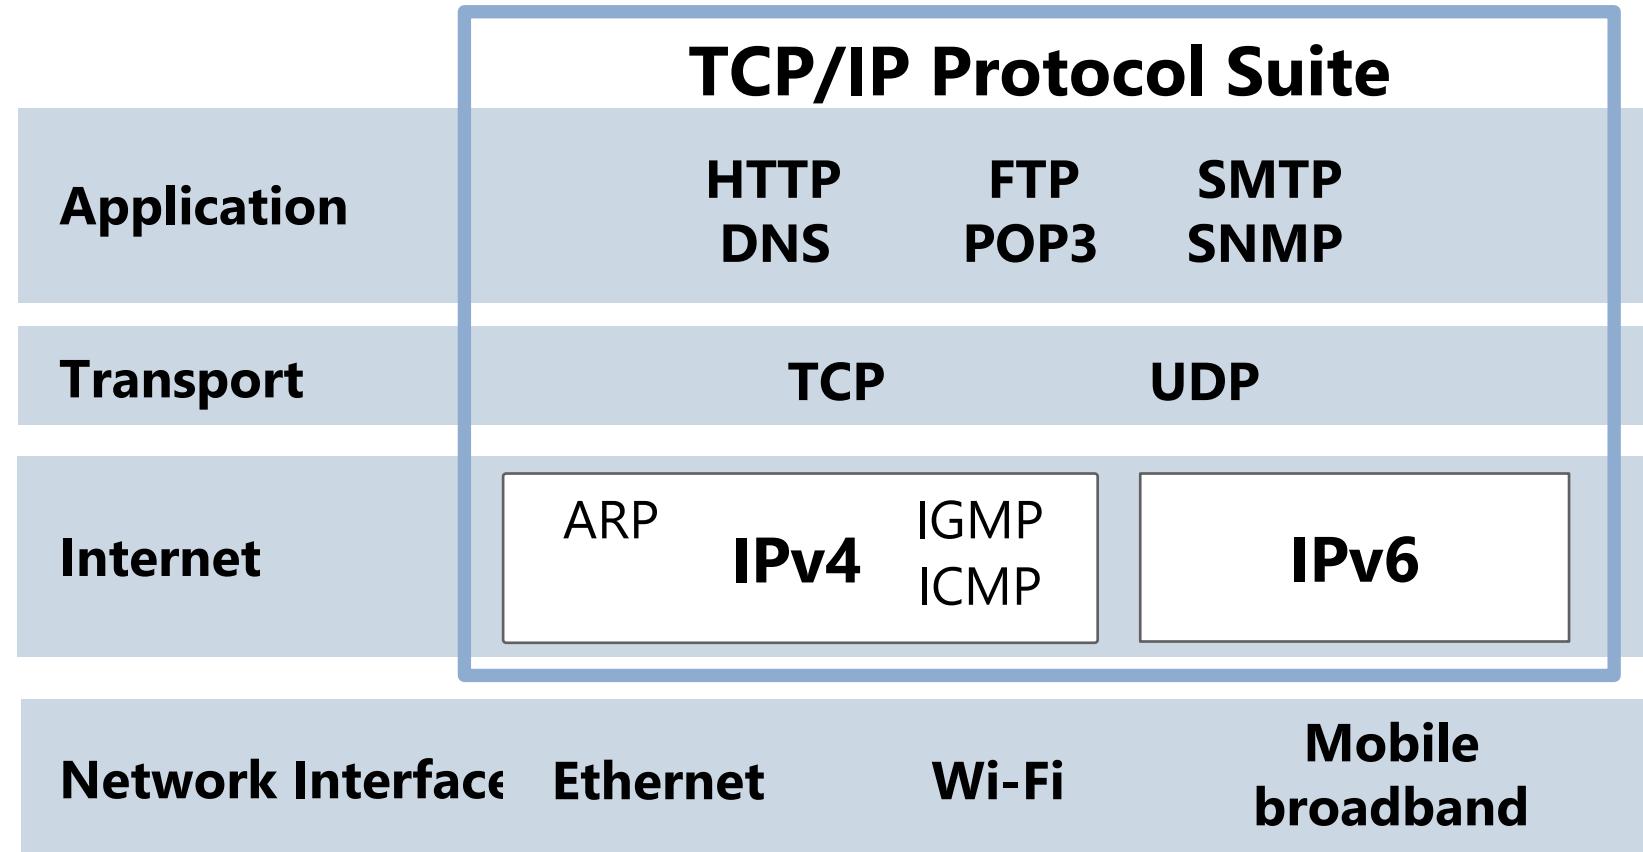

Protocols in the TCP/IP Suite

7 Schichten Modell

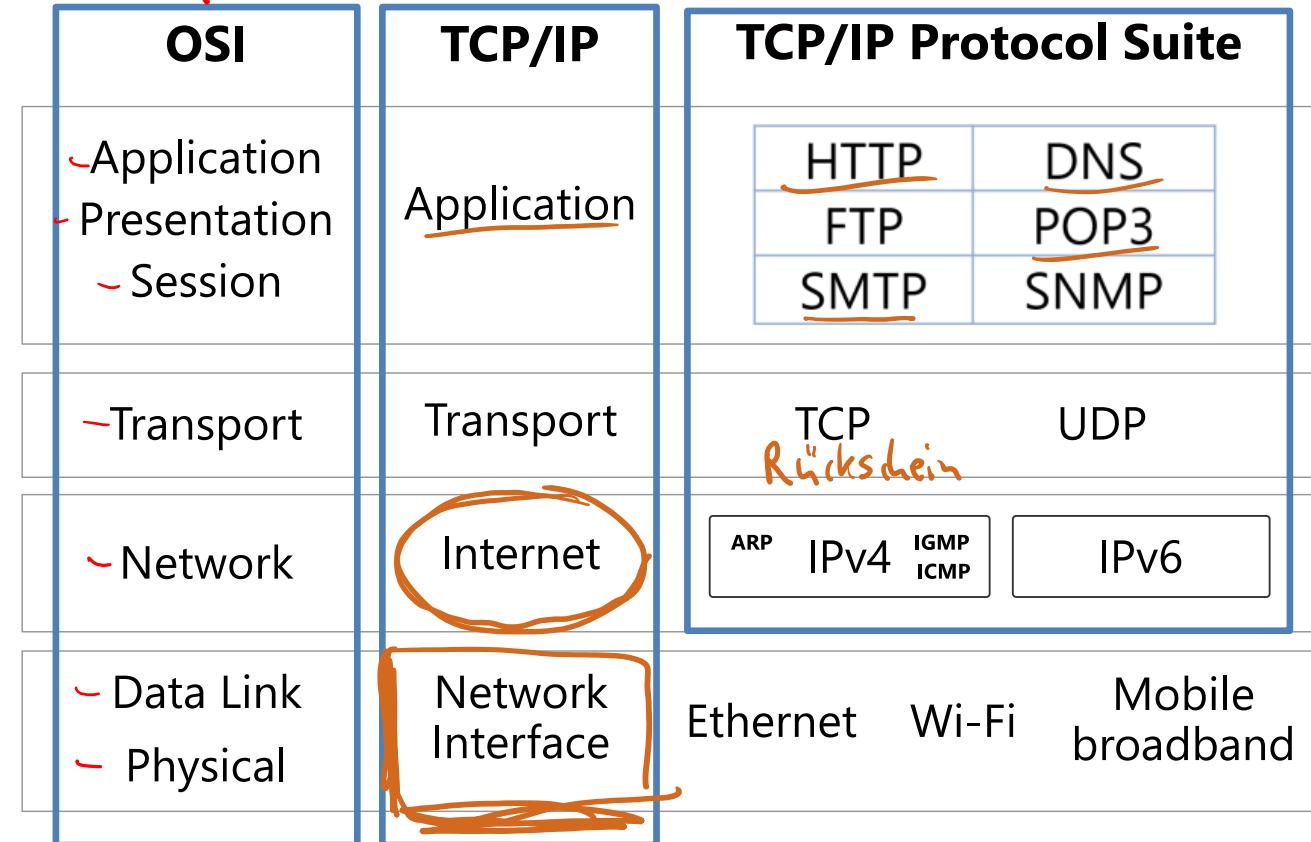



TCP/IP Applications

	Port	TCP / UDP mit ohne	Rückschein (Acknowledge)
• HTTP	80	TCP	
• HTTPS	443	TCP	
• SFTP	21	TCP	
• FTP			
• RDP	3389	TCP	
• SMB	445	TCP	
• SMTP	25	TCP	
• POP3	110	TCP	
• DNS	53	UDP	



What Is a Socket?

A socket is a combination of an IP address, a transport protocol, and a port

TCP/IP Protocol Suite

HTTP (80)	SMTP (25)
HTTPS (443)	DNS (53)
POP3 (110)	FTP (21)

TCP/UDP

IPv4

IPv6

IPv4 Addressing

11000000
128 64 32 16 8 4 2 1

C D

192 . 168 . 0 . 1

decimal 10
binary 2

- Each networked computer must be assigned a unique IPv4 address
- Network communication for a computer is directed to the IPv4 address of the computer
- Each IPv4 address contains:
 - Network ID, identifying the network
 - Host ID, identifying the computer
- The subnet mask identifies which part of the IPv4 address is the network ID (255) and which is the host ID (0)

0 1 2 3 4 5 6 7 8 9 A B C D E F
12

IPv4 Addressing

IP address	172	16	0	10	Network	Host
Subnet mask	255 11111111	255 11111111	0 00000000	0 00000006	255.255.0.0	/16
Network ID	172	16	0	0	172	/17
Host ID	0	0	0	10	172.16.0.0	/18


Subnetting ← → Subnetting

ipconfig


Get-NetIPConfiguration

255.255.0.0
/16
/17
/18
/19
/24
:
/30

Net
192.168.0.1
Host
255.255.255.0
124

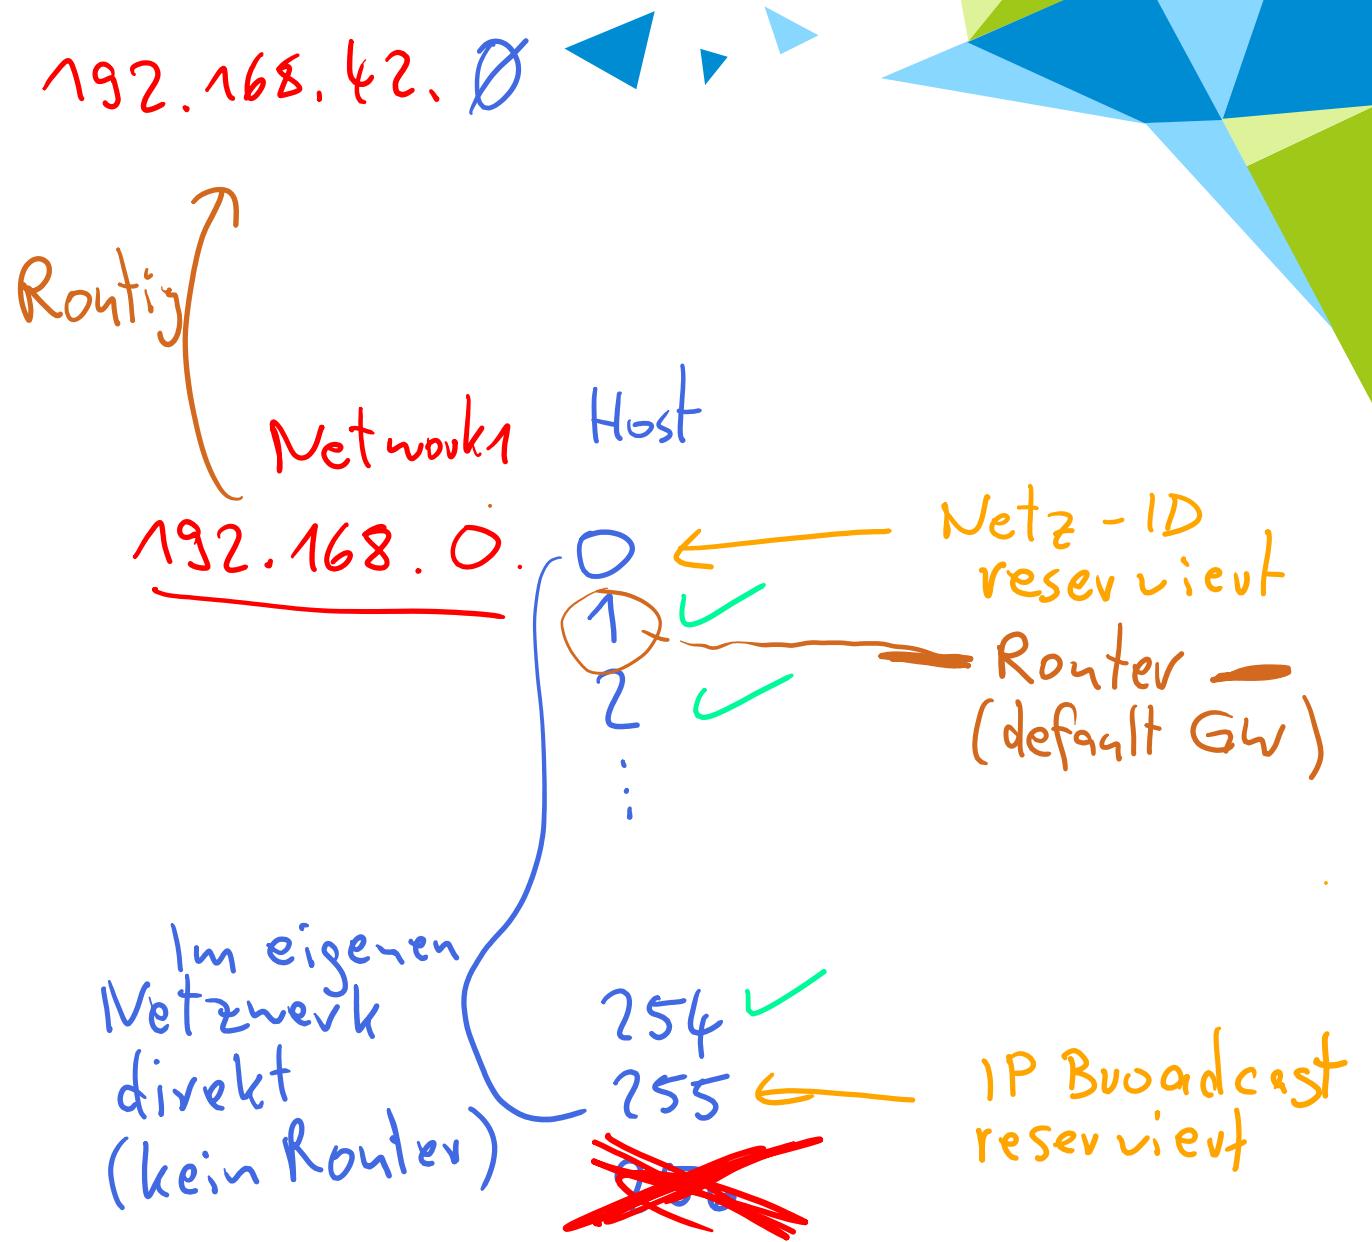

IPv4 Addressing

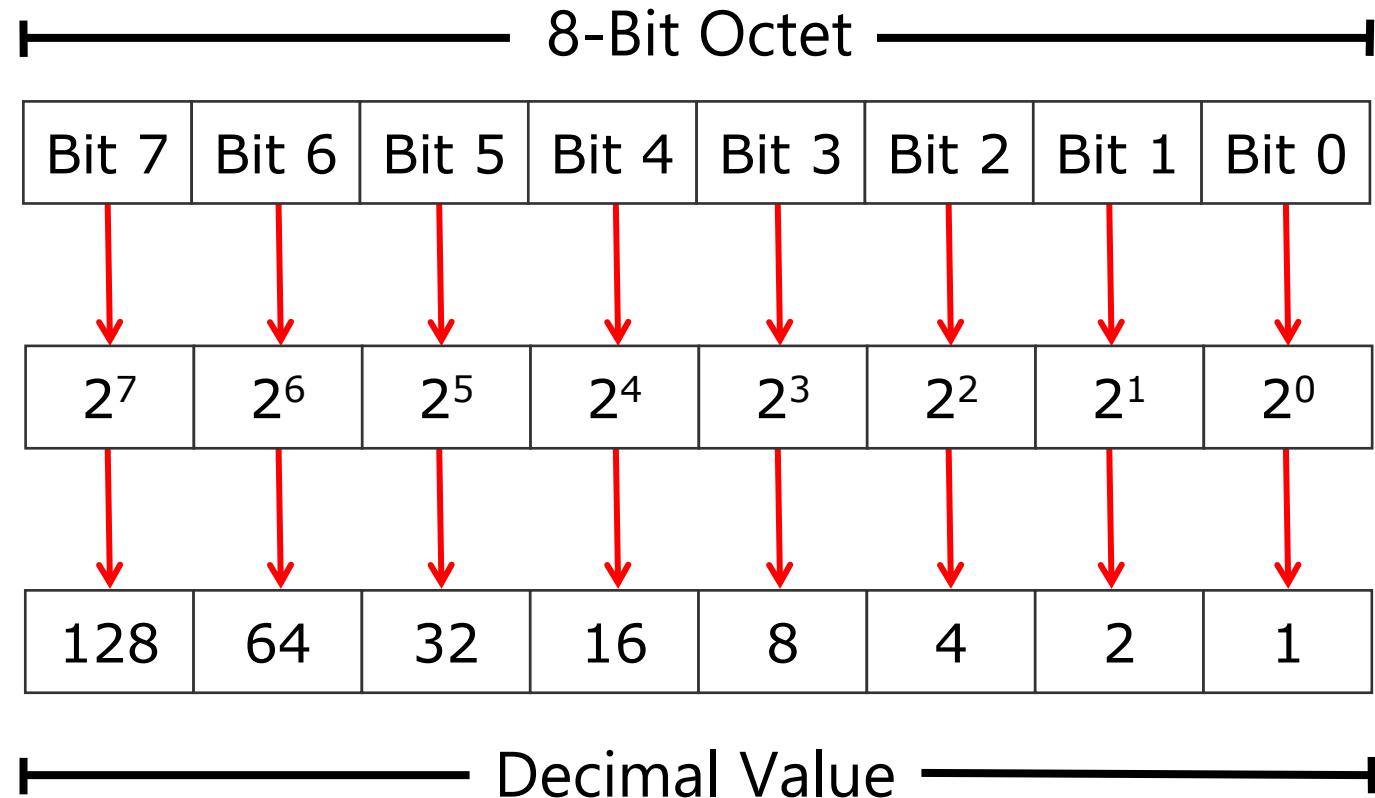



Public, private, and APIPA addresses

Public

- Required by devices and hosts that connect directly to the Internet
- Must be globally unique
- Routable on the Internet
- Must be assigned by IANA/RIR


IPv4
Ausverkauft!



Private


- Not routable on the Internet
 - 10.0.0.0/8
 - 172.16.0.0/12
 - 192.168.0.0/16
- Can be assigned locally by an organization
- Must be translated to access the Internet

NAT



IPv4 Addressing

An IPv4 configuration identifies a computer to other computers on a network

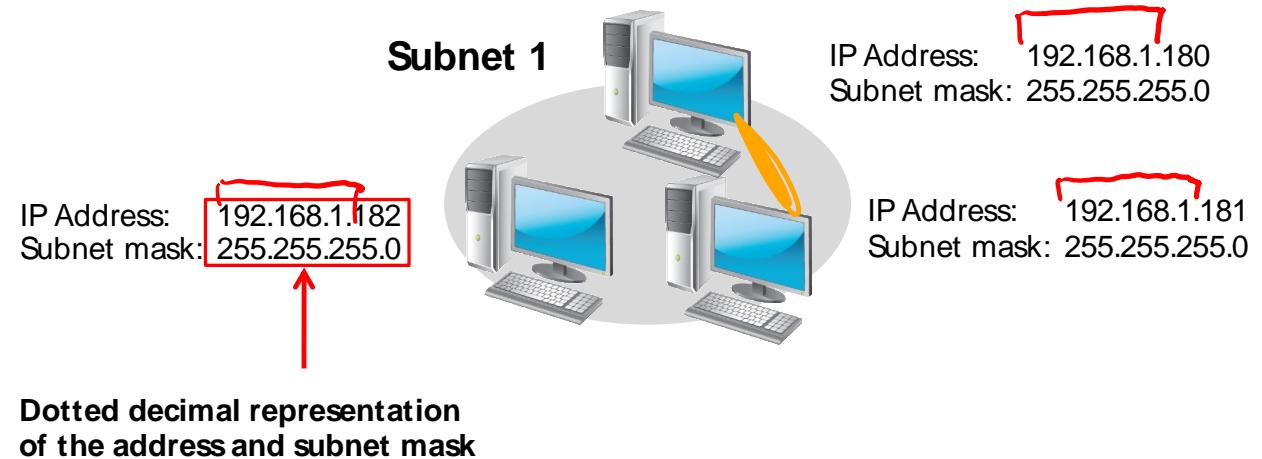


192.168.2.

ARP

IPv4 Addressing

An IPv4 configuration identifies a computer to other computers on a network

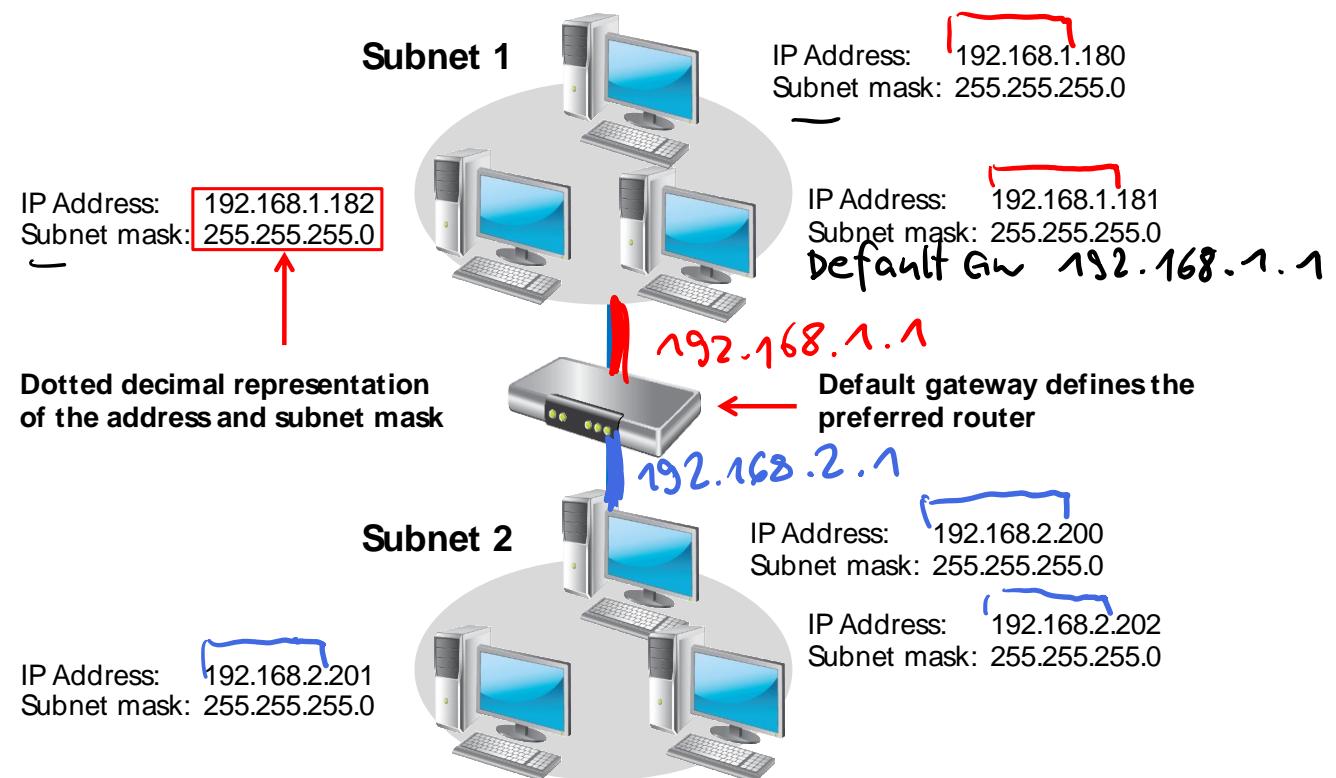



The Benefits of Using Subnetting (1 of 2)

When you subdivide a network into subnets, you create a unique ID for each subnet that is derived from the main network ID



The Benefits of Using Subnetting (2 of 2)

- By using subnets, you can:
 - Use a single network address across multiple locations
 - Reduce network congestion by segmenting traffic
 - Increase security by using firewalls
 - Overcome limitations of current technologies

Lesson 2: IPv6 Fundamentals



IPv6 Fundamentals



Overview of IPv4 addressing





Overview of IPv6 addressing

- 128-bit address in binary:

0010000000000010000110110111000
000000000000000010110101001100
000000111001100000000011011101
0001000100100010001001000110100

Länge

Address
Record
in DNS

IP
32 Bit

IPv6
128 Bit

- 128-bit address divided into 16-bit blocks:

001000000000001 0000110110111000
0000000000000000 0010110101001100
000000011001100 0000000011011101
0001000100100010 0001001000110100

Anzahl
Adressen
(im Prinzip)

$$2^{32} \approx 4 \times 10^9$$

$$2^{128} \approx 10^{38}$$

- Each 16-bit block converted to hexadecimal (base 16):

2001:0DB8:0000:2D4C:01CC:00DD:1122:1234

- Further simplified by removing leading zeros:

2001:DB8:0:2D4C:1CC:DD:1122:1234

2001:cafe::/64 Metz
2001:cafe::1/64



Overview of IPv6 addressing

[0010][1101][0100][1100]

8 4 2 1
[0 0 1 0]
 $0+0+2+0=2$

[1 1 0 1]
 $8+4+0+1=D$

[0 1 0 0]
 $0+4+0+0=4$

[1 1 0 0]
 $8+4+0+0=C$

= 2D4C



IPv6 address structure

- The number of network bits is defined by the prefix
- Each host has 64 bits allocated to the interface identifier

Type of address	IPv4 address	IPv6 address
Unspecified	0.0.0.0	::
Loopback	127.0.0.1	::1
Autoconfigured	169.254.0.0/16	FE80::/64
Broadcast	255.255.255.255	Uses multicasts instead
Multicast	224.0.0.0/4	FF00::/8




Types of IPv6 addresses

- The following are types of unicast IPv6 addresses:
 - Global unicast addresses
 - Unique local addresses
 - Link-local addresses
 - Site-local addresses:
 - Formerly deprecated in RFC 3879
 - Superseded by unique local addresses
 - Special addresses
 - Compatibility or transition addresses



Types of IPv6 addresses


- Global unicast addresses:
 - Are routable on the IPv6 Internet
 - Allocate 16 bits for internal subnetting
 - Begin with 2 or 3 (2000::/3)

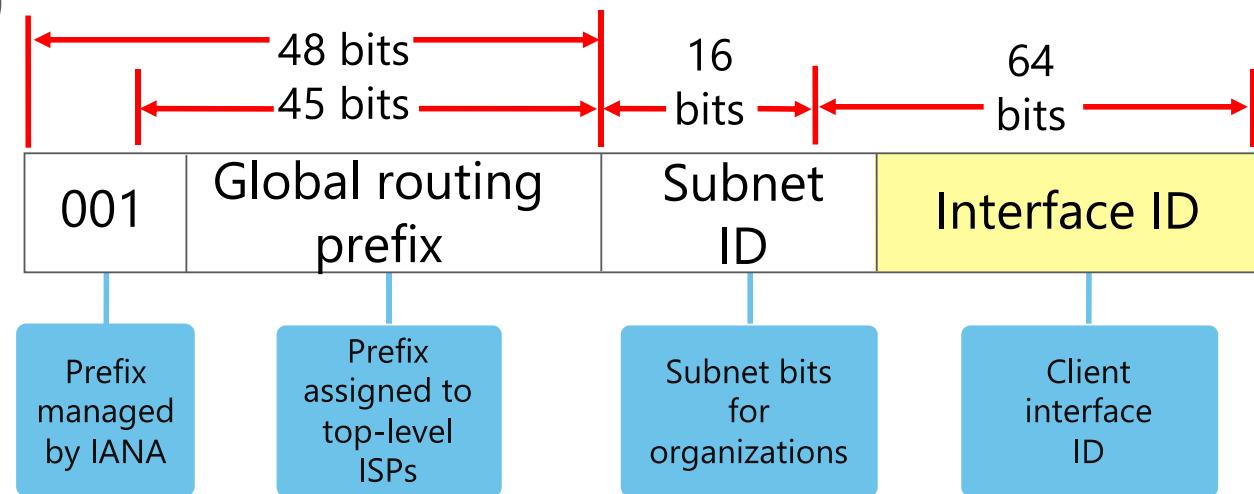



Types of IPv6 addresses

- Unique local addresses:
 - Are equivalent to IPv4 private addresses
 - Require the organization ID to be randomly generated
 - Allocate 16 bits for internal subnetting

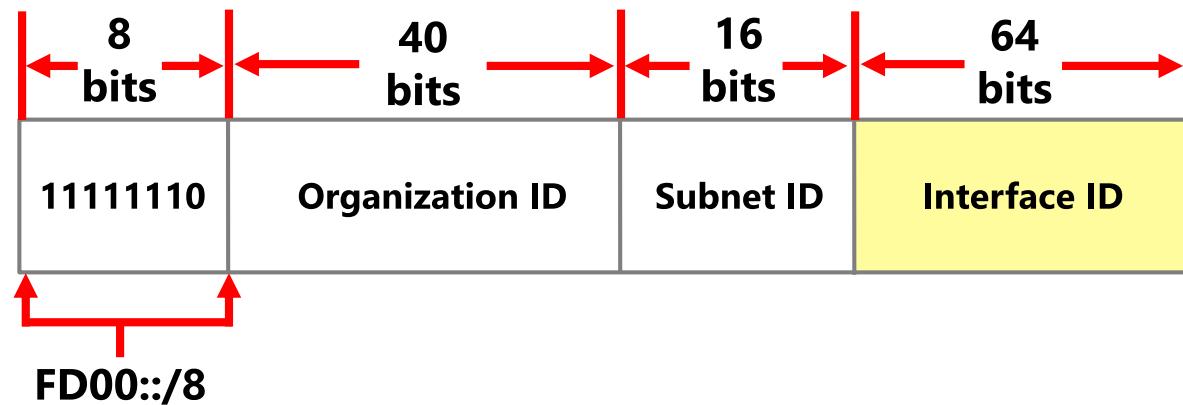


Max Mustermann, Wie trainieren wir heute?




Types of IPv6 addresses

- Link-local addresses:
 - Are automatically generated on all IPv6 hosts
 - Are similar to IPv4 APIPA addresses
 - Are sometimes used in place of broadcast messages
 - Include a zone ID that identifies the interface
 - Examples:
 - fe80::2b0:d0ff:fee9:4143%3
 - fe80::94bd:21cf:4080:e612%2

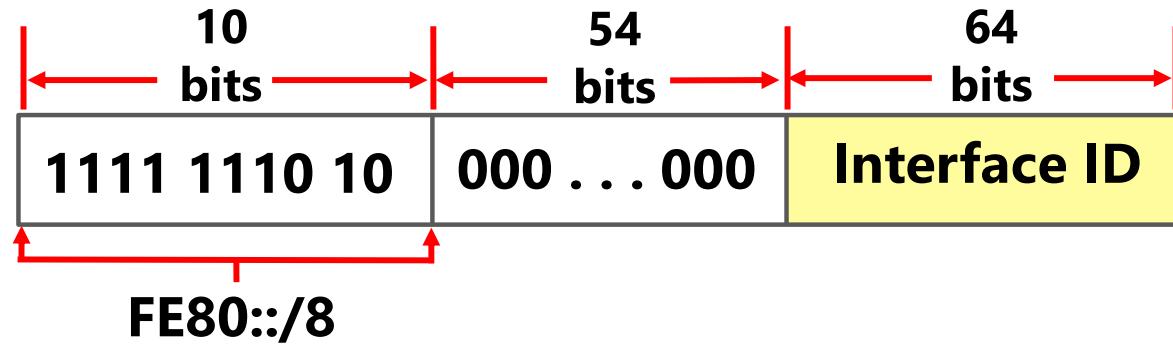

IPv6 Auto configuration

1 Derive Link-Local Address

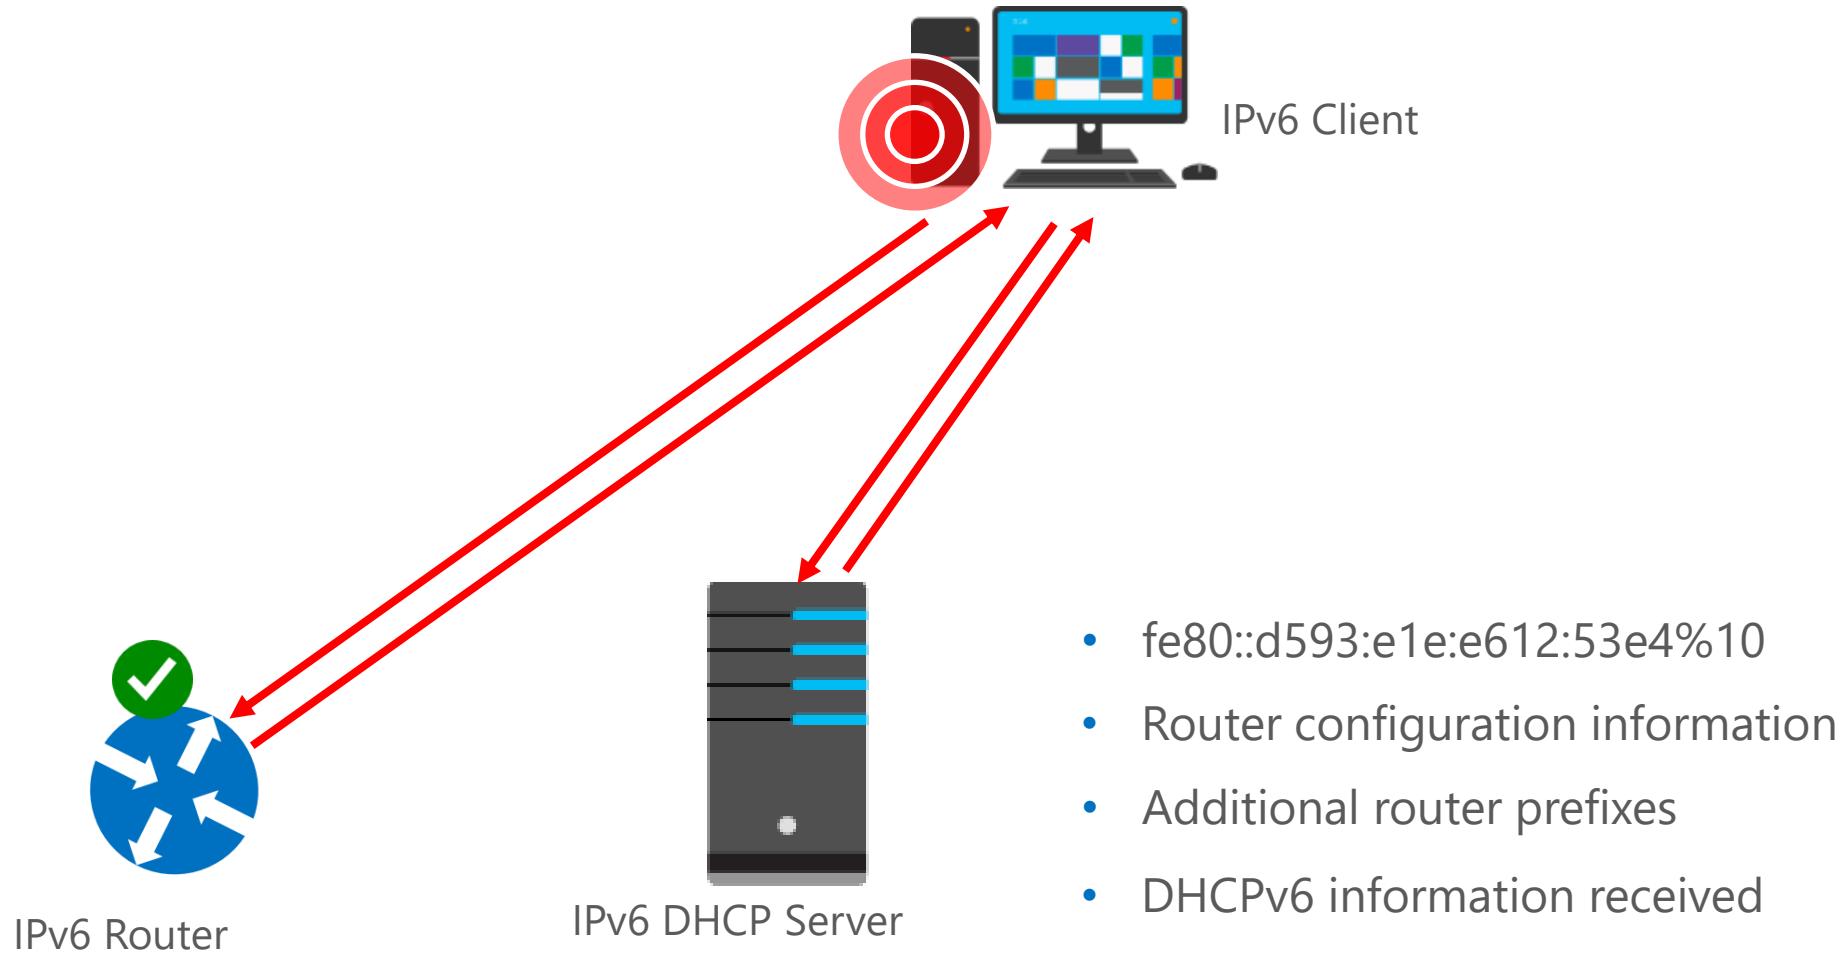

Lesson 3: Dynamic Host Configuration Protocol (DHCP)



VDP



Dynamic Host Configuration Protocol (DHCP)



Benefits of using DHCP



How DHCP allocates addresses



How DHCP lease generation works



How DHCP lease renewal works



DHCP scope and options




Benefits of Using DHCP


DHCP reduces the complexity and amount of administrative work by using automatic IP configuration

Automatic IP Configuration	Manual IP Configuration
IP addresses are supplied automatically	IP addresses are entered manually
Correct configuration information is ensured	IP address could be entered incorrectly
Client configuration is updated automatically	Communication and network issues can result
A common source of network problems is eliminated	Frequent computer moves increase administrative effort

How DHCP Allocates IP Addresses

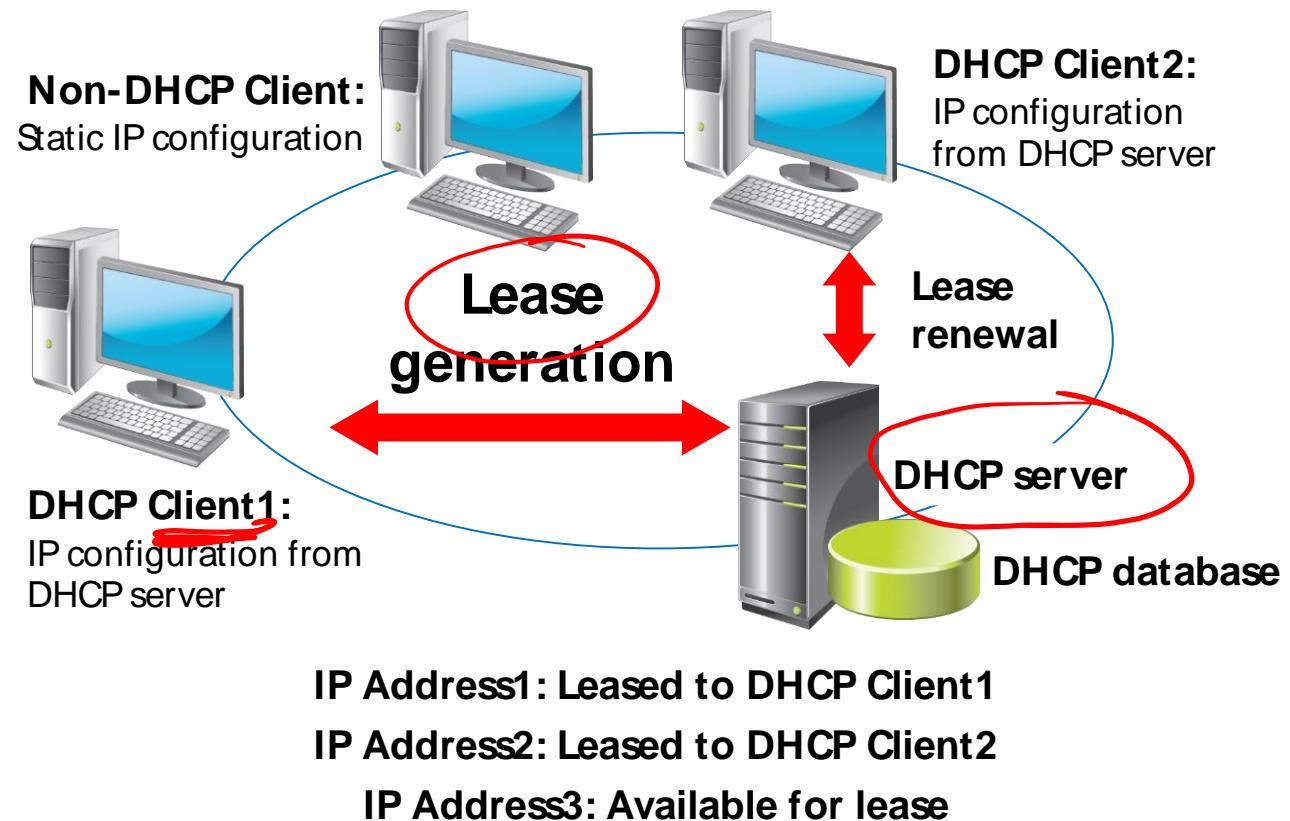


How DHCP Allocates IP Addresses

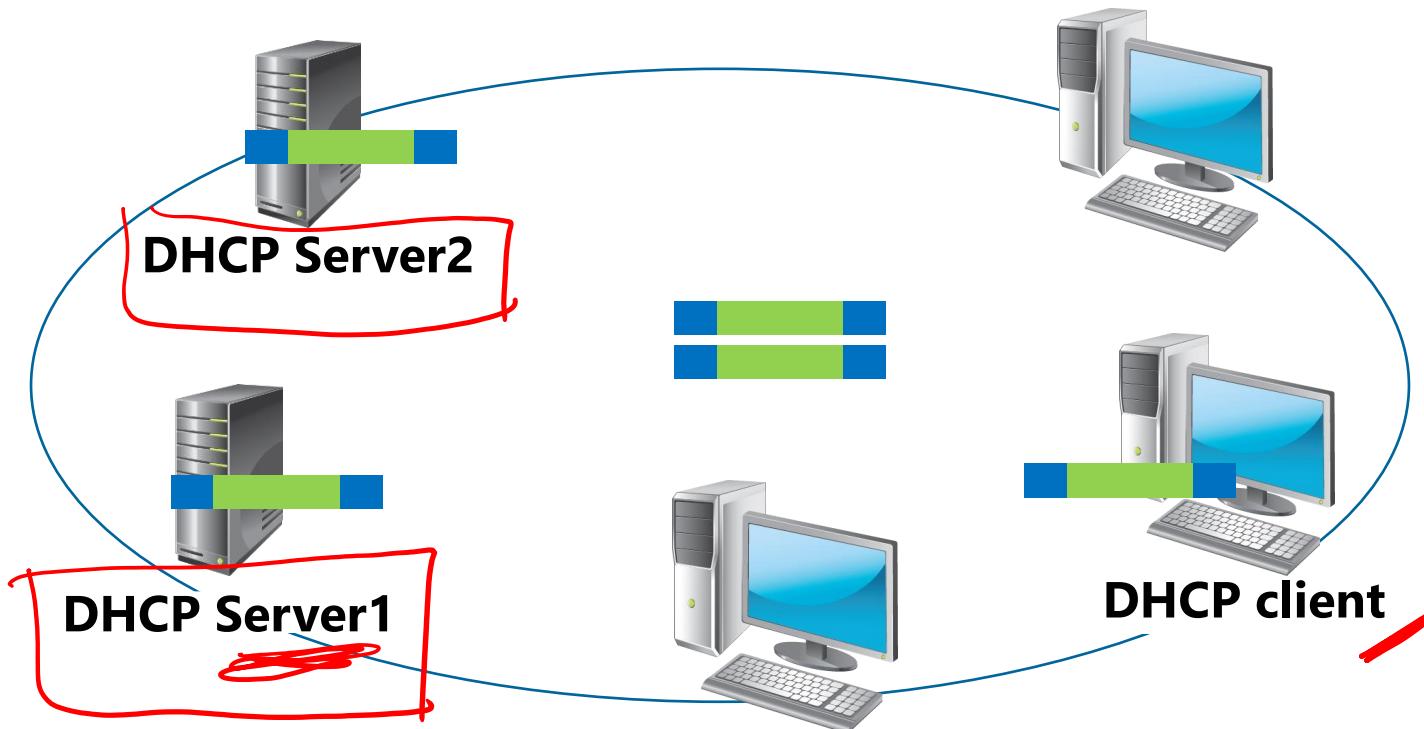

1. DHCP client broadcasts a **DHCPOFFER** packet ←
2. DHCP servers broadcast a **DHCPDISCOVER** packet
3. DHCP client broadcasts a **DHCPOFFER** packet
4. DHCP Server1 broadcasts a **DHCPOFFER** packet



How DHCP Allocates IP Addresses

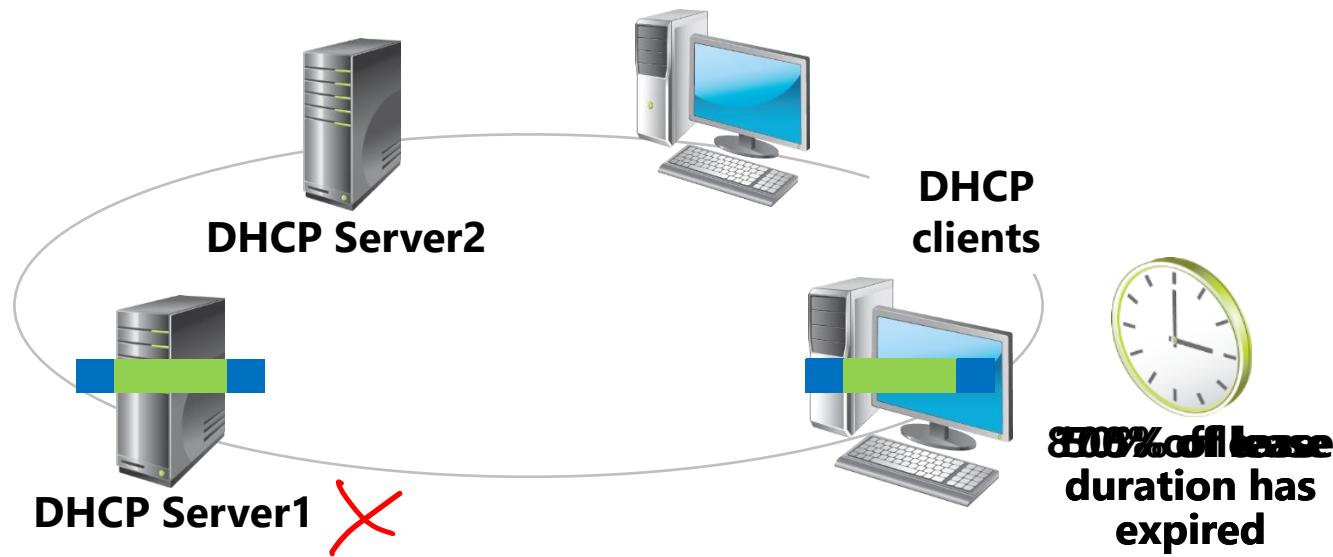


1. DHCP client sends a **DHCPREQUEST** packet
2. DHCP Server1 sends a **DHCPOFFER** packet
3. If the client fails to renew its lease after 50% of the lease duration has expired, the DHCP lease renewal process begins again after 87.5% of the lease duration has expired
4. If the client fails to renew its lease after 87.5% of the lease has expired, the DHCP lease generation process starts over again with a DHCP client broadcasting a **DHCPDISCOVER**




DHCP scope and options

- A DHCP scope is a range of IP addresses that are available to be leased
- DHCP scope properties include:
 - Network ID
 - Lease duration *8 Tage*
 - Scope name
 - Subnet mask
 - Network IP address range
 - Exclusion range

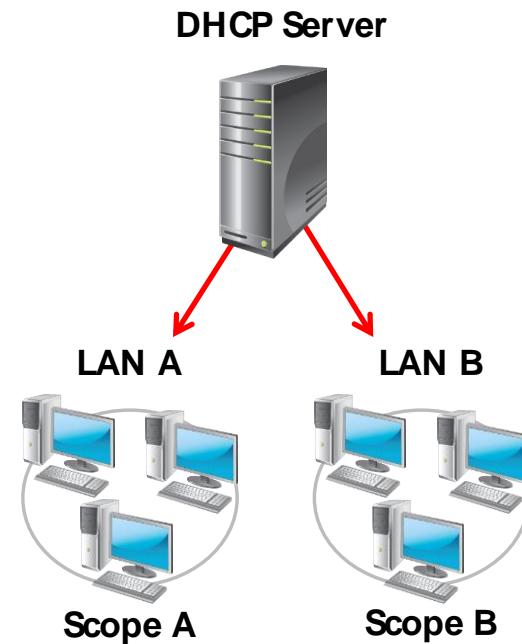

DHCP scope and options


- You must create scopes to define the network information that will be distributed to clients
- A scope must contain:
 - A range of IP addresses
 - A subnet mask
 - A lease duration
- A scope might contain:
 - Default gateway address
 - DNS server and suffix
 - Other network options
- IP addresses can be reserved based on the MAC address of the client network interface

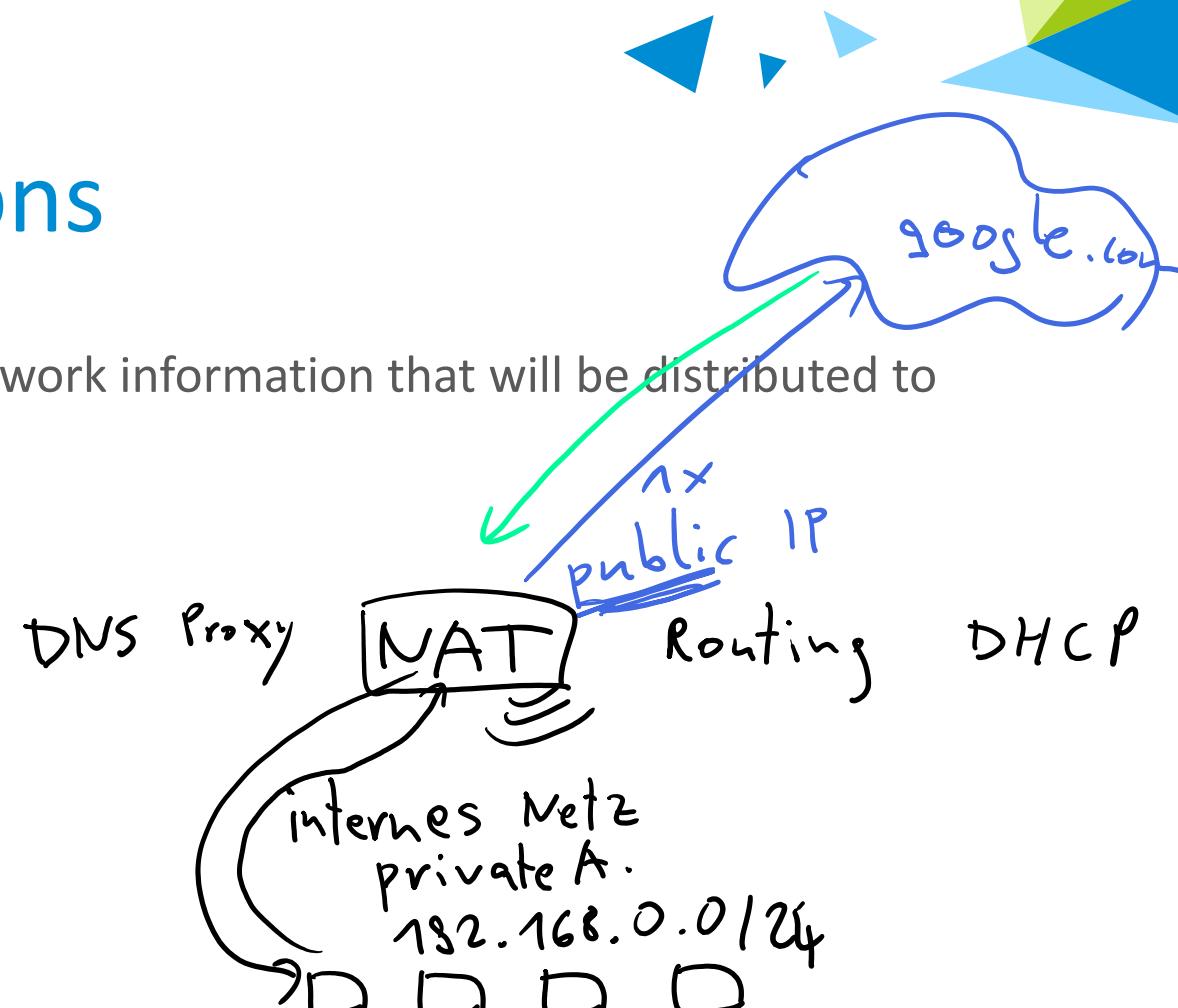



DHCP scope and options

- DHCP options:
 - Are values for common configuration data
 - Can be applied to the server, scope, class, and reservation level
- Common scope options include:
 - Router (Default gateway)
 - DNS domain name
 - DNS servers

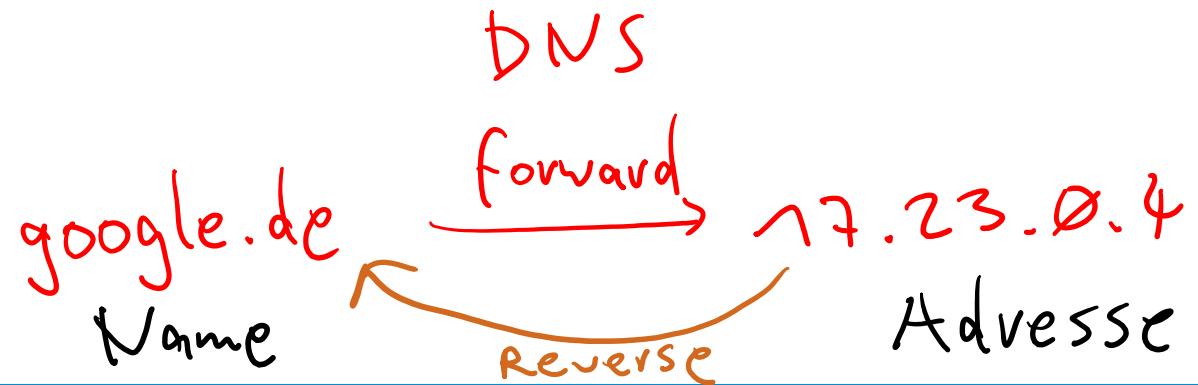

Lesson 4: Domain Name Service (DNS)



DNS unter Unix: BIND

Domain Name Service (DNS)



How does DNS name resolution work?



DNS components



What are DNS zones and records?
DB



Tools and techniques for troubleshooting name
resolution



nslookup




How does DNS name resolution work?

IANA

A **hostname** is a computer name that is added to a domain name and top level domain to make a fully qualified domain name (FQDN)

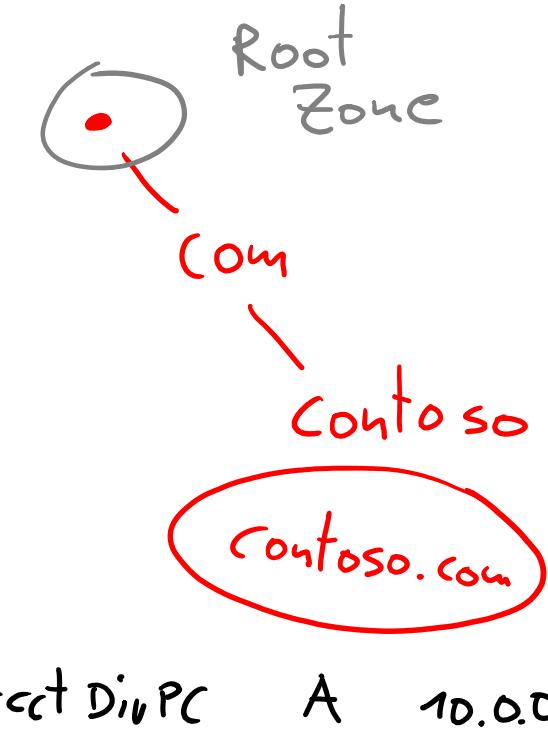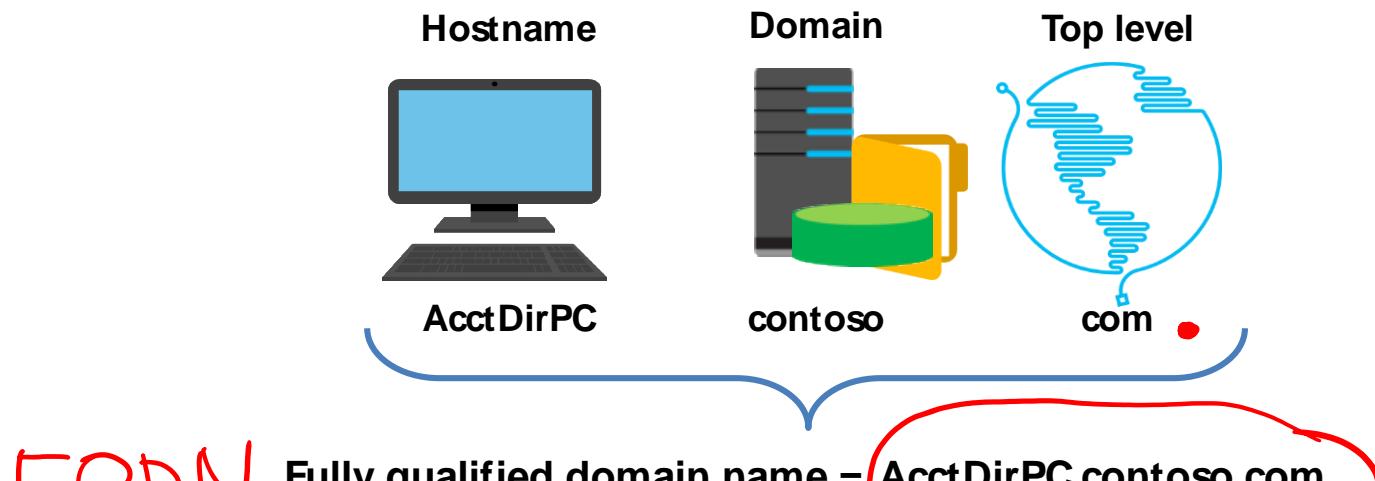


How does DNS name resolution work?

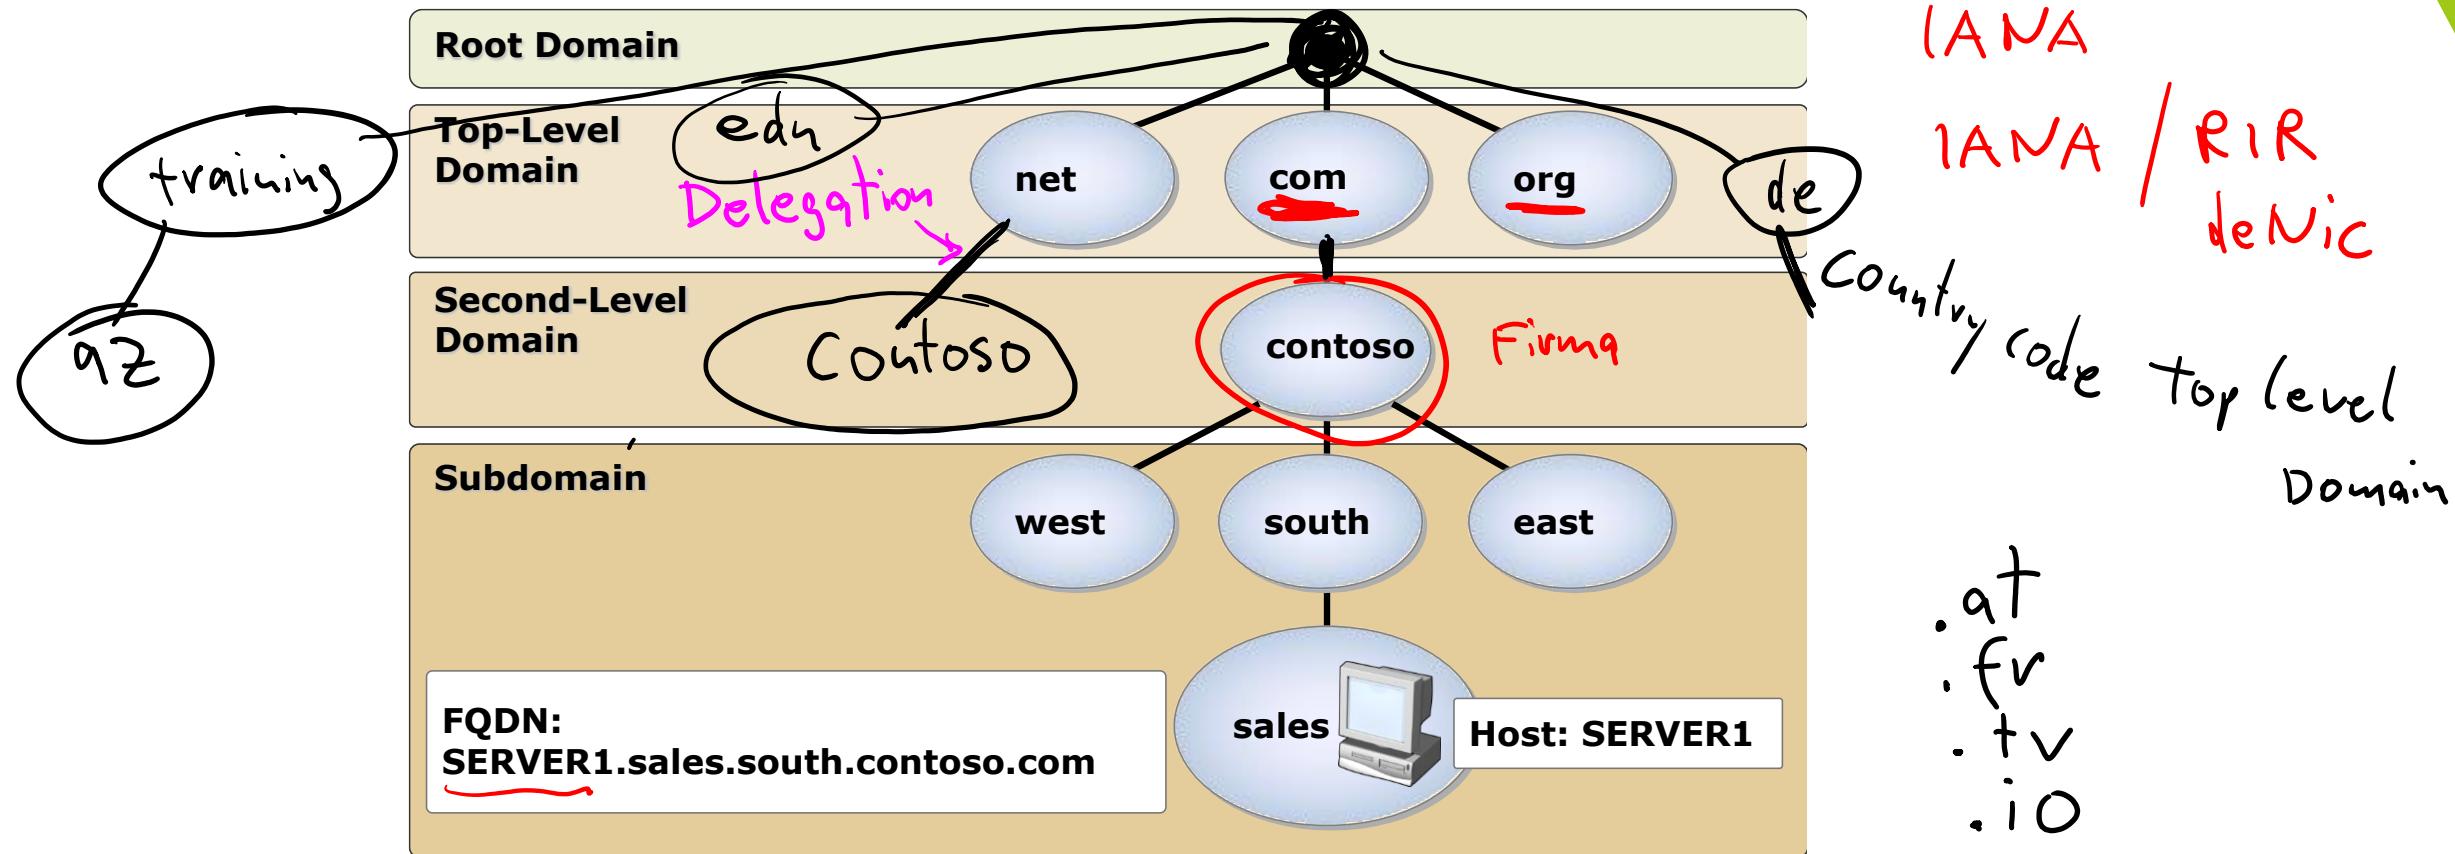

DNS im Internet (IANA)


reverse

forward

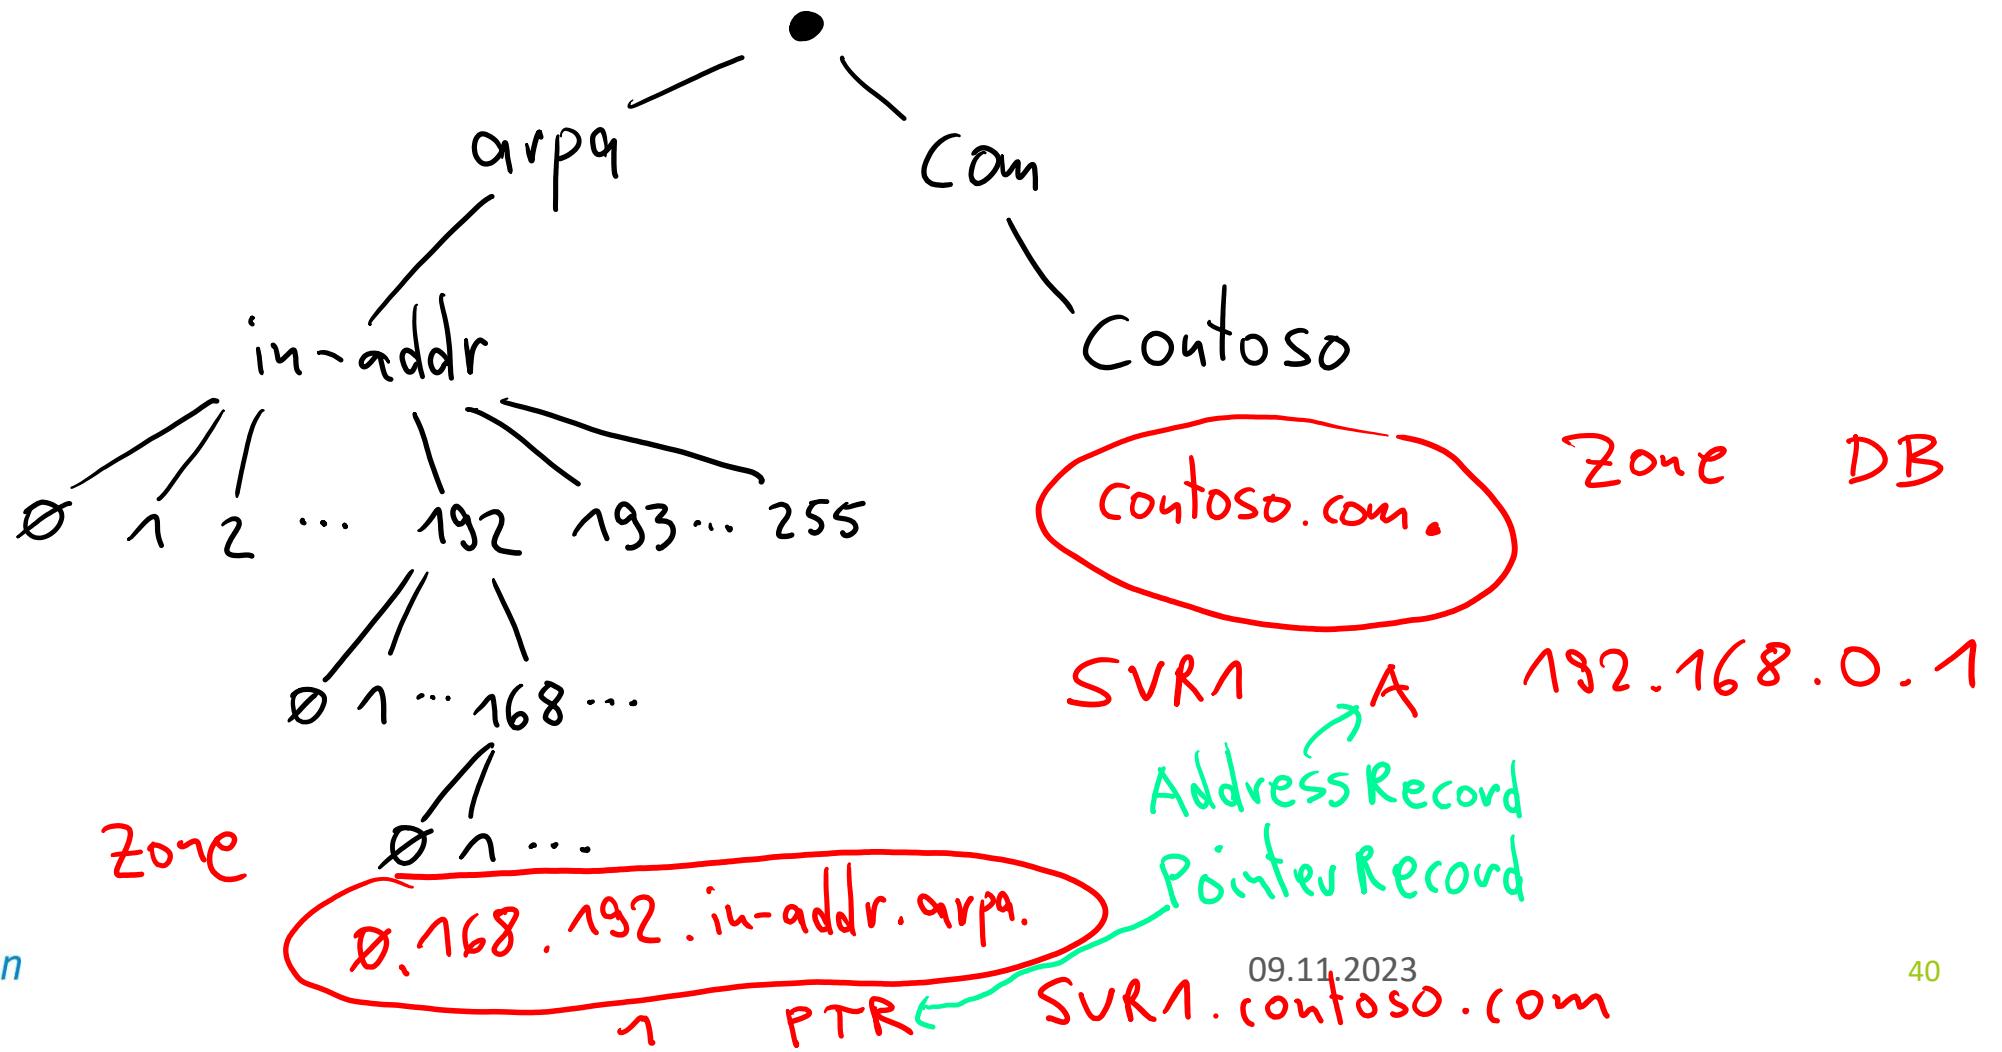



DNS components

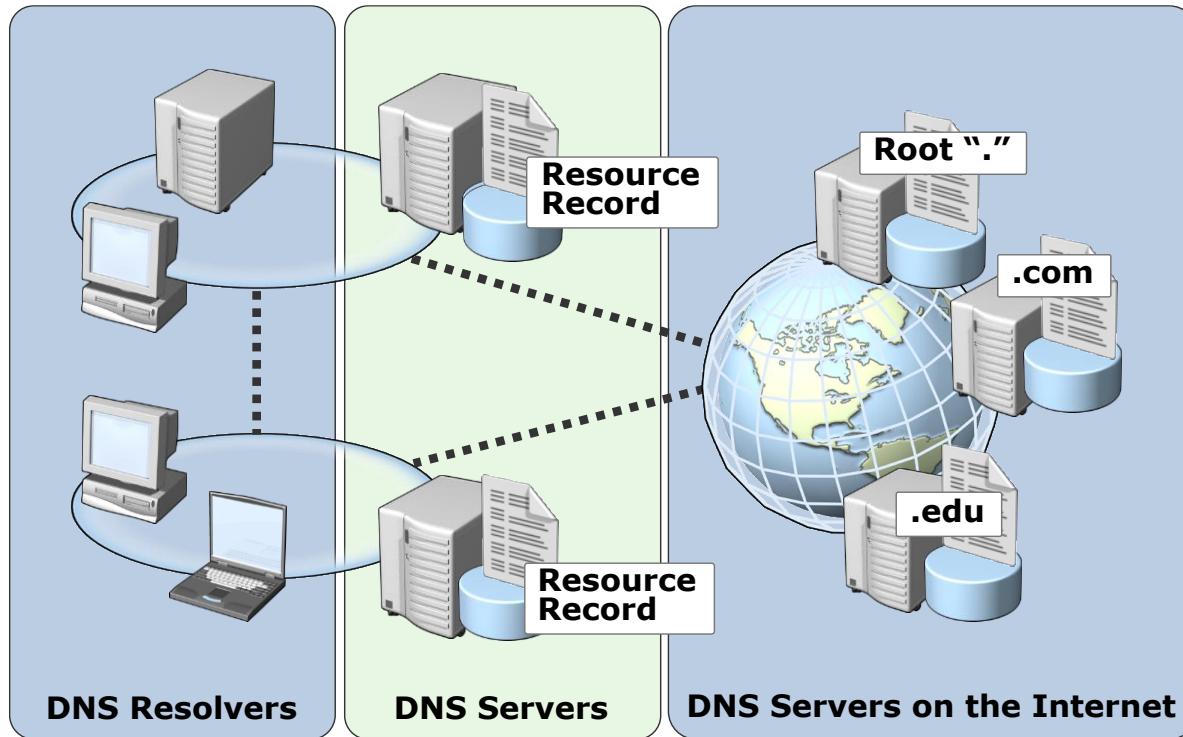


What are DNS zones and records?

DNS resource records include:

- SOA: Start of Authority
- A: Host Record
- CNAME: Alias Record
- MX: Mail Exchange Record
- SRV: Service Resources
- NS: Name Servers
- AAAA: IPv6 DNS Record
- PTR: Pointer Record



What are DNS zones and records?

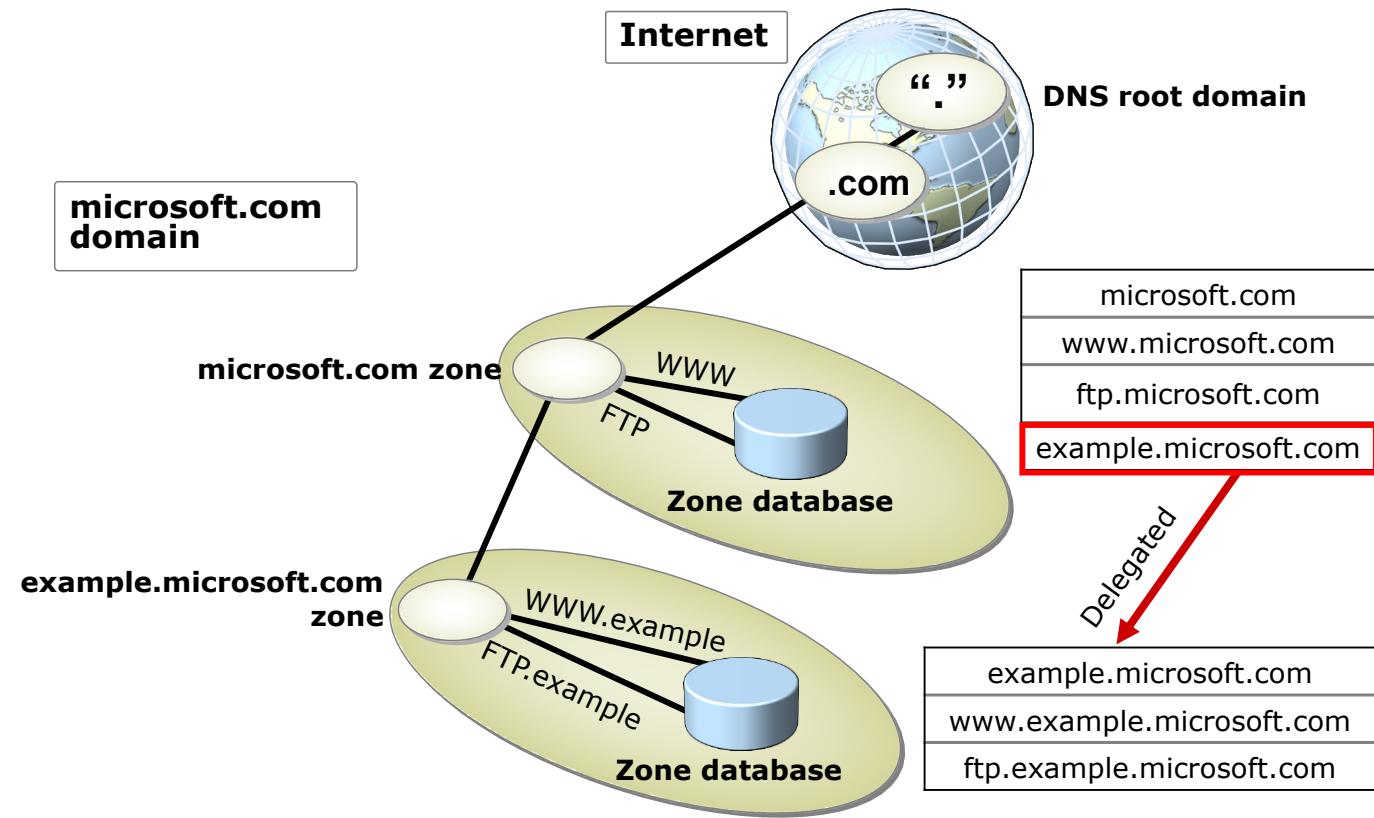




What are DNS zones and records?

Zones	Description
Primary	Read/write copy of a DNS database
Secondary	Read-only copy of a DNS database
Stub	Copy of a zone that contains only records used to locate name servers
Active Directory-integrated	Zone data is stored in AD DS rather than in zone files


What are DNS zones and records?

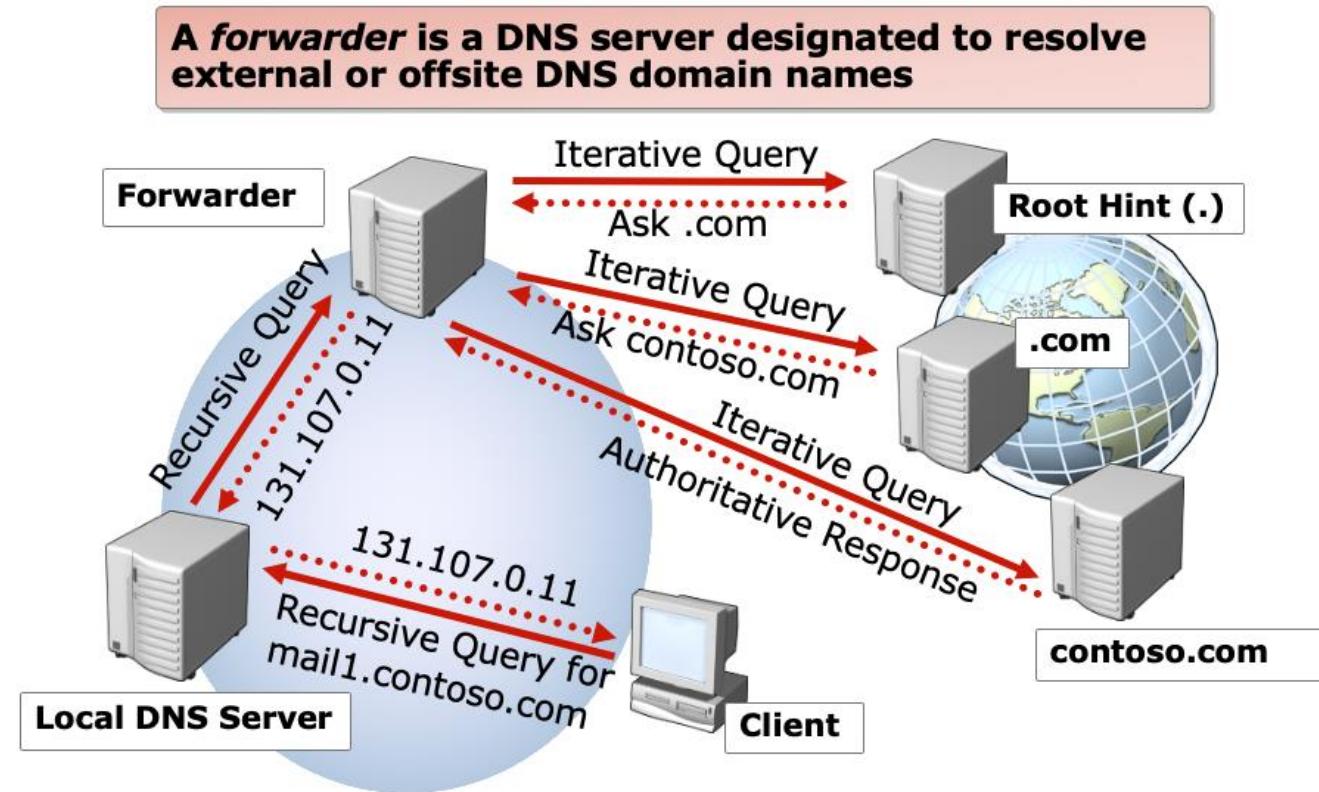

What are DNS zones and records?

Tag 4

Guten Morgen!

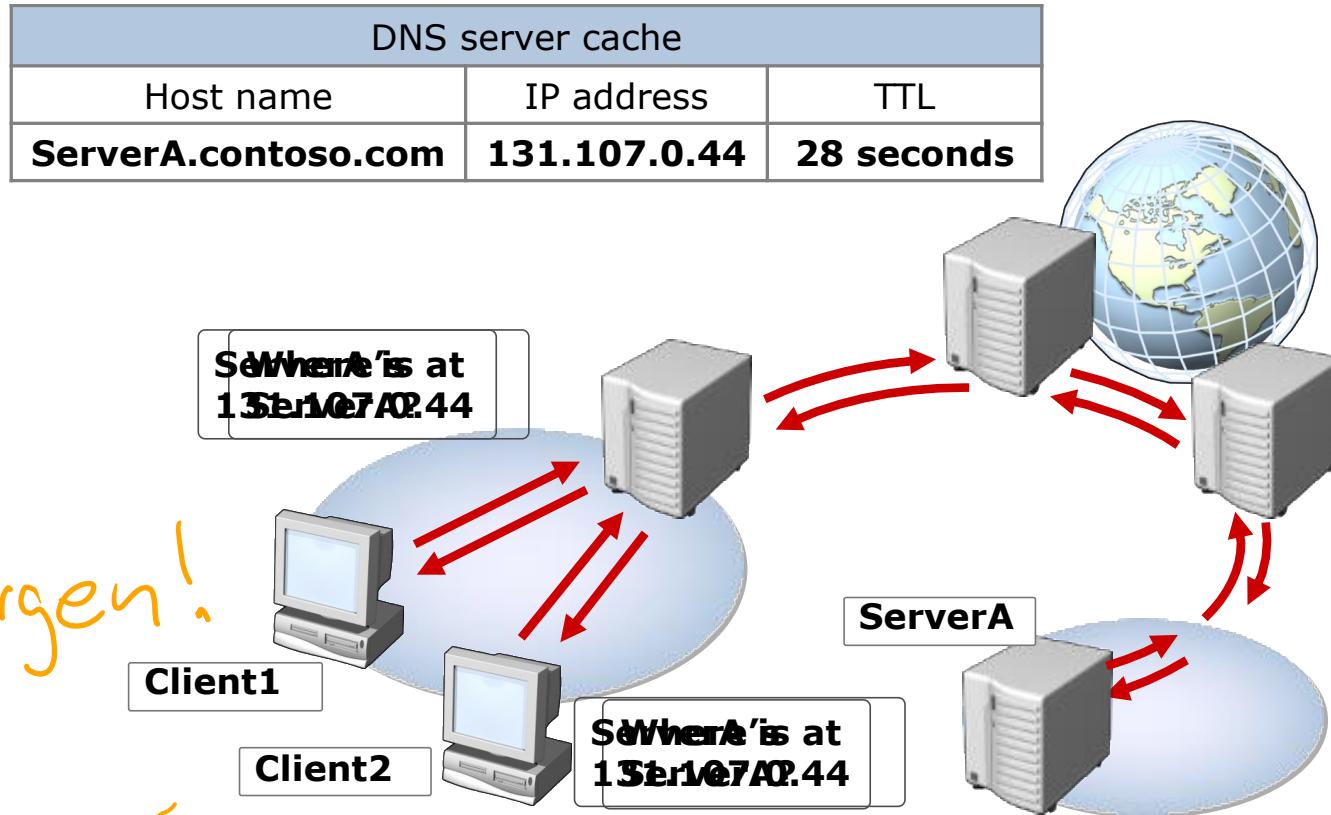



Tools and techniques for troubleshooting name resolution

- Command-line tools to troubleshoot configuration issues:
 - Nslookup
 - DNSCmd
 - DNSlint
 - Ipconfig
- PowerShell:
 - Get-DnsClientServerAddress
 - Clear-DnsClientCache
 - Resolve-DnsName
 - Register-DnsClient



Tools and techniques for troubleshooting name resolution

- The troubleshooting process:
 - Identify client DNS server with nslookup or Resolve-DnsName
 - Communicate via ping
 - Use nslookup to verify records


Lesson 4: Azure network Fundamentals



Azure network Fundamentals

-  Plan Virtual Networks
-  Create Subnets
-  Create Virtual Networks
-  Plan IP Addressing
-  Create Public IP Addresses
-  Associate Public IP Addresses
-  Associate Private IP Addresses

Plan Virtual Networks

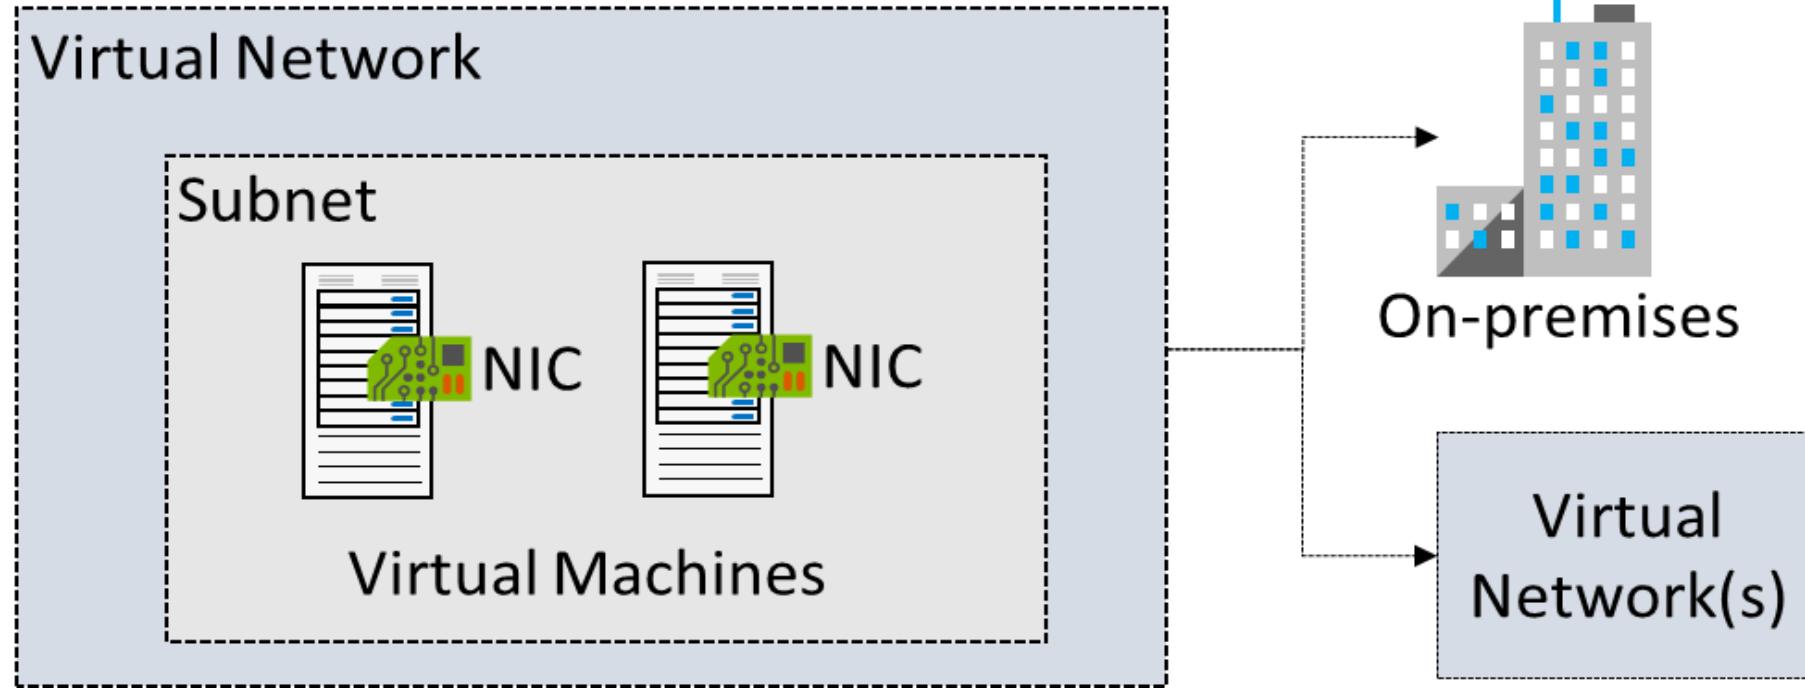

Logical representation
of your own network

Create a dedicated
private cloud-only
virtual network

Securely extend
your datacenter with
virtual networks

Enable hybrid
cloud scenarios

Create Virtual Networks

Create new virtual networks at any time

Add virtual networks when you create a virtual machine

Need to define the address space, and at least one subnet

Be careful with overlapping address spaces

Create virtual network

Basics IP Addresses Security Tags Review + create

Project details

Subscription * ⓘ

Visual Studio Enterprise

Resource group * ⓘ

Lab04

[Create new](#)

Instance details

Name *

VNet2

Region *

(US) East US 2

Create Subnets



Name ↑↓	IPv4 ↑↓	IPv6 ↑↓	Available IPs ↑↓	Delegated
subnet0	10.0.0.0/24	-	250	-
subnet1	10.0.1.0/24	-	251	-
subnet2	10.0.2.0/24	-	251	-
AzureBastionSubnet	10.0.30.0/27	-	27	-
GatewaySubnet	10.0.3.0/27	-	availability dependent on dynamic use	-


A virtual network can be segmented into one or more subnets

Subnets provide logical divisions within your network

Subnets can help improve security, increase performance, and make it easier to manage the network

Each subnet must have a unique address range – cannot overlap with other subnets in the vnet in the subscription

Plan IP Addressing

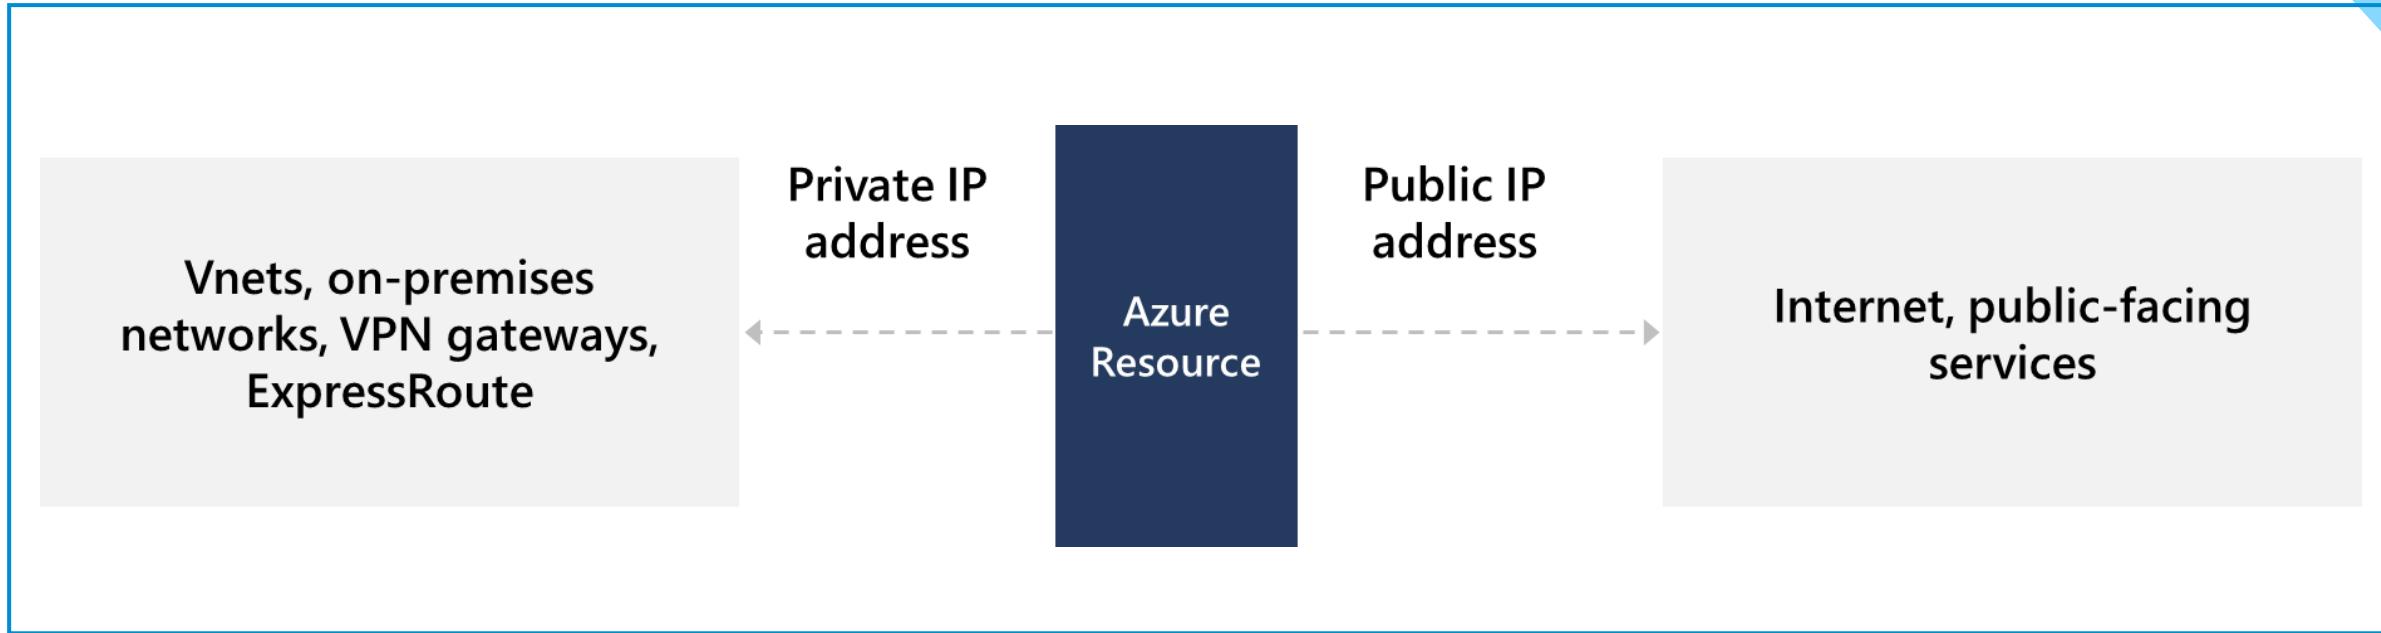

Private IP addresses - used within an Azure virtual network (VNet), and your on-premises network, when you use a VPN gateway or ExpressRoute circuit to extend your network to Azure

Public IP addresses - used for communication with the Internet, including Azure public-facing services

Associate Public IP Addresses



Public IP addresses	IP address association	Dynamic	Static
Virtual Machine	NIC	Yes	Yes
Load Balancer	Front-end configuration	Yes	Yes
VPN Gateway	Gateway IP configuration	Yes	Yes*
Application Gateway	Front-end configuration	Yes	Yes*

A public IP address resource can be associated with virtual machine network interfaces, internet-facing load balancers, VPN gateways, and application gateways

*Static IP addresses only available on certain SKUs.

Associate Private IP Addresses



Private IP Addresses	IP address association	Dynamic	Static
Virtual Machine	NIC	Yes	Yes
Internal Load Balancer	Front-end configuration	Yes	Yes
Application Gateway	Front-end configuration	Yes	Yes

Dynamic (default). Azure assigns the next available unassigned or unreserved IP address in the subnet's address range

Static. You select and assign any unassigned or unreserved IP address in the subnet's address range

Lesson 5: Configure Network Security Groups



Configure Network Security Groups

Introduction




Implement Network Security Groups (NSG)



Determine NSG Rules



Determine NSG Effective Rules



Create NSG Rules

Implement Network Security Groups

The screenshot shows the Azure portal interface for a Network Security Group named 'nsg0'. The left sidebar includes options for Overview, Activity log, Access control (IAM), Tags, and Diagnose and solve problems. The main content area displays the NSG's details: Resource group (change) : rg01, Location : East US, Subscription (change) : , Subscription ID : , and Tags (change) : Click here to add tags. It also shows associated resources: Custom security rules : 1 inbound, 0 outbound, Associated with : 1 subnets, 0 network interfaces.


Limits network traffic
to resources in a
virtual network

Lists the security rules
that allow or deny
inbound or outbound
network traffic

Associated
to a subnet or a
network interface

Can be associated
multiple times

Determine NSG Rules

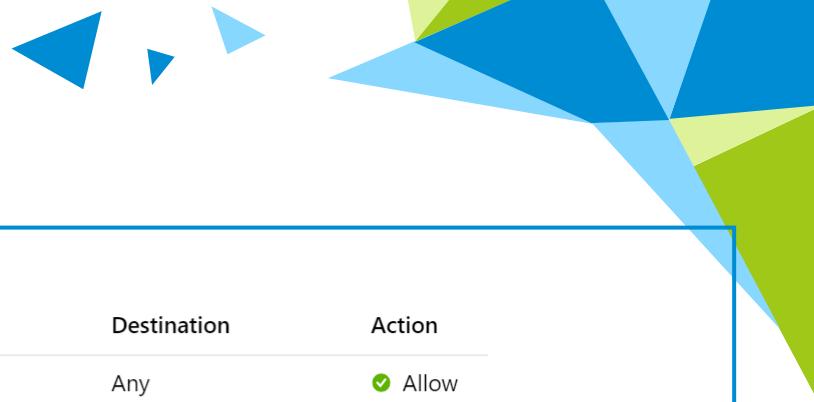

Inbound security rules

Priority	Name	Port	Protocol	Source	Destination	Action
100	⚠️ RDP_Inbound	3389	Any	Any	Any	Allow
65000	AllowVnetInBound	Any	Any	VirtualNetwork	VirtualNetwork	Allow
65001	AllowAzureLoadBalancerInBound	Any	Any	AzureLoadBalancer	Any	Allow
65500	DenyAllInBound	Any	Any	Any	Any	Deny

Outbound security rules

Priority	Name	Port	Protocol	Source	Destination	Action
65000	AllowVnetOutBound	Any	Any	VirtualNetwork	VirtualNetwork	Allow
65001	AllowInternetOutBound	Any	Any	Any	Internet	Allow
65500	DenyAllOutBound	Any	Any	Any	Any	Deny

Security rules in NSGs enable you to filter network traffic that can flow in and out of virtual network subnets and network interfaces


There are default security rules. You cannot delete the default rules, but you can add other rules with a higher priority

Determine NSG Effective Rules

NSGs are evaluated independently for the subnet and NIC

An “allow” rule must exist at both levels for traffic to be admitted

Use the Effective Rules link if you are not sure which security rules are being applied

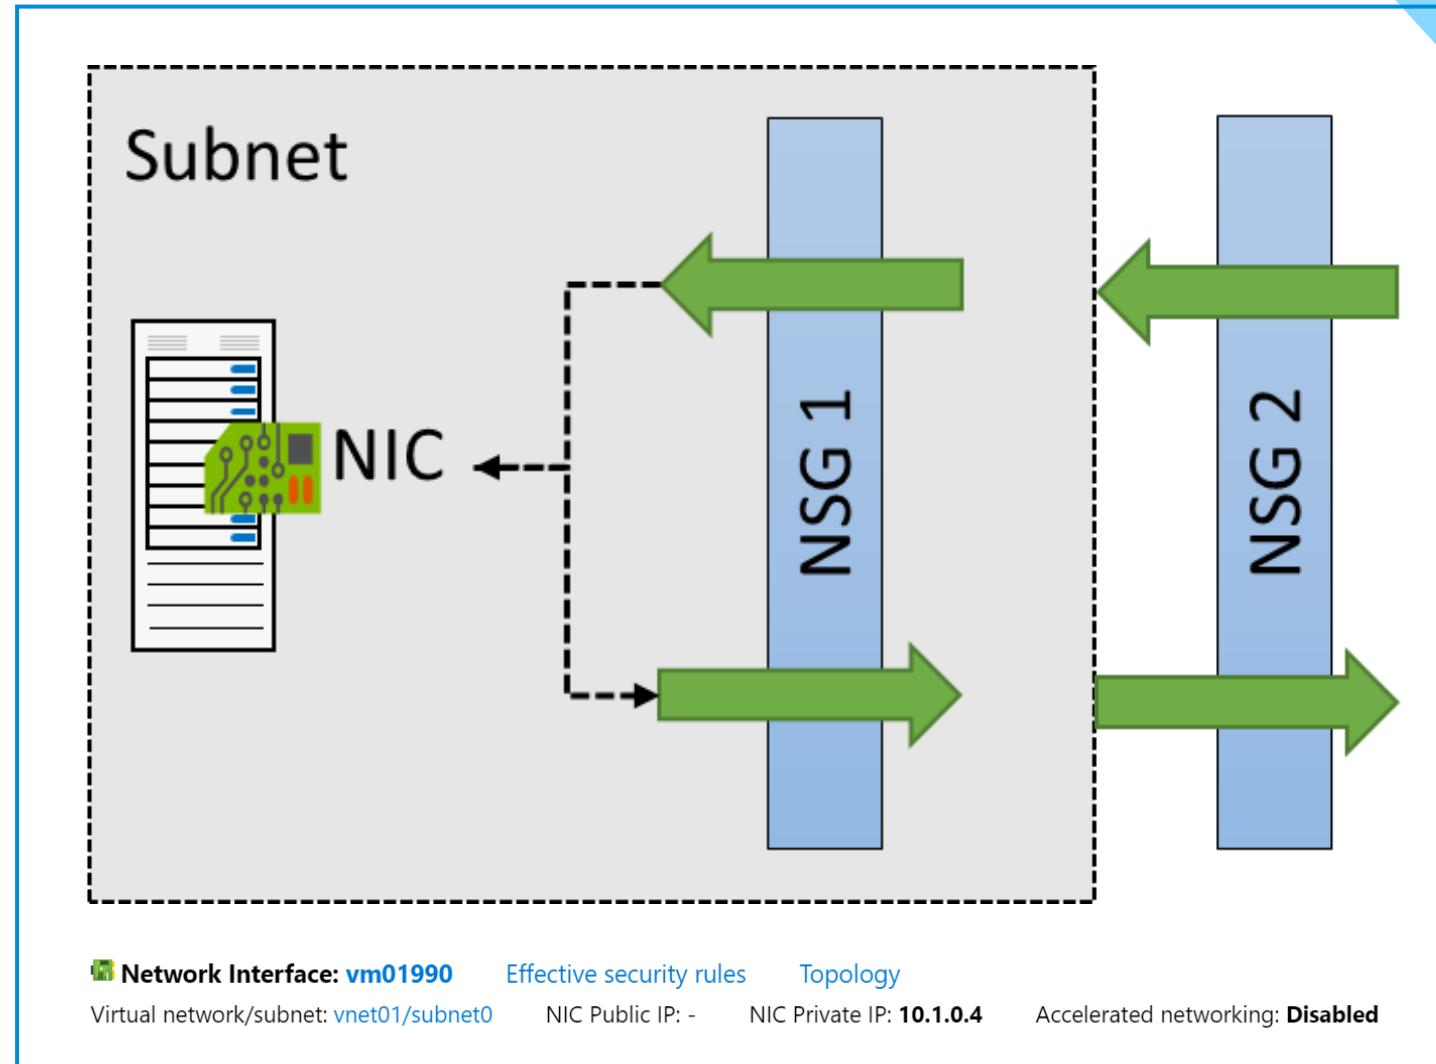


Create NSG rules

Select from a large variety of services

Service – The destination protocol and port range for this rule

Port ranges – Single port or multiple ports

Priority – The lower the number, the higher the priority

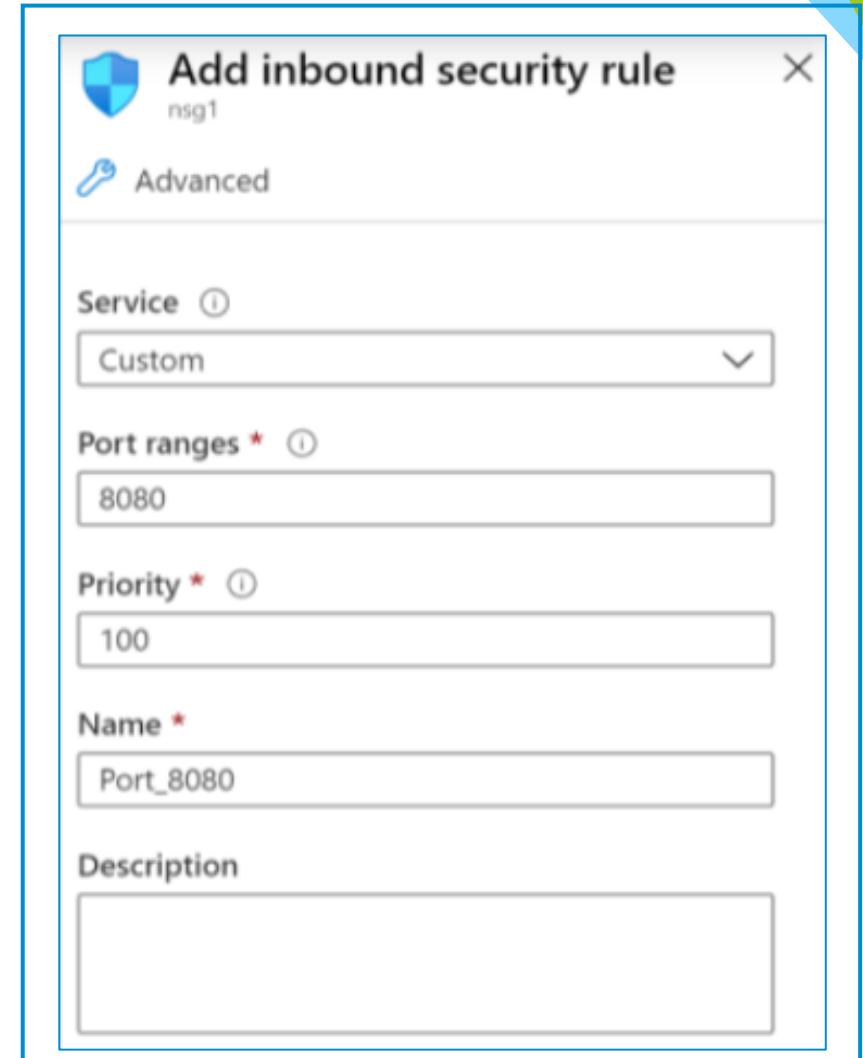

The screenshot shows a dialog box titled "Add inbound security rule" for an NSG named "nsg1". The dialog includes fields for Service (set to Custom), Port ranges (8080), Priority (100), Name (Port_8080), and Description.

Add inbound security rule
nsg1

Advanced

Service ⓘ
Custom

Port ranges * ⓘ
8080

Priority * ⓘ
100


Name *
Port_8080

Description

Lesson 6: Configure Azure DNS




Configure Azure DNS




Identify Domains and Custom Domains



Verify Custom Domain Names



Create Azure DNS Zones



Delegate DNS Domains



Add DNS Record Sets


Identity Domains and Custom Domains

When you create an Azure subscription an Azure AD domain is created for you

The domain has initial domain name in the form
domainname.onmicrosoft.com

You can customize/change the name

After the custom name is added it must be verified
(next topic)

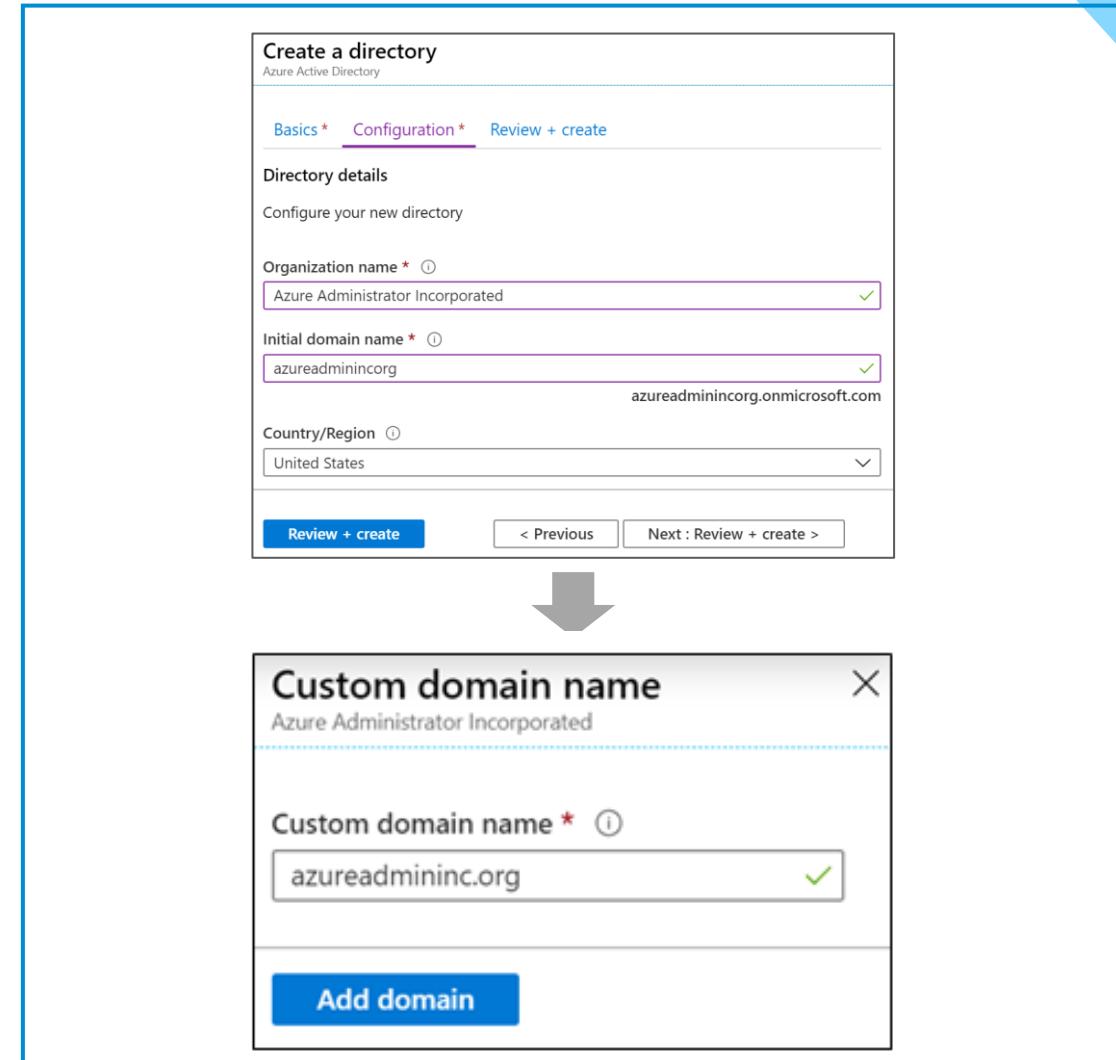

Create a directory
Azure Active Directory

Basics * Configuration * Review + create

Directory details
Configure your new directory

Organization name * ⓘ
Azure Administrator Incorporated

Initial domain name * ⓘ
azureadminincorg
azurereadminincorg.onmicrosoft.com

Country/Region ⓘ
United States

Review + create < Previous Next : Review + create >

Custom domain name
Azure Administrator Incorporated

Custom domain name * ⓘ
azurereadmininc.org

Add domain


Verify Custom Domain Names

Verification demonstrates ownership of the domain name

Add a DNS record (MX or TXT) that is provided by Azure into your company's DNS zone

Azure will query the DNS domain for the presence of the record

This could take several minutes or several hours

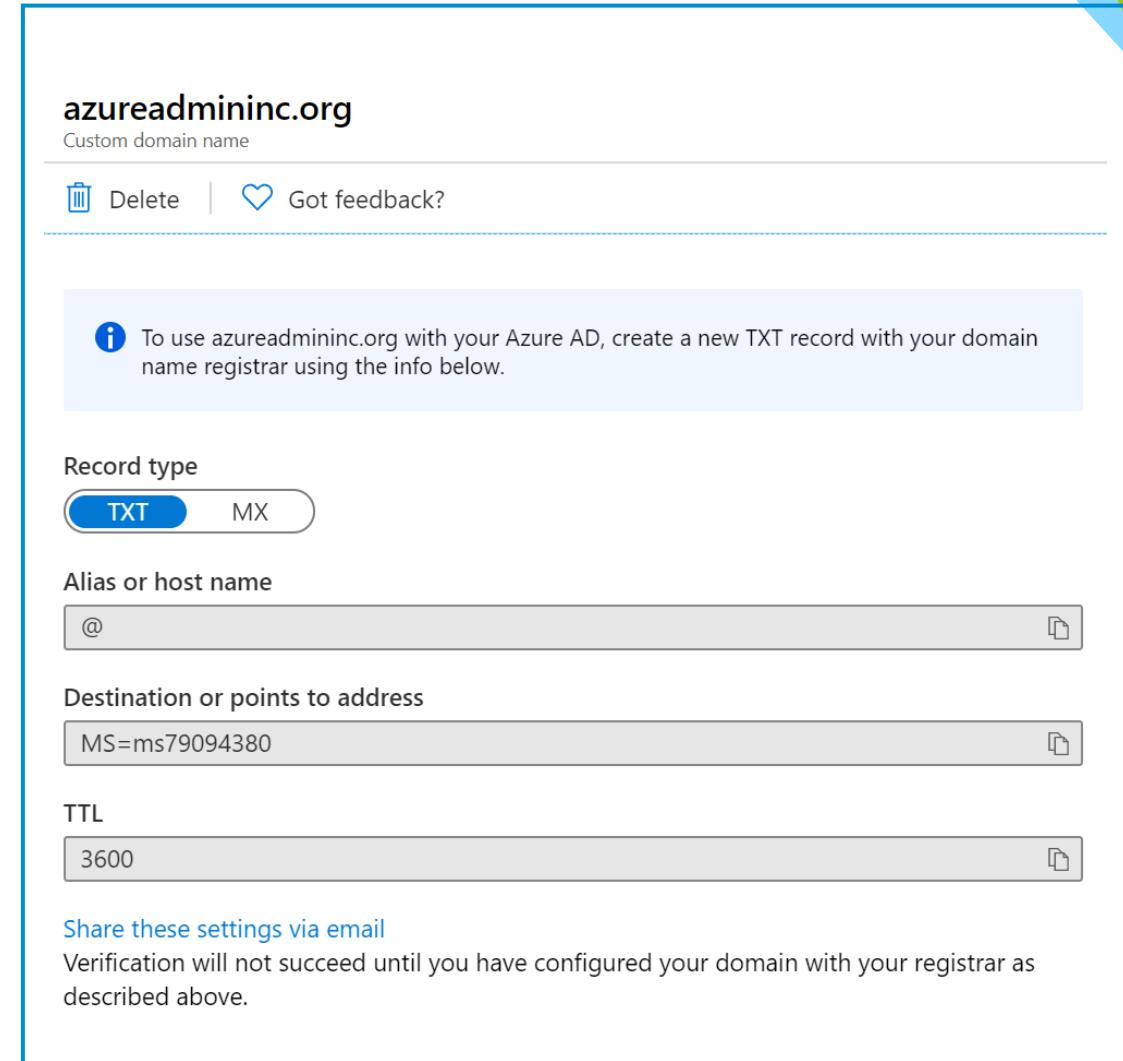

The screenshot shows the Azure portal interface for verifying a custom domain. The domain name 'azureadmininc.org' is displayed at the top, along with a 'Delete' button and a 'Got feedback?' link. A callout box provides instructions: 'To use azureadmininc.org with your Azure AD, create a new TXT record with your domain name registrar using the info below.' Below this, there are fields for configuration: 'Record type' (set to 'TXT'), 'Alias or host name' (containing '@'), 'Destination or points to address' (containing 'MS=ms79094380'), and 'TTL' (set to '3600'). At the bottom, there is a link to 'Share these settings via email' and a note stating 'Verification will not succeed until you have configured your domain with your registrar as described above.'

Create Azure DNS Zones

A DNS zone hosts the DNS records for a domain

The name of the zone must be unique within the resource group

Where multiple zones share the same name, each instance is assigned different name server addresses

Root/Parent domain is registered at the registrar and pointed to Azure NS

Create DNS zone

[Basics](#) [Tags](#) [Review + create](#)

A DNS zone is used to host the DNS records for a particular domain. For example, the domain 'contoso.com' may contain a number of DNS records such as 'mail.contoso.com' (for a mail server) and 'www.contoso.com' (for a web site). Azure DNS allows you to host your DNS zone and manage your DNS records, and provides name servers that will respond to DNS queries from end users with the DNS records that you create. [Learn more.](#)

Project details

Subscription *

Resource group * [Create new](#)

Instance details

Name *

Resource group location (Optional)

[Review + create](#) [Previous](#) [Next : Tags >](#) [Download a template for automation](#)

Delegate DNS Domains

When delegating a domain to Azure DNS, you must use the name server names provided by Azure DNS – use all four

Once the DNS zone is created, update the parent registrar

For child zones, register the NS records in the parent domain

The screenshot shows the Azure portal interface for managing a DNS zone. At the top, there's a header with the domain name 'azureadmininc.org' and 'DNS zone'. Below the header are several actions: 'Record set' (with a plus icon), 'Move' (with an arrow icon), 'Delete zone' (with a trash bin icon), and 'Refresh' (with a circular arrow icon). To the right of these actions, the text 'Name server 1 ns1-02.azure-dns.com.' is listed. The main content area contains information about the resource group ('Resource group (change) rg-dns'), subscription ('Subscription (change) MSDN Platforms Subscription'), and subscription ID ('Subscription ID'). To the right of this information, the remaining three name servers are listed: 'Name server 2 ns2-02.azure-dns.net.', 'Name server 3 ns3-02.azure-dns.org.', and 'Name server 4 ns4-02.azure-dns.info.'. At the bottom of the main content area, there's a section for 'Tags (change)' with the instruction 'Click here to add tags'.

Add DNS Record Sets

A record set is a collection of records in a zone that have the same name and are the same type

You can add up to 20 records to any record set

A record set cannot contain two identical records

Changing the drop-down Type, changes the information required

Add record set

azureadmininc.org

Name: helloworld .azureadmininc.org

Type: A

Alias record set: No


TTL *: 1 TTL unit: Hours

IP address: 0.0.0.0

Lesson 7: Configure VNet Peering



Configure VNet Peering Introduction

-  Determine VNet Peering Uses
-  Determine Gateway Transit and Connectivity Needs
-  Create VNet Peering
-  Determine Service Chaining Uses
-  Demonstration – VNet Peering
-  Summary and Resources



Determine VNet Peering Uses


VNet peering connects two Azure virtual networks

Two types of peering: Regional and Global

Peered networks use the Azure backbone
for privacy and isolation

You can peer across subscriptions and tenants

Easy to setup, seamless data transfer,
and great performance

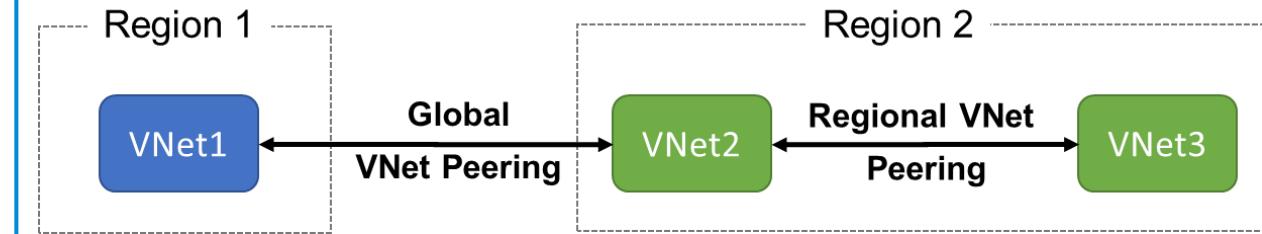

Determine Gateway Transit and Connectivity Needs


Gateway transit allows peered virtual networks to share the gateway and get access to resources

No VPN gateway is required in the peered virtual network

Default VNet peering provides full connectivity



IP address spaces of connected networks can't overlap

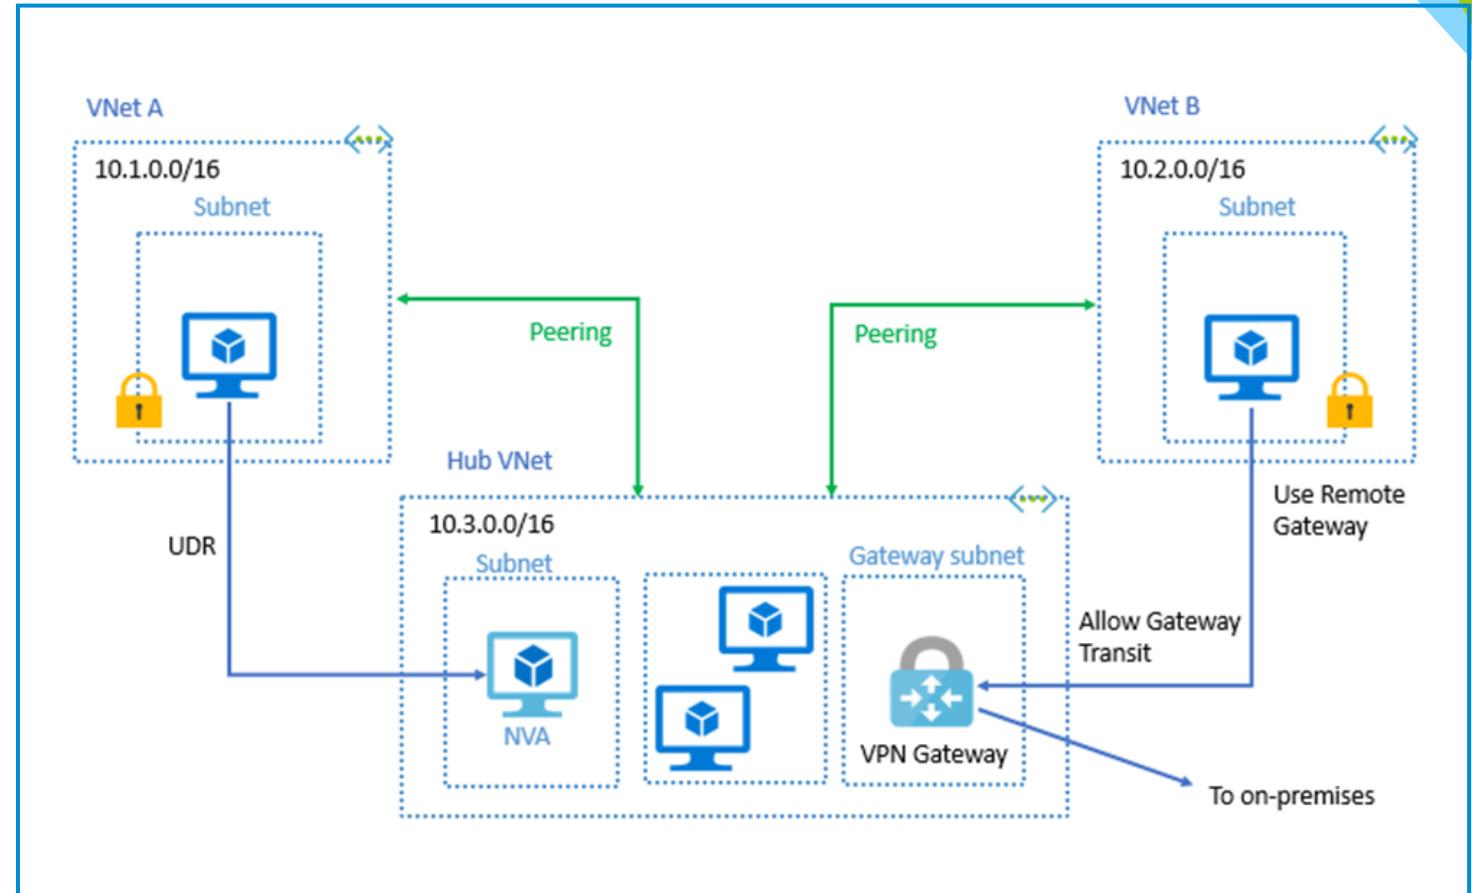

Create VNet Peering

Allow virtual network access settings

Configure forwarded traffic settings

This virtual network

Peering link name *

Traffic to remote virtual network ⓘ

Allow (default)

Block all traffic to the remote virtual network

Traffic forwarded from remote virtual network ⓘ

Allow (default)

Block traffic that originates from outside this virtual network

Virtual network gateway ⓘ

Use this virtual network's gateway

Use the remote virtual network's gateway

None (default)

Remote virtual network


Peering link name *

Determine Service Chaining Uses

Leverage user-defined routes and service chaining to implement custom routing

Implement a VNet hub with a network virtual appliance or a VPN gateway

Service chaining enables you to direct traffic from one virtual network to a virtual appliance, or virtual network gateway, in a peered virtual network, through user-defined routes


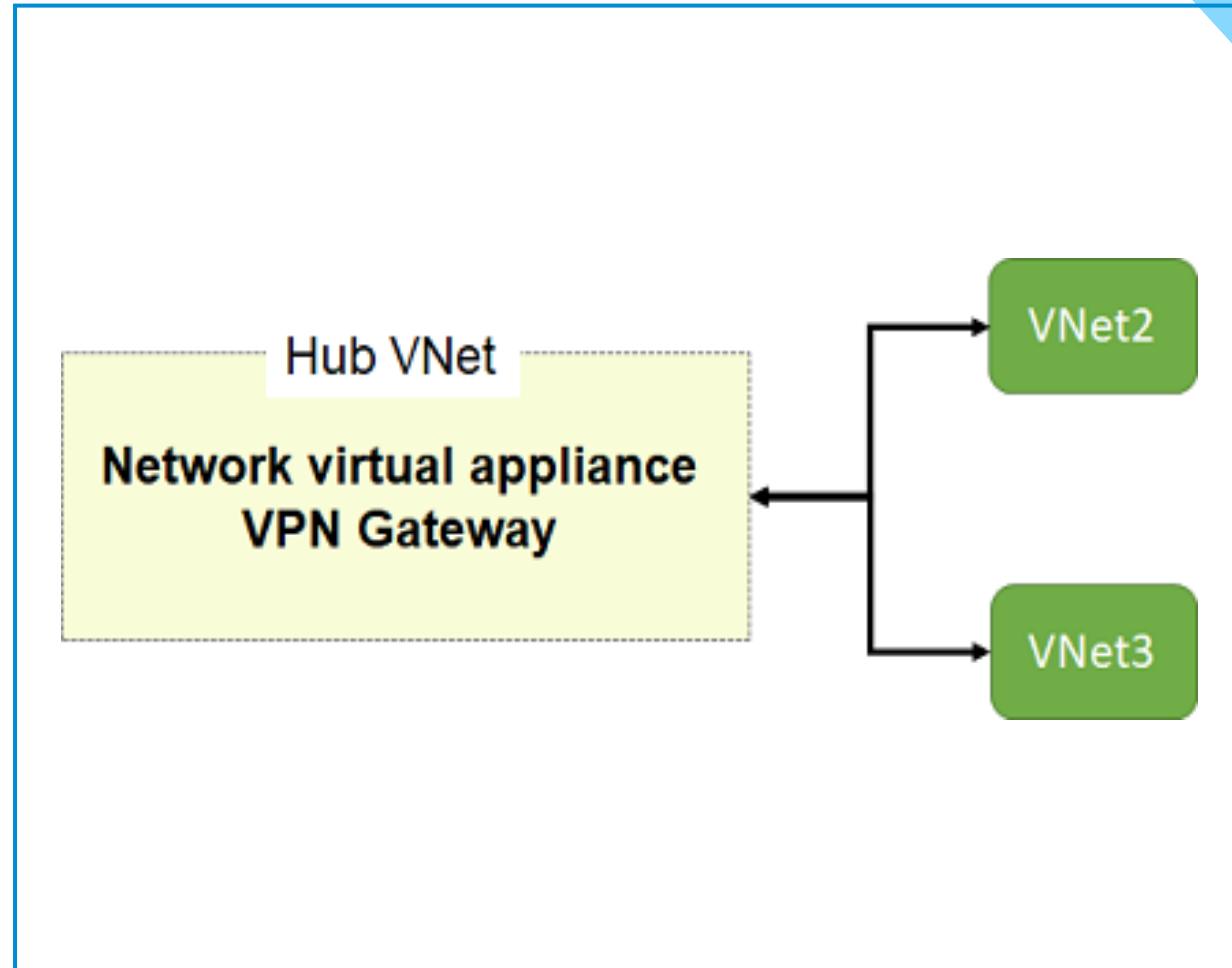


Lesson 8: Configure Network Routing






Configure Network Routing and Endpoints Introduction

-  Review System Routes
-  Identify User-Defined Routes
-  Examine a Routing Example
-  Determine Service Endpoint Uses
-  Determine Service Endpoint Services
-  Identify Private Link Uses

Review System Routes

System routes direct network traffic between virtual machines, on-premises networks, and the Internet:

- Traffic between VMs in the same subnet
- Between VMs in different subnets in the same virtual network
- Data flow from VMs to the Internet
- Communication between VMs using a VNet-to-VNet VPN
- Site-to-Site and ExpressRoute communication through the VPN gateway

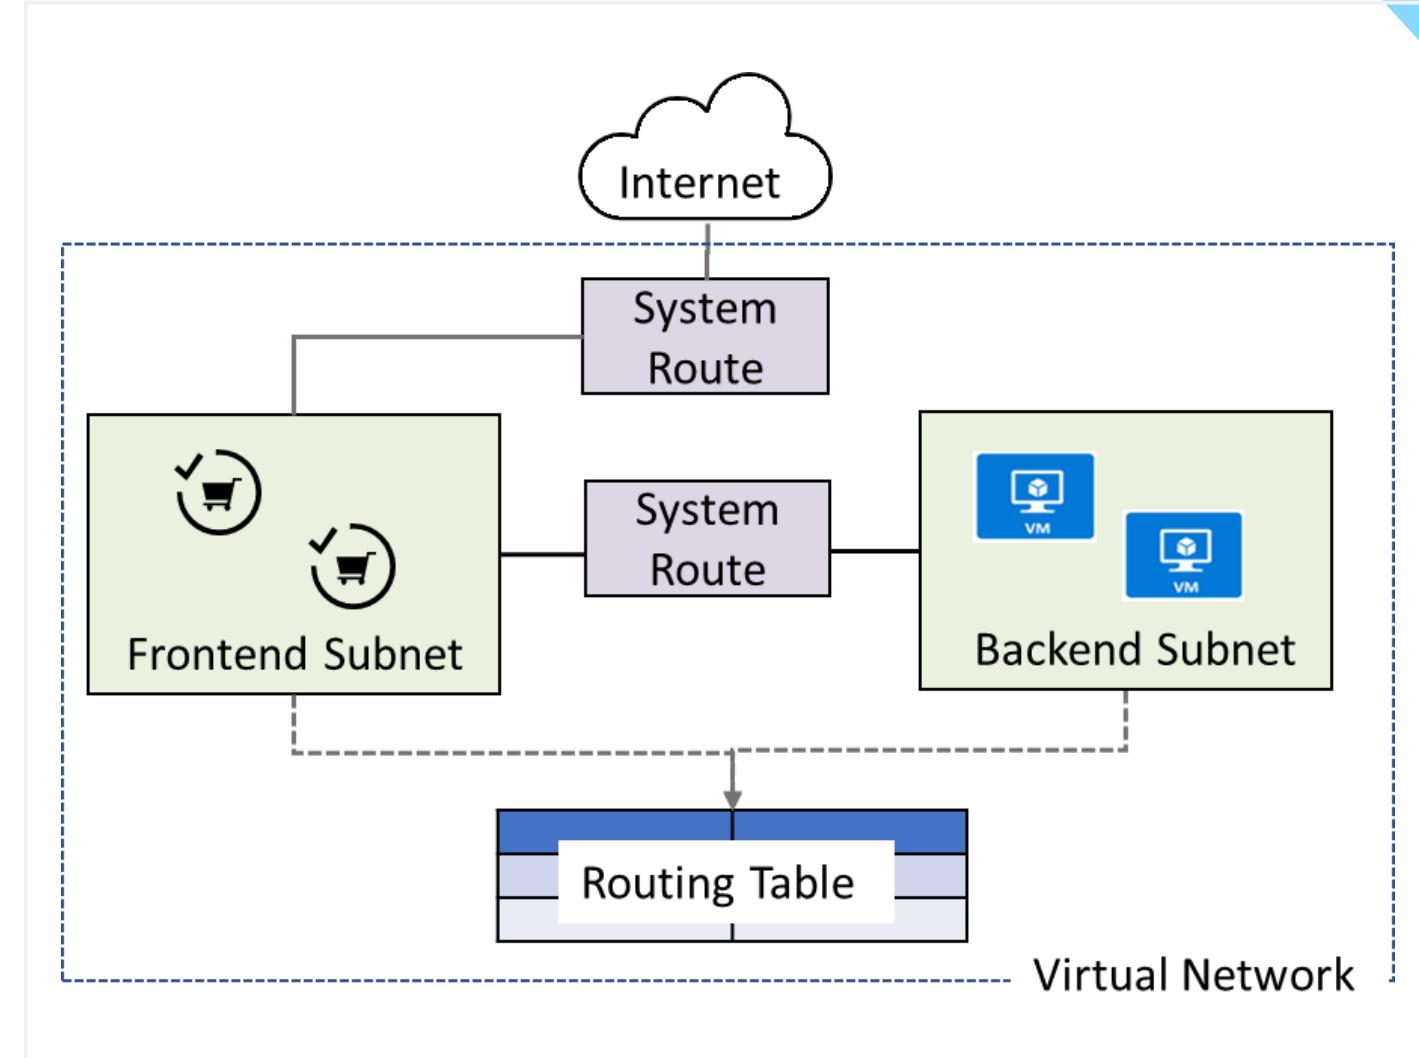


Identify User-Defined Routes

A route table contains a set of rules, called routes, that specifies how packets should be routed in a virtual network


User-defined routes are custom routes that control network traffic by defining routes that specify the next hop of the traffic flow

The next hop can be a virtual network gateway, virtual network, internet, or virtual appliance

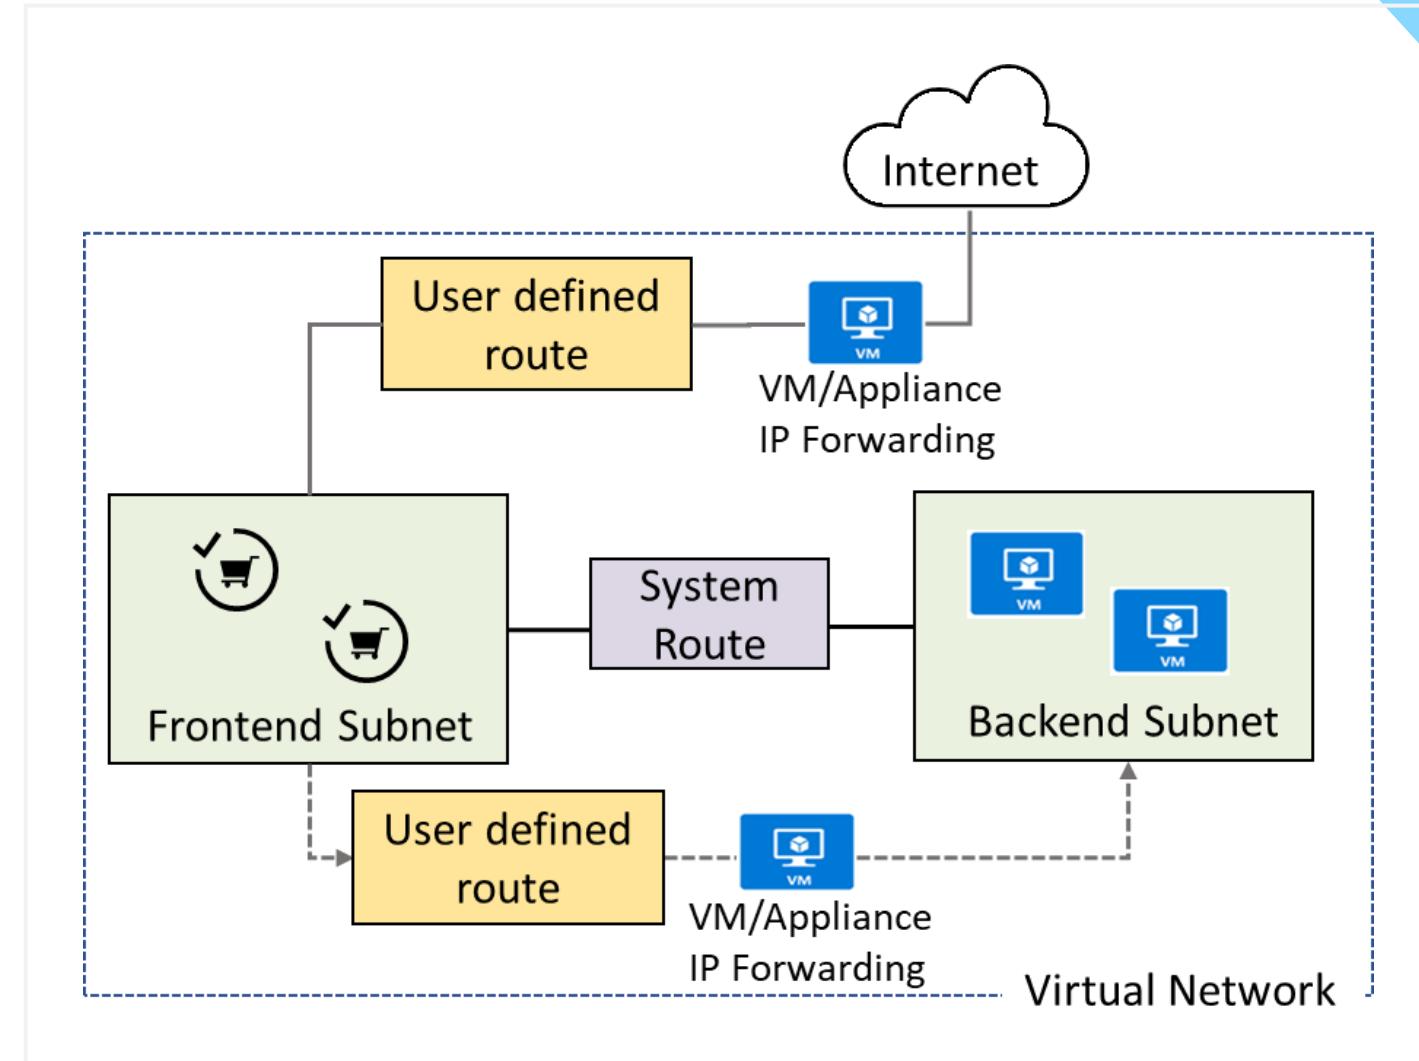

Examine a Routing Example

All traffic coming into the public subnet and headed for the private subnet must go through the virtual network appliance

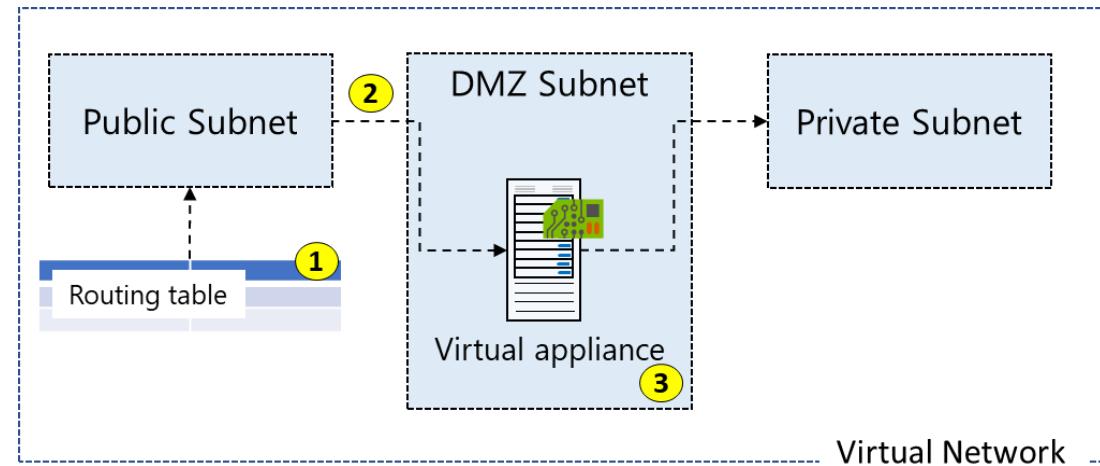

Create route table

You can add routes to this table after it's created.

* Name
myRouteTablePublic 

* Subscription
Visual Studio Enterprise 

* Resource group
myRGWest 
[Create new](#)

* Location
(US) West US 

Virtual network gateway route propagation
 Disabled Enabled

Create [Automation options](#)

Add route

myRouteTablePublic 2

Route name *

ToPrivateSubnet ✓

Address prefix * ⓘ

10.0.1.0/24 ✓

Next hop type ⓘ

Virtual network gateway ^

Virtual network gateway

Virtual network

Internet

Virtual appliance

None

Add subnet

VNet1

Name *

Address range (CIDR block) * ⓘ

10.0.1.0 - 10.0.1.255 (251 + 5 Azure reserved addresses)

NAT gateway ⓘ

Add IPv6 address space

Network security group



Route table

Lesson 9: Configure Azure Load Balancer






Configure Azure Load Balancer Introduction

-  Determine Azure Load Balancer Uses
-  Implement a Public Load Balancer
-  Implement an Internal Load Balancer
-  Determine Load Balancer SKUs
-  Create Backend Pools
-  Create Load Balancer Rules
-  Configure Session Persistence
-  Create Health Probes
-  Summary and Resources

Determine Azure Load Balancer Uses

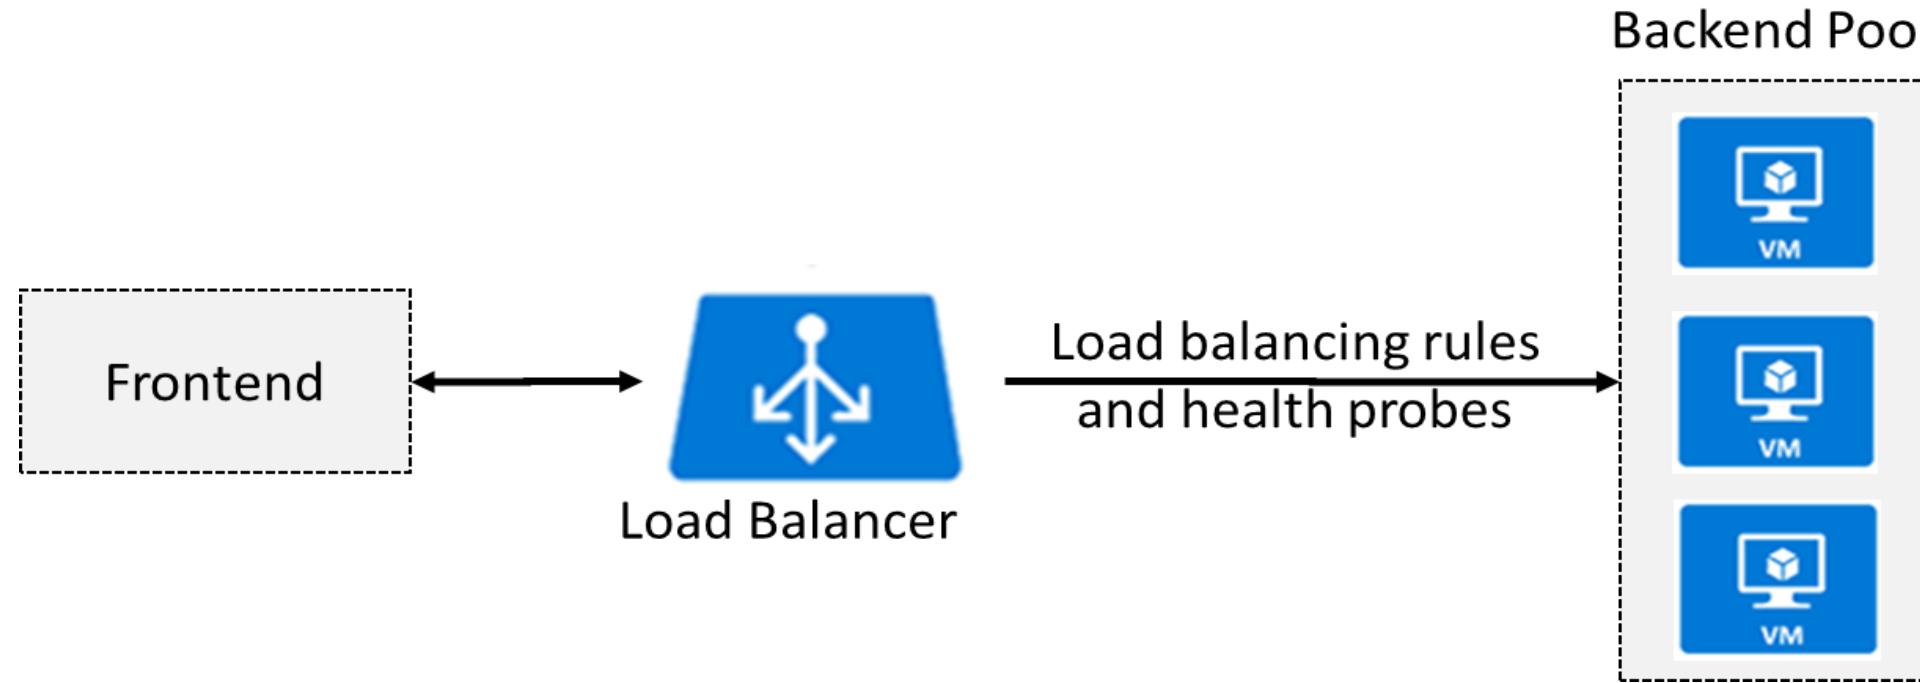


Distributes inbound traffic to backend resources using load-balancing rules and health probes

Can be used for both inbound/outbound scenarios

Two types: Public and Internal

Implement a Public Load Balancer

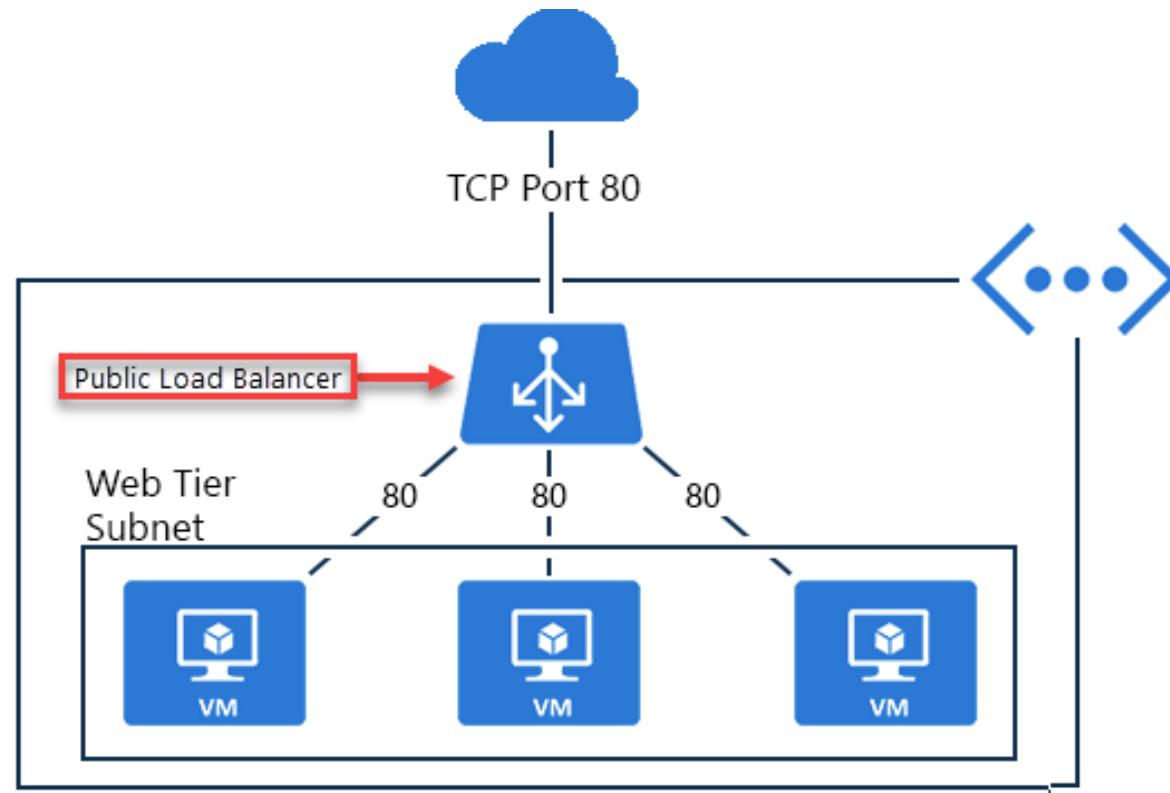

Maps public IP addresses and port number of incoming traffic to the VM's private IP address and port number, and vice versa


Apply load balancing rules to distribute traffic across VMs or services

Implement an Internal Load Balancer

Directs traffic only to resources inside a virtual network or that use a VPN to access Azure infrastructure

Frontend IP addresses and virtual networks are never directly exposed to an internet endpoint

Enables load balancing within a virtual network, for cross-premises virtual networks, for multi-tier applications, and for line-of-business applications

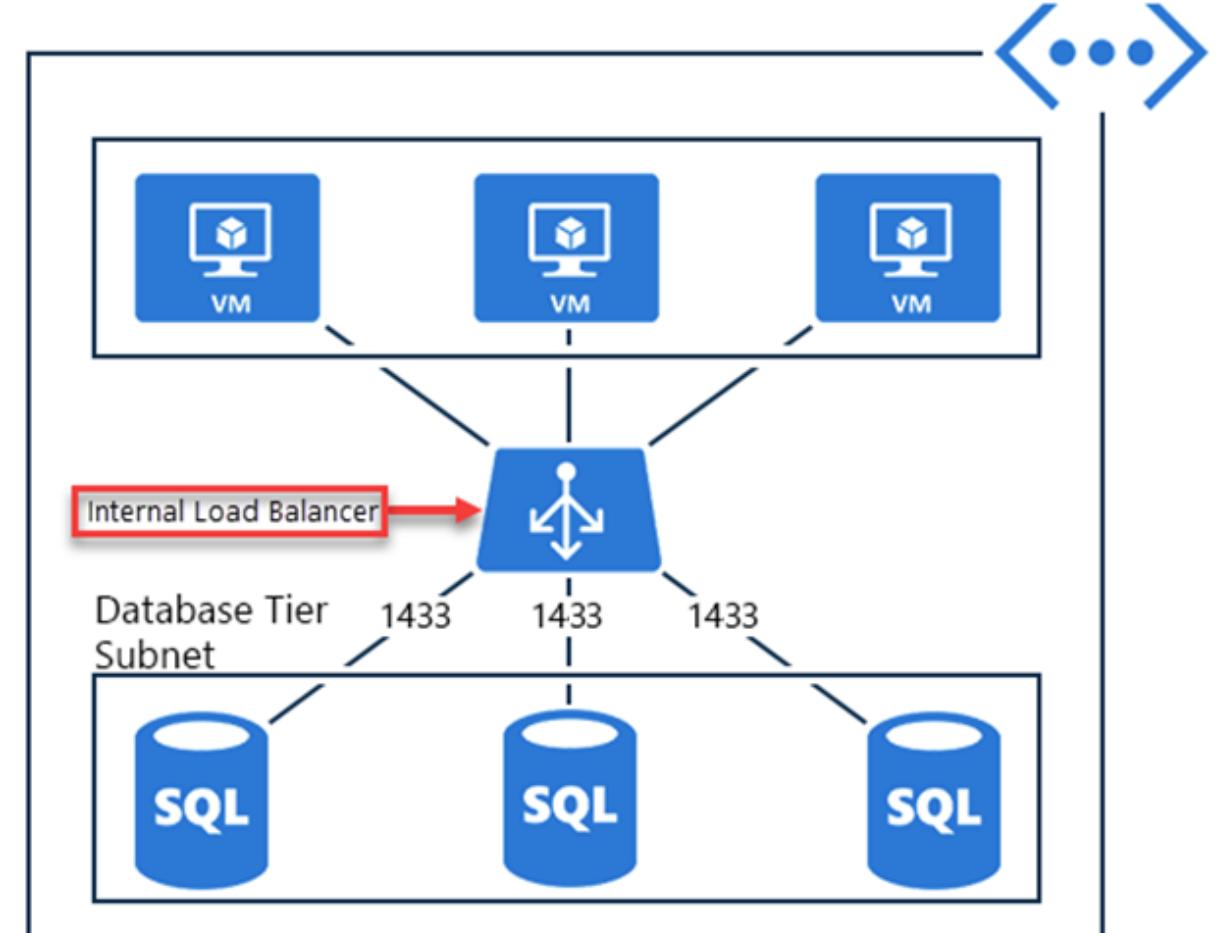

Determine Load Balancer SKUs

Feature	Basic SKU	Standard SKU
Backend pool	Up to 300 instances	Up to 1000 instances
Health probes	TCP, HTTP	TCP, HTTP, HTTPS
Availability zones	Not available	Zone-redundant and zonal frontends for inbound and outbound traffic
Multiple frontends	Inbound only	Inbound and outbound
Secure by default	Open by default. NSG optional.	Closed to inbound flows unless allowed by a NSG. Internal traffic from the virtual network to the internal load balancer is allowed.
SLA	Not available	99.99%

Instance details

Name *
lb01

Region *
(US) East US

Type *
 Internal Public

SKU *
 Basic Standard

Configure virtual network.

Virtual network *
vnet01

Subnet *
subnet01 (10.1.0.0/24)

[Manage subnet configuration](#)

IP address assignment *
 Static Dynamic

Create Backend Pools


SETTINGS

* Name: cesbackendpool

Associated to:

- Unassociated
- Unassociated (selected)
- Availability set
- Single virtual machine
- Virtual machine scale set

Backend pools (highlighted)

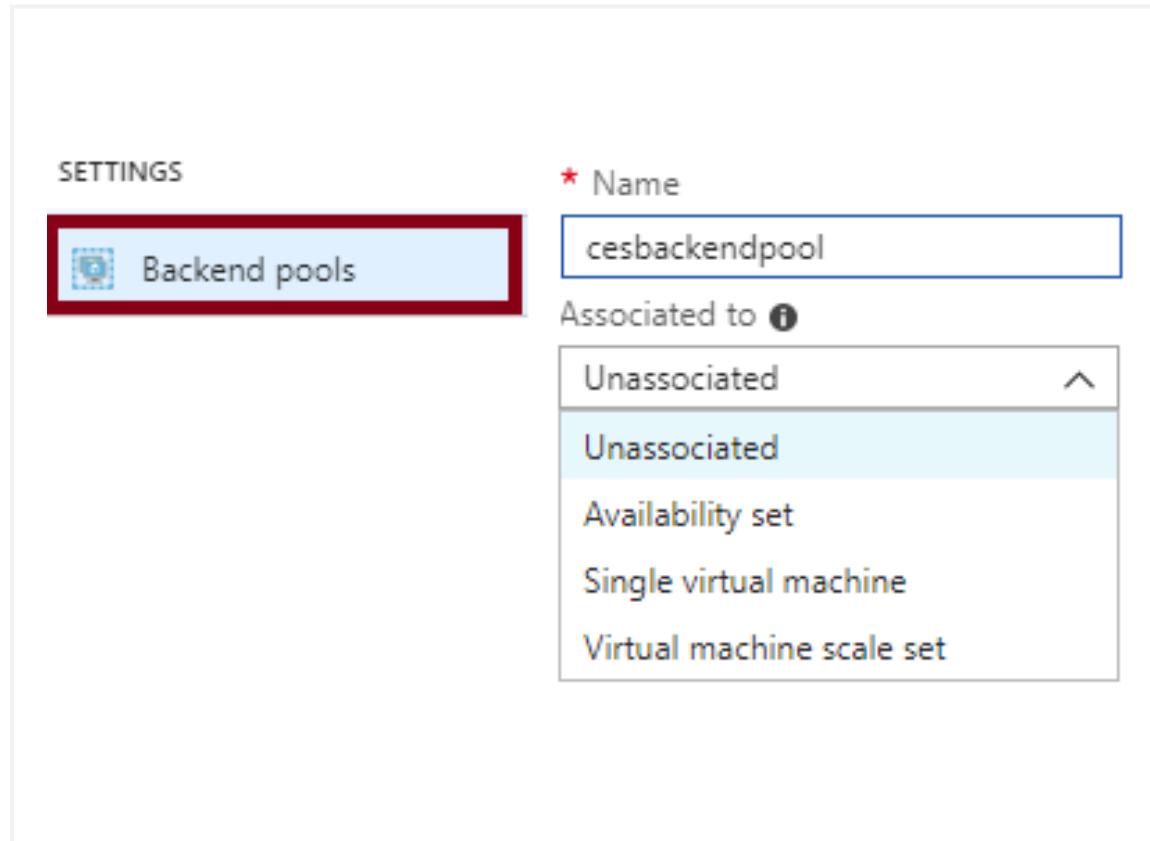

SKU	Backend pool endpoints
Basic SKU	VMs in a single availability set or VM scale set
Standard SKU	Any VM in a single virtual network, including a blend of VMs, availability sets, and VM scale sets


To distribute traffic, a back-end address pool contains the IP addresses of the virtual NICs that are connected to the load balancer

Create Load Balancer Rules

Maps a frontend IP and port combination to a set of backend pool and port combination

Rules can be combined with NAT rules

A NAT rule is explicitly attached to a VM (or network interface) to complete the path to the target

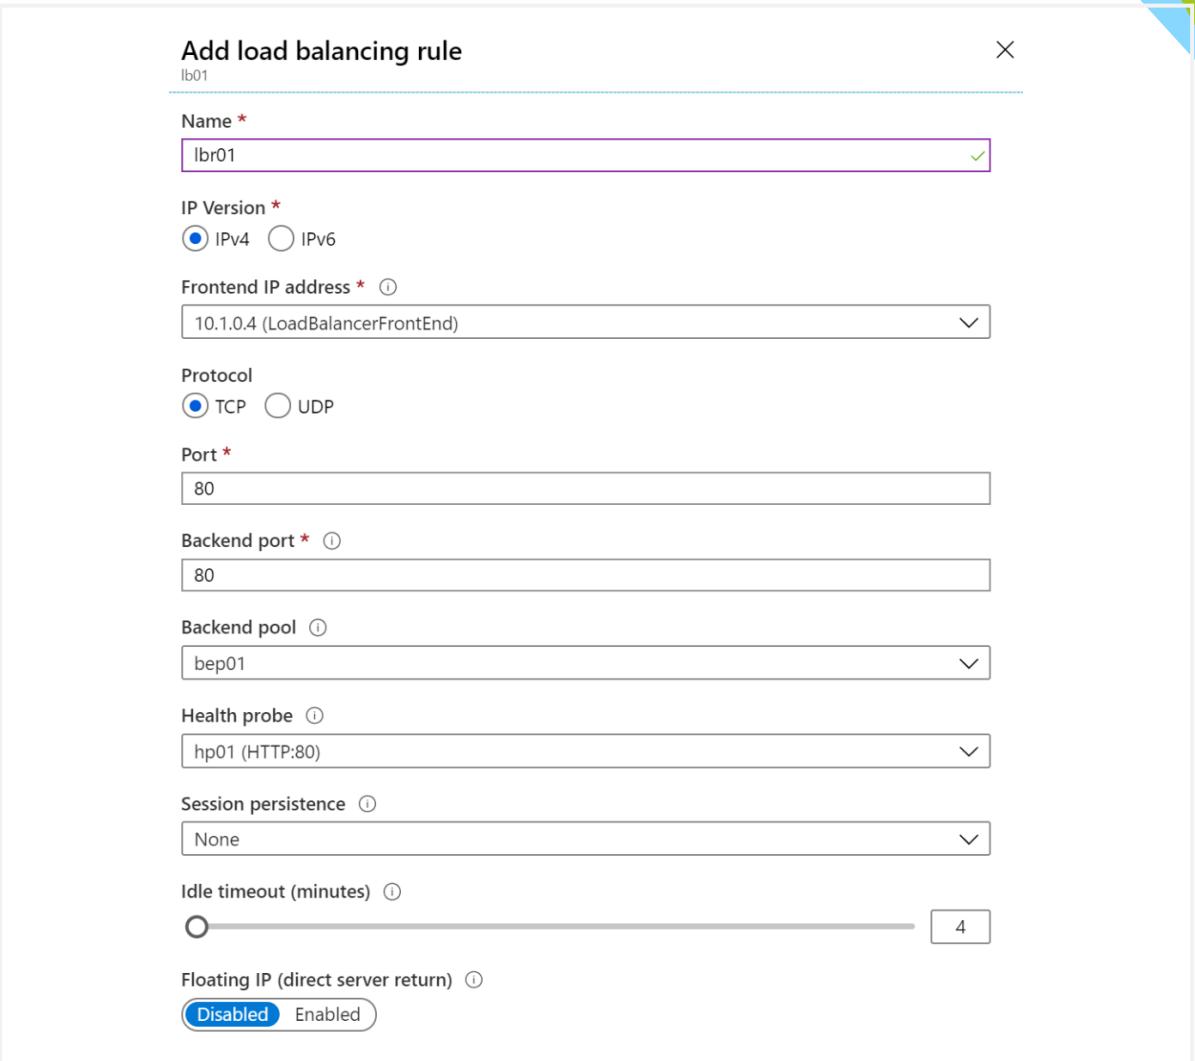

The screenshot shows a configuration dialog for creating a load balancing rule. The title bar says "Add load balancing rule" with a close button "X". Below it, there's a sub-label "lb01". The form fields are as follows:

- Name ***: lbr01
- IP Version ***: IPv4 (radio button selected)
- Frontend IP address ***: 10.1.0.4 (LoadBalancerFrontEnd)
- Protocol**: TCP (radio button selected)
- Port ***: 80
- Backend port ***: 80
- Backend pool**: bep01
- Health probe**: hp01 (HTTP:80)
- Session persistence**: None
- Idle timeout (minutes)**: A slider set to 4.
- Floating IP (direct server return)**: Disabled (radio button selected)

Configure Session Persistence

Session persistence ⓘ

None

None

Client IP


Client IP and protocol

Session persistence specifies how client traffic is handled

None (default) requests can be handled by any virtual machine

Client IP requests will be handled by the same virtual machine

Client IP and protocol specifies that successive requests from the same address and protocol will be handled by the same virtual machine

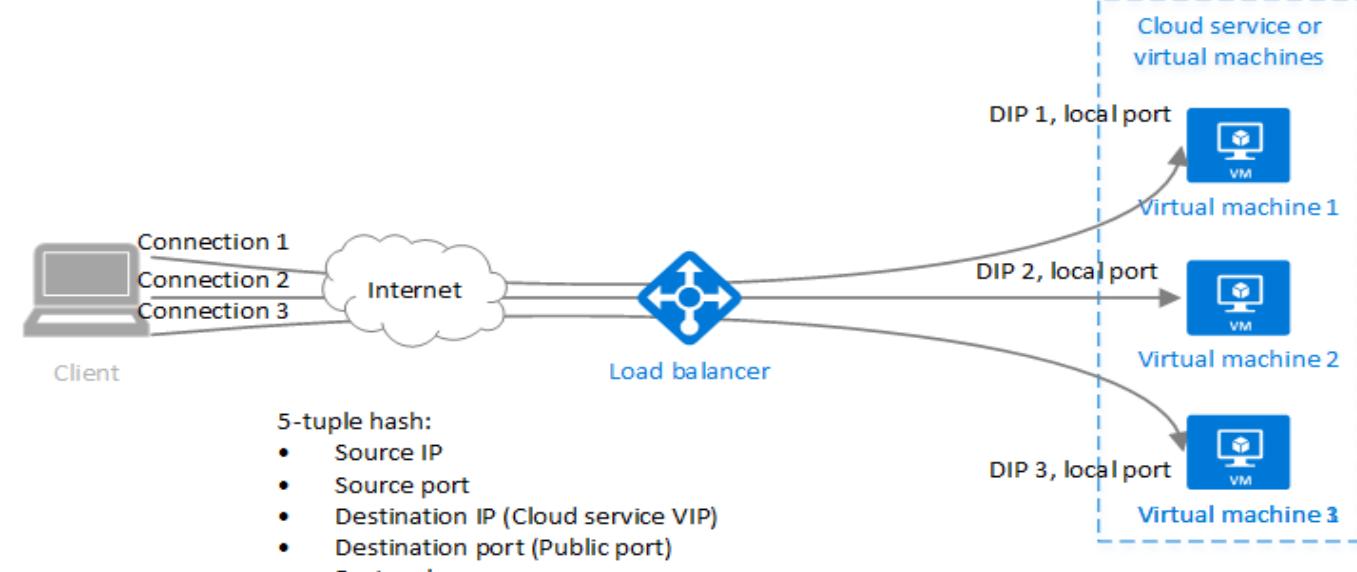

Create Health Probes

Allows the load balancer to monitor the status of an app

Dynamically adds or removes VMs from the load balancer rotation based on their response to health checks

HTTP custom probe (preferred) pings every 15 seconds

TCP custom probe tries to establish a successful TCP session



Add health probe
lb01

Name *

 ✓

Protocol ⓘ

HTTP

Port * ⓘ

80

Path * ⓘ

/

Interval * ⓘ

5

seconds

Unhealthy threshold * ⓘ

2

consecutive failures



The End