




a) Modified two-area plant: four controllable nodes (each = network bus + VSG proxy + storage plant)

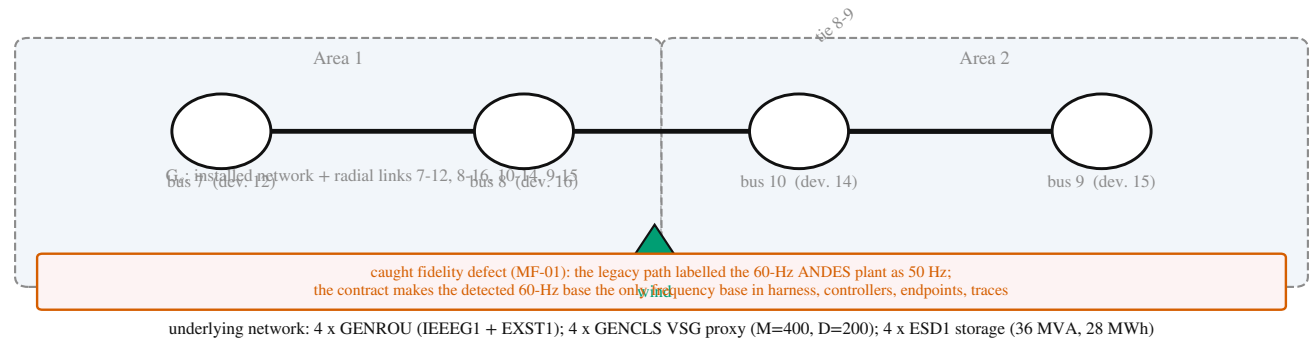

b) Three distinct graphs

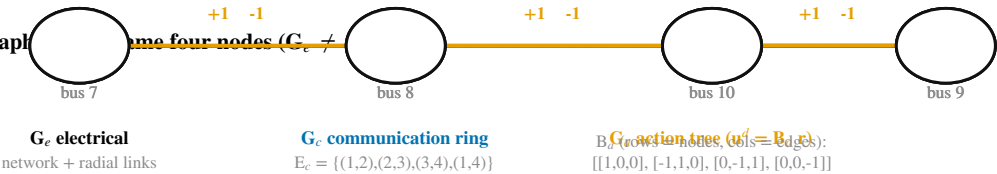

c) Three power layers: the controller sets requests only

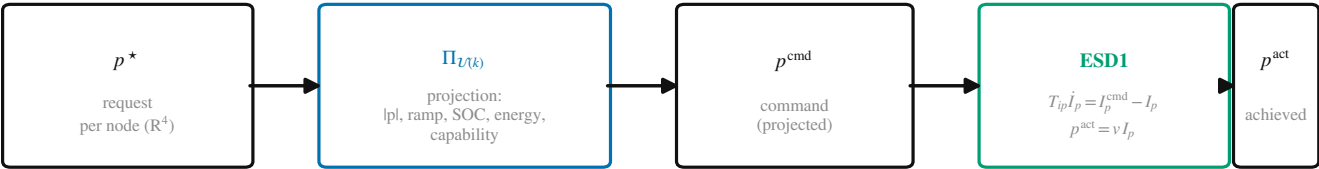

request $\neq$ command $\neq$ achieved: ESD1 realizes the projected command through the active-current lag;
edge governor caps $|r_e| \leq 0.05$ p.u. and $|\Delta r_e| \leq 0.05$ p.u./step before projection