

The Open Source CFD Toolbox

Programmer's Guide

Version 1.2 22nd August 2005 P-2

Copyright © 2000, 2001, 2002, 2003, 2004, 2005 OpenCFD Limited.

Permission is granted to copy, distribute and/or modify this document under the terms of the GNU Free Documentation License, Version 1.2 or any later version published by the Free Software Foundation; with no Invariant Sections, no Back-Cover Texts and one Front-Cover Text: "Available free from openfoam.org." A copy of the license is included in the section entitled "GNU Free Documentation License".

This document is distributed in the hope that it will be useful, but WITHOUT ANY WARRANTY; without even the implied warranty of MERCHANTABILITY or FITNESS FOR A PARTICULAR PURPOSE.

Typeset in LATEX.

P-4

Version 1.2, November 2002 Copyright ©2000,2001,2002 Free Software Foundation, Inc.

59 Temple Place, Suite 330, Boston, MA 02111-1307 USA

Everyone is permitted to copy and distribute verbatim copies of this license document, but changing it is not allowed.

#### Preamble

The purpose of this License is to make a manual, textbook, or other functional and useful document "free" in the sense of freedom: to assure everyone the effective freedom to copy and redistribute it, with or without modifying it, either commercially or noncommercially. Secondarily, this License preserves for the author and publisher a way to get credit for their work, while not being considered responsible for modifications made by others.

This License is a kind of "copyleft", which means that derivative works of the document must themselves be free in the same sense. It complements the GNU General Public License, which is a copyleft license designed for free software.

We have designed this License in order to use it for manuals for free software, because free software needs free documentation: a free program should come with manuals providing the same freedoms that the software does. But this License is not limited to software manuals; it can be used for any textual work, regardless of subject matter or whether it is published as a printed book. We recommend this License principally for works whose purpose is instruction or reference.

#### 1. APPLICABILITY AND DEFINITIONS

This License applies to any manual or other work, in any medium, that contains a notice placed by the copyright holder saying it can be distributed under the terms of this License. Such a notice grants a world-wide, royalty-free license, unlimited in duration, to use that work under the conditions stated herein. The "Document", below, refers to any such manual or work. Any member of the public is a licensee, and is addressed as "you". You accept the license if you copy, modify or distribute the work in a way requiring permission under copyright law.

A "Modified Version" of the Document means any work containing the Document or a portion of it, either copied verbatim, or with modifications and/or translated into another language.

A "Secondary Section" is a named appendix or a front-matter section of the Document that deals exclusively with the relationship of the publishers or authors of the Document to the Document's overall subject (or to related matters) and contains nothing that could fall directly within that overall subject. (Thus, if the Document is in part a textbook of mathematics, a Secondary Section may not explain any mathematics.) The relationship could be a matter of historical connection with the subject or with related matters, or of legal, commercial, philosophical, ethical or political position regarding them.

The "Invariant Sections" are certain Secondary Sections whose titles are designated, as being those of Invariant Sections, in the notice that says that the Document is released under this License. If a section does not fit the above definition of Secondary then it is not allowed to be designated as Invariant. The Document may contain zero Invariant Sections. If the Document does not identify any Invariant Sections then there are none.

The "Cover Texts" are certain short passages of text that are listed, as Front-Cover Texts or Back-Cover Texts, in the notice that says that the Document is released under this License. A Front-Cover Text may be at most 5 words, and a Back-Cover Text may be at most 25 words.

OpenVFOAM-1.2

A "Transparent" copy of the Document means a machine-readable copy, represented in a format whose specification is available to the general public, that is suitable for revising the document straightforwardly with generic text editors or (for images composed of pixels) generic paint programs or (for drawings) some widely available drawing editor, and that is suitable for input to text formatters or for automatic translation to a variety of formats suitable for input to text formatters. A copy made in an otherwise Transparent file format whose markup, or absence of markup, has been arranged to thwart or discourage subsequent modification by readers is not Transparent. An image format is not Transparent if used for any substantial amount of text. A copy that is not "Transparent" is called "Opaque".

Examples of suitable formats for Transparent copies include plain ASCII without markup, Texinfo input format, LaTeX input format, SGML or XML using a publicly available DTD, and standard-conforming simple HTML, PostScript or PDF designed for human modification. Examples of transparent image formats include PNG, XCF and JPG. Opaque formats include proprietary formats that can be read and edited only by proprietary word processors, SGML or XML for which the DTD and/or processing tools are not generally available, and the machine-generated HTML, PostScript or PDF produced by some word processors for output purposes only.

The "Title Page" means, for a printed book, the title page itself, plus such following pages as are needed to hold, legibly, the material this License requires to appear in the title page. For works in formats which do not have any title page as such, "Title Page" means the text near the most prominent appearance of the work's title, preceding the beginning of the body of the text.

A section "Entitled XYZ" means a named subunit of the Document whose title either is precisely XYZ or contains XYZ in parentheses following text that translates XYZ in another language. (Here XYZ stands for a specific section name mentioned below, such as "Acknowledgements", "Dedications", "Endorsements", or "History".) To "Preserve the Title" of such a section when you modify the Document means that it remains a section "Entitled XYZ" according to this definition.

The Document may include Warranty Disclaimers next to the notice which states that this License applies to the Document. These Warranty Disclaimers are considered to be included by reference in this License, but only as regards disclaiming warranties: any other implication that these Warranty Disclaimers may have is void and has no effect on the meaning of this License.

#### 2. VERBATIM COPYING

You may copy and distribute the Document in any medium, either commercially or noncommercially, provided that this License, the copyright notices, and the license notice saying this License applies to the Document are reproduced in all copies, and that you add no other conditions whatsoever to those of this License. You may not use technical measures to obstruct or control the reading or further copying of the copies you make or distribute. However, you may accept compensation in exchange for copies. If you distribute a large enough number of copies you must also follow the conditions in section 3.

You may also lend copies, under the same conditions stated above, and you may publicly display copies.

### 3. COPYING IN QUANTITY

If you publish printed copies (or copies in media that commonly have printed covers) of the Document, numbering more than 100, and the Document's license notice requires Cover Texts, you must enclose the copies in covers that carry, clearly and legibly, all these Cover Texts: Front-Cover Texts on the front cover, and Back-Cover Texts on the back cover. Both covers must also clearly and legibly identify you as the publisher of these copies. The front cover must present the full title with all words of the title equally prominent and visible. You may add other material on

P-5

the covers in addition. Copying with changes limited to the covers, as long as they preserve the title of the Document and satisfy these conditions, can be treated as verbatim copying in other respects.

If the required texts for either cover are too voluminous to fit legibly, you should put the first ones listed (as many as fit reasonably) on the actual cover, and continue the rest onto adjacent pages.

If you publish or distribute Opaque copies of the Document numbering more than 100, you must either include a machine-readable Transparent copy along with each Opaque copy, or state in or with each Opaque copy a computer-network location from which the general network-using public has access to download using public-standard network protocols a complete Transparent copy of the Document, free of added material. If you use the latter option, you must take reasonably prudent steps, when you begin distribution of Opaque copies in quantity, to ensure that this Transparent copy will remain thus accessible at the stated location until at least one year after the last time you distribute an Opaque copy (directly or through your agents or retailers) of that edition to the public.

It is requested, but not required, that you contact the authors of the Document well before redistributing any large number of copies, to give them a chance to provide you with an updated version of the Document.

#### 4. MODIFICATIONS

You may copy and distribute a Modified Version of the Document under the conditions of sections 2 and 3 above, provided that you release the Modified Version under precisely this License, with the Modified Version filling the role of the Document, thus licensing distribution and modification of the Modified Version to whoever possesses a copy of it. In addition, you must do these things in the Modified Version:

- A. Use in the Title Page (and on the covers, if any) a title distinct from that of the Document, and from those of previous versions (which should, if there were any, be listed in the History section of the Document). You may use the same title as a previous version if the original publisher of that version gives permission.
- B. List on the Title Page, as authors, one or more persons or entities responsible for authorship of the modifications in the Modified Version, together with at least five of the principal authors of the Document (all of its principal authors, if it has fewer than five), unless they release you from this requirement.
- C. State on the Title page the name of the publisher of the Modified Version, as the publisher.
- D. Preserve all the copyright notices of the Document.
- E. Add an appropriate copyright notice for your modifications adjacent to the other copyright notices.
- F. Include, immediately after the copyright notices, a license notice giving the public permission to use the Modified Version under the terms of this License, in the form shown in the Addendum below.
- G. Preserve in that license notice the full lists of Invariant Sections and required Cover Texts given in the Document's license notice.
- H. Include an unaltered copy of this License.

OpenVFOAM-1.2

- I. Preserve the section Entitled "History", Preserve its Title, and add to it an item stating at least the title, year, new authors, and publisher of the Modified Version as given on the Title Page. If there is no section Entitled "History" in the Document, create one stating the title, year, authors, and publisher of the Document as given on its Title Page, then add an item describing the Modified Version as stated in the previous sentence.
- J. Preserve the network location, if any, given in the Document for public access to a Transparent copy of the Document, and likewise the network locations given in the Document for previous versions it was based on. These may be placed in the "History" section. You may omit a network location for a work that was published at least four years before the Document itself, or if the original publisher of the version it refers to gives permission.
- K. For any section Entitled "Acknowledgements" or "Dedications", Preserve the Title of the section, and preserve in the section all the substance and tone of each of the contributor acknowledgements and/or dedications given therein.
- L. Preserve all the Invariant Sections of the Document, unaltered in their text and in their titles. Section numbers or the equivalent are not considered part of the section titles.
- M. Delete any section Entitled "Endorsements". Such a section may not be included in the Modified Version.
- N. Do not retitle any existing section to be Entitled "Endorsements" or to conflict in title with any Invariant Section.
- O. Preserve any Warranty Disclaimers.

If the Modified Version includes new front-matter sections or appendices that qualify as Secondary Sections and contain no material copied from the Document, you may at your option designate some or all of these sections as invariant. To do this, add their titles to the list of Invariant Sections in the Modified Version's license notice. These titles must be distinct from any other section titles.

You may add a section Entitled "Endorsements", provided it contains nothing but endorsements of your Modified Version by various parties—for example, statements of peer review or that the text has been approved by an organization as the authoritative definition of a standard.

You may add a passage of up to five words as a Front-Cover Text, and a passage of up to 25 words as a Back-Cover Text, to the end of the list of Cover Texts in the Modified Version. Only one passage of Front-Cover Text and one of Back-Cover Text may be added by (or through arrangements made by) any one entity. If the Document already includes a cover text for the same cover, previously added by you or by arrangement made by the same entity you are acting on behalf of, you may not add another; but you may replace the old one, on explicit permission from the previous publisher that added the old one.

The author(s) and publisher(s) of the Document do not by this License give permission to use their names for publicity for or to assert or imply endorsement of any Modified Version.

#### 5. COMBINING DOCUMENTS

OpenVFOAM-1.2

You may combine the Document with other documents released under this License, under the terms defined in section 4 above for modified versions, provided that you include in the combination all of the Invariant Sections of all of the original documents, unmodified, and list them all as Invariant Sections of your combined work in its license notice, and that you preserve all their Warranty Disclaimers.

The combined work need only contain one copy of this License, and multiple identical Invariant Sections may be replaced with a single copy. If there are multiple Invariant Sections with the same

name but different contents, make the title of each such section unique by adding at the end of it, in parentheses, the name of the original author or publisher of that section if known, or else a unique number. Make the same adjustment to the section titles in the list of Invariant Sections in the license notice of the combined work.

In the combination, you must combine any sections Entitled "History" in the various original documents, forming one section Entitled "History"; likewise combine any sections Entitled "Acknowledgements", and any sections Entitled "Dedications". You must delete all sections Entitled "Endorsements".

#### 6. COLLECTIONS OF DOCUMENTS

You may make a collection consisting of the Document and other documents released under this License, and replace the individual copies of this License in the various documents with a single copy that is included in the collection, provided that you follow the rules of this License for verbatim copying of each of the documents in all other respects.

You may extract a single document from such a collection, and distribute it individually under this License, provided you insert a copy of this License into the extracted document, and follow this License in all other respects regarding verbatim copying of that document.

#### 7. AGGREGATION WITH INDEPENDENT WORKS

A compilation of the Document or its derivatives with other separate and independent documents or works, in or on a volume of a storage or distribution medium, is called an "aggregate" if the copyright resulting from the compilation is not used to limit the legal rights of the compilation's users beyond what the individual works permit. When the Document is included in an aggregate, this License does not apply to the other works in the aggregate which are not themselves derivative works of the Document.

If the Cover Text requirement of section 3 is applicable to these copies of the Document, then if the Document is less than one half of the entire aggregate, the Document's Cover Texts may be placed on covers that bracket the Document within the aggregate, or the electronic equivalent of covers if the Document is in electronic form. Otherwise they must appear on printed covers that bracket the whole aggregate.

#### 8. TRANSLATION

Translation is considered a kind of modification, so you may distribute translations of the Document under the terms of section 4. Replacing Invariant Sections with translations requires special permission from their copyright holders, but you may include translations of some or all Invariant Sections in addition to the original versions of these Invariant Sections. You may include a translation of this License, and all the license notices in the Document, and any Warranty Disclaimers, provided that you also include the original English version of this License and the original versions of those notices and disclaimers. In case of a disagreement between the translation and the original version of this License or a notice or disclaimer, the original version will prevail.

If a section in the Document is Entitled "Acknowledgements", "Dedications", or "History", the requirement (section 4) to Preserve its Title (section 1) will typically require changing the actual title.

#### 9. TERMINATION

You may not copy, modify, sublicense, or distribute the Document except as expressly provided for under this License. Any other attempt to copy, modify, sublicense or distribute the Document is void, and will automatically terminate your rights under this License. However, parties who have

OpenVFOAM-1.2

P-8

OpenVFOAM-1.2

P-7

received copies, or rights, from you under this License will not have their licenses terminated so long as such parties remain in full compliance.

#### 10. FUTURE REVISIONS OF THIS LICENSE

The Free Software Foundation may publish new, revised versions of the GNU Free Documentation License from time to time. Such new versions will be similar in spirit to the present version, but may differ in detail to address new problems or concerns. See http://www.gnu.org/copyleft/.

Each version of the License is given a distinguishing version number. If the Document specifies that a particular numbered version of this License "or any later version" applies to it, you have the option of following the terms and conditions either of that specified version or of any later version that has been published (not as a draft) by the Free Software Foundation. If the Document does not specify a version number of this License, you may choose any version ever published (not as a draft) by the Free Software Foundation.

### Trademarks

ANSYS is a registered trademark of ANSYS Inc.

CFX is a registered trademark of AEA Technology Engineering Software Ltd.

 $\mathsf{CHEMKIN}$  is a registered trademark of Sandia National Laboratories

CORBA is a registered trademark of Object Management Group Inc.

openDX is a registered trademark of International Business Machines Corporation

EnSight is a registered trademark of Computational Engineering International Ltd.

AVS/Express is a registered trademark of Advanced Visual Systems Inc.

Fluent is a registered trademark of Fluent Inc.

GAMBIT is a registered trademark of Fluent Inc.

Fieldview is a registered trademark of Intelligent Light

Icem-CFD is a registered trademark of ICEM Technologies GmbH

I-DEAS is a registered trademark of Structural Dynamics Research Corporation

JAVA is a registered trademark of Sun Microsystems Inc.

Linux is a registered trademark of Linus Torvalds

MICO is a registered trademark of MICO Inc.

ParaView is a registered trademark of Kitware

STAR-CD is a registered trademark of Computational Dynamics Ltd.

UNIX is a registered trademark of The Open Group

# Contents

Copyright Notice P				
G	NU I	Free Do	ocumentation Licence	P-3
	1. A	PPLIC	ABILITY AND DEFINITIONS	P-3
			TIM COPYING	P-4
			G IN QUANTITY	P-4
	4. N	ODIFI	CATIONS	P-5
			NING DOCUMENTS	P-6
			TIONS OF DOCUMENTS	P-7
	7. A	GGRE	GATION WITH INDEPENDENT WORKS	P-7
	8. T	RANSL	ATION	P-7
			IATION	P-7
			E REVISIONS OF THIS LICENSE	P-8
Ti	rader	narks		P-9
C	onter	nts		P-11
1	Ten	sor ma	thematics	P-15
	1.1	Coordi	nate system	P-15
	1.2	Tensor	S	P-15
		1.2.1	Tensor notation	P-17
	1.3	Algebr	aic tensor operations	P-18
		1.3.1	The inner product	P-18
		1.3.2	The double inner product of two tensors	P-19
		1.3.3	The triple inner product of two third rank tensors	P-19
		1.3.4	The outer product	P-19
		1.3.5	The cross product of two vectors	P-20
		1.3.6	Other general tensor operations	P-20
		1.3.7	Geometric transformation and the identity tensor	P-21
		1.3.8	Useful tensor identities	P-21
		1.3.9	Operations exclusive to tensors of rank 2	P-22
		1.3.10	Operations exclusive to scalars	P-23
	1.4	OpenF	OAM tensor classes	P-23
		1.4.1	Algebraic tensor operations in OpenFOAM	P-24
	1.5	Dimen	sional units	P-26

P-27 2 Discretisation procedures P-27 P-27 P-28 P-28 Laplacian P-28 P-28 P-29 P-29 P-30 P-31 P-32 P-33 P-38 P-38 First time derivative P-39 P-39 P-39 P-40 P-41 P-41 P-41 P-41 P-42 2.5.1 Treatment of temporal discretisation in OpenFOAM P-43 P-43 P-44 P-45 3 Examples of the use of OpenFOAM P-45 P-46 P-47 P-47 P-49 P-49 P-52 Exercise P-54

Case control

Exercise

Contents

P-54

P-54 P-55

P-58

P-59

P-59

P-59

P-60

P-62

P-63

P-63

OpenVFOAM-1.2

P-12

Content	S		P-13
3.4	Decon	npression of a tank internally pressurised with water	P-63
	3.4.1	Problem specification	P-64
	3.4.2	Mesh Generation	P-65
	3.4.3	Preparing the Run	P-67
	3.4.4	Running the case	P-68
	3.4.5	Improving the solution by refining the mesh	P-69
3.5	Magne	etohydrodynamic flow of a liquid	P-69
	3.5.1	Problem specification	P-69
	3.5.2	Mesh generation	P-71
	3.5.3	Running the case	P-72
Index			P-75

P-14 Contents

# Chapter 1

## Tensor mathematics

This Chapter describes tensors and their algebraic operations and how they are represented in mathematical text in this book. It then explains how tensors and tensor algebra are programmed in OpenFOAM.

### 1.1 Coordinate system

OpenFOAM is primarily designed to solve problems in continuum mechanics, *i.e.* the branch of mechanics concerned with the stresses in solids, liquids and gases and the deformation or flow of these materials. OpenFOAM is therefore based in 3 dimensional space and time and deals with physical entities described by tensors. The coordinate system used by OpenFOAM is the right-handed rectangular Cartesian axes as shown in Figure 1.1. This system of axes is constructed by defining an origin O from which three lines are drawn at right angles to each other, termed the Ox, Oy, Oz axes. A right-handed set of axes is defined such that to an observer looking down the Oz axis (with O nearest them), the arc from a point on the Ox axis to a point on the Oy axis is in a clockwise sense.




Figure 1.1: Right handed axes

### 1.2 Tensors

The term tensor describes an entity that belongs to a particular space and obeys certain mathematical rules. Briefly, tensors are represented by a set of *component values* relating

P-16 Tensor mathematics

to a set of unit base vectors; in OpenFOAM the unit base vectors  $\mathbf{i}_x$ ,  $\mathbf{i}_y$  and  $\mathbf{i}_z$  are aligned with the right-handed rectangular Cartesian axes x,y and z respectively. The base vectors are therefore orthogonal, *i.e.* at right-angles to one another. Every tensor has the following attributes:

**Dimension** d of the particular space to which they belong, i.e. d = 3 in OpenFOAM;

**Rank** An integer r > 0, such that the number of component values  $= d^r$ .

While OpenFOAM 1.x is set to 3 dimensions, it offers tensors of ranks 0 to 3 as standard while being written in such a way to allow this basic set of ranks to be extended indefinitely. Tensors of rank 0 and 1, better known as scalars and vectors, should be familiar to readers; tensors of rank 2 and 3 may not be so familiar. For completeness all ranks of tensor offered as standard in OpenFOAM 1.x are reviewed below.

**Rank 0 'scalar'** Any property which can be represented by a single real number, denoted by characters in italics, e.q. mass m, volume V, pressure p and viscosity  $\mu$ .

**Rank 1 'vector'** An entity which can be represented physically by both magnitude and direction. In component form, the vector  $\mathbf{a} = (a_1, a_2, a_3)$  relates to a set of Cartesian axes x, y, z respectively. The *index notation* presents the same vector as  $a_i$ , i = 1, 2, 3, although the list of indices i = 1, 2, 3 will be omitted in this book, as it is intuitive since we are always dealing with 3 dimensions.

Rank 2 'tensor' or second rank tensor, T has 9 components which can be expressed in array notation as:

$$\mathbf{T} = T_{ij} = \begin{pmatrix} T_{11} & T_{12} & T_{13} \\ T_{21} & T_{22} & T_{23} \\ T_{31} & T_{32} & T_{33} \end{pmatrix}$$
(1.1)

The components  $T_{ij}$  are now represented using 2 indices since r=2 and the list of indices i, j=1,2,3 is omitted as before. The components for which i=j are referred to as the diagonal components, and those for which  $i\neq j$  are referred to as the off-diagonal components. The transpose of **T** is produced by exchanging components across the diagonal such that

$$\mathbf{T}^{\mathrm{T}} = T_{ji} = \begin{pmatrix} T_{11} & T_{21} & T_{31} \\ T_{12} & T_{22} & T_{32} \\ T_{13} & T_{23} & T_{33} \end{pmatrix}$$
(1.2)

Note: a rank 2 tensor is often colloquially termed 'tensor' since the occurrence of higher order tensors is fairly rare.

Symmetric rank 2 The term 'symmetric' refers to components being symmetric about the diagonal, i.e.  $T_{ij} = T_{ji}$ . In this case, there are only 6 independent components since  $T_{12} = T_{21}$ ,  $T_{13} = T_{31}$  and  $T_{23} = T_{32}$ . OpenFOAM distinguishes between symmetric and non-symmetric tensors to save memory by storing 6 components rather than 9 if the tensor is symmetric. Most tensors encountered in continuum mechanics are symmetric.

1.2 Tensors P-17

**Rank 3** has 27 components and is represented in index notation as  $P_{ijk}$  which is too long to represent in array notation as in Equation 1.1.

Symmetric rank 3 Symmetry of a rank 3 tensor is defined in OpenFOAM to mean that  $P_{ijk} = P_{ikj} = P_{jik} = P_{jki} = P_{kij} = P_{kij} = P_{kji}$  and therefore has 10 independent components. More specifically, it is formed by the outer product of 3 identical vectors, where the outer product operation is described in Section 1.3.4.

#### 1.2.1 Tensor notation

This is a book on computational continuum mechanics that deals with problems involving complex PDEs in 3 spatial dimensions and in time. It is vital from the beginning to adopt a notation for the equations which is compact yet unambiguous. To make the equations easy to follow, we must use a notation that encapsulates the idea of a tensor as an entity in the own right, rather than a list of scalar components. Additionally, any tensor operation should be perceived as an operation on the entire tensor entity rather than a series of operations on its components.

Consequently, in this book the *tensor notation* is preferred in which any tensor of rank 1 and above, *i.e.* all tensors other than scalars, are represented by letters in bold face, *e.g.* a. This actively promotes the concept of a tensor as a entity in its own right since it is denoted by a single symbol, and it is also extremely compact. The potential drawback is that the rank of a bold face symbol is not immediately apparent, although it is clearly not zero. However, in practice this presents no real problem since we are aware of the property each symbol represents and therefore intuitively know its rank, *e.g.* we know velocity  $\mathbf{U}$  is a tensor of rank 1.

A further, more fundamental idea regarding the choice of notation is that the mathematical representation of a tensor should not change depending on our coordinate system, *i.e.* the vector ais the same vector irrespective of where we view it from. The tensor notation supports this concept as it implies nothing about the coordinate system. However, other notations, *e.g. a<sub>i</sub>*, expose the individual components of the tensor which naturally implies the choice of coordinate system. The unsatisfactory consequence of this is that the tensor is then represented by a set of values which are not unique — they depend on the coordinate system.

That said, the index notation, introduced in Section 1.2, is adopted from time to time in this book mainly to expand tensor operations into the constituent components. When using the index notation, we adopt the *summation convention* which states that whenever the same letter subscript occurs twice in a term, the that subscript is to be given all values, *i.e.* 1, 2, 3, and the results added together, *e.q.* 

$$a_i b_i = \sum_{i=1}^3 a_i b_i = a_1 b_1 + a_2 b_2 + a_3 b_3 \tag{1.3}$$

In the remainder of the book the symbol  $\sum$  is omitted since the repeated subscript indicates the summation.

Open√FOAM-1.2

P-18 Tensor mathematics

### 1.3 Algebraic tensor operations

This section describes all the algebraic operations for tensors that are available in Open-FOAM. Let us first review the most simple tensor operations: addition, subtraction, and scalar multiplication and division. Addition and subtraction are both commutative and associative and are only valid between tensors of the same rank. The operations are performed by addition/subtraction of respective components of the tensors, *e.g.* the subtraction of two vectors **a** and **b** is

$$\mathbf{a} - \mathbf{b} = a_i - b_i = (a_1 - b_1, a_2 - b_2, a_3 - b_3) \tag{1.4}$$

Multiplication of any tensor  $\mathbf{a}$  by a scalar s is also commutative and associative and is performed by multiplying all the tensor components by the scalar. For example,

$$s\mathbf{a} = sa_i = (sa_1, sa_2, sa_3)$$
 (1.5)

Division between a tensor  $\mathbf{a}$  and a scalar is only relevant when the scalar is the second argument of the operation, *i.e.* 

$$\mathbf{a}/s = a_i/s = (a_1/s, a_2/s, a_3/s) \tag{1.6}$$

Following these operations are a set of more complex products between tensors of rank 1 and above, described in the following Sections.

### 1.3.1 The inner product

The inner product operates on any two tensors of rank  $r_1$  and  $r_2$  such that the rank of the result  $r = r_1 + r_2 - 2$ . Inner product operations with tensors up to rank 3 are described below:

• The inner product of two vectors  $\mathbf{a}$  and  $\mathbf{b}$  is commutative and produces a scalar  $\mathbf{s} = \mathbf{a} \cdot \mathbf{b}$  where

$$s = a_i b_i = a_1 b_1 + a_2 b_2 + a_3 b_3 \tag{1.7}$$

ullet The inner product of a tensor T and vector a produces a vector  $b = T \cdot a$ , represented below as a column array for convenience

$$b_i = T_{ij}a_j = \begin{pmatrix} T_{11}a_1 + T_{12}a_2 + T_{13}a_3 \\ T_{21}a_1 + T_{22}a_2 + T_{23}a_3 \\ T_{31}a_1 + T_{32}a_2 + T_{33}a_3 \end{pmatrix}$$

$$(1.8)$$

It is non-commutative if **T** is non-symmetric such that  $\mathbf{b} = \mathbf{a} \cdot \mathbf{T} = \mathbf{T}^{\mathrm{T}} \cdot \mathbf{a}$  is

$$b_i = a_j T_{ji} = \begin{pmatrix} a_1 T_{11} + a_2 T_{21} + a_3 T_{31} \\ a_1 T_{12} + a_2 T_{22} + a_3 T_{32} \\ a_1 T_{13} + a_2 T_{23} + a_3 T_{33} \end{pmatrix}$$

$$(1.9)$$

• The inner product of two tensors T and S produces a tensor  $P = T \cdot S$  whose components are evaluated as:

$$P_{ij} = T_{ik} S_{kj} \tag{1.10}$$

It is non-commutative such that  $\mathbf{T} \cdot \mathbf{S} = (\mathbf{S}^{\mathrm{T}} \cdot \mathbf{T}^{\mathrm{T}})^{\mathrm{T}}$ 

1.3 Algebraic tensor operations P-19

• The inner product of a vector  $\mathbf{a}$  and third rank tensor  $\mathbf{P}$  produces a second rank tensor  $\mathbf{T} = \mathbf{a} \cdot \mathbf{P}$  whose components are

$$T_{ij} = a_k P_{kij} \tag{1.11}$$

Again this is non-commutative so that  $T = P \cdot a$  is

$$T_{ij} = P_{ijk} a_k \tag{1.12}$$

• The inner product of a second rank tensor T and third rank tensor P produces a third rank tensor  $Q = T \cdot P$  whose components are

$$Q_{ijk} = T_{il}P_{ljk} \tag{1.13}$$

Again this is non-commutative so that  $\mathbf{Q} = \mathbf{P} \cdot \mathbf{T}$  is

$$Q_{ijk} = P_{ijl}T_{lk} \tag{1.14}$$

### 1.3.2 The double inner product of two tensors

The double inner product of two second-rank tensors T and S produces a scalar s = T : S which can be evaluated as the sum of the 9 products of the tensor components

$$s = T_{ij}S_{ij} = T_{11}S_{11} + T_{12}S_{12} + T_{13}S_{13} + T_{21}S_{21} + T_{22}S_{22} + T_{23}S_{23} + T_{31}S_{31} + T_{32}S_{32} + T_{33}S_{33}$$

$$(1.15)$$

The double inner product between a second rank tensor T and third rank tensor P produces a vector a = T : P with components

$$a_i = T_{ik}P_{iki} \tag{1.16}$$

This is non-commutative so that  $\mathbf{a} = \mathbf{P} \cdot \mathbf{T}$  is

$$a_i = P_{ijk}T_{ik} \tag{1.17}$$

### 1.3.3 The triple inner product of two third rank tensors

The triple inner product of two third rank tensors P and Q produces a scalar  $s = P \cdot Q$  which can be evaluated as the sum of the 27 products of the tensor components

$$s = P_{ijk}Q_{ijk} \tag{1.18}$$

### 1.3.4 The outer product

The outer product operates between vectors and tensors as follows:

• The outer product of two vectors  $\mathbf{a}$  and  $\mathbf{b}$  is non-commutative and produces a tensor  $\mathbf{T} = \mathbf{a}\mathbf{b} = (\mathbf{b}\mathbf{a})^{\mathrm{T}}$  whose components are evaluated as:

$$T_{ij} = a_i b_j = \begin{pmatrix} a_1 b_1 & a_1 b_2 & a_1 b_3 \\ a_2 b_1 & a_2 b_2 & a_2 b_3 \\ a_3 b_1 & a_3 b_2 & a_3 b_3 \end{pmatrix}$$
(1.19)

Open∇FOAM-1.2

P-20 Tensor mathematics

• An outer product of a vector  $\mathbf{a}$  and second rank tensor  $\mathbf{T}$  produces a third rank tensor  $\mathbf{P} = \mathbf{a}\mathbf{T}$  whose components are

$$P_{ijk} = a_i T_{jk} \tag{1.20}$$

This is non-commutative so that P = Ta produces

$$P_{ijk} = T_{ij}a_k \tag{1.21}$$

### 1.3.5 The cross product of two vectors

The cross product operation is exclusive to vectors only. For two vectors  $\mathbf{a}$  with  $\mathbf{b}$ , it produces a vector  $\mathbf{c} = \mathbf{a} \times \mathbf{b}$  whose components are

$$c_i = e_{ijk}a_jb_k = (a_2b_3 - a_3b_2, a_3b_1 - a_1b_3, a_1b_2 - a_2b_1)$$

$$(1.22)$$

where the *permutation symbol* is defined by

$$e_{ijk} = \begin{cases} 0 & \text{when any two indices are equal} \\ +1 & \text{when } i,j,k \text{ are an even permutation of } 1,2,3 \\ -1 & \text{when } i,j,k \text{ are an odd permutation of } 1,2,3 \end{cases}$$

$$(1.23)$$

in which the even permutations are 123, 231 and 312 and the odd permutations are 132, 213 and 321.

### 1.3.6 Other general tensor operations

Some less common tensor operations and terminology used by OpenFOAM are described below.

Square of a tensor is defined as the outer product of the tensor with itself, e.g. for a vector  $\mathbf{a}$ , the square  $\mathbf{a}^2 = \mathbf{a}\mathbf{a}$ .

*n*th power of a tensor is evaluated by *n* outer products of the tensor, *e.g.* for a vector  $\mathbf{a}$ , the 3rd power  $\mathbf{a}^3 = \mathbf{a}\mathbf{a}\mathbf{a}$ .

**Magnitude squared** of a tensor is the rth inner product of the tensor of rank r with itself, to produce a scalar. For example, for a second rank tensor  $\mathbf{T}$ ,  $|\mathbf{T}|^2 = \mathbf{T} \cdot \mathbf{T}$ .

Magnitude is the square root of the magnitude squared, e.g. for a tensor  $\mathbf{T}$ ,  $|\mathbf{T}| = \sqrt{\mathbf{T} \cdot \mathbf{T}}$ Vectors of unit magnitude are referred to as unit vectors.

Component maximum is the component of the tensor with greatest value, inclusive of sign, i.e. not the largest magnitude.

Component minimum is the component of the tensor with smallest value.

Component average is the mean of all components of a tensor.

Scale As the name suggests, the scale function is a tool for scaling the components of one tensor by the components of another tensor of the same rank. It is evaluated as the product of corresponding components of 2 tensors, e.g., scaling vector  $\mathbf{a}$  by vector  $\mathbf{b}$  would produce vector  $\mathbf{c}$  whose components are

$$c_i = \text{scale}(\mathbf{a}, \mathbf{b}) = (a_1 b_1, a_2 b_2, a_3 b_3)$$
 (1.24)

Open $\nabla$ FOAM-1.2

1.3 Algebraic tensor operations P-21

### 1.3.7 Geometric transformation and the identity tensor

A second rank tensor  $\mathbf{T}$  is strictly defined as a linear vector function, i.e. it is a function which associates an argument vector  $\mathbf{a}$  to another vector  $\mathbf{b}$  by the inner product  $\mathbf{b} = \mathbf{T} \cdot \mathbf{a}$ . The components of  $\mathbf{T}$  can be chosen to perform a specific geometric transformation of a tensor from the x, y, z coordinate system to a new coordinate system  $x^*, y^*, z^*$ ;  $\mathbf{T}$  is then referred to as the transformation tensor. While a scalar remains unchanged under a transformation, the vector  $\mathbf{a}$  is transformed to  $\mathbf{a}^*$  by

$$\mathbf{a}^* = \mathbf{T} \cdot \mathbf{a} \tag{1.25}$$

A second rank tensor S is transformed to  $S^*$  according to

$$\mathbf{S}^* = \mathbf{T} \cdot \mathbf{S} \cdot \mathbf{T}^{\mathrm{T}} \tag{1.26}$$

The *identity tensor* I is defined by the requirement that it transforms another tensor onto itself. For all vectors a

$$\mathbf{a} = \mathbf{I} \cdot \mathbf{a} \tag{1.27}$$

and therefore

$$\mathbf{I} = \delta_{ij} = \begin{pmatrix} 1 & 0 & 0 \\ 0 & 1 & 0 \\ 0 & 0 & 1 \end{pmatrix} \tag{1.28}$$

where  $\delta_{ij}$  is known as the Kronecker delta symbol.

#### 1.3.8 Useful tensor identities

Several identities are listed below which can be verified by under the assumption that all the relevant derivatives exist and are continuous. The identities are expressed for scalar s and vector  $\mathbf{a}$ .

$$\nabla \cdot (\nabla \times \mathbf{a}) \equiv 0$$

$$\nabla \times (\nabla s) \equiv \mathbf{0}$$

$$\nabla \cdot (s\mathbf{a}) \equiv s \nabla \cdot \mathbf{a} + \mathbf{a} \cdot \nabla s$$

$$\nabla \times (s\mathbf{a}) \equiv s \nabla \times \mathbf{a} + \nabla s \times \mathbf{a}$$

$$\nabla (\mathbf{a} \cdot \mathbf{b}) \equiv \mathbf{a} \times (\nabla \times \mathbf{b}) + \mathbf{b} \times (\nabla \times \mathbf{a}) + (\mathbf{a} \cdot \nabla) \mathbf{b} + (\mathbf{b} \cdot \nabla) \mathbf{a}$$

$$\nabla \cdot (\mathbf{a} \times \mathbf{b}) \equiv \mathbf{b} \cdot (\nabla \times \mathbf{a}) - \mathbf{a} \cdot (\nabla \times \mathbf{b})$$

$$\nabla \times (\mathbf{a} \times \mathbf{b}) \equiv \mathbf{a}(\nabla \cdot \mathbf{b}) - \mathbf{b}(\nabla \cdot \mathbf{a}) + (\mathbf{b} \cdot \nabla) \mathbf{a} - (\mathbf{a} \cdot \nabla) \mathbf{b}$$

$$\nabla \times (\nabla \times \mathbf{a}) \equiv \nabla(\nabla \cdot \mathbf{a}) - \nabla^2 \mathbf{a}$$

$$(\nabla \times \mathbf{a}) \times \mathbf{a} \equiv \mathbf{a} \cdot (\nabla \mathbf{a}) - \nabla(\mathbf{a} \cdot \mathbf{a})$$

$$(1.29)$$

It is sometimes useful to know the  $e-\delta$  identity to help to manipulate equations in index notation:

$$e_{ijk}e_{irs} = \delta_{jr}\delta_{ks} - \delta_{js}\delta_{kr} \tag{1.30}$$

Open VFOAM-1.2

P-22 Tensor mathematics

### 1.3.9 Operations exclusive to tensors of rank 2

There are several operations that manipulate the components of tensors of rank 2 that are listed below:

**Transpose** of a tensor  $T = T_{ij}$  is  $T^{T} = T_{ij}$  as described in Equation 1.2.

Symmetric and skew (antisymmetric) tensors As discussed in section 1.2, a tensor is said to be symmetric if its components are symmetric about the diagonal, i.e.  $\mathbf{T} = \mathbf{T}^{\mathrm{T}}$ . A skew or antisymmetric tensor has  $\mathbf{T} = -\mathbf{T}^{\mathrm{T}}$  which intuitively implies that  $T_{11} = T_{22} = T_{33} = 0$ . Every second order tensor can be decomposed into symmetric and skew parts by

$$\mathbf{T} = \underbrace{\frac{1}{2}(\mathbf{T} + \mathbf{T}^{\mathrm{T}})}_{summetric} + \underbrace{\frac{1}{2}(\mathbf{T} - \mathbf{T}^{\mathrm{T}})}_{skew} = \operatorname{symm} \mathbf{T} + \operatorname{skew} \mathbf{T}$$
(1.31)

Trace The trace of a tensor T is a scalar, evaluated by summing the diagonal components

$$\operatorname{tr} \mathbf{T} = T_{11} + T_{22} + T_{33} \tag{1.32}$$

 ${f Diagonal}$  returns a vector whose components are the diagonal components of the second rank tensor  ${f T}$ 

$$\operatorname{diag} \mathbf{T} = (T_{11}, T_{22}, T_{33}) \tag{1.33}$$

Deviatoric and hydrostatic tensors Every second rank tensor  $\mathbf{T}$  can be decomposed into a deviatoric component, for which  $\operatorname{tr} \mathbf{T} = 0$  and a hydrostatic component of the form  $\mathbf{T} = s\mathbf{I}$  where s is a scalar. Every second rank tensor can be decomposed into deviatoric and hydrostatic parts as follows:

$$\mathbf{T} = \underbrace{\mathbf{T} - \frac{1}{3} (\operatorname{tr} \mathbf{T}) \mathbf{I}}_{deviatoric} + \underbrace{\frac{1}{3} (\operatorname{tr} \mathbf{T}) \mathbf{I}}_{hudrostatic} = \operatorname{dev} \mathbf{T} + \operatorname{hyd} \mathbf{T}$$
(1.34)

**Determinant** The determinant of a second rank tensor is evaluated by

$$\det \mathbf{T} = \begin{vmatrix} T_{11} & T_{12} & T_{13} \\ T_{21} & T_{22} & T_{23} \\ T_{31} & T_{32} & T_{33} \end{vmatrix} = T_{11}(T_{22}T_{33} - T_{23}T_{32}) - T_{12}(T_{21}T_{33} - T_{23}T_{31}) + T_{13}(T_{21}T_{32} - T_{22}T_{31})$$

$$= \frac{1}{6}e_{ijk}e_{pqr}T_{ip}T_{jq}T_{kr}$$
(1.35)

**Cofactors** The *minors* of a tensor are evaluated for each component by deleting the row and column in which the component is situated and evaluating the resulting entries as a  $2 \times 2$  determinant. For example, the minor of  $T_{12}$  is

$$\begin{vmatrix} \overline{T_{11}} & \overline{T_{12}} & \overline{T_{13}} \\ T_{21} & T_{22} & T_{23} \\ T_{31} & T_{32} & T_{33} \end{vmatrix} = \begin{vmatrix} T_{21} & T_{23} \\ T_{31} & T_{33} \end{vmatrix} = T_{21}T_{33} - T_{23}T_{31}$$

$$(1.36)$$

Open $\nabla$ FOAM-1.2

1.4 OpenFOAM tensor classes P-23

The cofactors are *signed minors* where each minor is component is given a sign based on the rule

+ve if 
$$i + j$$
 is even  
-ve if  $i + j$  is odd (1.37)

The cofactors of  ${f T}$  can be evaluated as

$$\operatorname{cof} \mathbf{T} = \frac{1}{2} e_{jkr} e_{ist} T_{sk} T_{tr} \tag{1.38}$$

Inverse The inverse of a tensor can be evaluated as

$$\operatorname{inv} \mathbf{T} = \frac{\operatorname{cof} \mathbf{T}^{\mathrm{T}}}{\det \mathbf{T}} \tag{1.39}$$

Hodge dual of a tensor is a vector whose components are

$$*\mathbf{T} = (T_{23}, -T_{13}, T_{12}) \tag{1.40}$$

### 1.3.10 Operations exclusive to scalars

OpenFOAM supports most of the well known functions that operate on scalars, e.g. square root, exponential, logarithm, sine, cosine etc..., a list of which can be found in Table 1.2. There are 3 additional functions defined within OpenFOAM that are described below:

**Sign** of a scalar s is

$$sgn(s) = \begin{cases} 1 & \text{if } s \ge 0, \\ -1 & \text{if } s < 0. \end{cases}$$
 (1.41)

Positive of a scalar s is

$$pos(s) = \begin{cases} 1 & \text{if } s \ge 0, \\ 0 & \text{if } s < 0. \end{cases}$$
 (1.42)

**Limit** of a scalar s by the scalar n

$$limit(s, n) = \begin{cases} s & \text{if } s < n, \\ 0 & \text{if } s \ge n. \end{cases}$$
(1.43)

### 1.4 OpenFOAM tensor classes

OpenFOAM contains a C++ class library primitive that contains the classes for the tensor mathematics described so far. The basic tensor classes that are available as standard in OpenFOAM are listed in Table 1.1. The Table also lists the functions that allow the user to access individual components of a tensor, known as access functions.

We can declare the tensor

$$\mathbf{T} = \begin{pmatrix} 1 & 2 & 3 \\ 4 & 5 & 6 \\ 7 & 8 & 9 \end{pmatrix} \tag{1.44}$$

in OpenFOAM by the line:

Open VFOAM-1.2

P-24 Tensor mathematics

Rank	Common name	Basic class	Access functions
0	Scalar	scalar	
1	Vector	vector	x(), y(), z()
2	Tensor	tensor	xx(), xy(), xz()

Table 1.1: Basic tensor classes in OpenFOAM

tensor T(1, 2, 3, 4, 5, 6, 7, 8, 9);

We can then access the component  $T_{13}$ , or  $T_{xz}$  using the xz() access function. For instance the code

outputs to the screen:

Txz = 3

### 1.4.1 Algebraic tensor operations in OpenFOAM

The algebraic operations described in Section 1.3 are all available to the OpenFOAM tensor classes using syntax which closely mimics the notation used in written mathematics. Some functions are represented solely by descriptive functions, e.g. symm(), but others can also be executed using symbolic operators, e.g. \*. All functions are listed in Table 1.2.

Operation	Comment	Mathematical	Description
		Description	in OpenFOAM
Addition		$\mathbf{a} + \mathbf{b}$	a + b
Subtraction		a - b	a - b
Scalar multiplication		$s\mathbf{a}$	s * a
Scalar division		$\mathbf{a}/s$	a/s
Outer product	$\operatorname{rank} \mathbf{a}, \mathbf{b} >= 1$	ab	a * b
Inner product	$\operatorname{rank} \mathbf{a}, \mathbf{b} >= 1$	a•b	a & b
Double inner product	$\operatorname{rank} \mathbf{a}, \mathbf{b} >= 2$	a:b	a && b
Cross product	$rank \mathbf{a}, \mathbf{b} = 1$	$\mathbf{a} \times \mathbf{b}$	a ^ b
Square		$\mathbf{a}^2$	sqr(a)
Magnitude squared		$ \mathbf{a} ^2$	magSqr(a)
Magnitude		a	mag(a)
Power	n = 0, 1,, 4	$\mathbf{a}^n$	pow(a,n)
Component average	i = 1,, N	$\overline{a_i}$	cmptAv(a)
Component maximum	i = 1,, N	$\max(a_i)$	max(a)
Component minimum	i = 1,, N	$\min(a_i)$	min(a)
Scale		$scale(\mathbf{a}, \mathbf{b})$	scale(a,b)
Geometric transformation	transforms $\mathbf{a}$ u	sing tensor $T$	transform(T,a)

#### Operations exclusive to tensors of rank 2

Continued on next page

1.4 OpenFOAM tensor classes P-25

Operation	Comment	Mathematical	Description
		Description	in OpenFOAM
Transpose		$\mathbf{T}^{\mathrm{T}}$	T.T()
Diagonal		$\operatorname{diag} \mathbf{T}$	diag(T)
Trace		$\operatorname{tr} \mathbf{T}$	tr(T)
Deviatoric component		$\operatorname{dev} \mathbf{T}$	dev(T)
Symmetric component		$\operatorname{symm} \mathbf{T}$	symm(T)
Skew-symmetric component		skew $T$	skew(T)
Determinant		$\det \mathbf{T}$	det(T)
Cofactors		$\operatorname{cof}\mathbf{T}$	cof(T)
Inverse		$\operatorname{inv} \mathbf{T}$	inv(T)
Hodge dual		$*\mathbf{T}$	*T

O	1 .			
Operations	exclusive	to	sca	lars

Sign (boolean)	sgn(s)	sign(s)
Positive (boolean)	s >= 0	pos(s)
Negative (boolean)	$s \le 0$	neg(s)
Limit $n \text{ scal}$	ar $limit(s, n)$	limit(s,n)
Square root	$\sqrt{s}$	sqrt(s)
Exponential	$\exp s$	exp(s)
Natural logarithm	$\ln s$	log(s)
Base 10 logarithm	$\log_{10} s$	log10(s)
Sine	$\sin s$	sin(s)
Cosine	$\cos s$	cos(s)
Tangent	$\tan s$	tan(s)
Arc sine	asin s	asin(s)
Arc cosine	$a\cos s$	acos(s)
Arc tangent	a tan s	atan(s)
Hyperbolic sine	$\sinh s$	sinh(s)
Hyperbolic cosine	$\cosh s$	cosh(s)
Hyperbolic tangent	$\tanh s$	tanh(s)
Hyperbolic arc sine	a s inh s	asinh(s)
Hyperbolic arc cosine	$a \cosh s$	acosh(s)
Hyperbolic arc tangent	$\operatorname{atanh} s$	atanh(s)
Error function	$\operatorname{erf} s$	erf(s)
Complement error function	$\operatorname{erfc} s$	erfc(s)
Logarithm gamma function	$\ln \Gamma s$	lgamma(s)
Type 1 Bessel function of order 0	$J_0 s$	j0(s)
Type 1 Bessel function of order 1	$J_1 s$	j1(s)
Type 2 Bessel function of order 0	$Y_0 s$	y0(s)
Type 2 Bessel function of order 1	$Y_1 s$	y1(s)
- 1		

a, b are tensors of arbitrary rank unless otherwise stated

Table 1.2: Algebraic tensor operations in OpenFOAM

OpenVFOAM-1.2

P-26 Tensor mathematics

#### Dimensional units 1.5

In continuum mechanics, properties are represented in some chosen units, e.g. mass in kilograms (kg), volume in cubic metres (m<sup>3</sup>), pressure in Pascals (kg m s<sup>-2</sup>). Algebraic operations must be performed on these properties using consistent units of measurement; in particular, addition, subtraction and equality are only physically meaningful for properties of the same dimensional units. As a safeguard against implementing a meaningless operation, OpenFOAM encourages the user to attach dimensional units to any tensor and will then perform dimension checking of any tensor operation.

Units are defined using the dimensionSet class, e.g.

dimensionSet pressureDims(1, -1, -2, 0, 0, 0, 0);

No.	Property	Unit	Symbol
1	Mass	kilogram	k
2	Length	metre	m
3	Time	second	S
4	Temperature	Kelvin	K
5	Quantity	moles	mol
6	Current	ampere	A
7	Luminous intensity	candela	cd

Table 1.3: S.I. base units of measurement

where each of the values corresponds to the power of each of the S.I. base units of measurement listed in Table 1.3. The line of code declares pressureDims to be the dimensionSet for pressure kg m s<sup>-2</sup> since the first entry in the pressureDims array, 1, corresponds to k<sup>1</sup>, the second entry, -1, corresponds to  $m^{-1}$  etc.. A tensor with units is defined using the dimensioned<Type> template class, the <Type> being scalar, vector, tensor, etc.. The dimensioned<Type> stores a variable name of class word, the value <Type> and a dimensionSet

```
dimensionedTensor sigma
        "sigma",
       dimensionSet(1, -1, -2, 0, 0, 0, 0),
        tensor(1e6,0,0,0,1e6,0,0,0,1e6),
   );
```

creates a tensor with correct dimensions of pressure, or stress

$$\mathbf{\sigma} = \begin{pmatrix} 10^6 & 0 & 0\\ 0 & 10^6 & 0\\ 0 & 0 & 10^6 \end{pmatrix} \tag{1.45}$$

s is a scalar, N is the number of tensor components

# Chapter 2

# Discretisation procedures

So far we have dealt with algebra of tensors at a point. The PDEs we wish to solve involve derivatives of tensors with respect to time and space. We therefore need to extend our description to a tensor field, i.e. a tensor that varies across time and spatial domains. In this Chapter we will first present a mathematical description of all the differential operators we may encounter. We will then show how a tensor field is constructed in OpenFOAM and how the derivatives of these fields are discretised into a set of algebraic equations.

### 2.1 Differential operators

Before defining the spatial derivatives we first introduce the nabla vector operator  $\nabla$ , represented in index notation as  $\partial_i$ :

$$\nabla \equiv \partial_i \equiv \frac{\partial}{\partial x_i} \equiv \left(\frac{\partial}{\partial x_1}, \frac{\partial}{\partial x_2}, \frac{\partial}{\partial x_3}\right) \tag{2.1}$$

The nabla operator is a useful notation that obeys the following rules:

- it operates on the tensors to its right and the conventional rules of a derivative of a product, e.g. ∂<sub>i</sub>ab = (∂<sub>i</sub>a) b + a (∂<sub>i</sub>b);
- otherwise the nabla operator behaves like any other vector in an algebraic operation.

### 2.1.1 Gradient

If a scalar field s is defined and continuously differentiable then the gradient of s,  $\nabla s$  is a vector field

$$\nabla s = \partial_i s = \left(\frac{\partial s}{\partial x_1}, \frac{\partial s}{\partial x_2}, \frac{\partial s}{\partial x_3}\right) \tag{2.2}$$

The gradient can operate on any tensor field to produce a tensor field that is one rank higher. For example, the gradient of a vector field  ${\bf a}$  is a second rank tensor field

$$\nabla \mathbf{a} = \partial_i a_j = \begin{pmatrix} \partial a_1 / \partial x_1 & \partial a_2 / \partial x_1 & \partial a_3 / \partial x_1 \\ \partial a_1 / \partial x_2 & \partial a_2 / \partial x_2 & \partial a_3 / \partial x_2 \\ \partial a_1 / \partial x_3 & \partial a_2 / \partial x_3 & \partial a_3 / \partial x_3 \end{pmatrix}$$

$$(2.3)$$

P-28 Discretisation procedures

### 2.1.2 Divergence

If a vector field  $\mathbf{a}$  is defined and continuously differentiable then the divergence of  $\mathbf{a}$  is a scalar field

$$\nabla \cdot \mathbf{a} = \partial_i a_i = \frac{\partial a_1}{\partial x_1} + \frac{\partial a_2}{\partial x_2} + \frac{\partial a_3}{\partial x_3} \tag{2.4}$$

The divergence can operate on any tensor field of rank 1 and above to produce a tensor that is one rank lower. For example the divergence of a second rank tensor field  $\mathbf{T}$  is a vector field (expanding the vector as a column array for convenience)

$$\nabla \cdot \mathbf{T} = \partial_i T_{ij} = \begin{pmatrix} \partial T_{11}/\partial x_1 + \partial T_{12}/\partial x_1 + \partial T_{13}/\partial x_1 \\ \partial T_{21}/\partial x_2 + \partial T_{22}/\partial x_2 + \partial T_{23}/\partial x_2 \\ \partial T_{31}/\partial x_3 + \partial T_{32}/\partial x_3 + \partial T_{33}/\partial x_3 \end{pmatrix}$$
(2.5)

#### 2.1.3 Curl

If a vector field  $\mathbf{a}$  is defined and continuously differentiable then the curl of  $\mathbf{a}$ ,  $\nabla \times \mathbf{a}$  is a vector field

$$\nabla \times \mathbf{a} = e_{ijk} \partial_j a_k = \left( \frac{\partial a_3}{\partial x_2} - \frac{\partial a_2}{\partial x_3}, \frac{\partial a_1}{\partial x_3} - \frac{\partial a_3}{\partial x_1}, \frac{\partial a_2}{\partial x_1} - \frac{\partial a_1}{\partial x_2} \right)$$
(2.6)

The curl is related to the gradient by

$$\nabla \times \mathbf{a} = 2 \,(* \,\mathrm{skew} \,\nabla \mathbf{a}) \tag{2.7}$$

### 2.1.4 Laplacian

The Laplacian is an operation that can be defined mathematically by a combination of the divergence and gradient operators by  $\nabla^2 \equiv \nabla \cdot \nabla$ . However, the Laplacian should be considered as a single operation that transforms a tensor field into another tensor field of the same rank, rather than a combination of two operations, one which raises the rank by 1 and one which reduces the rank by 1.

In fact, the Laplacian is best defined as a *scalar operator*, just as we defined nabla as a vector operator, by

$$\nabla^2 \equiv \partial^2 \equiv \frac{\partial^2}{\partial x_1^2} + \frac{\partial^2}{\partial x_2^2} + \frac{\partial^2}{\partial x_3^2} \tag{2.8}$$

For example, the Laplacian of a scalar field s is the scalar field

$$\nabla^2 s = \partial^2 s = \frac{\partial^2 s}{\partial x_1^2} + \frac{\partial^2 s}{\partial x_2^2} + \frac{\partial^2 s}{\partial x_3^2} \tag{2.9}$$

### 2.1.5 Temporal derivative

There is more than one definition of temporal, or time, derivative of a tensor. To describe the temporal derivatives we must first recall that the tensor relates to a property of a volume of material that may be moving. If we track an infinitesimally small volume of material, or

2.2 Overview of discretisation P-29

particle, as it moves and observe the change in the tensorial property  $\phi$  in time, we have the total, or material time derivative denoted by

$$\frac{D\phi}{Dt} = \lim_{\Delta t \to 0} \frac{\Delta\phi}{\Delta t} \tag{2.10}$$

However in continuum mechanics, particularly fluid mechanics, we often observe the change of a  $\phi$  in time at a fixed point in space as different particles move across that point. This change at a point in space is termed the *spatial* time derivative which is denoted by  $\partial/\partial t$  and is related to the material derivative by:

$$\frac{D\phi}{Dt} = \frac{\partial\phi}{\partial t} + \mathbf{U} \cdot \nabla\phi \tag{2.11}$$

where **U** is the velocity field of property  $\phi$ . The second term on the right is known as the convective rate of change of  $\phi$ .

### 2.2 Overview of discretisation

The term discretisation means approximation of a problem into discrete quantities. The FV method and others, such as the finite element and finite difference methods, all discretise the problem as follows:

**Spatial discretisation** Defining the solution domain by a set of points that fill and bound a region of space when connected;

**Temporal discretisation** (For transient problems) dividing the time domain into into a finite number of time intervals, or steps;

**Equation discretisation** Generating a system of algebraic equations in terms of discrete quantities defined at specific locations in the domain, from the PDEs that characterise the problem.

#### 2.2.1 OpenFOAM lists and fields

OpenFOAM frequently needs to store sets of data and perform functions, such as mathematical operations, on the data. OpenFOAM therefore provides an array template class List<Type>, making it possible to create a list of any object of class Type that inherits the functions of the Type. For example a List of vector is List<vector>.


Lists of the tensor classes are defined as standard in OpenFOAM by the template class Field<Type>. For better code legibility, all instances of Field<Type>, e.g. Field<vector>, are renamed using typedef declarations as scalarField, vectorField, tensorField, symmTensorField, tensorThirdField and symmTensorThirdField. Algebraic operations can be performed between Fields subject to obvious restrictions such as the fields having the same number of elements. OpenFOAM also supports operations between a field and single tensor, e.g. all values of a Field U can be multiplied by the scalar 2 with the operation U = 2.0 \* U.


Open VFOAM-1.2

P-30 Discretisation procedures

### 2.3 Discretisation of the solution domain

Discretisation of the solution domain is shown in Figure 2.1. The space domain is discretised into computational mesh on which the PDEs are subsequently discretised. Discretisation of time, if required, is simple: it is broken into a set of time steps  $\Delta t$  that may change during a numerical simulation, perhaps depending on some condition calculated during the simulation.





Time domain

Figure 2.1: Discretisation of the solution domain




Figure 2.2: Parameters in finite volume discretisation

On a more detailed level, discretisation of space requires the subdivision of the domain into a number of cells, or control volumes. The cells are contiguous, *i.e.* they do not overlap one another and completely fill the domain. A typical cell is shown in Figure 2.2. Dependent variables and other properties are principally stored at the cell centroid P although they

2.3 Discretisation of the solution domain P-31 P-32 Discretisation procedures

may be stored on faces or vertices. The cell is bounded by a set of flat faces, given the generic label f. In OpenFOAM there is no limitation on the number of faces bounding each cell, nor any restriction on the alignment of each face. This kind of mesh is often referred to as "arbitrarily unstructured" to differentiate it from meshes in which the cell faces have a prescribed alignment, typically with the coordinate axes. Codes with arbitrarily unstructured meshes offer greater freedom in mesh generation and manipulation in particular when the geometry of the domain is complex or changes over time.

Whilst most properties are defined at the cell centroids, some are defined at cell faces. There are two types of cell face.

Internal faces Those faces that connect two cells (and it can never be more than two).
For each internal face, OpenFOAM designates one adjoining cell to be the face owner and the other to be the neighbour;

**Boundary faces** Those belonging to one cell since they coincide with the boundary of the domain. These faces simply have an owner cell.

### 2.3.1 Defining a mesh in OpenFOAM

There are different levels of mesh description in OpenFOAM, beginning with the most basic mesh class, named polyMesh since it is based on polyhedra. A polyMesh is constructed using the minimum information required to define the mesh geometry described below and presented in Figure 2.3:

**Points** A list of cell vertex point coordinate vectors, *i.e.* a vectorField, that is renamed pointField using a typedef declaration;

Faces A list of cell faces List<face>, or faceList, where the face class is defined by a list of vertex numbers, corresponding to the pointField:

Cells a list of cells List<cell>, or cellList, where the cell class is defined by a list of face numbers, corresponding to the faceList described previously.


Boundary a polyBoundaryMesh decomposed into a list of patches, polyPatchList representing different regions of the boundary. The boundary is subdivided in this manner to allow different boundary conditions to be specified on different patches during a solution. All the faces of any polyPatch are stored as a single block of the faceList, so that its faces can be easily accessed using the slice class which stores references to the first and last face of the block. Each polyPatch is then constructed from

- a slice;
- a word to assign it a name.

FV discretisation uses specific data that is derived from the mesh geometry stored in polyMesh. OpenFOAM therefore extends the polyMesh class to fvMesh which stores the additional data needed for FV discretisation. fvMesh is constructed from polyMesh and stores the data in Table 2.1 which can be updated during runtime in cases where the mesh moves, is refined etc..

Open VFOAM-1.2

Discretisation procedures






Figure 2.3: Schematic of the basic mesh description used in OpenFOAM

### 2.3.2 Defining a geometricField in OpenFOAM

So far we can define a field, *i.e.* a list of tensors, and a mesh. These can be combined to define a tensor field relating to discrete points in our domain, specified in OpenFOAM by the template class <code>geometricField<Type></code>. The Field values are separated into those defined within the internal region of the domain, *e.g.* at the cell centres, and those defined on the domain boundary, *e.g.* on the boundary faces. The <code>geometricField<Type></code> stores the following information:

Internal field This is simply a Field<Type>, described in Section 2.2.1;

BoundaryField This is a GeometricBoundaryField, in which a Field is defined for the faces of each patch and a Field is defined for the patches of the boundary. This is then a field of fields, stored within an object of the FieldField<Type> class. A reference to the fvBoundaryMesh is also stored [\*\*].

Mesh A reference to an fvMesh, with some additional detail as to the whether the field is defined at cell centres, faces, etc..

Dimensions A dimensionSet, described in Section 1.5.

Old values Discretisation of time derivatives requires field data from previous time steps.

Class	Description	Symbol	Access function
volScalarField	Cell volumes	V	V()
surfaceVectorField	Face area vectors	$\mathbf{S}_f$	Sf()
surfaceScalarField	Face area magnitudes	$ \mathbf{S}_f $	magSf()
volVectorField	Cell centres	$\mathbf{C}$	C()
surfaceVectorField	Face centres	$\mathbf{C}_f$	Cf()
surfaceScalarField	Face motion fluxes **	$\phi_a$	phi()

Table 2.1: fvMesh stored data.

The geometricField<Type> will store references to stored fields from the previous, or old, time step and its previous, or old-old, time step where necessary.

Previous iteration values The iterative solution procedures can use under-relaxation which requires access to data from the previous iteration. Again, if required, geometricField<Type> stores a reference to the data from the previous iteration.

As discussed in Section 2.3, we principally define a property at the cell centres but quite often it is stored at the cell faces and on occasion it is defined on cell vertices. The geometricField<Type> is renamed using typedef declarations to indicate where the field variable is defined as follows:

volField<Type> A field defined at cell centres;

surfaceField<Type> A field defined on cell faces;

pointField<Type> A field defined on cell vertices.

These typedef field classes of geometricField<Type>are illustrated in Figure 2.4. A geometricField<Type> inherits all the tensor algebra of Field<Type> and has all operations subjected to dimension checking using the dimensionSet. It can also be subjected to the FV discretisation procedures described in the following Section. The class structure used to build geometricField<Type> is shown in Figure 2.5<sup>1</sup>.

# 2.4 Equation discretisation

Equation discretisation converts the PDEs into a set of algebraic equations that are commonly expressed in matrix form as:

$$[A][x] = [b] \tag{2.12}$$

where [A] is a square matrix, [x] is the column vector of dependent variable and [b] is the source vector. The description of [x] and [b] as 'vectors' comes from matrix terminology rather than being a precise description of what they truly are: a list of values defined at locations in the geometry, i.e. a geometricField<Type>, or more specifically a volField<Type> when using FV discretisation.

OpenVFOAM-1.2

P-34 Discretisation procedures

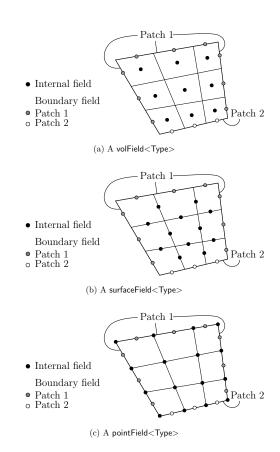


Figure 2.4: Types of  $\mathsf{geometricField} < \mathsf{Type} > \mathsf{defined}$  on a mesh with 2 boundary patches (in 2 dimensions for simplicity)

<sup>&</sup>lt;sup>1</sup>The diagram is not an exact description of the class hierarchy, rather a representation of the general structure leading from some primitive classes to geometric<Type>Field.

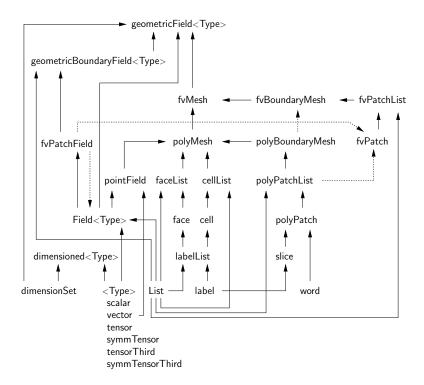


Figure 2.5: Basic class structure leading to geometricField<Type>

OpenVFOAM-1.2

P-36 Discretisation procedures

[A] is a list of coefficients of a set of algebraic equations, and cannot be described as a geometricField<Type>. It is therefore given a class of its own: fvMatrix. fvMatrix<Type> is created through discretisation of a geometric<Type>Field and therefore inherits the <Type>. It supports many of the standard algebraic matrix operations of addition +, subtraction - and multiplication \*.

Each term in a PDE is represented individually in OpenFOAM code using the classes of static functions finiteVolumeMethod and finiteVolumeCalculus, abbreviated by a typedef to fvm and fvc respectively. fvm and fvc contain static functions, representing differential operators, e.g.  $\nabla^2$ ,  $\nabla \cdot$  and  $\partial/\partial t$ , that discretise geometricField<Type>s. The purpose of defining these functions within two classes, fvm and fvc, rather than one, is to distinguish:

- functions of fvm that calculate implicit derivatives of and return an fvMatrix<Type>
- some functions of fvc that calculate explicit derivatives and other explicit calculations, returning a geometricField<Type>.

Figure 2.6 shows a geometric Field<Type> defined on a mesh with 2 boundary patches and illustrates the explicit operations merely transform one field to another and drawn in 2D for simplicity.

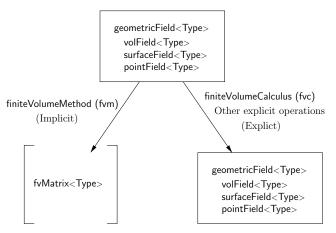


Figure 2.6: A geometricField<Type> and its operators

Table 2.2 lists the main functions that are available in  $\mathsf{fvm}$  and  $\mathsf{fvc}$  to discretise terms that may be found in a PDE. FV discretisation of each term is formulated by first integrating the term over a cell volume V. Most spatial derivative terms are then converted to integrals over the cell surface S bounding the volume using Gauss's theorem

$$\int_{V} \nabla \star \phi \ dV = \int_{S} d\mathbf{S} \star \phi \tag{2.13}$$

where **S** is the surface area vector,  $\phi$  can represent any tensor field and the star notation  $\star$  is used to represent any tensor product, *i.e.* inner, outer and cross and the respective

Term description	Implicit /	Text	fvm::/fvc:: functions
	Explicit	expression	
Laplacian	Imp/Exp	$\nabla^2 \phi$	laplacian(phi)
		$\nabla \cdot \Gamma \nabla \phi$	laplacian(Gamma, phi)
Time derivative	$\mathrm{Imp}/\mathrm{Exp}$	$rac{\partial \phi}{\partial t} \ rac{\partial  ho \phi}{\partial  ho}$	ddt(phi)
		$\frac{\partial \rho \phi}{\partial t}$	ddt(rho,phi)
Second time derivative	Imp/Exp	$\frac{\partial}{\partial t} \left( \rho \frac{\partial \phi}{\partial t} \right)$	d2dt2(rho, phi)
Convection	Imp/Exp	$\nabla \cdot (\psi)$	div(psi,scheme)*
		$\nabla \cdot (\psi \phi)$	$\mathtt{div}(\mathtt{psi},\ \mathtt{phi},\ \mathtt{word})^*$
			div(psi, phi)
Divergence	Exp	$\nabla \cdot \chi$	div(chi)
Gradient	Exp	$\nabla \chi$	grad(chi)
		$\nabla \phi$	gGrad(phi)
			lsGrad(phi)
			<pre>snGrad(phi)</pre>
			${\tt snGradCorrection(phi)}$
Grad-grad squared	Exp	$ \nabla \nabla \phi ^2$	sqrGradGrad(phi)
Curl	Exp	$\nabla \times \phi$	curl(phi)
Source	Imp	$\rho\phi$	Sp(rho,phi)
+c	Imp/Exp†	11	SuSp(rho,phi)

†fvm::SuSp source is discretised implicit or explicit depending on the sign of rho. †An explicit source can be introduced simply as a vol<Type>Field, e.g. rho\*phi. Function arguments can be of the following classes:

phi: vol<Type>Field

Gamma: scalar volScalarField, surfaceScalarField, volTensorField, surfaceTensorField,

rho: scalar, volScalarField psi: surfaceScalarField.

chi: surface<Type>Field, vol<Type>Field.

Table 2.2: Discretisation of PDE terms in OpenFOAM

Open VFOAM-1.2

P-38 Discretisation procedures

derivatives: divergence  $\nabla \cdot \phi$ , gradient  $\nabla \phi$  and  $\nabla \times \phi$ . Volume and surface integrals are then linearised using appropriate schemes which are described for each term in the following Sections. Some terms are always discretised using one scheme, a selection of schemes is offered in OpenFOAM for the discretisation of other terms. The choice of scheme is either made by a direct specification within the code or it can be read from an input file at job run-time and stored within an fvSchemes class object.

### 2.4.1 The Laplacian term

The Laplacian term is integrated over a control volume and linearised as follows:

$$\int_{V} \nabla \cdot (\Gamma \nabla \phi) \ dV = \int_{S} d\mathbf{S} \cdot (\Gamma \nabla \phi) = \sum_{f} \Gamma_{f} \mathbf{S}_{f} \cdot (\nabla \phi)_{f}$$
(2.14)

The face gradient discretisation is implicit when the length vector  $\mathbf{d}$  between the centre of the cell of interest P and the centre of a neighbouring cell N is orthogonal to the face plane, *i.e.* parallel to  $\mathbf{S}_{f}$ :

$$\mathbf{S}_{f} \bullet (\nabla \phi)_{f} = |S_{f}| \frac{\phi_{N} - \phi_{P}}{|\mathbf{d}|} \tag{2.15}$$

In the case of non-orthogonal meshes, an additional explicit term is introduced [?] which is evaluated by interpolating cell centre gradients, themselves calculated by central differencing cell centre values.

#### 2.4.2 The convection term

The convection term is integrated over a control volume and linearised as follows:

$$\int_{V} \nabla \cdot (\rho \mathbf{U} \phi) \ dV = \int_{S} d\mathbf{S} \cdot (\rho \mathbf{U} \phi) = \sum_{f} \mathbf{S}_{f} \cdot (\rho \mathbf{U})_{f} \phi_{f} = \sum_{f} F \phi_{f}$$
(2.16)

The face field  $\phi_f$  can be evaluated using a variety of schemes:

Central differencing (CD) is second-order accurate but unbounded

$$\phi_f = f_x \phi_P + (1 - f_x) \phi_N \tag{2.17}$$

where  $f_x \equiv \overline{fN}/\overline{PN}$  where  $\overline{fN}$  is the distance between f and cell centre N and  $\overline{PN}$  is the distance between cell centres P and N.

**Upwind differencing (UD)** determines  $\phi_f$  from the direction of flow and is bounded at the expense of accuracy

$$\phi_f = \begin{cases} \phi_P & \text{for } F \ge 0\\ \phi_N & \text{for } F < 0 \end{cases}$$
 (2.18)

Blended differencing (BD) schemes combine UD and CD in an attempt to preserve boundedness with reasonable accuracy,

$$\phi_f = (1 - \gamma) \left(\phi_f\right)_{UD} + \gamma \left(\phi_f\right)_{CD} \tag{2.19}$$

OpenFOAM has several implementations of the Gamma differencing scheme to select the blending coefficient  $\gamma$  [?] but it offers other well-known schemes such as van Leer, SUPERBEE, MINMOD etc.

#### 2.4.3 First time derivative

The first time derivative  $\partial/\partial t$  is integrated over a control volume as follows:

$$\frac{\partial}{\partial t} \int_{V} \rho \phi \ dV$$
 (2.20)

The term is discretised by simple differencing in time using:

**new values**  $\phi^n \equiv \phi(t + \Delta t)$  at the time step we are solving for;

**old values**  $\phi^o \equiv \phi(t)$  that were stored from the previous time step;

old-old values  $\phi^{oo} \equiv \phi(t - \Delta t)$  stored from a time step previous to the last.

One of two discretisation schemes can be declared using the timeScheme keyword in the appropriate input file, described in detail in section 4.4 of the User Guide.

Euler implicit scheme, timeScheme EulerImplicit, that is first order accurate in time:

$$\frac{\partial}{\partial t} \int_{V} \rho \phi \ dV = \frac{(\rho_{P} \phi_{P} V)^{n} - (\rho_{P} \phi_{P} V)^{o}}{\Delta t}$$
(2.21)

Backward differencing scheme, timeScheme BackwardDifferencing, that is second order accurate in time by storing the old-old values and therefore with a larger overhead in data storage than EulerImplicit:

$$\frac{\partial}{\partial t} \int_{V} \rho \phi \ dV = \frac{3 \left(\rho_{P} \phi_{P} V\right)^{n} - 4 \left(\rho_{P} \phi_{P} V\right)^{o} + \left(\rho_{P} \phi_{P} V\right)^{oo}}{2\Delta t} \tag{2.22}$$

### 2.4.4 Second time derivative

The second time derivative is integrated over a control volume and linearised as follows:

$$\frac{\partial}{\partial t} \int_{V} \rho \frac{\partial \phi}{\partial t} dV = \frac{(\rho_{P} \phi_{P} V)^{n} - 2(\rho_{P} \phi_{P} V)^{o} + (\rho_{P} \phi_{P} V)^{oo}}{\Delta t^{2}}$$
(2.23)

It is first order accurate in time.

### 2.4.5 Divergence

The divergence term described in this Section is strictly an explicit term that is distinguished from the convection term of Section 2.4.2, *i.e.* in that it is not the divergence of the product of a velocity and dependent variable. The term is integrated over a control volume and linearised as follows:

$$\int_{V} \nabla \cdot \phi \ dV = \int_{S} d\mathbf{S} \cdot \phi = \sum_{f} \mathbf{S}_{f} \cdot \phi_{f}$$
(2.24)

The fvc::div function can take as its argument either a surface<Type>Field, in which case  $\phi_f$  is specified directly, or a vol<Type>Field which is interpolated to the face by central differencing as described in Section 2.4.10:

Open FOAM-1.2

P-40 Discretisation procedures

#### 2.4.6 Gradient

The gradient term is an explicit term that can be evaluated in a variety of ways. The scheme can be evaluated either by selecting the particular grad function relevant to the discretisation scheme, e.g. fvc::gGrad, fvc::lsGrad etc., or by using the fvc::grad function combined with the appropriate timeScheme keyword in an input file

Gauss integration is invoked using the fvc::grad function with timeScheme Gauss or directly using the fvc::gGrad function. The discretisation is performed using the standard method of applying Gauss's theorem to the volume integral:

$$\int_{V} \nabla \phi \ dV = \int_{S} d\mathbf{S} \ \phi = \sum_{f} \mathbf{S}_{f} \phi_{f} \tag{2.25}$$

As with the fvc::div function, the Gaussian integration fvc::grad function can take either a surfaceField<Type> or a volField<Type> as an argument.

Least squares method is based on the following idea:

- a value at point P can be extrapolated to neighbouring point N using the gradient at P:
- the extrapolated value at N can be compared to the actual value at N, the difference being the error;
- if we now minimise the sum of the square of weighted errors at all neighbours of P with the respect to the gradient, then the gradient should be a good approximation.

Least squares is invoked using the fvc::grad function with timeScheme leastSquares or directly using the fvc::lsGrad function. The discretisation is performed as by first calculating the tensor G at every point P by summing over neighbours N:

$$\mathbf{G} = \sum_{N} w_{N}^{2} \mathbf{dd} \tag{2.26}$$

where **d** is the vector from P to N and the weighting function  $w_N = 1/|\mathbf{d}|$ . The gradient is then evaluated as:

$$(\nabla \phi)_P = \sum_N w_N^2 \mathbf{G}^{-1} \cdot \mathbf{d} (\phi_N - \phi_P)$$
(2.27)

Surface normal gradient The gradient normal to a surface  $\mathbf{n}_f \cdot (\nabla \phi)_f$  can be evaluated at cell faces using the scheme

$$(\nabla \phi)_f = \frac{\phi_N - \phi_P}{|\mathbf{d}|} \tag{2.28}$$

This gradient is called by the function fvc::snGrad and returns a surfaceField<Type>. The scheme is directly analogous to that evaluated for the Laplacian discretisation scheme in Section 2.4.1, and in the same manner, a correction can be introduced to improve the accuracy of this face gradient in the case of non-orthogonal meshes. This correction is called using the function fvc::snGradCorrection [Check\*\*].

### 2.4.7 Grad-grad squared

The grad-grad squared term is evaluated by: taking the gradient of the field; taking the gradient of the resulting gradient field; and then calculating the magnitude squared of the result. The mathematical expression for grad-grad squared of  $\phi$  is  $|\nabla (\nabla \phi)|^2$ .

#### 2.4.8 Curl

The curl is evaluated from the gradient term described in Section 2.4.6. First, the gradient is discretised and then the curl is evaluated using the relationship from Equation 2.7, repeated here for convenience

$$\nabla \times \phi = 2 * (\text{skew } \nabla \phi)$$

### 2.4.9 Source terms

Source terms can be specified in 3 ways

**Explicit** Every explicit term is a volField<Type>. Hence, an explicit source term can be incorporated into an equation simply as a field of values. For example if we wished to solve Poisson's equation  $\nabla^2 \phi = f$ , we would define phi and f as volScalarField and then do

Implicit An implicit source term is integrated over a control volume and linearised by

$$\int_{V} \rho \phi \ dV = \rho_P V_P \phi_P \tag{2.29}$$

Implicit/Explicit The implicit source term changes the coefficient of the diagonal of the matrix. Depending on the sign of the coefficient and matrix terms, this will either increase or decrease diagonal dominance of the matrix. Decreasing the diagonal dominance could cause instability during iterative solution of the matrix equation. Therefore OpenFOAM provides a mixed source discretisation procedure that is implicit when the coefficients that are greater than zero, and explicit for the coefficients less than zero. In mathematical terms the matrix coefficient for node P is  $V_P \max(\rho_P, 0)$  and the source term is  $V_P \phi_P \min(\rho_P, 0)$ .

### 2.4.10 Other explicit discretisation schemes

There are some other discretisation procedures that convert volField<Type>s into surface<Type>Fields and visa versa.

Surface integral fvc::surfaceIntegrate performs a summation of surface<br/>-Type>Field face values bounding each cell and dividing by the cell volume, i.e.  $(\sum_f \phi_f)/V_P$ . It returns a volField<br/>-Type>.

Surface sum fvc::surfaceSum performs a summation of surface<Type>Field face values bounding each cell,  $i.e. \sum_{t} \phi_{f}$  returning a volField<Type>.

OpenVFOAM-1.2

P-42 Discretisation procedures

Average fvc::average produces an area weighted average of surface<Type>Field face values, i.e.  $(\sum_t S_t \phi_t)/\sum_t S_t$ , and returns a volField<Type>.

#### Reconstruct

Face interpolate The geometric<Type>Field function faceInterpolate() interpolates volField<Type> cell centre values to cell faces using central differencing, returning a surface<Type>Field.

### 2.5 Temporal discretisation

Although we have described the discretisation of temporal derivatives in Sections 2.4.3 and 2.4.4, we need to consider how to treat the spatial derivatives in a transient problem. If we denote all the spatial terms as  $\mathcal{A}\phi$  where  $\mathcal{A}$  is any spatial operator, e.g. Laplacian, then we can express a transient PDE in integral form as

$$\int_{t}^{t+\Delta t} \left[ \frac{\partial}{\partial t} \int_{V} \rho \phi \ dV + \int_{V} \mathcal{A} \phi \ dV \right] \ dt = 0$$
(2.30)

Using the Euler implicit method of Equation 2.21, the first term can be expressed as

$$\int_{t}^{t+\Delta t} \left[ \frac{\partial}{\partial t} \int_{V} \rho \phi \ dV \right] \ dt = \int_{t}^{t+\Delta t} \frac{(\rho_{P} \phi_{P} V)^{n} - (\rho_{P} \phi_{P} V)^{o}}{\Delta t} \ dt$$

$$= \frac{(\rho_{P} \phi_{P} V)^{n} - (\rho_{P} \phi_{P} V)^{o}}{\Delta t} \Delta t$$
(2.31)

The second term can be expressed as

$$\int_{t}^{t+\Delta t} \left[ \int_{V} \mathcal{A}\phi \ dV \right] \ dt = \int_{t}^{t+\Delta t} \mathcal{A}^{*}\phi \ dt \tag{2.32}$$

where  $\mathcal{A}^*$  represents the spatial discretisation of  $\mathcal{A}$ . The time integral can be discretised in three ways:

Euler implicit uses implicit discretisation of the spatial terms, thereby taking current values  $\phi^n$ 

$$\int_{t}^{t+\Delta t} \mathcal{A}^{*}\phi \ dt = \mathcal{A}^{*}\phi^{n}\Delta t \tag{2.33}$$

It is first order accurate in time, guarantees boundedness and is unconditionally stable.

**Explicit** uses explicit discretisation of the spatial terms, thereby taking old values  $\phi^o$ .

$$\int_{t}^{t+\Delta t} \mathcal{A}^* \phi \ dt = \mathcal{A}^* \phi^o \Delta t \tag{2.34}$$

It is first order accurate in time and is unstable if the Courant number Co is greater than 1. The Courant number is defined as

$$Co = \frac{\mathbf{U}_f \cdot \mathbf{d}}{|\mathbf{d}|^2 \Delta t} \tag{2.35}$$

where  $\mathbf{U}_f$  is a characteristic velocity, e.g. velocity of a wave front, velocity of flow.

2.6 Boundary Conditions P-43

Crank Nicholson uses the trapezoid rule to discretise the spatial terms, thereby taking a mean of current values  $\phi^n$  and old values  $\phi^o$ .

$$\int_{t}^{t+\Delta t} \mathcal{A}^{*} \phi \ dt = \mathcal{A}^{*} \left( \frac{\phi^{n} + \phi^{o}}{2} \right) \Delta t \tag{2.36}$$

It is second order accurate in time, is unconditionally stable but does not guarantee boundedness.

### 2.5.1 Treatment of temporal discretisation in OpenFOAM

At present the treatment of the temporal discretisation is controlled by the implementation of the spatial derivatives in the PDE we wish to solve. For example, let us say we wish to solve a transient diffusion equation

$$\frac{\partial \phi}{\partial t} = \kappa \nabla^2 \phi \tag{2.37}$$

An Euler implicit implementation of this would read

```
solve(fvm::ddt(phi) == kappa*fvm::laplacian(phi))
```

where we use the fvm class to discretise the Laplacian term implicitly. An explicit implementation would read

```
solve(fvm::ddt(phi) == kappa*fvc::laplacian(phi))
```

where we now use the fvc class to discretise the Laplacian term explicitly. The Crank Nicholson scheme can be implemented by the mean of implicit and explicit terms:

```
solve
  (
  fvm::ddt(phi)
  ==
  kappa*0.5*(fvm::laplacian(phi) + fvc::laplacian(phi))
  )
```

### 2.6 Boundary Conditions

Boundary conditions are required to complete the problem we wish to solve. We therefore need to specify boundary conditions on all our boundary faces. Boundary conditions can be divided into 2 types:

Dirichlet prescribes the value of the dependent variable on the boundary and is therefore termed 'fixed value' in this guide;

**Neumann** prescribes the gradient of the variable normal to the boundary and is therefore termed 'fixed gradient' in this guide.

Open∇FOAM-1.2

P-44 Discretisation procedures

When we perform discretisation of terms that include the sum over faces  $\sum_f$ , we need to consider what happens when one of the faces is a boundary face.

**Fixed value** We specify a fixed value at the boundary  $\phi_b$ 

- We can simply substitute φ<sub>b</sub> in cases where the discretisation requires the value on a boundary face φ<sub>f</sub>, e.g. in the convection term in Equation 2.16.
- In terms where the face gradient  $(\nabla \phi)_f$  is required, e.g. Laplacian, it is calculated using the boundary face value and cell centre value.

$$\mathbf{S}_{f} \cdot (\nabla \phi)_{f} = |S_{f}| \frac{\phi_{b} - \phi_{P}}{|\mathbf{d}|} \tag{2.38}$$

Fixed gradient The fixed gradient boundary condition  $g_b$  is a specification on inner product of the gradient and unit normal to the boundary, or

$$g_b = \left(\frac{\mathbf{S}}{|\mathbf{S}|} \bullet \nabla \phi\right)_f \tag{2.39}$$

• When discretisation requires the value on a boundary face  $\phi_f$  we must interpolate the cell centre value to the boundary by

$$\phi_f = \phi_P + \mathbf{d} \cdot (\nabla \phi)_f$$

$$= \phi_P + |\mathbf{d}| q_h$$
(2.40)

•  $\phi_b$  can be directly substituted in cases where the discretisation requires the face gradient to be evaluated.

$$\mathbf{S}_f \bullet (\nabla \phi)_f = |S_f| \, g_b \tag{2.41}$$

### 2.6.1 Physical boundary conditions

The specification of boundary conditions is usually an engineer's interpretation of the true behaviour. Real boundary conditions are generally defined by some physical attributes rather than the numerical description as described of the previous Section. In incompressible fluid flow there are the following physical boundaries

Inlet The velocity field at the inlet is supplied and, for consistency, the boundary condition on pressure is zero gradient.

Outlet The pressure field at the outlet is supplied and a zero gradient boundary condition on velocity is specified.

No-slip impermeable wall The velocity of the fluid is equal to that of the wall itself, *i.e.* a fixed value condition can be specified. The pressure is specified zero gradient since the flux through the wall is zero.

In a problem whose solution domain and boundary conditions are symmetric about a plane, we only need to model half the domain to one side of the symmetry plane. The boundary condition on the plane must be specified according to

Symmetry plane The symmetry plane condition specifies the component of the gradient normal to the plane should be zero. [Check\*\*]

# Chapter 3

# Examples of the use of OpenFOAM

In this section we shall describe several test cases supplied with the OpenFOAM distribution. The intention is to provide example cases, including those in the tutorials in chapter 2 of the User Guide, for every standard solver. The examples are designed to introduce certain tools and features of OpenFOAM, e.g. within pre-/post-processing, numerical schemes, algorithms. They also provide a means for validation of solvers although that is not their principal function.

Each example contains a description of the problem: the geometry, initial and boundary conditions, a brief description of the equations being solved, models used, and physical properties required. The solution domain is selected which may be a portion of the original geometry, e.g. if we introduce symmetry planes. The method of meshing, usually blockMesh, is specified; of course the user can simply view the mesh since every example is distributed with the polyMesh directory containing the data files that describe the mesh.

The examples coexist with the tutorials in the *tutorials* subdirectory of the OpenFOAM installation. They are organised into a set of subdirectories by solver, *e.g.* all the <code>icoFoam</code> cases are stored within a subdirectory <code>icoFoam</code>. Before running a particular example, the user is urged to copy it into their user account. We recommend that the user stores all OpenFOAM cases in a directory we recommend that the tutorials are copied into a directory <code>\$FOAM\_RUN</code>. If this directory structure has not yet been created in the user's account, it can be created with

```
mkdir -p $FOAM_RUN
```

The tutorials can then be copied into this directory with

cp -r \$FOAM\_TUTORIALS/\* \$FOAM\_RUN

### 3.1 Flow around a cylinder

In this example we shall investigate potential flow around a cylinder using potentialFoam. This example introduces the following OpenFOAM features:

- non-orthogonal meshes;
- generating an analytical solution to a problem in OpenFOAM.

P-46

#### Examples of the use of OpenFOAM

### 3.1.1 Problem specification

The problem is defined as follows:

**Solution domain** The domain is 2 dimensional and consists of a square domain with a cylinder collocated with the centre of the square as shown in Figure 3.1.

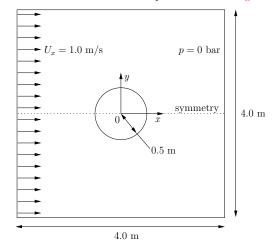


Figure 3.1: Geometry of flow round a cylinder

#### Governing equations

• Mass continuity for an incompressible fluid

$$\mathbf{\bullet U} = 0 \tag{3.1}$$

 Pressure equation for an incompressible, irrotational fluid assuming steady-state conditions

$$\nabla^2 p = 0 \tag{3.2}$$

### $Boundary\ conditions$

- Inlet (left) with fixed velocity U = (1, 0, 0) m/s.
- Outlet (right) with a fixed pressure p = 0 Pa.
- No-slip wall (bottom);
- Symmetry plane (top).

Initial conditions U=0 m/s, p=0 Pa — required in OpenFOAM input files but not necessary for the solution since the problem is steady-state.

Solver name potentialFoam: a potential flow code, i.e. assumes the flow is incompressible, steady, irrotational, inviscid and it ignores gravity.

Case name cylinder case located in the \$FOAM\_TUTORIALS/potentialFoam directory.

### 3.1.2 Note on potentialFoam

potentialFoam is a useful solver to validate OpenFOAM since the assumptions of potential flow are such that an analytical solution exists for cases whose geometries are relatively simple. In this example of flow around a cylinder an analytical solution exists with which we can compare our numerical solution. potentialFoam can also be run more like a utility to provide a (reasonably) conservative initial U field for a problem. When running certain cases, this can useful for avoiding instabilities due to the initial field being unstable. In short, potentialFoam creates a conservative field from a non-conservative initial field supplied by the user.

### 3.1.3 Mesh generation

Mesh generation using blockMesh has been described in tutorials in the User Guide. In this case, the mesh consists of 10 blocks as shown in Figure 3.2. Remember that all meshes

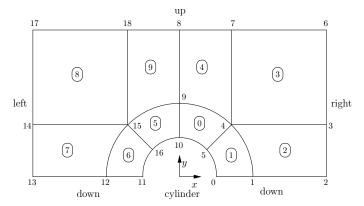


Figure 3.2: Blocks in cylinder geometry

are treated as 3 dimensional in OpenFOAM. If we wish to solve a 2 dimensional problem, we must describe a 3 dimensional mesh that is only one cell thick in the third direction that is not solved. In Figure 3.2 we show only the back plane of the geometry, along z=-0.5, in which the vertex numbers are numbered 0-18. The other 19 vertices in the front plane, z=+0.5, are numbered in the same order as the back plane, as shown in the mesh description file below:

OpenVFOAM-1.2

Examples of the use of OpenFOAM

```
13
14
                                    ""
15
            case
                                    ....
16
17
            instance
                                    dictionary
19
            class
                                    blockMeshDict:
            object
21
22
                                                       * * * * * * * * * * * * * * * * * * * //
23
24
25
      convertToMeters 1:
27
      vertices
             (0.5 \ 0 \ -0.5)
           (0.5 0 -0.b)
(1 0 -0.5)
(2 0 -0.5)
(2 0.707107 -0.5)
(0.707107 0.707107 -0.5)
(0.353553 0.353553 -0.5)
29
31
32
            (0.353553 0.353553
(2 2 -0.5)
             (0.707107 2 -0.5)
            (0 2 -0.5)
(0 1 -0.5)
            (0 0.5 -0.5)
(-0.5 0 -0.5)
             (-1 0 -0.5)
(-2 0 -0.5)
            (-2 0 -0.5)

(-2 0.707107 -0.5)

(-0.707107 0.707107 -0.5)

(-0.353553 0.353553 -0.5)

(-2 2 -0.5)

(-0.707107 2 -0.5)
\frac{46}{47}
            (0.5 0 0.5)
(1 0 0.5)
49
            (1 0 0.5)
(2 0 0.5)
(2 0.707107 0.5)
(0.707107 0.707107 0.5)
50
51
52
53
            (0.707107 0.707107 0.5)
(0.353553 0.353553 0.5)
(2 2 0.5)
(0.707107 2 0.5)
(0 2 0.5)
(0 1 0.5)
(0 0.5 0.5)
54
55
56
57
58
59
60
61
             (-0.5 0 0.5)
(-1 0 0.5)
(-2 0 0.5)
             (-2 0.707107 0.5)
(-0.707107 0.707107 0.5)
63
             (-0.353553 0.353553 0.5)
64
65
             (-0.707107 2 0.5)
66
67
     );
      blocks
69
70
71
            hex (5 4 9 10 24 23 28 29) (10 10 1) simpleGrading (1 1 1)
72
            hex (0 1 4 5 19 20 23 24) (10 10 1) simpleGrading (1 1 1)
            hex (1 2 3 4 20 21 22 23) (20 10 1) simpleGrading (1 1 1)
73
            hex (4 3 6 7 23 22 25 26) (20 20 1) simpleGrading (1 1 1)
74
            hex (9 4 7 8 28 23 26 27) (10 20 1) simpleGrading (1 1 1)
75
            hex (15 16 10 9 34 35 29 28) (10 10 1) simpleGrading (1 1 1)
            hex (12 11 16 15 31 30 35 34) (10 10 1) simpleGrading (1 1 1)
            hex (13 12 15 14 32 31 34 33) (20 10 1) simpleGrading (1 1 1)
78
           hex (14 15 18 17 33 34 37 36) (20 20 1) simpleGrading (1 1 1)
79
            hex (15 9 8 18 34 28 27 37) (10 20 1) simpleGrading (1 1 1)
81
82
83
      edges
84
85
                     5 (0.469846 0.17101 -0.5)
           arc 5 10 (0.17101 0.469846 -0.5)
arc 1 4 (0.939693 0.34202 -0.5)
            arc 4 9
                        (0.34202 0.939693 -0.5)
88
           arc 19 24 (0.469846 0.17101 0.5)
arc 24 29 (0.17101 0.469846 0.5)
arc 20 23 (0.939693 0.34202 0.5)
```

OpenVFOAM-1.2

P-48

```
arc 23 28 (0.34202 0.939693 0.5)
          arc 11 16 (-0.469846 0.17101 -0.5)
arc 16 10 (-0.17101 0.469846 -0.5)
          arc 12 15 (-0.939693 0.34202 -0.5)
                      (-0.34202 0.939693 -0.5)
(-0.469846 0.17101 0.5)
          arc 15 9
arc 30 35
          arc 35 29 (-0.17101 0.469846 0.5)
          arc 31 34 (-0.939693 0.34202 0.5)
          arc 34 28 (-0.34202 0.939693 0.5)
100
101
103
     natches
104
          symmetryPlane down
105
106
                (0 1 20 19)
(1 2 21 20)
107
                (12 11 30 31)
(13 12 31 32)
109
110
111
          patch right
112
                (2 3 22 21)
114
                (3 6 25 22)
115
          symmetryPlane up
117
118
119
                (6 7 26 25)
(8 18 37 27)
121
                (18 17 36 37)
122
123
          patch left
124
125
                (14 13 32 33)
126
127
128
          symmetryPlane cylinder
129
130
                (10 5 24 29)
(5 0 19 24)
131
132
133
                (16 10 29 35
134
     );
\frac{136}{137}
     mergePatchPairs
139
141
```

### 3.1.4 Boundary conditions and initial fields

Using FoamX or editing case files by hand, set the boundary conditions in accordance with the problem description in Figure 3.1, i.e. the left boundary should be an Inlet, the right boundary should be an Outlet and the down and cylinder boundaries should be symmetryPlane. The top boundary conditions is chosen so that we can make the most genuine comparison with our analytical solution which uses the assumption that the domain is infinite in the y direction. The result is that the normal gradient of  $\mathbf{U}$  is small along a plane coinciding with our boundary. We therefore impose the condition that the normal component is zero, i.e. specify the boundary as a symmetryPlane, thereby ensuring that the comparison with the analytical is reasonable.

### 3.1.5 Running the case

No fluid properties need be specified in this problem since the flow is assumed to be incompressible and inviscid. In the *system* subdirectory, the *controlDict* specifies the control

OpenVFOAM-1.2


Examples of the use of OpenFOAM

parameters for the run. Note that since we assume steady flow, we only run for 1 time step:


```
OpenFOAM: The Open Source CFD Toolbox
              F ield
              O peration
                             Version: 1.0
      11
              A nd
                             Web:
                                      http://www.openfoam.org
              M anipulation
   FoamFile
10
11
       version
      format
                     ascii;
       case
       instance
       class
                     dictionary
21
   application potentialFoam;
   startFrom
                 startTime;
   startTime
                 0;
                 endTime:
   stopAt
                 1;
   endTime
                 1;
   writeControl
                 timeStep;
   writeInterval
                 1;
   purgeWrite
   writeFormat
                 ascii:
   writePrecision 6:
   writeCompression uncompressed;
                 general;
   timeFormat
   timePrecision
                 6;
   runTimeModifiable ves:
```

potentialFoam executes an iterative loop around the pressure equation which it solves in order that explicit terms relating to non-orthogonal correction in the Laplacian term may be updated in successive iterations. The number of iterations around the pressure equation is controlled by the nNonOrthogonalCorrectors keyword in controlDict. In the first instance we can set nNonOrthogonalCorrectors to 0 so that no loops are performed, i.e. the pressure equation is solved once, and there is no non-orthogonal correction. The solution is shown in Figure 3.3(a) (at t=1, when the steady-state simulation is complete). We expect the solution to show smooth streamlines passing across the domain as in the analytical solution in Figure 3.3(c), yet there is clearly some error in the regions where there is high non-orthogonality in the mesh, e.g. at the join of blocks 0, 1 and 3. The case can be run a second time with some non-orthogonal correction by setting nNonOrthogonalCorrectors to 3. The solution shows smooth streamlines with no significant error due to non-orthogonality as shown in Figure 3.3(b).


P-50

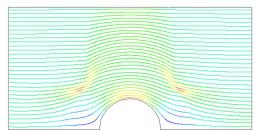

(a) With no non-orthogonal correction

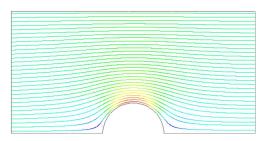

(b) With non-orthogonal correction

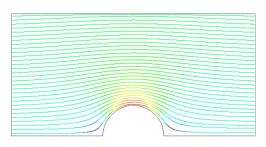

(c) Analytical solution

Figure 3.3: Streamlines of potential flow

Open√FOAM-1.2

Examples of the use of OpenFOAM

### 3.1.6 Generating the analytical solution

P-52

Source code is included in the  $FOAM\_TUTORIALS/potentialFoam/analyticalCylinder$  directory to generate the analytical solution for the potential flow case. The velocity at any point at a distance d and angle  $\theta$  from the cylinder centre is described analytically as

$$U_x = U_{\infty} \left[ 1 - \left( \frac{r}{d} \right)^2 \cos 2\theta \right]$$

$$U_y = U_{\infty} \left( \frac{r}{d} \right)^2 \sin 2\theta \quad (3.3)$$

where r is the cylinder radius and  $U_{\infty}$  is the inlet flow velocity. Here,  $\theta$  describes the angle subtended from the x-axis.

Let us examine some details of the source code in the <code>analyticalCylinder</code> directory. In <code>createFields.H</code>, the velocity field is read in using the <code>IOobject::NO\_WRITE</code> option to ensure that the field data can never be overwritten during execution of <code>analyticalCylinder</code>. The inlet velocity and cylinder radius are taken from data read from the mesh and a field <code>UA</code> is set up to store the analytical solution:

```
Info<< "Reading field U\n" << endl;
yolVectorField U</pre>
            IOobject
                  runTime.timeName(),
                  mesh,
IOobject::MUST_READ,
IOobject::NO_WRITE
11
12
13
14
15
      Info<< "Reading inlet velocity uInfX\n" << endl;</pre>
16
17
      dimensionedScalar uInfX
18
19
           "uInfx",
dimensionSet(0, 1, -1, 0, 0),
U.boundaryField()[3][0].x()
22
23
24
25
26
27
28
      Info << "U at inlet = " << uInfX.value() << " m/s" << endl;</pre>
      dimensionedScalar radius
             "radius".
           dimensionSet(0, 1, 0, 0, 0),
mag(U.mesh().boundary()[4].Cf()[0])
31
32
33
34
35
      Info << "Cylinder radius = " << radius.value() << " m" << endl;</pre>
      volVectorField UA
36
            IOobject
37
38
39
40
                  runTime.timeName(),
                  mesh,
IOobject::NO_READ,
IOobject::AUTO_WRITE
41
42
43
44
     );
```

Thea main code analyticalCylinder. C performs the following tasks:

• increments the time step by runTime++;

• generates the analytical solution for field UA using tensor arithmetic;

```
• writes the solution to file by runTime.writeObjects().
                    F ield
                                         OpenFOAM: The Open Source CFD Toolbox
                    O peration
                                         Copyright (C) 1991-2005 OpenCFD Ltd.
                    A nd
           \\/
                    M anipulation
     License
          This file is part of OpenFOAM.
          {\tt OpenFOAM} is free software; you can redistribute it and/or modify it under the terms of the GNU General Public License as published by the
          Free Software Foundation; either version 2 of the License, or (at your
13
          option) any later version.
14
          OpenFOAM is distributed in the hope that it will be useful, but WITHOUT ANY WARRANTY; without even the implied warranty of MERCHANTABILITY or FINNESS FOR A PARTICULAR PURPOSE. See the GNU General Public License
          for more details.
          You should have received a copy of the GNU General Public License along with OpenFOAM; if not, write to the Free Software Foundation, Inc., 51 Franklin St, Fifth Floor, Boston, MA 02110-1301 USA
     Application
25
          analyticalCylinder
     Description
28
          Generates an analytical solution for potential flow around a cylinder.
          Can be compared with the solution from the potentialFlow/cylinder example
33
     #include "fvCFD.H"
     int main(int argc, char *argv[])
39
          include "setRootCase.H'
          include "createTime.H" include "createMesh.H"
45
          include "createFields.H"
          Info << "\nEvaluating analytical solution" << endl;
          volVectorField centres = UA.mesh().C();
52
          volScalarField magCentres = mag(centres);
          volScalarField theta = acos((centres & vector(1,0,0))/magCentres);
          volVectorField cs2theta =
            cos(2*theta)*vector(1,0,0)
+ sin(2*theta)*vector(0,1,0);
          UA = uInfX*(dimensionedVector(vector(1,0,0))
61
            - pow((radius/magCentres),2)*cs2theta);
          runTime.write();
          Info<< "end" << endl;</pre>
          return(0);
68
```

The utility must be compiled with wmake as normal. It can then be run by typing

analyticalCylinder \$FOAM\_RUN/potentialFoam cylinder

Open∇FOAM-1.2

P-54

The analytical solution is plotted as streamlines as shown in Figure 3.3(c). Note that differences in the analytical and numerical solutions at the top plane are due to the fact that the analytical solution assumes an infinite boundary and the numerical solution specifies a zeroGradient boundary condition at that boundary.

#### 3.1.7 Exercise

Investigate the accuracy of the numerical solution by implementing some measure of comparison between the numerical and analytical in analyticalCylinder.

### 3.2 Steady turbulent flow over a backward-facing step

In this example we shall investigate steady turbulent flow over a backward-facing step. The problem description is taken from one used by Pitz and Daily in an experimental investigation [\*\*] against which the computed solution can be compared. This example introduces the following OpenFOAM features for the first time:

- generation of a mesh using blockMesh using full mesh grading capability;
- steady turbulent flow.

### 3.2.1 Problem specification

The problem is defined as follows:

**Solution domain** The domain is 2 dimensional, consisting of a short inlet, a backward-facing step and converging nozzle at outlet as shown in Figure 3.4.



Figure 3.4: Geometry of backward-facing step

#### Governing equations

Mass continuity for incompressible flow

$$\nabla \cdot \mathbf{U} = 0 \tag{3.4}$$

Steady flow momentum equation

$$\nabla \cdot (\mathbf{U}\mathbf{U}) + \nabla \cdot \mathbf{R} = -\nabla p \tag{3.5}$$

where p is kinematic pressure and (in slightly over-simplistic terms)  $\mathbf{R} = \nu_{eff} \nabla \mathbf{U}$  is the viscous stress term with an effective kinematic viscosity  $\nu_{eff}$ , calculated from selected transport and turbulence models.

Initial conditions U = 0 m/s, p = 0 Pa — required in OpenFOAM input files but not necessary for the solution since the problem is steady-state.

#### Boundary conditions

- Inlet (left) with fixed velocity  $\mathbf{U} = (10, 0, 0) \text{ m/s}$ ;
- Outlet (right) with fixed pressure p = 0 Pa;
- · No-slip walls on other boundaries

### $Transport\ properties$

• Kinematic viscosity of air  $\nu = \mu/\rho = 18.1 \times 10^{-6}/1.293 = 14.0 \ \mu m^2/s$ 

#### Turbulence model

- Standard  $k \epsilon$ :
- Coefficients:  $C_{\mu} = 0.09$ ;  $C_1 = 1.44$ ;  $C_2 = 1.92$ ;  $\alpha_k = 1$ ;  $\alpha_{\epsilon} = 0.76923$ .

Solver name simpleFoam: an implementation for steady incompressible flow.

Case name pitzDaily, located in the \$FOAM\_TUTORIALS/simpleFoam directory.

The problem is solved using simpleFoam, so-called as it is an implementation for steady flow using the SIMPLE algorithm [\*\*]. The solver has full access to all the turbulence models in the incompressibleTurbulenceModels library and the non-Newtonian models incompressibleTransportModels library of the standard OpenFOAM release.

#### 3.2.2 Mesh generation

We expect that the flow in this problem is reasonably complex and an optimum solution will require grading of the mesh. In general, the regions of highest shear are particularly critical, requiring a finer mesh than in the regions of low shear. We can anticipate where high shear will occur by considering what the solution might be in advance of any calculation. At the inlet we have strong uniform flow in the x direction and, as it passes over the step, it generates shear on the fluid below, generating a vortex in the bottom half of the domain. The regions of high shear will therefore be close to the centreline of the domain and close to the walls.

The domain is subdivided into 12 blocks as shown in Figure 3.5.

The mesh is 3 dimensional, as always in OpenFOAM, so in Figure 3.5 we are viewing the back plane along z=-0.5. The full set of vertices and blocks are given in the mesh description file below:

Open VFOAM-1.2


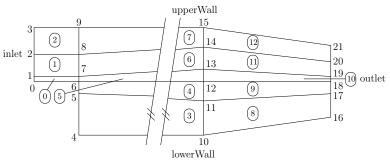


Figure 3.5: Blocks in backward-facing step

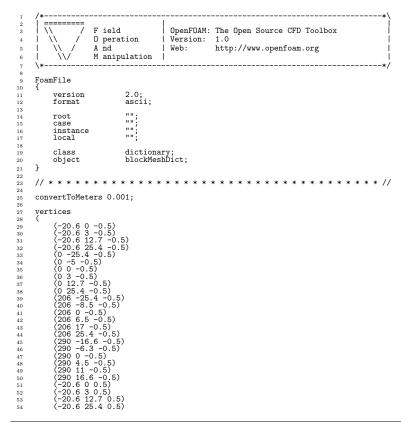

OpenVFOAM-1.2

P-56

P-58

P-57

```
(0 -25.4 0.5)
(0 -5 0.5)
(0 0 0.5)
(0 3 0.5)
(0 12.7 0.5)
(0 25.4 0.5)
(206 -25.4 0.5)
(206 -8.5 0.5)
(206 0.5)
             (206 0 0.5)
(206 6.5 0.5)
             (206 17 0.5)
(206 25.4 0.5)
(290 -16.6 0.5)
(290 -6.3 0.5)
(290 0 0.5)
             (290 16.6 0.5)
72
73
       blocks
            hex (0 6 7 1 22 28 29 23) (18 7 1) simpleGrading (0.5 1.8 1)
            hex (1 7 8 2 23 29 30 24) (18 10 1) simpleGrading (0.5 4 1)
             hex (2 8 9 3 24 30 31 25) (18 13 1) simpleGrading (0.5 0.25 1)
 79
            hex (4 10 11 5 26 32 33 27) (180 18 1) simpleGrading (4 1 1)
 80
            hex (5 11 12 6 27 33 34 28) (180 9 1) edgeGrading (4 4 4 4 0.5 1 1 0.5 1 1 1 1) hex (6 12 13 7 28 34 35 29) (180 7 1) edgeGrading (4 4 4 4 1.8 1 1 1.8 1 1 1 1)
 81
            hex (7 13 14 8 29 35 36 30) (180 10 1) edgeGrading (4 4 4 4 4 1 1 4 1 1 1 1)
             hex (8 14 15 9 30 36 37 31) (180 13 1) simpleGrading (4 0.25 1)
 84
            hex (10 16 17 11 32 38 39 33) (25 18 1) simpleGrading (2.5 1 1)
 85
            hex (11 17 18 12 33 39 40 34) (25 9 1) simpleGrading (2.5 1 1)
            hex (12 18 19 13 34 40 41 35) (25 7 1) simpleGrading (2.5 1 1)
             hex (13 19 20 14 35 41 42 36) (25 10 1) simpleGrading (2.5 1 1)
            hex (14 20 21 15 36 42 43 37) (25 13 1) simpleGrading (2.5 0.25 1)
90
93
       patches
97
             patch inlet
99
                   (0 22 23 1)
(1 23 24 2)
101
                   (2 24 25 3)
102
             patch outlet
104
105
                        17 39 38
106
                  (10 17 39 38)
(17 18 40 39)
(18 19 41 40)
(19 20 42 41)
(20 21 43 42)
108
109
111
112
             wall upperWall
113
                   (3 25 31 9)
(9 31 37 15)
114
115
                   (15 37 43 21)
116
117
             wall lowerWall
118
119
                   (0 6 28 22)
(6 5 27 28)
(5 4 26 27)
120
121
122
                   (4 10 32 26)
(10 16 38 32)
124
125
126
             empty frontAndBack
127
                  (22 28 29 23)
(23 29 30 24)
(24 30 31 25)
(26 32 33 27)
120
130
131
```

OpenVFOAM-1.2

```
(27 33 34 28)
(28 34 35 29)
(29 35 36 30)
(30 36 37 31)
(32 38 39 33)
(33 39 40 34)
132
133
134
135
136
137
138
                        (33 39 40 34)
(34 40 41 35)
(35 41 42 36)
(36 42 43 37)
(0 1 7 6)
(1 2 8 7)
(2 3 9 8)
140
141
143
                        (4 5 11 10)
(5 6 12 11)
(6 7 13 12)
144
145
146
147
                        (8 9 15 14)
(10 11 17 16
(11 12 18 17
\frac{149}{150}
                        (12 13 19 18)
(13 14 20 19)
151
152
153
                        (14 15 21 20)
154
155
        );
156
        mergePatchPairs
157
158
159
160
```

A major feature of this problem is the use of the full mesh grading capability of blockMesh that is described in section 6.3.1 of the User Guide. The user can see that blocks 4,5 and 6 use the full list of 12 expansion ratios. The expansion ratios correspond to each edge of the block, the first 4 to the edges aligned in the local  $x_1$  direction, the second 4 to the edges in the local  $x_2$  direction and the last 4 to the edges in the local  $x_3$  direction. In blocks 4, 5, and 6, the ratios are equal for all edges in the local  $x_1$  and  $x_3$  directions but not for the edges in the  $x_2$  direction that corresponds in all blocks to the global y. If we consider the ratios used in relation to the block definition in section 6.3.1 of the User Guide, we realize that different gradings have been prescribed along the left and right edges in blocks 4,5 and 6 in Figure 3.5. The purpose of this differential grading is to generate a fine mesh close to the most critical region of flow, the corner of the step, and allow it to expand into the rest of the domain.

The mesh can be generated using blockMesh from the command line or from within FoamX and viewed as described in previous examples.

### 3.2.3 Boundary conditions and initial fields

The case files can be viewed, or edited from within FoamX or by hand. In this case, we are required to set the initial and boundary fields for velocity  $\mathbf{U}$ , pressure p, turbulent kinetic energy k and dissipation rate  $\varepsilon$ . The boundary conditions can be specified by setting the physical patch types in FoamX: the upper and lower walls are set to Wall, the left patch to Inlet and the right patch to Outlet. These physical boundary conditions require us to specify a fixedValue at the inlet on  $\mathbf{U}$ , k and  $\varepsilon$ .  $\mathbf{U}$  is given in the problem specification, but the values of k and  $\epsilon$  must be chosen by the user in a similar manner to that described in section 2.1.8.1 of the User Guide. We assume that the inlet turbulence is isotropic and estimate the fluctuations to be 5% of  $\mathbf{U}$  at the inlet. We have

$$U'_x = U'_y = U'_z = \frac{5}{100} 10 = 0.5 \text{ m/s}$$
 (3.6)

$$k = \frac{3}{2}(0.5)^2 = 0.375 \text{ m}^2/\text{s}^2$$
 (3.7)

If we estimate the turbulent length scale l to be 10% of the width of the inlet then

$$\varepsilon = \frac{C_{\mu}^{0.75}k^{1.5}}{l} = \frac{0.09^{0.75}0.375^{1.5}}{0.1 \times 25.4 \times 10^{-3}} = 14.855 \,\mathrm{m}^2/\mathrm{s}^3 \tag{3.8}$$

At the outlet we need only specify the pressure p = 0Pa.

#### 3.2.4 Case control

The choices of fvSchemes are as follows: the timeScheme should be SteadyState; the gradScheme and laplacianScheme should be set as default to Gauss; and, the divScheme should be set to UD to ensure boundedness.

Special attention should be paid to the settings of *tvTolerances*. Although the top level simpleFoam code contains only equations for p and  $\mathbf{U}$ , the turbulent model solves equations for k,  $\varepsilon$  and  $\mathbf{R}$ , and tolerance settings are required for all 5 equations. A solverTolerance of  $10^{-5}$  and solverRelativeTolerance of 0.1 are acceptable for all variables with the exception of p when  $10^{-6}$  and 0.01 are recommended. Under-relaxation of the solution is required since the problem is steady. A relaxationFactor of 0.7 is acceptable for  $\mathbf{U}$ , k,  $\varepsilon$  and  $\mathbf{R}$  but 0.3 is required for p to avoid numerical instability.

Finally, in *controlDict*, the time step deltaT should be set to 1 since in steady state cases such as this is effectively an iteration counter. With benefit of hindsight we know that the solution requires 1000 iterations reach reasonable convergence, hence endTime is set to 1000. Ensure that the writeFrequency is sufficiently high, e.g. 50, that you will not fill the hard disk with data during run time.

#### 3.2.5 Running the case and post-processing

Run the case and post-process the results. After a few iterations, e.g. 50, a vortex develops beneath the corner of the step that is the height of the step but narrow in the x-direction as shown by the vector plot of velocities is shown Figure 3.6(a). Over several iterations the vortex stretches in the x-direction from the step to the outlet until at 1000 iterations the system reaches a steady-state in which the vortex is fully developed as shown in Figure 3.6(b-c).


### 3.3 Supersonic flow over a forward-facing step

In this example we shall investigate supersonic flow over a forward-facing step. The problem description involves a flow of Mach 3 at an inlet to a rectangular geometry with a step near the inlet region that generates shock waves.


This example introduces the following OpenFOAM features for the first time:

supersonic flow;


Open VFOAM-1.2



(a) Velocity vectors after 50 iterations



(b) Velocity vectors at 1000 iterations



(c) Streamlines at 1000 iterations

Figure 3.6: Development of a vortex in the backward-facing step.

### 3.3.1 Problem specification

The problem is defined as follows:

Solution domain The domain is 2 dimensional and consists of a short inlet section followed by a forward-facing step of 20% the height of the section as shown in Figure 3.7

#### $Governing\ equations$

P-60

Mass continuity

$$\frac{\partial \rho}{\partial t} + \nabla \cdot (\rho \mathbf{U}) = 0 \tag{3.9}$$

• Ideal gas

$$p = \rho RT \tag{3.10}$$

• Momentum equation for Newtonian fluid

$$\frac{\partial \rho \mathbf{U}}{\partial t} + \nabla \cdot (\rho \mathbf{U} \mathbf{U}) - \nabla \cdot \mu \nabla \mathbf{U} = -\nabla p \tag{3.11}$$

P-61

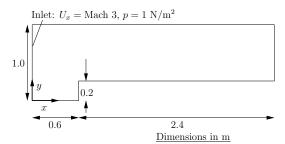


Figure 3.7: Geometry of the forward step geometry

• Energy equation for fluid (ignoring some viscous terms),  $e=C_vT$ , with Fourier's Law  $\mathbf{q}=-k\nabla T$ 

$$\frac{\partial \rho e}{\partial t} + \nabla \cdot (\rho \mathbf{U} e) - \nabla \cdot \left(\frac{k}{C_v}\right) \nabla e = p \nabla \cdot \mathbf{U}$$
(3.12)

**Initial conditions** U = 0 m/s, p = 1 Pa, T = 1 K.

### Boundary conditions

- Inlet (left) with fixed Value for velocity  $U=3~\mathrm{m/s}=\mathrm{Mach}\ 3,$  pressure  $p=1~\mathrm{Pa}$  and temperature  $T=1~\mathrm{K};$
- Outlet (right) with zeroGradient on U, p and T;
- No-slip adiabatic wall (bottom);
- Symmetry plane (top).

#### Transport properties

• Dynamic viscosity of air  $\mu = 18.1 \mu Pa s$ 

### Thermodynamic properties

- Specific heat at constant volume  $C_v = 1.78571 \text{ J/kg K}$
- Gas constant R = 0.714286 J/kg K
- Conductivity  $k = 32.3 \, \mu \text{W/m K}$

Case name forwardStep case located in the \$FOAM\_TUTORIALS/sonicFoam directory.

 ${\it Solver\ name}\ {\it sonic}{\it Foam}$ : an implementation for compressible trans-sonic/supersonic laminar gas flow.

The case is designed such that the speed of sound of the gas  $c = \sqrt{\gamma RT} = 1$  m/s, the consequence being that the velocities are directly equivalent to the Mach number, e.g. the inlet velocity of 3 m/s is equivalent to Mach 3. This speed of sound calculation can be verified using the relationship for a perfect gas,  $C_n - Cv = R$ , i.e. the ratio of specific heats

$$\gamma = C_p/C_v = \frac{R}{C_v} + 1 \tag{3.13}$$

Open VFOAM-1.2

### 3.3.2 Mesh generation

P-62

The mesh used in this case is relatively simple, specified with uniform rectangular cells of length  $0.06~\mathrm{m}$  in the x direction and  $0.05~\mathrm{m}$  in the y direction. The geometry can simply be divided into 3 blocks, one below the top of the step, and two above the step, one either side of the step front. The full set of vertices and blocks are given in the mesh description file below:

```
OpenFOAM: The Open Source CFD Toolbox
                      0 peration
                                            Version:
                                                        1.0
                      A nd
                                                         http://www.openfoam.org
            11/
                      M anipulation
     FoamFile
10
11
          version
                               2.0:
                               ascii;
12
13
          format
          root
          instance
                               m m .
          class
                               dictionary;
blockMeshDict;
21
22
23
24
25
     convertToMeters 1;
26
27
     vertices
28
29
          (0 0 -0.05)
(0.6 0 -0.05)
(0 0.2 -0.05)
(0.6 0.2 -0.05)
37
38
39
40
41
42
43
           (0.6 0.2 0.05)
           (0 1 0.05)
(0.6 1 0.05)
44
45
46
47
48
     blocks
          hex (0 1 3 2 8 9 11 10) (25 10 1) simpleGrading (1 1 1)
          hex (2 3 6 5 10 11 14 13) (25 40 1) simpleGrading (1 1 1)
          hex (3 4 7 6 11 12 15 14) (100 40 1) simpleGrading (1 1 1)
51
52
53
54
     edges
55
56
57
58
     );
     patches
59
          patch inlet
                (0 8 10 2)
(2 10 13 5)
           patch outlet
                (4 7 15 12)
```

OpenVFOAM-1.2

### 3.3.3 Running the case

The case approaches a steady-state at some time after 5 s. The results for pressure at 10 s are shown in Figure 3.8. The results clearly show discontinuities in pressure, *i.e.* shock waves, emanating from ahead of the base of the step.

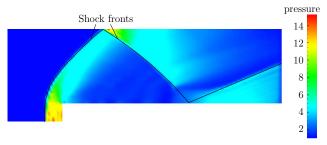


Figure 3.8: Shock fronts in the forward step problem

### 3.3.4 Exercise

The user can examine the effect on the solution of increasing the inlet velocity.

# 3.4 Decompression of a tank internally pressurised with water

In this example we shall investigate a problem of rapid opening of a pipe valve close to a pressurised liquid-filled tank. The prominent feature of the result in such cases is the propagation of pressure waves which must therefore be modelled as a compressible liquid.

This tutorial introduces the following OpenFOAM features for the first time:

• Mesh refinement

OpenVFOAM-1.2

#### • Pressure waves in liquids

P-64

### 3.4.1 Problem specification

Solution domain The domain is 2 dimensional and consists of a tank with a small outflow pipe as shown in Figure 3.9

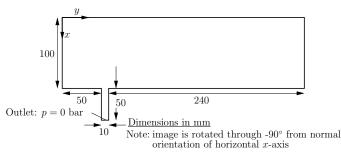


Figure 3.9: Geometry of a tank with outflow pipe

Governing equations This problem requires a model for compressibility  $\psi$  in the fluid in order to be able to resolve waves propagating at a finite speed. A barotropic relationship is used to relate density  $\rho$  and pressure p are related to  $\psi$ .

Mass continuity

$$\frac{\partial \rho}{\partial t} + \nabla \cdot (\rho \mathbf{U}) = 0 \tag{3.14}$$

• The barotropic relationship

$$\frac{\partial \rho}{\partial p} = \frac{\rho}{K} = \psi \tag{3.15}$$

where K is the bulk modulus

• Equation 3.15 is linearised as

$$\rho \approx \rho_0 + \psi \left( p - p_0 \right) \tag{3.16}$$

where  $\rho_0$  and  $p_0$  are the reference density and pressure respectively such that  $\rho(p_0) = \rho_0$ .

• Momentum equation for Newtonian fluid

$$\frac{\partial \rho \mathbf{U}}{\partial t} + \nabla \cdot (\rho \mathbf{U} \mathbf{U}) - \nabla \cdot \mu \nabla \mathbf{U} = -\nabla p \tag{3.17}$$

 $Boundary\ conditions$  Using  $\mathsf{FoamX}$  the following physical boundary conditions can be set:

- outerWall is specified the wall condition;
- axis is specified as the symmetryPlane;
- nozzle is specified as a pressureOutlet where p = 0 bar.
- front and back boundaries are specified as empty.

**Initial conditions** U = 0 m/s, p = 100 bar.

### Transport properties

• Dynamic viscosity of water  $\mu = 1.0 \text{ mPa s}$ 

#### Thermodynamic properties

- Density of water  $\rho = 1000 \text{ kg/m}^3$
- Reference pressure  $p_0 = 1$  bar
- Compressibility of water  $\psi = 4.54 \times 10^{-7} \text{ s}^2/\text{m}^2$

Solver name sonicLiquidFoam: a compressible sonic laminar liquid flow code.

Case name decompressionTank case located in the \$FOAM\_TUTORIALS/sonicLiquidFoam directory.

### 3.4.2 Mesh Generation

The full geometry is modelled in this case; the set of vertices and blocks are given in the mesh description file below:

```
F ield
                                            OpenFOAM: The Open Source CFD Toolbox
                      O peration
                                            Version: 1.0
                                                          http://www.openfoam.org
                      A nd
                      M anipulation
      FoamFile
           version
                                2.0;
           instance
                               dictionary;
blockMeshDict;
           class
20
21
23
24
25
     convertToMeters 0.1;
     vertices
           (0 0 -0.1)
(1 0 -0.1)
(0 0.5 -0.1)
(1 0.5 -0.1)
(1.5 0.5 -0.1)
           (0 0.6 -0.1)
(1 0.6 -0.1)
```

Open VFOAM-1.2

```
(0 3 -0.1)
(1 3 -0.1)
(0 0 0.1)
(1 0 0.1)
(0 0.5 0.1)
(1 0.5 0.1)
(1.5 0.5 0.1)
(1 0.6 0.1)
(1 0.6 0.1)
(1 0.5 0.6 0.1)
37
38
39
40
41
42
43
            (0 3 0.1)
(1 3 0.1)
48
49
50
51
52
      );
      blocks
           hex (0 1 3 2 10 11 13 12) (30 20 1) simpleGrading (1 1 1)
53
           hex (2 3 6 5 12 13 16 15) (30 5 1) simpleGrading (1 1 1)
           hex (3 4 7 6 13 14 17 16) (25 5 1) simpleGrading (1 1 1)
55
           hex (5 6 9 8 15 16 19 18) (30 95 1) simpleGrading (1 1 1)
56
57
58
59
      edges
60
61
62
63
      patches
64
65
            wall outerWall
                 (0 1 11 10)
(1 3 13 11)
(3 4 14 13)
(7 6 16 17)
(6 9 19 16)
                 (9 8 18 19)
            symmetryPlane axis
75
76
77
78
79
80
                 (0 10 12 2)
(2 12 15 5)
(5 15 18 8)
           patch nozzle
                 (4 7 17 14)
82
            empty back
84
                 (0 2 3 1)
87
            empty front
                 (10 11 13 12)
                 (15 16 19 18)
      );
99
100
      mergePatchPairs
\frac{101}{102}
```

In order to improve the numerical accuracy, we shall use the reference level of 1 bar for the pressure field. Note that both the internal field level and the boundary conditions are offset by the reference level.

P-66

### 3.4.3 Preparing the Run

Before we commence the setup of the calculation, we need to consider the characteristic velocity of the phenomenon we are trying to capture. In the case under consideration, the fluid velocity will be very small, but the pressure wave will propagate with the speed of sound in water. The speed of sound is calculated as:

$$c = \sqrt{\frac{1}{\psi}} = \sqrt{\frac{1}{4.54 \times 10^{-7}}} = 1483.2 \text{m/s}.$$
 (3.18)

For the mesh described above, the characteristic mesh size is approximately 2 mm (note the scaling factor of 0.1 in the *blockMeshDict* file). Using

$$Co = \frac{U \,\Delta t}{\Delta x} \tag{3.19}$$

a reasonable time step is around  $\Delta t = 5 \times 10^{-7} \mathrm{s}$ , giving the Co number of 0.35, based on the speed of sound. Also, note that the reported Co number by the code (associated with the convective velocity) will be two orders of magnitude smaller. As we are interested in the pressure wave propagation, we shall set the simulation time to 0.25 ms. For reference, the *controlDict* file is quoted below.

```
OpenFOAM: The Open Source CFD Toolbox
                  F ield
                  0 peration
                                   Version:
                                             1.0
                                              http://www.openfoam.org
                  M anipulation
    FoamFile
10
         version
         case
         instance
         class
                         dictionary;
20
21
23
    application sonicLiquidFoam;
25
27
    startFrom
                     startTime;
29
    startTime
    stopAt
                     endTime;
    endTime
                     0.0001;
                     5e-07;
    writeControl
                     timeStep;
    writeInterval
                     20:
    purgeWrite
                     0;
    writeFormat
                     ascii;
    writePrecision 6;
    writeCompression compressed;
```

OpenVFOAM-1.2



### 3.4.4 Running the case

P-68

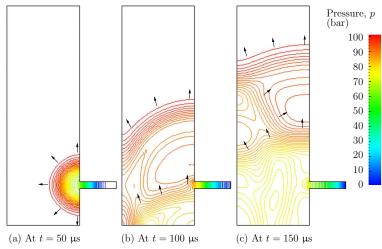


Figure 3.10: Propagation of pressure waves

The user can run the case and view results in dxFoam. The liquid flows out through the nozzle causing a wave to move along the nozzle. As it reaches the inlet to the tank, some of the wave is transmitted into the tank and some of it is reflected. While a wave is reflected up and down the inlet pipe, the waves transmitted into the tank expand and propagate through the tank. In Figure 3.10, the pressures are shown as contours so that the wave fronts are more clearly defined than if plotted as a normal isoline plot.

If the simulation is run for a long enough time for the reflected wave to return to the pipe, we can see that negative absolute pressure is detected. The modelling permits this and has some physical basis since liquids can support tension, *i.e.* negative pressures. In reality, however, impurities or dissolved gases in liquids act as sites for cavitation, or vapourisation/boiling, of the liquid due to the low pressure. Therefore in practical situations, we generally do not observe pressures falling below the vapourisation pressure of the liquid; not at least for longer than it takes for the cavitation process to occur.

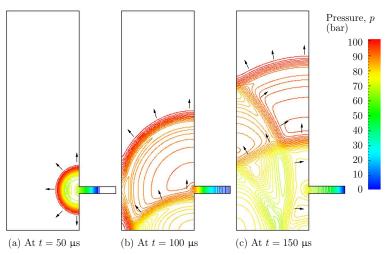


Figure 3.11: Propagation of pressure waves with refined mesh

### 3.4.5 Improving the solution by refining the mesh

Looking at the evolution of the resulting pressure field in time, we can clearly see the propagation of the pressure wave into the tank and numerous reflections from the inside walls. It is also obvious that the pressure wave is smeared over a number of cells. We shall now refine the mesh and reduce the time step to obtain a sharper front resolution. Simply edit the blockMeshDict and increase the number of cells by a factor of 4 in the x and y directions, i.e. block 0 becomes (120 80 1) from (30 20 1) and so on. Run blockMesh on this file. In addition, in order to maintain a Courant number below 1, the time step must be reduced accordingly to  $\Delta t = 10^{-7}$  s. The second simulation gives considerably better resolution of the pressure waves as shown in Figure 3.11.

### 3.5 Magnetohydrodynamic flow of a liquid

In this example we shall investigate an flow of an electrically-conducting liquid through a magnetic field. The problem is one belonging to the branch of fluid dynamics known as magnetohydrodynamics (MHD) that uses mhdFoam.

### 3.5.1 Problem specification

The problem is known as the Hartmann problem, chosen as it contains an analytical solution with which mhdFoam can be validated. It is defined as follows:

**Solution domain** The domain is 2 dimensional and consists of flow along two parallel plates as shown in Fig. 3.12.

### Governing equations



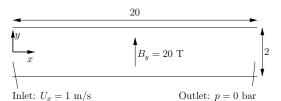


Figure 3.12: Geometry of the Hartmann problem

• Mass continuity for incompressible fluid

$$\nabla \cdot \mathbf{U} = 0 \tag{3.20}$$

• Momentum equation for incompressible fluid

$$\frac{\partial \mathbf{U}}{\partial t} + \nabla \cdot (\mathbf{U}\mathbf{U}) + \nabla \cdot (2\mathbf{B}\Gamma_{\mathbf{B}\mathbf{U}}\mathbf{B}) + \nabla \cdot (\nu \mathbf{U}) + \nabla (\Gamma_{\mathbf{B}\mathbf{U}}\mathbf{B} \cdot \mathbf{B}) = -\nabla p \ (3.21)$$

where **B** is the magnetic flux density,  $\Gamma_{\mathbf{B}\mathbf{U}} = (2\mu\rho)^{-1}$ .

• Maxwell's equations

P-70

$$\nabla \times \mathbf{E} = -\frac{\partial \mathbf{B}}{\partial t} \tag{3.22}$$

where E is the electric field strength.

$$\nabla \cdot \mathbf{B} = 0 \tag{3.23}$$

$$\nabla \times \mathbf{H} = \mathbf{J} + \frac{\partial \mathbf{D}}{\partial t} = \mathbf{J} \tag{3.24}$$

assuming  $\partial \mathbf{D}/\partial t \ll \mathbf{J}$ . Here,  $\mathbf{H}$  is the magnetic field strength,  $\mathbf{J}$  is the current density and  $\mathbf{D}$  is the electric flux density.

• Charge continuity

$$\nabla \cdot \mathbf{J} = 0 \tag{3.25}$$

• Constitutive law

$$\mathbf{B} = \mu \mathbf{H} \tag{3.26}$$

• Ohm's law

$$\mathbf{J} = \sigma \left( \mathbf{E} + \mathbf{U} \times \mathbf{B} \right) \tag{3.27}$$

• Combining Equation 3.22, Equation 3.24, Equation 3.27, and taking the curl

$$\frac{\partial \mathbf{B}}{\partial t} + \nabla \cdot (\mathbf{U}\mathbf{B}) - \nabla \cdot (\phi_{\mathbf{B}}\mathbf{U}) - \nabla \cdot (\Gamma_{\mathbf{B}}\mathbf{B}) = 0 \tag{3.28}$$

- inlet is specified the inlet condition with fixed velocity U = (1, 0, 0) m/s;
- outlet is specified as the outlet with with fixed pressure p = 0 Pa;
- upperWall is specified as a wall where  $\mathbf{B} = (0, 20, 0) \mathrm{T}$ .
- lowerWall is specified as a wall where  $\mathbf{B} = (0, 20, 0) \mathrm{T}$ .
- front and back boundaries are specified as empty.

Initial conditions U = 0 m/s, p = 100 Pa, B = (0, 20, 0) T.

### Transport properties

- Kinematic viscosity  $\nu = 1 \text{ Pas}$
- Density  $\rho = 1 \text{ kg m/s}$
- Electrical conductivity  $\sigma = 1 \ (\Omega \, m)^{-1}$
- Permeability  $\mu = 1 \text{ H/m}$

Solver name mhdFoam: an incompressible laminar magneto-hydrodynamics code.

Case name hartmann case located in the \$FOAM\_TUTORIALS/mhdFoam directory.

### 3.5.2 Mesh generation

The geometry is simply modelled with 100 cells in the x-direction and 40 cells in the y-direction; the set of vertices and blocks are given in the mesh description file below:

```
F ield
                                            OpenFOAM: The Open Source CFD Toolbox
         //
                      O peration
                                            Version: 1.0
                      A nd
                                                         http://www.openfoam.org
                      M anipulation
      FoamFile
           version
                                2.0:
11
           instance
           class
                               dictionary; blockMeshDict:
21
23
24
25
     convertToMeters 1;
27
     vertices
           (0 -1 0)
(20 -1 0)
(20 1 0)
(0 1 0)
(0 -1 0.1
           (20 -1 0.1)
(20 1 0.1)
```

Open VFOAM-1.2

```
);
   blocks
39
40
41
       hex (0 1 2 3 4 5 6 7) (100 40 1) simpleGrading (1 1 1)
42
43
44
    edges
45
46
47
    );
   patches
48
       patch inlet
50
           (0 4 7 3)
       patch outlet
55
           (2651)
       patch lowerWall
59
           (1 5 4 0)
       patch upperWall
62
           (3 7 6 2)
65
66
        empty frontAndBack
67
68
69
70
71
72
73
   mergePatchPairs
74
75
```

### 3.5.3 Running the case

P-72


The user can run the case and view results in dxFoam. It is also useful at this stage to run the Ucomponents utility to convert the U vector field into individual scalar components. MHD flow is governed by, amongst other things, the Hartmann number which is a measure of the ratio of electromagnetic body force to viscous force

$$M = BL\sqrt{\frac{\sigma}{\rho\nu}} \tag{3.29}$$

where L is the characteristic length scale. In this case with  $B_y=20$  T, M=20 and the electromagnetic body forces dominate the viscous forces. Consequently with the flow fairly steady at t=2 s the velocity profile is almost planar, viewed at a cross section midway along the domain x=10 m. The user can plot a graph of the profile of  $U_x$  in dxFoam. Now the user should reduce the magnetic flux density  ${\bf B}$  to 1 Tand re-run the code and Ucomponents. In this case, M=1 and the electromagnetic body forces no longer dominate. The velocity profile consequently takes on the parabolic form, characteristic of Poiseuille flow as shown in Figure 3.13. To validate the code the analytical solution for the velocity profile  $U_x$  is superimposed in Figure 3.13, given by:

$$\frac{U_x(y)}{U_x(0)} = \frac{\cosh M - \cosh M(y/L)}{\cosh M - 1} \tag{3.30}$$

where the characteristic length L is half the width of the domain, i.e. 1 m.



3.5 Magnetohydrodynamic flow of a liquid

Figure 3.13: Velocity profile in the Hartmann problem for  $B_y=1~\mathrm{T}$  and  $B_y=20~\mathrm{T}$ .

Index P-75 P-76 Index

## Index

## Symbols Numbers A B C D E F G H I J K L M N O P Q R S T U V W X Z

Symbols	access functions, P-23
*	Actor color button, U-168
tensor member function, P-25	adiabaticFlameT utility, U-93
+	adjustableRunTime
tensor member function, P-25	keyword entry, U-61, U-106
-	adjustPhi tools, U-95
tensor member function, P-25	adjustTimeStep keyword, U-60
/	algebraic multi-grid, U-116
tensor member function, P-25	algorithms tools, U-94
/**/	allTime
C++ syntax, U-78	menu entry, U-127
//	AMG
C++ syntax, U-78	keyword entry, U-115
OpenFOAM file syntax, U-100	analytical solution, P-45
# include	anisotropicFilter model, U-98
C++ syntax, U-72, U-78	Annotate window panel, U-27, U-168
&	APIfunctions model, U-97
tensor member function, P-25	applicationClass keyword, U-105
&&	applications, U-69
tensor member function, P-25	arbitrarily unstructured, P-31
•	arc
tensor member function, P-25	keyword entry, U-48, U-151
<lesmodel>Coeffs keyword, U-185</lesmodel>	arc keyword, U-150
<delta>Coeffs keyword, U-185</delta>	ascii
<pre><turbulencemodel>Coeffs keyword, U-185</turbulencemodel></pre>	keyword entry, U-106
0.000000e+00 directory, U-100	attachMesh utility, U-90
1-dimensional mesh, U-140	autoPatch utility, U-90
1D mesh, U-140	axes
2-dimensional mesh, U-140	right-handed, U-149
2D mesh, U-140	right-handed rectangular Cartesian, P-15
3D View button, U-168, U-169	U-21
3D view Properties	axi-symmetric cases, U-146, U-155
menu entry, U-27, U-168–U-170	axi-symmetric mesh, U-140
Numbers	В
0 directory, U-100	background
o directory, 0-100	process, U-28, U-82
$\mathbf{A}$	backward
Accept button II-167	keyword entry U-114

Backward differencing, P-39	processor, U-146
basicThermophysicalModels	setup, U-23
library, U-95	slip, U-148
BDCG	supersonicFreeStream, U-148
keyword entry, U-115	surfaceNormalFixedValue, U-148
BICCG	symmetryPlane, P-65, U-145
keyword entry, U-115	totalPressure, U-148
binary	turbulentInlet, U-148
keyword entry, U-106	wall, U-42
BirdCarreau model, U-98	wall, P-65, P-71, U-145
blended differencing, P-38	wallBuoyantPressure, U-148
block	wedge, U-142, U-146, U-155
expansion ratio, U-152	zeroGradient, U-147
block keyword, U-150	boundary conditions, P-43
blockMesh solver, P-47	Dirichlet, P-43
blockMesh utility, U-39, U-90, U-149	inlet, P-44
blockMesh	Neumann, P-43
menu entry, U-22, U-33	no-slip impermeable wall, P-44
blockMesh executable	outlet, P-44
vertex numbering, U-152	physical, P-44
blockMeshDict	symmetry plane, P-44
dictionary, U-21, U-22, U-37, U-48, U-149,	
U-156	empty, U-132
blocks keyword, U-22, U-151	wall, U-42
bound tools, U-95	boundaryField keyword, U-104
boundaries, U-142	boundaryFoam solver, U-87
boundary, U-142	bounded
boundary	keyword entry, U-111, U-113
dictionary, U-139, U-149	boxToCell keyword, U-59
boundary condition	boxTurb utility, U-89
calculated, U-147	breaking of a dam, U-56
cyclic, U-146	bubbleFoam solver, U-88
directionMixed, U-147	buoyantFoam solver, U-89
empty, P-65, P-71, U-21, U-142, U-146	buoyantSimpleFoam solver, U-89
fixedGradient, U-147	button
fixedValue, U-147	3D View, U-168, U-169
fluxCorrectedVelocity, U-148	Accept, U-167
gammaContactAngle, U-58	Actor color, U-168
inlet, P-71	Close Case, U-33
inletOutlet, U-148	Compact, U-128
mixed, U-147	Delete, U-167
movingWallVelocity, U-148	Display Orientation Axes, U-168
outlet, P-71	Info, U-128
outletlnlet, U-148	My Jobs, U-128
partialSlip, U-148	Orientation Axes, U-27
patch, U-145	Refresh Case Browser, U-41
pressureDirectedInletVelocity, U-148	Reset Range, U-28
pressureInletVelocity, U-148	Reset, U-167
pressureOutlet, P-65	Start Calculation Now, U-28
nressureTransmissive II-148	Start Calculation U-35

Index P-77 P-78 Index

Has nevellal prejection II 97 II 169	cfdTools
Use parallel projection, U-27, U-168 cont, U-128	library, U-94
endNow, U-128	
	cfxToFoam utility, U-90, U-156
end, U-128 kill, U-128	cGamma keyword, U-62 channelOodles solver, U-88
purge, U-128	,
read, U-128	checkMesh utility, U-90, U-158
status, U-128	checkYPlus utility, U-93
suspend, U-128	chemistryModel
Suspend, 6 126	library, U-97 chemistryModel model, U-97
$\mathbf{C}$	chemistryNodel model, U-97
C++ syntax	chemkinMixture model, U-96, U-182
/**/, U-78	Class menu, U-125
//, U-78	class menu, 0-123
# include, U-72, U-78	cell, P-31
calculated	dimensionSet, P-26, P-32, P-33
boundary condition, U-147	face, P-31
Camera window panel, U-168	finiteVolumeCalculus, P-36
Camera Controls window panel, U-168	finiteVolumeCalculus, F-30
Camera Orientation window panel, U-168	fvMesh, P-31, U-139
Case menu, U-87	fvSchemes, P-38
case	fvc, P-36
browser, U-123	fvm, P-36
server, U-129	pointField, P-31
case keyword, U-101	polyBoundaryMesh, P-31
case manager	polyMesh, P-31, U-137, U-139
FoamX, U-119	polyPatchList, P-31
Case Name text box, U-125	polyPatch, P-31
Case Root text box, U-125	scalarField, P-29
caseRoots keyword, U-19	scalar, P-24
cases, U-99	slice, P-31
cavity flow, U-19	symmTensorField, P-29
CELARCH	symmTensorThirdField, P-29
environment variable, U-174	tensorField, P-29
CEI_HOME	tensorThirdField, P-29
environment variable, U-174 cell	tensor, P-24
	vectorField, P-29
expansion ratio, U-152 cell class, P-31	vector, P-24, U-103
cell	word, P-26, P-31
keyword entry, U-176	class keyword, U-101
cellDecompFiniteElement	clockTime
library, U-95	keyword entry, U-106
cellPoint	Close Case button, U-33
keyword entry, U-176	cloud keyword, U-177
cellPointFace	cmptAv
keyword entry, U-176	tensor member function, P-25
cells	Co utility, U-92
dictionary, U-139, U-149	cofactors
cellSet utility, U-90	tensor member function, P-25
central differencing, P-38	coldEngineFoam solver, U-88

Color by menu, U-168	keyword entry, U-113
combustionThermophysicalModels	cubicCorrection
library, U-96	keyword entry, U-111
comments, U-78	curl, P-37
Compact button, U-128	curl
compressed	fvc member function, P-37
keyword entry, U-106	curve keyword, U-177
compressible tools, U-95	cyclic
compressibleLESmodels	boundary condition, U-146
library, U-98	cyclic
compressible Turbulence Models	keyword entry, U-145
library, U-97	cylinder
constant directory, U-99, U-181	flow around a, P-45
constLaminarFlameSpeed model, U-96	D
constTransport model, U-96, U-182	D
cont button, U-128	d2dt2
contactStressFoam solver, U-89	fvc member function, P-37
containers tools, U-94	fvm member function, P-37
continuum	dam
mechanics, P-15	breaking of a, U-56
control	db tools, U-94
of time, U-105	DCG
controlDict	keyword entry, U-115
dictionary, P-67, U-24, U-34, U-43, U-52,	ddt
U-61, U-99, U-163	fvc member function, P-37
controlDict file, P-49	fvm member function, P-37
convection, see divergence, P-38	DeardorffDiffStress model, U-98
convergence, U-41	decomposePar utility, U-82, U-83, U-93
convertToMeters keyword, U-149, U-150	decomposeParDict
coordinate	dictionary, U-82
system, P-15	decomposition
coordinate system, U-21	of field, U-82
CORBA, U-95, U-119	of mesh, U-82
corrected	decompression of a tank, P-63
keyword entry, U-111, U-113	defaultFieldValues keyword, U-59
couplePatches utility, U-90	deformedGeom utility, U-90
Courant number, P-42, U-25	Delete button, U-167
cpuTime	delta keyword, U-84, U-185
keyword entry, U-106	deltaT keyword, U-105
Crank Nicholson	dependencies, U-72
temporal discretisation, P-43	dependency lists, U-72
CrankNicholson	det
keyword entry, U-114	tensor member function, P-25
createPatch utility, U-90	determinant, see tensor, determinant
	dev
cross product, see tensor, vector cross product	tensor member function, P-25
CrossPowerLaw	diag
keyword entry, U-59	tensor member function, P-25
CrossPowerLaw model, U-98	Dictionaries dictionary tree, U-132
cubeRootVolDelta model, U-98	dictionary
cubicCorrected	PISO, U-26

Index P-79 P-80 Index

blockMeshDict, U-21, U-22, U-37, U-48, U-149, U-156 boundary, U-139, U-149 cells, U-139, U-149 controlDict, P-67, U-24, U-34, U-43, U-52, U-61, U-99, U-163 decomposeParDict, U-82	constant, U-99, U-181 fluentInterface, U-171 polyMesh, U-99, U-139 processorN, U-84 run, U-99 system, P-49, U-99
faces, U-139, U-149	tutorials, P-45, U-19 discretisation
fvSchemes, U-61, U-62, U-99, U-107, U-108 fvSolution, U-99, U-114	equation, P-33
mechanicalProperties, U-51	Display window panel, U-27, U-28, U-166, U-168
points, U-139, U-149	Display Orientation Axes button, U-168
thermalProperties, U-52	distance
thermophysicalProperties, U-181	keyword entry, U-177
transportProperties, U-24, U-41, U-43	distributed keyword, U-84, U-86
turbulenceProperties, U-43, U-184	div
dictionary tree	fvc member function, P-37
Dictionaries, U-132	fvm member function, P-37
Fields, U-23, U-132	divergence, P-37, P-39
Mesh, U-23	divSchemes keyword, U-108
Patches, U-23	divU utility, U-92
dieselEngineFoam solver, U-88	dnsFoam solver, U-88
dieselMixture model, U-96, U-182	double inner product, see tensor, double inner
dieselSpray	product
library, U-95	dxFoamExec utility, U-91
diEthylEther model, U-96	dynamicMesh
differencing	library, U-95
Backward, P-39	dynMixedSmagorinsky model, U-98
blended, P-38	dynOneEqEddy model, U-98
central, P-38	dynSmagorinsky model, U-98
Euler implicit, P-39	${f E}$
Gamma, P-38	edgeGrading keyword, U-152
MINMOD, P-38	edgeMesh
SUPERBEE, P-38	library, U-95
upwind, P-38	edges keyword, U-150
van Leer, P-38	electrostaticFoam solver, U-89
dimension	empty
checking in OpenFOAM, P-26	boundary condition, P-65, P-71, U-21,
dimensioned <type> template class, P-26</type>	U-142, U-146
dimensionedTypes tools, U-94	empty boundary type, U-132
dimensions keyword, U-104	empty
dimensionSet class, P-26, P-32, P-33	keyword entry, U-145
dimensionSet tools, U-94	end button, U-128
diMethylEther model, U-96	endNow button, U-128
direct numerical simulation, U-61 directionMixed	endTime keyword, U-25, U-105
boundary condition, U-147	engine
directory	library, U-95 engineCompRatio utility, U-93
0.000000e+00, U-100	engineFoam solver, U-88
0. U-100	engineSwirl utility, U-89
0, 0 100	engineeswiii duinty, 0-00

ensight74FoamExec utility, U-91, U-174	flow over backward step, P-54
ensight76FoamExec utility, U-91	Hartmann problem, P-69
ENSIGHT7_INPUT	supersonic flow over forward step, P-59
environment variable, U-174	explicit
ENSIGHT7_READER	temporal discretisation, P-42
environment variable, U-174	exponential model, U-97
enstrophy utility, U-92	T.
environment variable	$\mathbf{F}$
CEI_ARCH, U-174	face class, P-31
CEI_HOME, U-174	face keyword, U-177
ENSIGHT7_INPUT, U-174	faceDecompFiniteElement
ENSIGHT7_READER, U-174	library, U-95
FOAMX_PATH, U-135	faces
FOAMX_SYSTEM_CONFIG, U-135	dictionary, U-139, U-149
FOAMX_USER_CONFIG, U-135	faceSet utility, U-90
FOAM_RUN, U-99, U-136	field
JAVA_HOME, U-135	U, U-25
WM_ARCH, U-76	p, U-25
WM_COMPILER_BIN, U-76	decomposition, U-82
WM_COMPILER_DIR, U-76	FieldField <type> template class, P-32</type>
WM_COMPILER_LIB, U-76	Fields dictionary tree, U-23, U-132
WM_COMPILER, U-76	Fields window, U-28
WM_COMPILE_OPTION, U-76	fields, P-29
	mapping, U-163
WM_DIR, U-76	fields tools, U-94
WM_JAVAC_OPTION, U-76	fields keyword, U-176
WM_LINK_LANGUAGE, U-76	fieldToCellSet utility, U-90
WM_MPLIB, U-76	Field <type> template class, P-29</type>
WM_OPTIONS, U-76	fieldValues keyword, U-59
WM_PROJECT_DIR, U-76	file
WM_PROJECT_INST_DIR, U-76	FoamX.cfg, U-135
WM_PROJECT_LANGUAGE, U-76	FoamXClient.cfg, U-120, U-135
WM_PROJECT_USER_DIR, U-76	Make/files, U-75
WM_PROJECT_VERSION, U-76	controlDict, P-49
WM_PROJECT, U-76	environmentalProperties, U-60
WM_SHELL, U-76	files, U-73
wmake, U-76	options, U-73
environmentalProperties file, U-60	transportProperties, U-59
equilibriumCO utility, U-93	file format, U-100
equilibriumFlameT utility, U-93	files file, U-73
errorEstimation	financialFoam solver, U-89
library, U-95	finite volume
estimateScalarError utility, U-93	discretisation, P-27
Euler	mesh, P-31
keyword entry, U-114	finiteVolume tools, U-94
Euler implicit	finiteVolumeCalculus class, P-36
differencing, P-39	finiteVolumeMethod class, P-36
temporal discretisation, P-42	firstTime
examples	menu entry, U-127
decompression of a tank, P-63	firstTime keyword, U-105
flow around a cylinder, P-45	fixed

Index P-81 P-82 Index

keyword entry, U-106	FOAMX_PATH
fixedGradient	environment variable, U-135
boundary condition, U-147	FOAMX_SYSTEM_CONFIG
fixedValue	environment variable, U-135
boundary condition, U-147	FOAMX_USER_CONFIG
flattenMesh utility, U-90	environment variable, U-135
flow	FoamXClient.cfg file, U-120, U-135
free surface, U-56	foreground
laminar, U-19	process, U-28
steady, turbulent, P-54	format keyword, U-101
supersonic, P-59	fourth
turbulent, U-20	keyword entry, U-111-U-113
flow around a cylinder, P-45	fvc class, P-36
flow over backward step, P-54	fvc member function
fluentInterface directory, U-171	curl, P-37
fluentMeshToFoam utility, U-90, U-156	d2dt2, P-37
fluxCorrectedVelocity	ddt, P-37
boundary condition, U-148	div, P-37
fluxRequired keyword, U-108	gGrad, P-37
OpenFOAM	grad, P-37
cases, U-99	laplacian, P-37
FOAM_RUN	lsGrad, P-37
environment variable, U-99, U-136	snGrad, P-37
Foam Utilities menu, U-22, U-33, U-34	snGradCorrection, P-37
foamConvert21To22 utility, U-94	sqrGradGrad, P-37
foamCorrectVrt script/alias, U-161	fvm class, P-36
foamDataToFluent utility, U-91, U-171	fvm member function d2dt2, P-37
foamDebugSwitches utility, U-94	,
FoamFile keyword, U-101	ddt, P-37 div, P-37
foamInfoExec utility, U-94	laplacian, P-37
foamJob script/alias, U-178	Su, P-37
foamLog script/alias, U-179	SuSp, P-37
foamMeshToFluent utility, U-90, U-171	fvMatrix template class, P-36
foamToDX utility, U-91	fvMesh class, P-31, U-139
foamToEnsight utility, U-91	fvSchemes
foamToFieldview utility, U-91	dictionary, U-61, U-62, U-99, U-107, U-108
foamToFieldview9 utility, U-91	fvSchemes class, P-38
foamToVTK utility, U-92	fvSchemes
foamUser	menu entry, U-53
library, U-81	fvSolution
FoamX	dictionary, U-99, U-114
case browser, U-123	
case manager, U-119	G
case server, U-129	gambitToFoam utility, U-90, U-156
OpenFOAM case manager, U-119	Gamma
host browser, U-120	keyword entry, U-111
JAVA GUI, U-121	Gamma differencing, P-38
name server, U-120	gammaContactAngle
FoamX utility, U-89	boundary condition, U-58
FoamX.cfg file, U-135	Gauss

keyword entry, U-112	icoTopoFoam solver, U-88
Gauss's theorem, P-36	ideasToFoam utility, U-90, U-156
GaussSeidel	identities, see tensor, identities
keyword entry, U-115	identity, see tensor, identity
General window panel, U-168	incompressible tools, U-95
general model, U-97	incompressibleLESmodels
general	library, U-98
keyword entry, U-106	incompressiblePostProcessing
GeometricBoundaryField template class, P-32	library, U-95
geometricField <type> template class, P-32</type>	incompressibleTransportModels
gGrad	library, P-55, U-98
fvc member function, P-37	incompressibleTurbulenceModels
global tools, U-94	library, P-55, U-97
gmshToFoam utility, U-90	index
gnuplot	notation, P-16, P-17
keyword entry, U-106, U-176	Info button, U-128
grad	Information window panel, U-166
fvc member function, P-37	inhomogeneousMixture model, U-96, U-18
(Grad Grad) squared, P-37	inlet
gradient, P-37, P-40	boundary condition, P-71
Gauss scheme, P-40	inletOutlet
Gauss's theorem, U-53	boundary condition, U-148
least square fit, U-53	inner product, see tensor, inner product
least squares method, P-40, U-53	insideCells utility, U-90
surface normal, P-40	instance keyword, U-101
gradSchemes keyword, U-108	interFoam solver, U-88
graphFormat keyword, U-106	internalField keyword, U-104, U-132
Gstream	interpolationScheme keyword, U-176
library, U-95	interpolations tools, U-94
guldersLaminarFlameSpeed model, U-96	interpolationSchemes keyword, U-108
guiders Editional Turnes peed Inodes, 6 00	inv
H	tensor member function, P-25
hConstThermo model, U-96, U-181	isoOctane model, U-96
hhuMixtureThermo model, U-96, U-182	isocetane model, 0-30
hierarchical	${f J}$
keyword entry, U-83, U-84	janafThermo model, U-96, U-181
hMixtureThermo model, U-96, U-182	JAVA_HOME
homogeneousMixture model, U-96, U-182	environment variable, U-135
host, U-20	jplot
browser, U-120	keyword entry, U-106, U-176
hThermo model, U-95, U-182	
	K
I	kappa keyword, U-185
I	kEpsilon model, U-97
tensor member function, P-25	keyword
ICCG	FoamFile, U-101
keyword entry, U-115	LESmodel, U-185
icoErrorEstimate utility, U-93	adjustTimeStep, U-60
icoFoam solver, U-19, U-24, U-25, U-28, U-87	applicationClass, U-105
icoFoamAutoMotion solver, U-87	arc, U-150
icoMomentError utility, U-94	blocks, U-22, U-151

block, U-150	pRefCell, U-26, U-118
boundaryField, U-104	pRefValue, U-26, U-118
boxToCell, U-59	patchMap, U-163
cGamma, U-62	patches, U-150, U-152, U-153
caseRoots, U-19	pdRefCell, U-118
case, U-101	pdRefValue, U-118
class, U-101	physicalType, $U-140$ , $U-142$
cloud, U-177	processorWeights, $U ext{-}84$
convertToMeters, U-149, U-150	purgeWrite, $U-106$
curve, U-177	refGradient, U-147
defaultFieldValues, U-59	referenceLevel, $U-104$ , $U-132$
deltaT, U-105	${\tt regions}, {\hbox{U-}59}$
delta, U-84, U-185	roots, U-84, U-86
dimensions, U-104	root, <u>U-101</u>
distributed, U-84, U-86	runTimeModifiable, $U$ - $107$
divSchemes, U-108	sampleSets, U-176
${\tt edgeGrading}, \hbox{U-}152$	$ exttt{simpleGrading},  exttt{U-152}$
edges, $U$ - $150$	${ t snGradSchemes},\ { t U-108}$
$\mathtt{endTime},\ \mathrm{U\text{-}}25,\ \mathrm{U\text{-}}105$	solvers, U-115
face, U-177	$\mathtt{spline}, \mathrm{U}\text{-}150$
${ t fieldValues}, { t U-59}$	startFace, U-140
fields, U-176	$\mathtt{startFrom},\ \mathtt{U-25},\ \mathtt{U-105}$
firstTime, U-105	$\mathtt{startTime},\ \mathtt{U-25},\ \mathtt{U-105}$
fluxRequired, U-108	$\mathtt{stopAt},\ \mathrm{U} ext{-}105$
format, U-101	thermoType, $U-181$
gradSchemes, U-108	${\tt timeFormat},\ U\text{-}106$
${\tt graphFormat},  {\tt U-106}$	${\tt timePrecision},  U\text{-}106$
instance, U-101	timeScheme, U-108
internalField, U-104, U-132	${\tt topoSetSource},  \hbox{U-}59$
interpolationSchemes, U-108	turbulenceModel, U-185
interpolationScheme, U-176	turbulence, U-185
kappa, U- $185$	${\tt type}, \hbox{U-}142$
laplacianSchemes, U-108	uniform, U-177
latestTime, U-41	$ ext{valueFraction},   ext{U-}147$
leastSquares, U-53	value, U-147
local, U-101	version, U-101
manualCoeffs, U-84	$\mathtt{vertices},\ U\text{-}22,\ U\text{-}150$
maxCo, U-60	wallFunctionCoeffs, U-185
maxDeltaT, U-60	writeCompression, U-106
method, U-84	writeControl, $U-25$ , $U-61$ , $U-105$
metisCoeffs, U-84	writeFormat, U-55, U-106
midPointAndFace, U-177	writeInterval, U-25, U-35, U-106
midPoint, U-177	writePrecision, U-106
nFaces, U-140	<pre><lesmodel>Coeffs, U-185</lesmodel></pre>
nGammaSubCycles, U-62	<delta>Coeffs, U-185</delta>
numberOfSubdomains, U-84	<pre><turbulencemodel>Coeffs, U-185</turbulencemodel></pre>
n, U-84	keyword entry
object, U-101	AMG, U-115
order, U-84	BDCG, U-115
outputFormat, U-176	BICCG, U-115
• ′	′

CrankNicholson, U-114	none, U-109
CrossPowerLaw, U-59	patch, U-145
DCG, U-115	polyLine, U-151
Euler, U-114	polySpline, U-151
Gamma, U-111	processor, U-145
GaussSeidel, U-115	raw, U-106, U-176
Gauss, U-112	runTime, U-35, U-106
ICCG, U-115	scientific, U-106
MUSCL, U-111	simpleSpline, U-151
Newtonian, U-59	simple, U-83, U-84
QUICK, U-111, U-113	skewLinear, U-111, U-113
SFCD, U-111, U-113	startTime, U-25, U-105
UMIST, U-109	steadyState, U-114
adjustableRunTime, U-61, U-106	symmetryPlane, U-145
arc, U-48, U-151	timeStep, U-25, U-35, U-106
ascii, U-106	uncompressed, U-106
backward, U-114	uncorrected, U-111, U-113
binary, U-106	upwind, U-111, U-113
bounded, U-111, U-113	vanLeer, U-111
cellPointFace, U-176	wall, U-145
*	wedge, U-145
cellPoint, U-176	writeControl, U-105
cell, U-176	writeNow, U-105
clockTime, U-106	xmgr, U-106, U-176
compressed, U-106	xyz, U-177
corrected, U-111, U-113	x, U-177
cpuTime, U-106	y, U-177
cubicCorrected, U-113	z, U-177
cubicCorrection, U-111	kill button, U-128
cyclic, U-145	kivaToFoam utility, U-90
distance, U-177	Kronecker delta, P-21
empty, U-145	,
fixed, U-106	${f L}$
fourth, U-111-U-113	lagrangian
general, U-106	library, U-95
gnuplot, U-106, U-176	LAM
hierarchical, U-83, U-84	message passing interface, U-84
jplot, U-106, U-176	MPI, U-84
latestTime, U-105	Lambda2 utility, U-92
leastSquares, U-112	LamBremhorstKE model, U-97
limitedCubic, U-111	laminar model, U-97
limitedLinear, U-111	laminar Flame Speed Models
limited, U-111-U-113	library, U-96
linearUpwind, U-111, U-113	laplaceFilter model, U-98
linear, U-111, U-113	Laplacian, P-38
line, U-151	laplacian, P-37
manual, U-83, U-84	laplacian
metis, U-83, U-84	fvc member function, P-37
midPoint, U-111	fvm member function, P-37
nextWrite, U-105	laplacianFoam solver, U-87
noWriteNow, U-105	laplacianSchemes keyword, U-108

Index P-85 P-86 Index

3 · · · · · · · · · ·	P. II OF
latestTime	sampling, U-95
keyword entry, U-105	shapeMeshTools, U-95
menu entry, U-127	specie, U-96
latestTime keyword, U-41	thermophysicalFunctions, U-97
LaunderGibsonRSTM model, U-97, U-98	thermophysical, U-181
LaunderSharmaKE model, U-97	triSurface, U-95
leastSquares	vtkFoam, U-165
keyword entry, U-112	zlib-1.2.1, U-95
leastSquares keyword, U-53	lid-driven cavity flow, U-19
LESdeltas	LienCubicKE model, U-97
library, U-98	LienCubicKELowRE model, U-97
LESfilters	LienLeschzinerLowRE model, U-97
library, U-98	liftDrag utility, U-93
lesInterFoam solver, U-88	limited
LESmodel keyword, U-185	keyword entry, U-111-U-113
libraries, U-69	limitedCubic
library	keyword entry, U-111
Gstream, U-95	limitedLinear
LESdeltas, U-98	keyword entry, U-111
LESfilters, U-98	line
ODE, U-95	keyword entry, U-151
OpenFOAM, U-94	linear
PVFoamReader, U-165	keyword entry, U-111, U-113
basicThermophysicalModels, U-95	linearUpwind
cellDecompFiniteElement, U-95	keyword entry, U-111, U-113
cfdTools, U-94	liquid
· · · · · · · · · · · · · · · · · · ·	electrically-conducting, P-69
chemistryModel, U-97	liquids
combustionThermophysicalModels, U-96	library, U-96
compressibleLESmodels, U-98	lists, P-29
compressibleTurbulenceModels, U-97	List <type> template class, P-29</type>
dieselSpray, U-95	local keyword, U-101
dynamicMesh, U-95	locDynOneEqEddy model, U-98
edgeMesh, U-95	Lower and Upper Times text box, U-167
engine, U-95	lowReOneEqEddy model, U-98
errorEstimation, U-95	LRDDiffStress model, U-98
faceDecompFiniteElement, U-95	LRR model, U-97
foamUser, U-81	1sGrad
incompressibleLESmodels, U-98	fvc member function, P-37
incompressiblePostProcessing, U-95	ive member function, 1-57
incompressibleTransportModels, P-55, U-98	$\mathbf{M}$
incompressibleTurbulenceModels, P-55, U-97	Mach utility, U-92
lagrangian, U-95	mag
laminarFlameSpeedModels, U-96	tensor member function, P-25
liquids, U-96	magGradU utility, U-92
meshTools, U-95	magnetohydrodynamics, P-69
mico-2.3.11, U-95	magSqr
mpich-1.2.4, U-95	tensor member function, P-25
pdf, U-97	magU utility, U-35, U-92
primitive, P-23	Make directory, U-73
randomProcesses, U-95	make script/alias, U-71

Иal	ke/files file, U-75	basic, P-31
nak	ePolyMesh utility, U-90	block structured, U-149
an	ual	decomposition, U-82
	keyword entry, U-83, U-84	description, U-137
an	ualCoeffs keyword, U-84	finite volume, P-31
nap	Fields utility, U-33, U-40, U-43, U-55, U-89,	generation, U-149
·	U-163	grading, U-149, U-152
ap	Fields	grading, example of, P-54
•	menu entry, U-34	non-orthogonal, P-45
nar	pping	refinement, P-63
_	fields, U-163	resolution, U-33
	rices tools, U-94	specification, U-137
ax	,	validity constraints, U-137
	tensor member function, P-25	meshes tools, U-94
ax	Co keyword, U-60	meshTools
	DeltaT keyword, U-60	library, U-95
	chanicalProperties	message passing interface
	dictionary, U-51	LAM, U-84
ner		MPICH, U-187
	Case, U-87	method keyword, U-84
	Class, U-125	metis
	Color by, U-168	keyword entry, U-83, U-84
	Foam Utilities, U-22, U-33, U-34	metisCoeffs keyword, U-84
	Mesh, U-51	mhdFoam solver, P-71, U-89
	View, U-28, U-168, U-169	mico-2.3.11
	u entry	library, U-95
пет	•	midPoint
	3D view Properties, U-27, U-168-U-170	
	Property, U-168	keyword entry, U-111
	Read Mesh&Fields, U-23, U-45, U-51	midPoint keyword, U-177
	Refresh Case Browser, U-41	midPointAndFace keyword, U-177
	Source, U-28, U-169	min
	Wireframe, U-168	tensor member function, P-25
	allTime, U-127	MINMOD differencing, P-38
	blockMesh, U-22, U-33	mirrorMesh utility, U-90
	firstTime, U-127	mixed
	fvSchemes, U-53	boundary condition, U-147
	latestTime, U-127	mixedSmagorinsky model, U-98
	mapFields, U-34	mixtureAdiabaticFlameT utility, U-93
	noTime, U-127	model
	preProcessing, U-34	APIfunctions, U-97
	sample, U-55	BirdCarreau, U-98
ner	geMeshes utility, U-90	CrossPowerLaw, U-98
Лes	h dictionary tree, U-23	DeardorffDiffStress, U-98
les:	h menu, U-51	LRDDiffStress, U-98
nes	h	LRR, U-97
	1-dimensional, U-140	LamBremhorstKE, U-97
	1D, U-140	LaunderGibsonRSTM, U-97, U-98
	2-dimensional, U-140	LaunderSharmaKE, U-97
	2D, U-140	LienCubicKELowRE, U-97
	axi-symmetric, U-140	LienCubicKE, U-97

P-87 P-88  $\operatorname{Index}$ Index

LienLeschzinerLowRE, U-97	scaleSimilarity, U-98
NSRDSfunctions, U-97	simpleFilter, U-98
Newtonian, U-98	smoothDelta, U-98
NonlinearKEShih, U-97	specieThermo, U-96, U-181
PrandtlDelta, U-98	spectEddyVisc, U-98
QZeta, U-97	sutherlandTransport, U-96, U-182
RNGkEpsilon, U-97	uniform, U-97
RosinRammler, U-97	veryInhomogeneousMixture, $U-96,\ U-182$
Smagorinsky2, U-98	water, U-96
Smagorinsky, U-98	momentScalarError utility, U-94
SpalartAllmaras, U-97, U-98	moveEngineMesh utility, U-90
anisotropicFilter, U-98	moveMesh utility, U-90
chemistryModel, U-97	movingWallVelocity
chemistrySolver, U-97	boundary condition, U-148
chemkinMixture, U-96, U-182	MPI
constLaminarFlameSpeed, U-96	LAM, U-84
constTransport, U-96, U-182	MPICH, U-187
cubeRootVolDelta, U-98	MPICH
diEthylEther, U-96	message passing interface, U-187
diMethylEther, U-96	MPI, U-187
dieselMixture, U-96, U-182	mpich-1.2.4
dynMixedSmagorinsky, U-98	library, U-95
dynOneEqEddy, U-98	mshToFoam utility, U-90
dynSmagorinsky, U-98	multi-grid
exponential, U-97	algebraic, U-116
general, U-97	multiComponentMixture model, U-96, U-182
guldersLaminarFlameSpeed, U-96	MUSCL
hConstThermo, U-96, U-181	keyword entry, U-111
hMixtureThermo, U-96, U-182	My Jobs button, U-128
hThermo, U-95, U-182	N
hhuMixtureThermo, U-96, U-182	
homogeneousMixture, U-96, U-182	n keyword, U-84
inhomogeneousMixture, U-96, U-182	nabla
isoOctane, U-96	operator, P-27
janafThermo, U-96, U-181	name
kEpsilon, U-97	server, U-120
laminar, U-97	nDecane model, U-96
laplaceFilter, U-98	nDodecane model, U-96
locDynOneEqEddy, U-98	Newtonian
lowReOneEqEddy, U-98	keyword entry, U-59
mixedSmagorinsky, U-98	Newtonian model, U-98
	nextWrite
multiComponentMixture, U-96, U-182	keyword entry, U-105
nDecane, U-96	nFaces keyword, U-140
nDodecane, U-96	nGammaSubCycles keyword, U-62
nHeptane, U-96	nHeptane model, U-96
nOctane, U-96	nOctane model, U-96
normal, U-97	non-orthogonal mesh, P-45
oneEqEddy, U-98	none
perfectGas, U-96, U-181	keyword entry, U-109
pureMixture, U-96, U-182	NonlinearKEShih model, U-97

nonNewtonianIcoFoam solver, U-88	Patches dictionary tree, U-23
normal model, U-97	patches keyword, U-150, U-152, U-153
noTime	patchMap keyword, U-163
menu entry, U-127	pdf
noWriteNow	library, U-97
keyword entry, U-105	pdRefCell keyword, U-118
NSRDSfunctions model, U-97	pdRefValue keyword, U-118
numberOfSubdomains keyword, U-84	Pe utility, U-92
numerical diffusion, U-61	perfectGas model, U-96, U-181
0	permutation symbol, P-20
O	physicalType keyword, U-140, U-142
object keyword, U-101	PISO
objToVTK utility, U-90	dictionary, U-26
ODE	pointField class, P-31
library, U-95	pointField <type> template class, P-33</type>
oneEqEddy model, U-98	points
podles solver, U-88	dictionary, U-139, U-149
Opacity text box, U-168	pointSet utility, U-91
OpenFOAM	polyBoundaryMesh class, P-31
applications, U-69	polyLine
file format, U-100	keyword entry, U-151
libraries, U-69	polyMesh directory, U-99, U-139
OpenFOAM	polyMesh class, P-31, U-137, U-139
library, U-94	polyPatch class, P-31
OpenFOAM file syntax	polyPatchList class, P-31
//, U-100	polySpline
operator	keyword entry, U-151
scalar, P-28	post-processing, U-165
vector, P-27	post-processing
options file, U-73	paraFoam, U-165
order keyword, U-84	postChannel utility, U-93
Orientation Axes button, U-27	potentialFoam solver, P-46, U-87
outer product, see tensor, outer product	pow
outlet	tensor member function, P-25
boundary condition, P-71	PrandtlDelta model, U-98
outletInlet	pRefCell keyword, U-26, U-118
boundary condition, U-148	pRefValue keyword, U-26, U-118
outputFormat keyword, U-176	preProcessing
P	menu entry, U-34
<del>=</del>	pressure waves
p field, U-25	in liquids, P-64
paraFoam, U-26, U-165	
parallel	pressureDirectedInletVelocity
running, U-82	boundary condition, U-148
Parameters window panel, U-28, U-166, U-167	pressureInletVelocity
partialSlip	boundary condition, U-148
boundary condition, U-148	pressureOutlet
patch	boundary condition, P-65
boundary condition, U-145	pressure Transmissive
patch	boundary condition, U-148
keyword entry, U-145	primitive

P-89  $\operatorname{Index}$ P-90 Index

1:1	
library, P-23	restart, U-41
primitives tools, U-94	Reynolds number, U-20, U-24
process	rhopSonicFoam solver, U-88
background, U-28, U-82	rhoSonicFoam solver, U-88
foreground, U-28	rmdepall script/alias, U-77
processor	RNGkEpsilon model, U-97
boundary condition, U-146	root keyword, U-101
processor	roots keyword, U-84, U-86
keyword entry, U-145	RosinRammler model, U-97
processorN directory, U-84	run
${\tt processorWeights} \ {\tt keyword}, \ {\tt U-84}$	parallel, U-82
Property	run directory, U-99
menu entry, U-168	runFoamX script/alias, U-119-U-121
ptot utility, U-93	runFoamXHB script/alias, U-119, U-120
pureMixture model, U-96, U-182	runTime
purge button, U-128	keyword entry, U-35, U-106
purgeWrite keyword, U-106	runTimeModifiable keyword, U-107
PVFoamReader	$\mathbf{S}$
library, U-165	·-
	sammToFoam utility, U-90
Q	sample utility, U-93, U-175
Q utility, U-92	sample
QUICK	menu entry, U-55
keyword entry, U-111, U-113	sampleSets keyword, U-176
QZeta model, U-97	sampleSurface utility, U-93
R.	sampling
=-	library, U-95
R utility, U-92	scalar, P-16
randomProcesses	operator, P-28
library, U-95	scalar class, P-24
rasInterFoam solver, U-88	scalarField class, P-29
raw	scalarTransportFoam solver, U-87
keyword entry, U-106, U-176	scale
Rcomponents utility, U-92	tensor member function, P-25
read button, U-128	scalePoints utility, U-91, U-160
Read Mesh&Fields	scaleSimilarity model, U-98
menu entry, U-23, U-45, U-51	scientific
reconstructPar utility, U-87, U-93	keyword entry, U-106
referenceLevel keyword, U-104, U-132	script/alias
refGradient keyword, U-147	foamCorrectVrt, U-161
refineMesh utility, U-91	foamJob, U-178
refineShapeMesh utility, U-91	foamLog, U-179
Refresh Case Browser button, U-41	=:
	make, U-71
Refresh Case Browser	$\begin{array}{c} \text{make, U-71} \\ \text{rmdepall, U-77} \end{array}$
menu entry, U-41	make, $\overline{\rm U}$ -71 rmdepall, $\overline{\rm U}$ -77 runFoamXHB, $\overline{\rm U}$ -119, $\overline{\rm U}$ -120
menu entry, U-41 Region window, U-28	$\begin{array}{l} \text{make, $\overline{\text{U}}$-71} \\ \text{rmdepall, $\text{U}$-77} \\ \text{runFoamXHB, $\text{U}$-119, $\text{U}$-120} \\ \text{runFoamX, $\text{U}$-119$-$\text{U}$-121} \end{array}$
menu entry, U-41 Region window, U-28 regions keyword, U-59	$\begin{array}{l} \text{make, $\overline{U}$-71}\\ \text{rmdepall, $U$-77}\\ \text{runFoamXHB, $U$-119, $U$-120}\\ \text{runFoamX, $U$-119$-$U$-121}\\ \text{wclean, $U$-76} \end{array}$
menu entry, U-41 Region window, U-28 regions keyword, U-59 relative tolerance, U-116	$\begin{array}{l} \text{make, $U$-71$} \\ \text{rmdepall, $U$-77$} \\ \text{runFoamXHB, $U$-119, $U$-120$} \\ \text{runFoamX, $U$-119$-$U$-121} \\ \text{wclean, $U$-76$} \\ \text{wmake, $U$-71$} \end{array}$
menu entry, U-41 Region window, U-28 regions keyword, U-59 relative tolerance, U-116 renumberMesh utility, U-91	make, U-71 rmdepall, U-77 runFoamXHB, U-119, U-120 runFoamX, U-119-U-121 wclean, U-76 wmake, U-71 second time derivative, P-37
menu entry, U-41 Region window, U-28 regions keyword, U-59 relative tolerance, U-116 renumberMesh utility, U-91 Reset button, U-167	make, U-71 rmdepall, U-77 runFoamXHB, U-119, U-120 runFoamX, U-119-U-121 wclean, U-76 wmake, U-71 second time derivative, P-37 Seed window, U-171
menu entry, U-41 Region window, U-28 regions keyword, U-59 relative tolerance, U-116 renumberMesh utility, U-91	make, U-71 rmdepall, U-77 runFoamXHB, U-119, U-120 runFoamX, U-119-U-121 wclean, U-76 wmake, U-71 second time derivative, P-37

setFields utility, U-59	interFoam, U-88
settlingFoam solver, U-88	laplacianFoam, U
SFCD	lesInterFoam, U-
keyword entry, U-111, U-113	mhdFoam, P-71,
shape, U-152	nonNewtonianIco
shapeMeshTools	oodles, U-88
library, U-95	potentialFoam, F
simple	rasInterFoam, U-
keyword entry, U-83, U-84	rhoSonicFoam, U
simpleFilter model, U-98	rhopSonicFoam,
simpleFoam solver, P-55, U-88	scalarTransportFo
simpleGrading keyword, U-152	settlingFoam, U-
simpleSpline	simpleFoam, P-5
keyword entry, U-151	sonicFoamAutoN
skew	sonicFoam, P-61
tensor member function, P-25	sonicLiquidFoam
skewLinear	sonicTurbFoam,
keyword entry, U-111, U-113	stressFemFoam,
SI utility, U-93	stressedFoam, $U$ -
slice class, P-31	turbFoam, U-20,
slip	solver relative tolera
boundary condition, U-148	solver tolerance, U-1
Smagorinsky model, U-98	solvers keyword, U
Smagorinsky2 model, U-98	sonicFoam solver, P-
smapToFoam utility, U-92	sonicFoamAutoMotio
smoothDelta model, U-98	sonicLiquidFoam solv
snGrad	sonicTurbFoam solve
fvc member function, P-37	Source
snGradCorrection	menu entry, U-2
fvc member function, P-37	source, P-37
snGradSchemes keyword, U-108	SpalartAllmaras mode
solver	specie
XiFoam, U-88	library, U-96
Xoodles, U-88	specieThermo model,
blockMesh, P-47	spectEddyVisc model
boundaryFoam, U-87	spline keyword, U-
bubbleFoam, U-88	splitMesh utility, U-9
buoyantFoam, U-89	splitMeshRegions util
buoyantSimpleFoam, U-89	sqr
channelOodles, U-88	tensor member f
coldEngineFoam, U-88	sqrGradGrad
contactStressFoam, U-89	fvc member fund
dieselEngineFoam, U-88	Standard Views wind
dnsFoam, U-88	Start Calculation but
electrostaticFoam, U-89	Start Calculation Nov
engineFoam, U-88	startFace keyword,
financialFoam, U-89	startFrom keyword,
icoFoamAutoMotion, U-87	starToFoam utility, $U$
icoFoam, U-19, U-24, U-25, U-28, U-87	startTime
icoTopoFoam, U-88	keyword entry, U

```
cianFoam, U-87
terFoam, U-88
Foam, P-71, U-89
lewtonianIcoFoam, U-88
es, U-88
ntialFoam, P-46, U-87
terFoam, U-88
onicFoam, U-88
SonicFoam, U-88
rTransportFoam, U-87
ngFoam, U-88
leFoam, P-55, U-88
FoamAutoMotion, U-88
Foam, P-61, U-88
LiquidFoam, P-65, U-88
TurbFoam, U-88
sFemFoam, U-89
sedFoam, U-52, U-89
oam, U-20, U-88
ative tolerance, U-116
lerance, U-116
keyword, U-115
n solver, P-61, U-88
mAutoMotion solver, U-88
idFoam solver, P-65, U-88
Foam solver, U-88
entry, U-28, U-169
Imaras model, U-97, U-98
ry, U-96
ermo model, U-96, U-181
yVisc model, U-98
keyword, U-150
utility, U-91
Regions utility, U-91
member function, P-25
Grad
nember function, P-37
Views window panel, U-168
culation button, U-35
culation Now button, U-28
ce keyword, U-140
om keyword, U-25, U-105
am utility, U-90, U-156
ord entry, U-25, U-105
```

Index P-91 P-92 Index

startTime keyword, U-25, U-105	pointField <type>, P-33</type>
status button, U-128	surfaceField <type>, P-33</type>
steady flow	volField <type>, P-33</type>
turbulent, P-54	temporal discretisation, P-42
steadyState	Crank Nicholson, P-43
keyword entry, U-114	Euler implicit, P-42
stitchMesh utility, U-91	explicit, P-42
stopAt keyword, U-105	in OpenFOAM, P-43
Stored Camera Position window panel, U-168	tensor, P-15
streamFunction utility, U-92	addition, P-18
stress analysis of plate with hole, U-45	algebraic operations, P-18
stressComponents utility, U-92	algebraic operations, 1-18 algebraic operations in OpenFOAM, P-24
stressedFoam solver, U-52, U-89	
stressFemFoam solver, U-89	antisymmetric, see tensor, skew
Su	calculus, P-27
fvm member function, P-37	classes in OpenFOAM, P-23
subsetMesh utility, U-91	cofactors, P-22
summation convention, P-17	component average, P-20
SUPERBEE differencing, P-38	component maximum, P-20
supersonic flow, P-59	component minimum, P-20
supersonic flow over forward step, P-59	determinant, P-22
supersonicFreeStream	deviatoric, P-22
boundary condition, U-148	diagonal, P-22
surfaceField <type> template class, P-33</type>	dimension, P-16
surfaceNormalFixedValue	double inner product, P-19
boundary condition, U-148	geometric transformation, P-21
SuSp	Hodge dual, P-23
fvm member function, P-37	hydrostatic, P-22
suspend button, U-128	identities, P-21
sutherlandTransport model, U-96, U-182	identity, P-21
symm	inner product, P-18
tensor member function, P-25	inverse, P-23
symmetryPlane	magnitude, P-20
boundary condition, P-65, U-145	magnitude squared, P-20
symmetryPlane	mathematics, P-15
keyword entry, U-145	notation, P-17
symmTensorField class, P-29	nth power, P-20
symmTensorThirdField class, P-29	outer product, P-19
system directory, P-49, U-99	rank, P-16
<b>T</b>	rank 3, P-17
<b>T</b>	scalar division, P-18
T()	scalar multiplication, P-18
tensor member function, P-25	scale function, P-20
template class	second rank, P-16
GeometricBoundaryField, P-32	skew, P-22
fvMatrix, P-36	square of, P-20
dimensioned <type>, P-26</type>	subtraction, P-18
FieldField <type>, P-32</type>	symmetric, P-22
Field <type>, P-29</type>	symmetric rank 2, P-16
geometricField <type>, P-32</type>	symmetric rank 3, P-17
List <type>, P-29</type>	trace, P-22

transformation, P-21	dictionary, U-181
transpose, P-16, P-22	thermoType keyword, U-181
triple inner product, P-19	Time window, U-28
vector cross product, P-20	time
tensor class, P-24	control, U-105
tensor member function	time derivative, P-37
*, P-25	first, P-39
+, P-25	second, P-37, P-39
-, P-25	Time step text box, U-167
/, P-25	time step, U-25
&, P-25	timeFormat keyword, U-106
&&, P-25	timePrecision keyword, U-106
^, P-25	times text box, U-33
cmptAv, P-25	timeScheme keyword, U-108
cofactors, P-25	
	timeStep
det, P-25	keyword entry, U-25, U-35, U-106
dev, P-25	tolerance
diag, P-25	solver, U-116
I, P-25	solver relative, U-116
inv, P-25	tools
mag, P-25	adjustPhi, U-95
magSqr, P-25	algorithms, U-94
max, P-25	bound, U-95
min, P-25	compressible, U-95
pow, P-25	containers, U-94
scale, P-25	db, U-94
skew, P-25	dimensionSet, U-94
sqr, P-25	dimensionedTypes, U-94
symm, P-25	fields, U-94
T(), P-25	finiteVolume, U-94
tr, P-25	global, U-94
transform, P-25	incompressible, U-95
tensorField class, P-29	interpolations, U-94
tensorThirdField class, P-29	matrices, U-94
tetDecomposition utility, U-91	meshes, U-94
tetgenToFoam utility, U-90	primitives, U-94
text box	wallDist, U-95
Case Name, U-125	topoSetSource keyword, U-59
Case Root, U-125	totalPressure
Lower and Upper Times, U-167	boundary condition, U-148
Opacity, U-168	tr
Time step, U-167	tensor member function, P-25
times, U-33	trace, see tensor, trace
thermalProperties	transform
dictionary, U-52	tensor member function, P-25
thermophysical	transportProperties
library, U-181	dictionary, U-24, U-41, U-43
thermophysicalFunctions	transportProperties file, U-59
library, U-97	triple inner product, P-19
	triSurface
thermophysicalProperties	ungunde

Index P-93 P-94 Index

	CI TT 00
library, U-95	SI, U-93
turbFoam solver, U-20, U-88	Ucomponents, P-72, U-35, U-92
turbulence	adiabaticFlameT, U-93
dissipation, U-42	attachMesh, U-90
kinetic energy, U-42	autoPatch, U-90
length scale, U-42	blockMesh, U-39, U-90, U-149
model, U-43	boxTurb, U-89
turbulence keyword, U-185	cellSet, U-90
turbulence model, U-42	cfxToFoam, U-90, U-156
turbulenceModel keyword, U-185	checkMesh, U-90, U-158
turbulenceProperties	checkYPlus, U-93
dictionary, U-43, U-184	couplePatches, U-90
turbulent flow	createPatch, U-90
steady, P-54	decomposePar, U-82, U-83, U-93
turbulentInlet	deformedGeom, U-90
boundary condition, U-148	divU, U-92
tutorials	dxFoamExec, U-91
breaking of a dam, U-56	engineCompRatio, U-93
lid-driven cavity flow, U-19	•
stress analysis of plate with hole, U-45	engineSwirl, U-89
tutorials directory, P-45, U-19	ensight74FoamExec, U-91, U-174
type keyword, U-142	ensight76FoamExec, U-91
-Jr,,	enstrophy, U-92
$\mathbf{U}$	equilibriumCO, U-93
U field, U-25	equilibriumFlameT, U-93
Ucomponents utility, P-72, U-35, U-92	estimateScalarError, U-93
UMIST	faceSet, U-90
keyword entry, U-109	fieldToCellSet, U-90
uncompressed	flattenMesh, U-90
keyword entry, U-106	fluentMeshToFoam, U-90, U-156
uncorrected	foamConvert21To22, U-94
keyword entry, U-111, U-113	foamDataToFluent, U-91, U-171
uniform model, U-97	foamDebugSwitches, U-94
uniform keyword, U-177	foamInfoExec, U-94
units	foamMeshToFluent, U-90, U-171
of measurement, P-26	foamToDX, U-91
S.I. base, P-26	foamToEnsight, U-91
uprime utility, U-92	foamToFieldview9, U-91
upwind	foamToFieldview, U-91
keyword entry, U-111, U-113	foamToVTK, U-92
upwind differencing, P-38, U-61	gambitToFoam, U-90, U-156
Use parallel projection button, U-27, U-168	gmshToFoam, U-90
utility	icoErrorEstimate, U-93
Co, U-92	icoMomentError, U-94
FoamX, U-89	ideasToFoam, U-90, U-156
Lambda2, U-92	insideCells, U-90
Mach, U-92	kivaToFoam, U-90
Pe, U-92	liftDrag, U-93
	magGradU, U-92
Q, U-92	
Rcomponents, U-92	magU, U-35, U-92
R, U-92	makePolyMesh, U-90

	${\sf mapFields}, \ U\text{-}33, \ U\text{-}40, \ U\text{-}43, \ U\text{-}55, \ U\text{-}89,$	vector product, see tensor, vector cross product
	U-163	vectorField class, P-29
	mergeMeshes, U-90	version keyword, U-101
	mirrorMesh, U-90	vertices keyword, U-22, U-150
	mixtureAdiabaticFlameT, U-93	veryInhomogeneousMixture model, U-96, U-182
	momentScalarError, U-94	View menu, U-28, U-168, U-169
	moveEngineMesh, U-90	viscosity
	moveMesh, U-90	kinematic, U-24, U-43
	mshToFoam, U-90	volField <type> template class, P-33</type>
	objToVTK, U-90	vorticity utility, U-92
	pointSet, U-91	vtkFoam
	postChannel, U-93	library, U-165
	ptot, U-93	
	reconstructPar, U-87, U-93	$\mathbf{W}$
	refineMesh, U-91	wall
	refineShapeMesh, U-91	boundary condition, P-65, P-71, U-145
	renumberMesh, U-91	wall boundary type, U-42
	sammToFoam, U-90	wall
	sampleSurface, U-93	keyword entry, U-145
	sample, U-93, U-175	wall function, U-97
	scalePoints, U-91, U-160	wallBuoyantPressure
	setFields, U-59	boundary condition, U-148
	smapToFoam, U-92	wallDist tools, U-95
	splitMeshRegions, U-91	wallFunctionCoeffs keyword, U-185
	splitMesh, U-91	wallGradU utility, U-93
	starToFoam, U-90, U-156	wallShearStress utility, U-93
	stitchMesh, U-91	water model, U-96
	streamFunction, U-92	wclean script/alias, U-76
	stressComponents, U-92	wdot utility, U-93
	subsetMesh, U-91	wedge
	tetDecomposition, U-91	boundary condition, U-142, U-146, U-155
	tetgenToFoam, U-90	wedge
	uprime, U-92	keyword entry, U-145
	vorticity, U-92	window
	wallGradU, U-93	Fields, U-28
	wallShearStress, U-93	Region, U-28
	wdot, U-93	Seed, U-171
	writeMeshObj, U-90	Selection Window, U-27, U-166
	yPlusLES, U-93	Time, U-28
	zipUpMesh, U-91	window panel
	• • •	Annotate, U-27, U-168
	$\mathbf{V}$	Camera Controls, U-168
val	ue keyword, U-147	Camera Orientation, U-168
val	ueFraction keyword, U-147	Camera, U-168
van	Leer differencing, P-38	Display, U-27, U-28, U-166, U-168
van	Leer	General, U-168
	keyword entry, U-111	Information, U-166
vec	tor, P-16	Parameters, U-28, U-166, U-167
	operator, P-27	Standard Views, U-168
	unit, P-20	Stored Camera Position, U-168
vec	tor class, P-24, U-103	Wireframe

Index P-95

menu entry, U-168	wmake
WM_ARCH	platforms, U-73
environment variable, U-76	wmake script/alias, U-71
WM_COMPILE_OPTION	word class, P-26, P-31
environment variable, U-76	writeCompression keyword, U-106
WM_COMPILER	writeControl
environment variable, U-76	keyword entry, U-105
WM_COMPILER_BIN	writeControl keyword, U-25, U-61, U-105
environment variable, U-76	writeFormat keyword, U-55, U-106
WM_COMPILER_DIR	writeInterval keyword, U-25, U-35, U-106
environment variable, U-76	writeMeshObj utility, U-90
WM_COMPILER_LIB	writeNow
environment variable, U-76	keyword entry, U-105
WM_DIR	writePrecision keyword, U-106
environment variable, U-76	v
WM_JAVAC_OPTION	$\mathbf{X}$
environment variable, U-76	X
WM_LINK_LANGUAGE	keyword entry, U-177
environment variable, U-76	XiFoam solver, U-88
WM_MPLIB	xmgr
environment variable, U-76	keyword entry, U-106, U-176
WM_OPTIONS	Xoodles solver, U-88
environment variable, U-76	xyz
WM_PROJECT	keyword entry, U-177
environment variable, U-76	Y
WM_PROJECT_DIR	У
environment variable, U-76	keyword entry, U-177
WM_PROJECT_INST_DIR	vPlusLES utility, U-93
environment variable, U-76	, ,,
WM_PROJECT_LANGUAGE	${f Z}$
environment variable, U-76	z
WM_PROJECT_USER_DIR	keyword entry, U-177
environment variable, U-76	zeroGradient
WM_PROJECT_VERSION	boundary condition, U-147
environment variable, U-76	zipUpMesh utility, U-91
WM_SHELL	zlib-1.2.1
environment variable, U-76	library, U-95