Inductor Data Sheet

LQH3NPNR68NJR#

“ # ” indicates a package specification code.

New | Available | General | 105℃ | Wound (Shield) | LowRdc | Thickness 1.2mm max. | Reflow OK | RoHS

< List of part numbers with package codes >
LQH3NPNR68NJRL

Shape

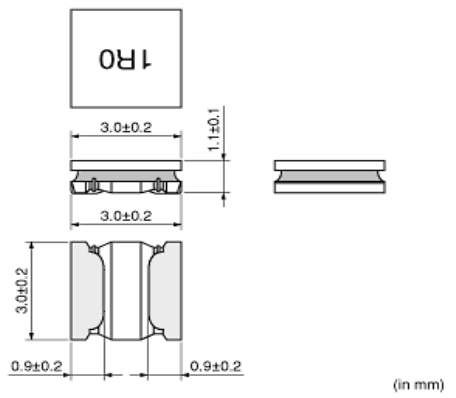

L size	3.0 ±0.02mm
W size	3.0 ±0.02mm
T size	1.1 ±0.1mm
Size code in inch (mm)	1212 (3030)

Specifications

Inductance	0.68μH ±30%
Inductance test frequency	1MHz
Rated current (Isat) (Based on Inductance change)	2700mA
Rated current (Itemp) (Based on Temperature rise)	2860mA(Ambient temperature 85℃) 1280mA(Ambient temperature 105℃)
Max. of DC resistance	0.0384Ω
Avg. of DC resistance	0.032Ω±20%
Self resonance frequency (min.)	130MHz
Operating temperature range (Self-temperature rise is included)	-40～125℃
Operating temperature range (Self-temperature rise is not included)	-40～105℃
Class of magnetic shield	Magnetic shield of magnetic powder in resin

Notes

When applied Rated current to the Products, Inductance will be within ±30% of initial inductance value range.
Keep the temperature (ambient temperature plus self-generation of heat) under 125℃.
When applied Rated current to the Products, temperature rise caused by self-generated heat shall be limited to 40℃ max.(Ambient temperature 85℃).
When applied Rated current to the Products, temperature rise caused by self-generated heat shall be limited to 20℃max.(Ambient temperature 85℃ to 105℃).

References

Packaging code	Specifications	Minimum quantity
L	φ180mm Embossed taping	2000

Mass (Typ.)	
1 piece	0.045g

Chart of characteristic data (The charts below may show another part number which shares its characteristics.)

- Inductance-Frequency characteristics (Typ.)

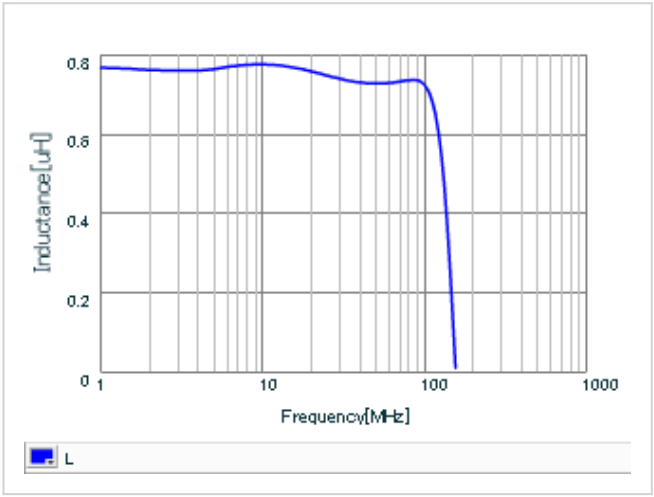

- Inductance-Current characteristics (Typ.)

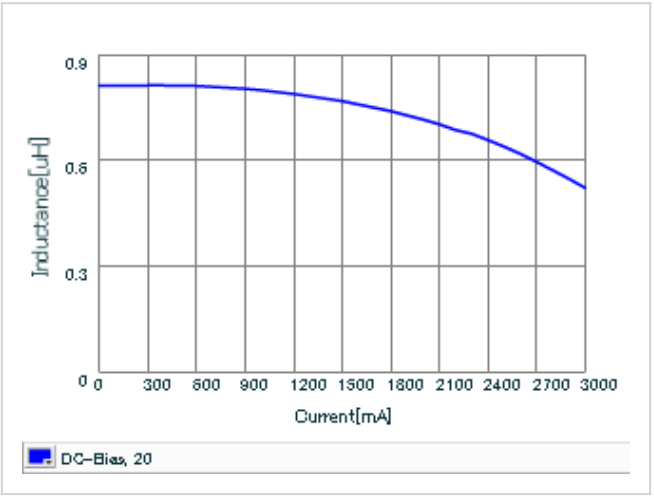

- Temperature rise characteristics (Typ.)

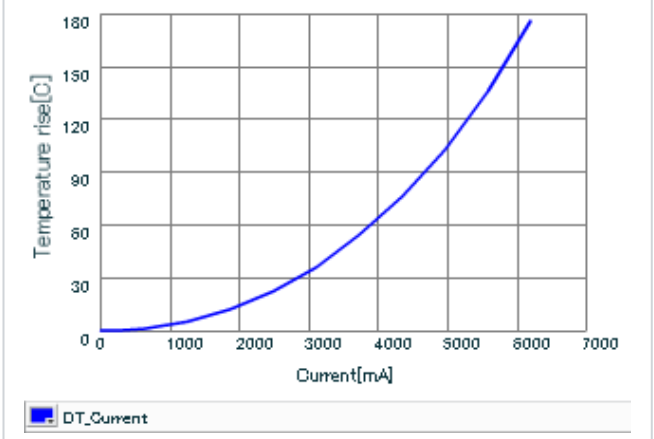

- Q-Frequency characteristics (Typ.)

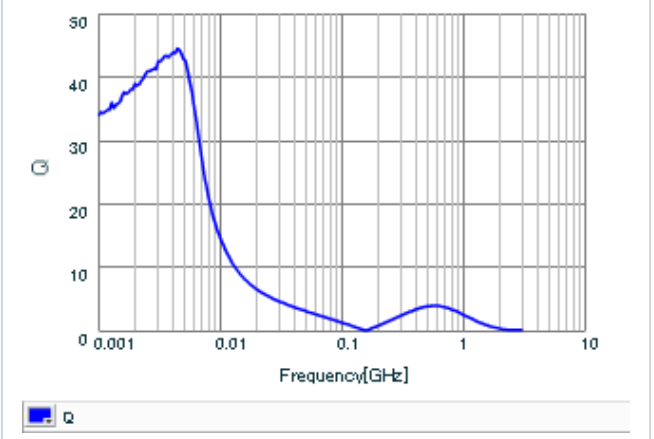

This PDF data has only typical specifications because there is no space for detailed specifications.
Therefore, please reviewour product specifications or consult the approval sheet for product specifications before ordering.

Murata Manufacturing Co., Ltd.
Last updated: 2014/10/26