




1) Sensing surface, 2) Housing, 3) Cover, 4) Function indicator yellow, 5) Indicator Echo green

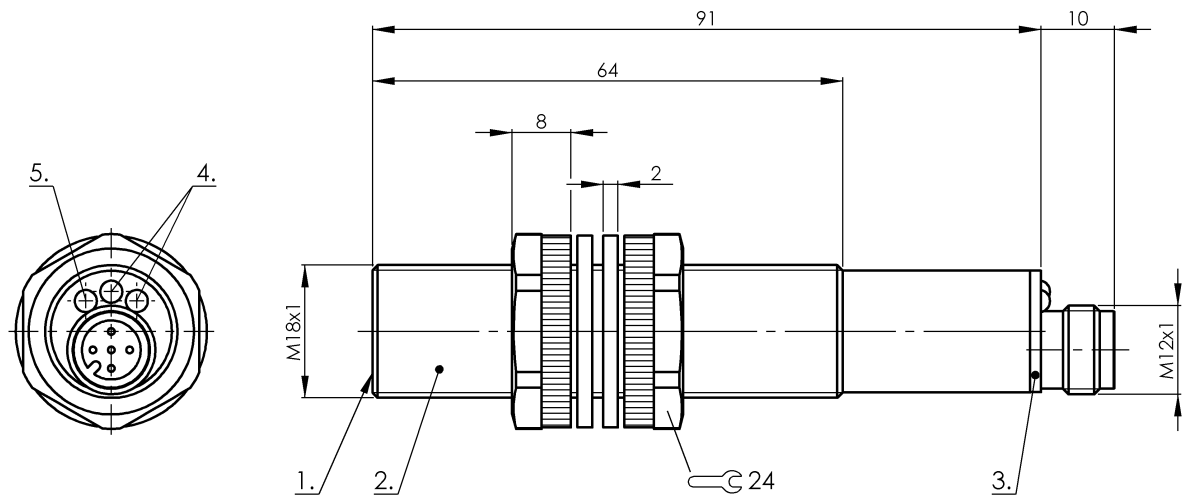

Basic features

Series	M18K0
Display/Operation	
Echo indicator	Green LED
Switching function display	LED yellow
Electrical connection	
Connection	M12x1, 5-pin
Polarity reversal protected	yes
Short-circuit protection	yes

Electrical data

Current draw max.	40 mA
Operating voltage U_b	15...30 VDC
Protection class	II
Rated operating voltage U_e DC	24 V
Ultrasonic Frequency	360 kHz

Environmental conditions

Ambient temperature	-15...70 °C
IP rating	IP67
Storage temperature	-30...75 °C

Interface

Analog output	Analog, voltage 0...10 V
---------------	--------------------------

Material

Cover material	PA
Housing material	PBT
Material sensing surface	Epoxy hollow glass sphere/PUR


Mechanical data

Gradient U adjustable	yes
Weight	45.00 g

Range/Distance

Accuracy	$\pm 0.5\%$ FS
Measuring range	30...400 mm
Opening angle, sound cone	8 °
Repeat accuracy	0.2 %FS
Resolution	≤ 0.200 mm

Connector Drawings



PIN 1: +24V

PIN 2: not used

PIN 3: 0V

PIN 4: Analog output

PIN 5: Teach-in