
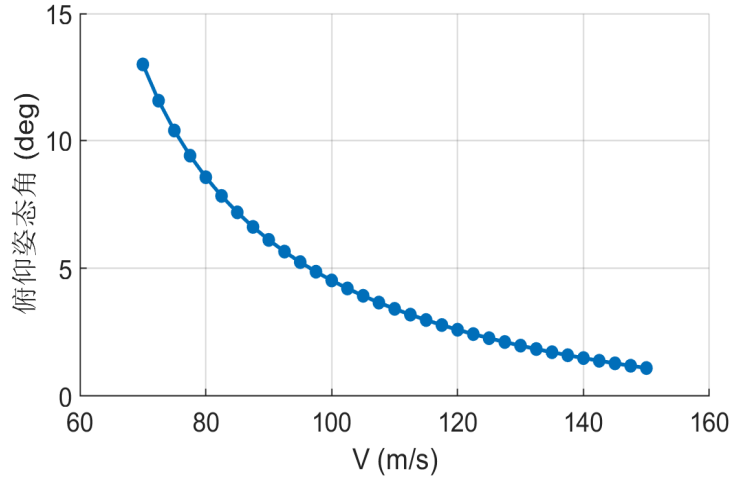
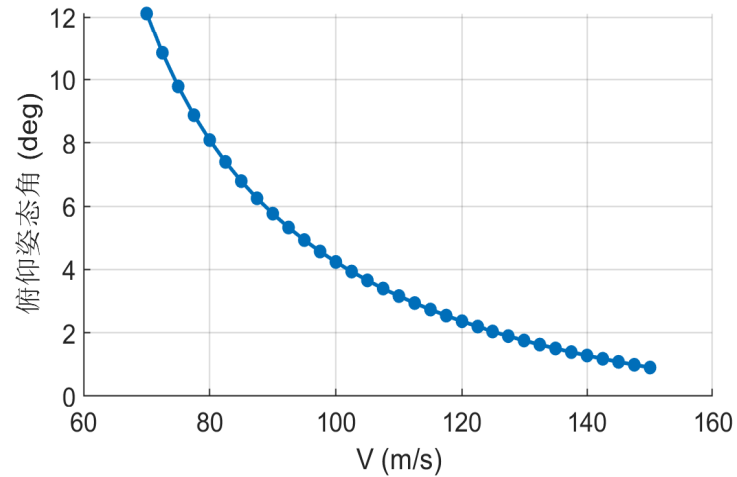
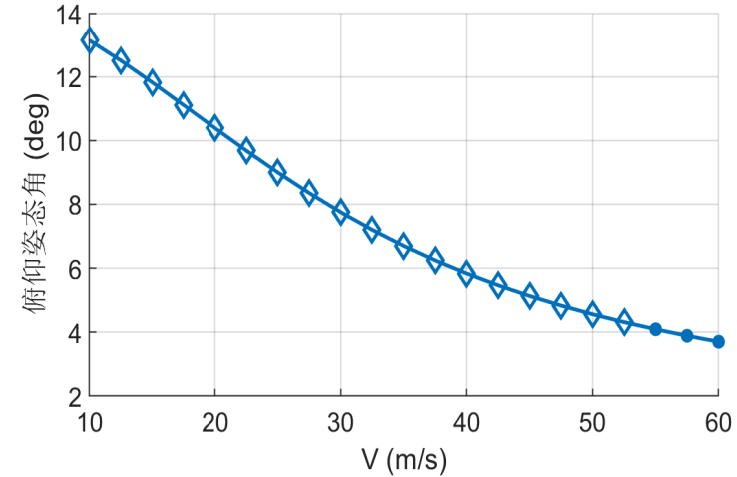
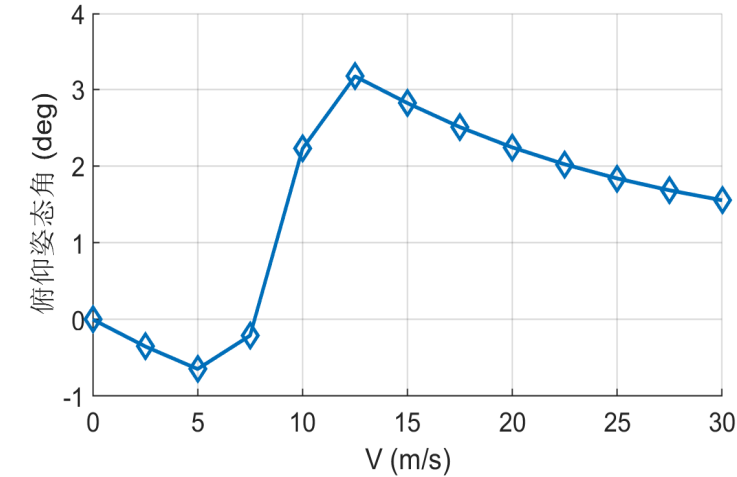
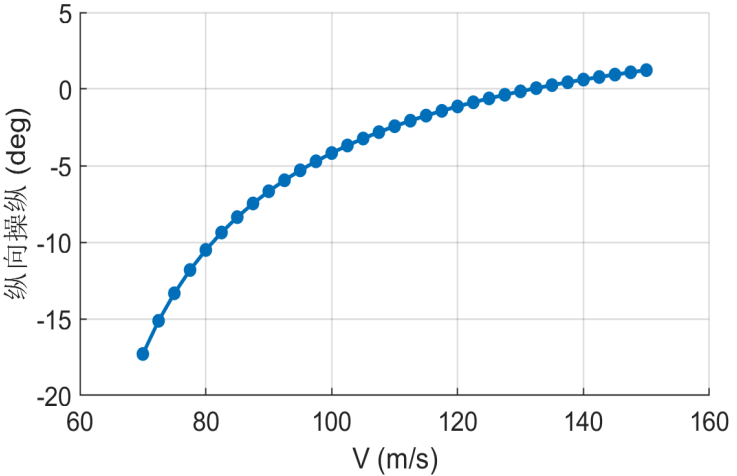
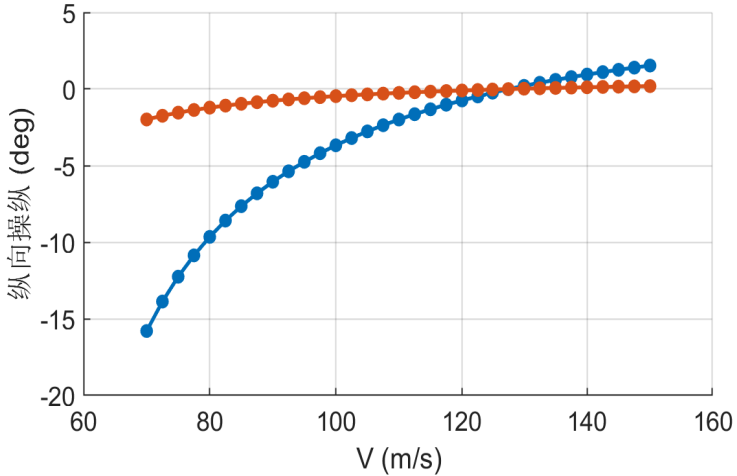
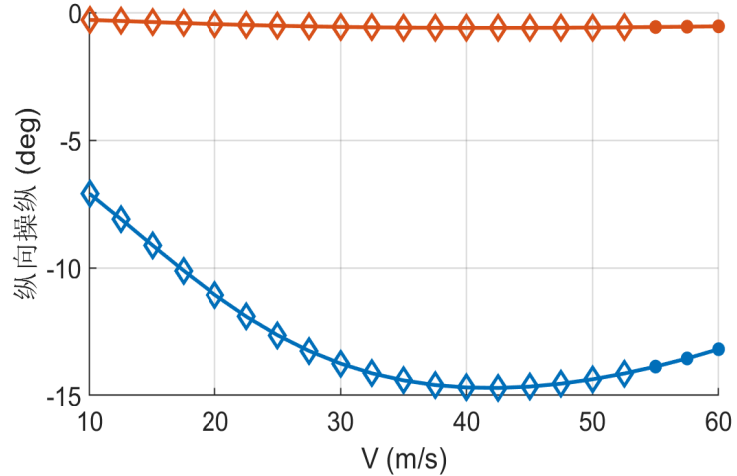
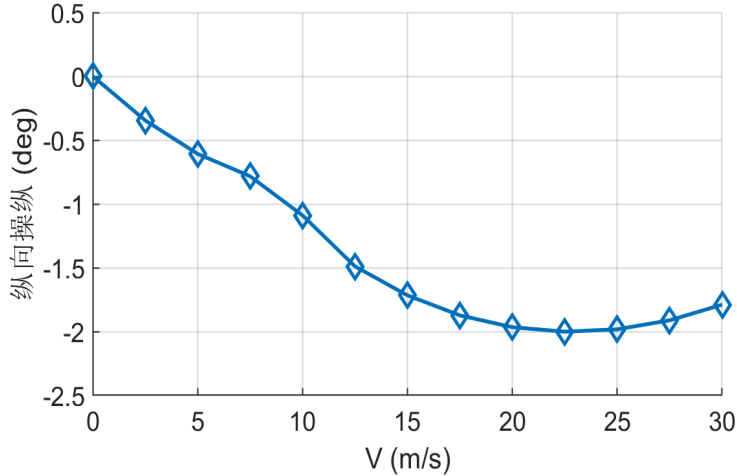
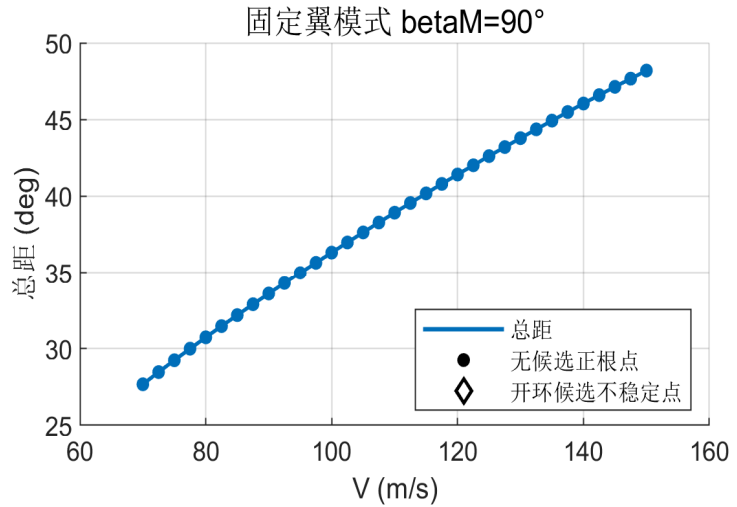
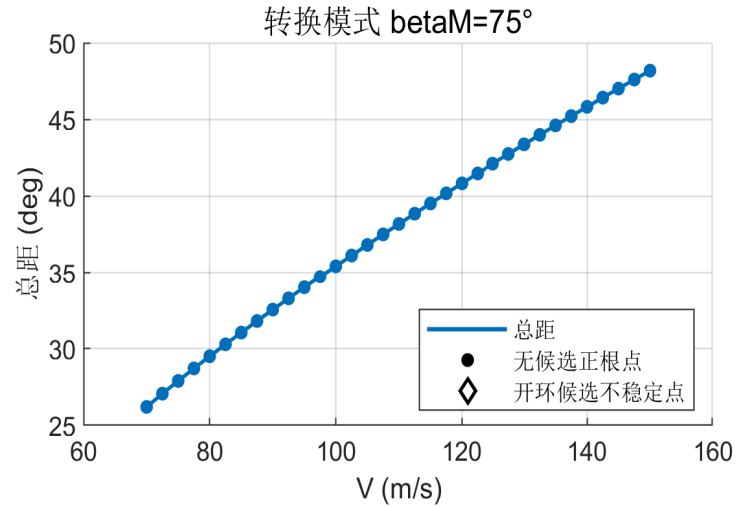
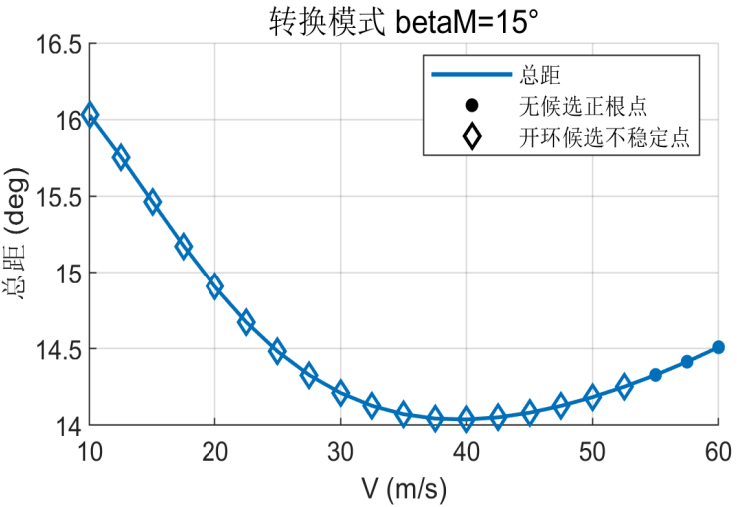


倾转旋翼机配平点趋势总览

Git 091c27ac78549ffad68f549c2b49eca990be9613； 数据日期 2026-06-25

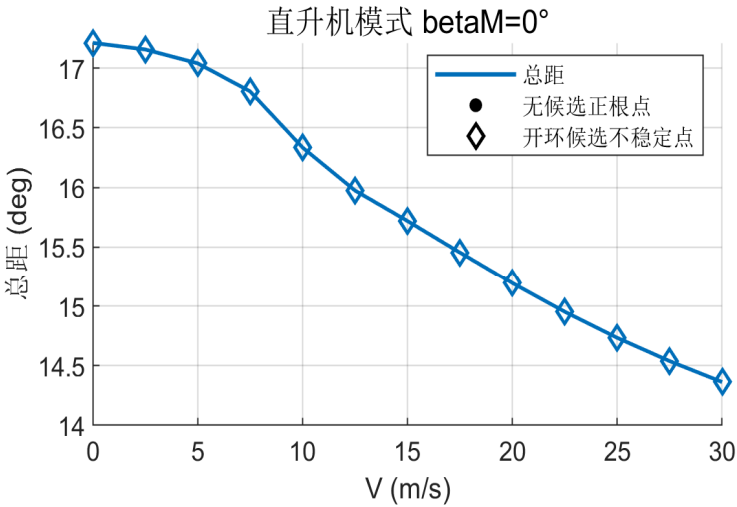

直升机模式
速度范围: 0.0-30.0 m/s
点数: 13
总距端点变化: -2.85 deg
纵向周期变距端点变化: -1.79 deg
俯仰姿态端点变化: +1.55 deg
最大残差: 2.07e-09
最小控制增量: 11.36 deg

转换模式 15°
速度范围: 10.0-60.0 m/s
点数: 21
总距端点变化: -1.52 deg
纵向周期变距端点变化: -6.09 deg
俯仰姿态端点变化: -9.44 deg
最大残差: 3.63e-09
最小控制增量: 11.04 deg

转换模式 75°
速度范围: 70.0-150.0 m/s
点数: 33
总距端点变化: +21.99 deg
升降舵端点变化: +17.33 deg
俯仰姿态端点变化: -11.21 deg
最大残差: 2.99e-08
最小控制增量: 4.20 deg

固定翼模式
速度范围: 70.0-150.0 m/s
点数: 33
总距端点变化: +20.52 deg
升降舵端点变化: +18.53 deg
俯仰姿态端点变化: -11.87 deg
最大残差: 2.25e-08
最小控制增量: 2.70 deg