
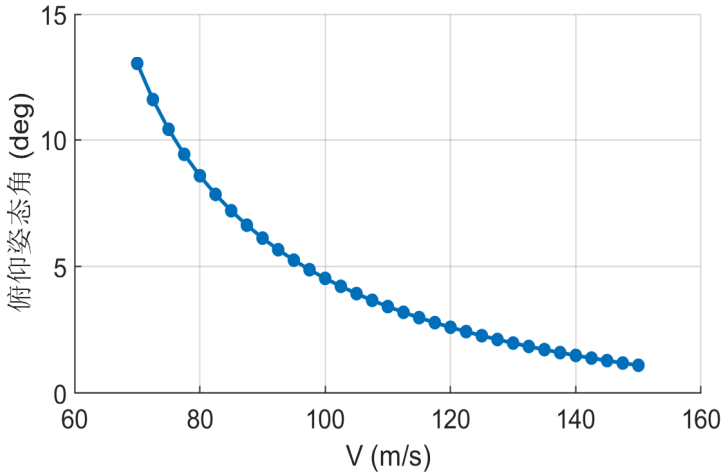
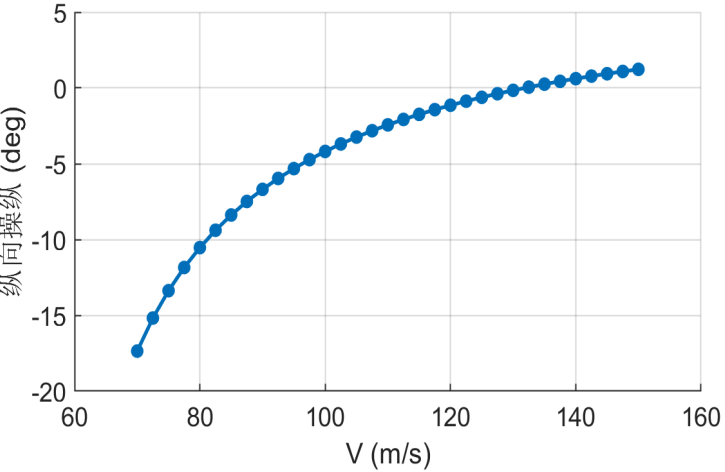
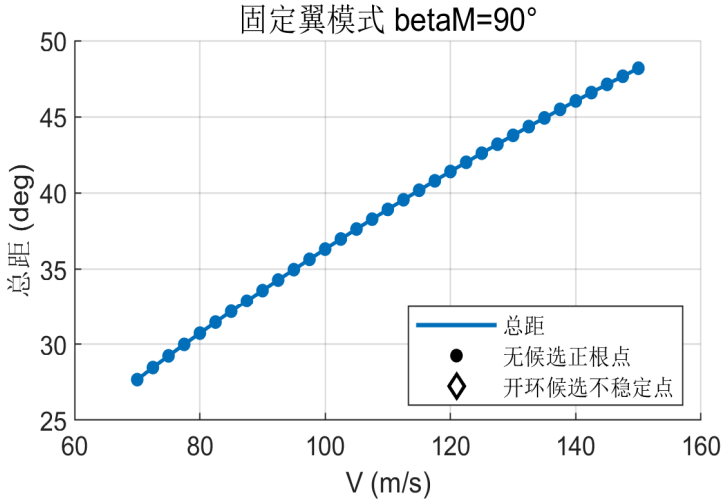
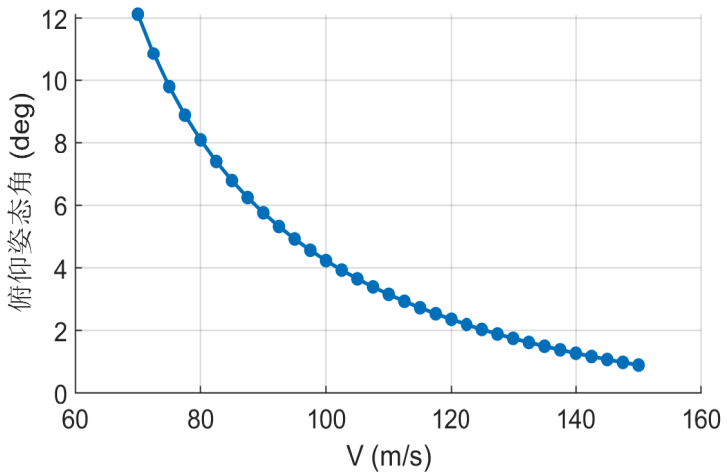
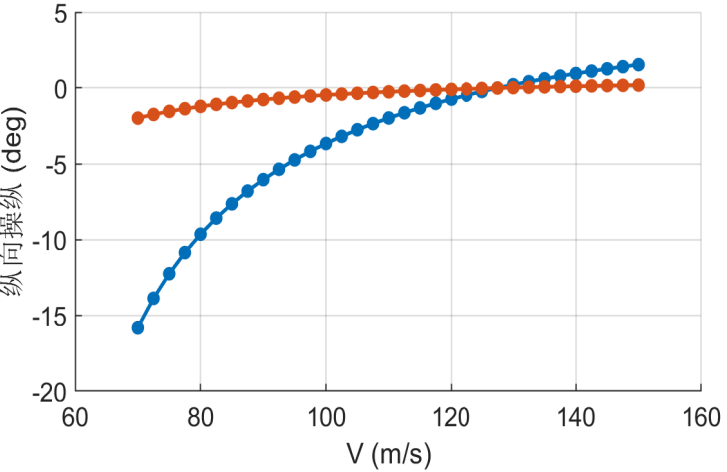
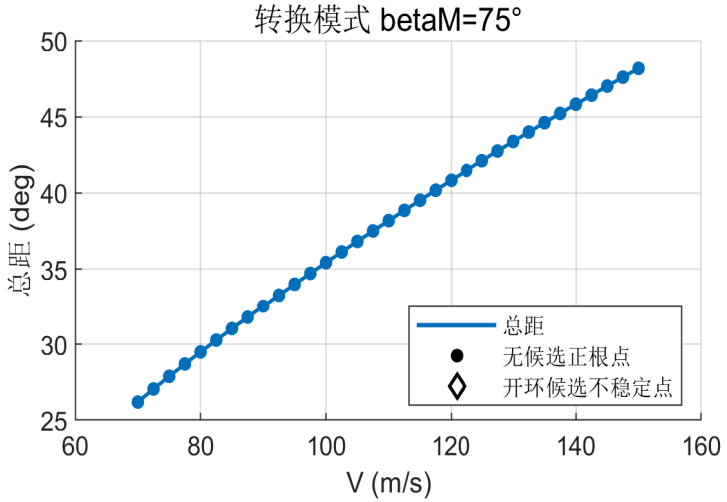
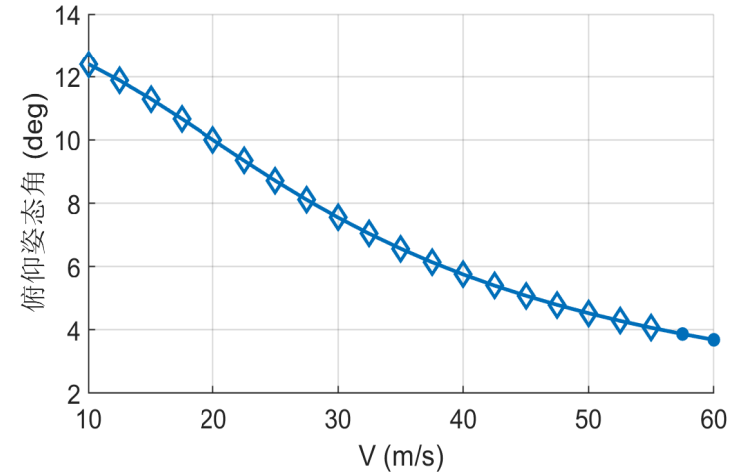
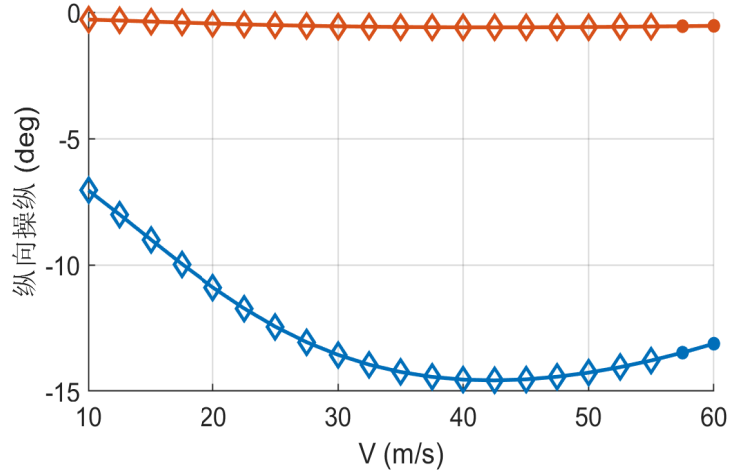
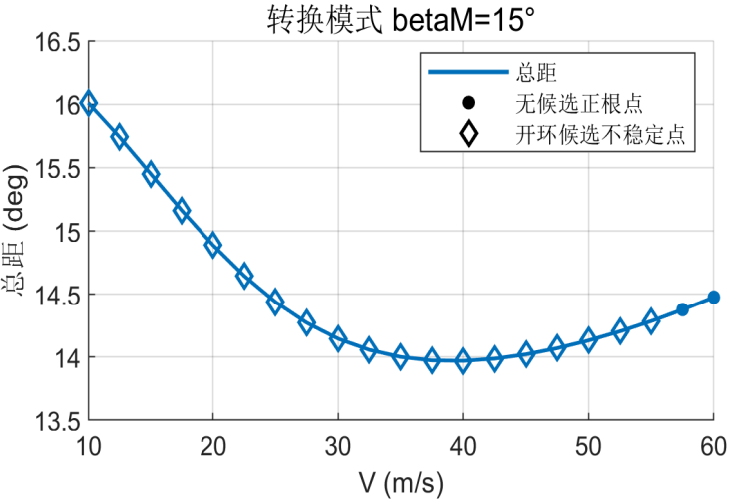
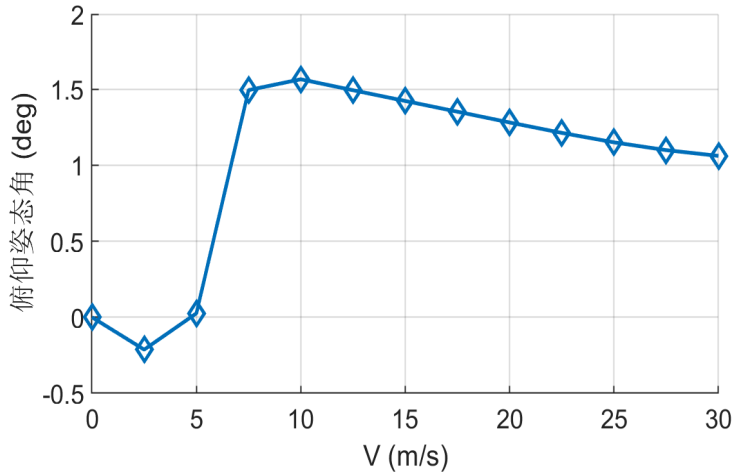
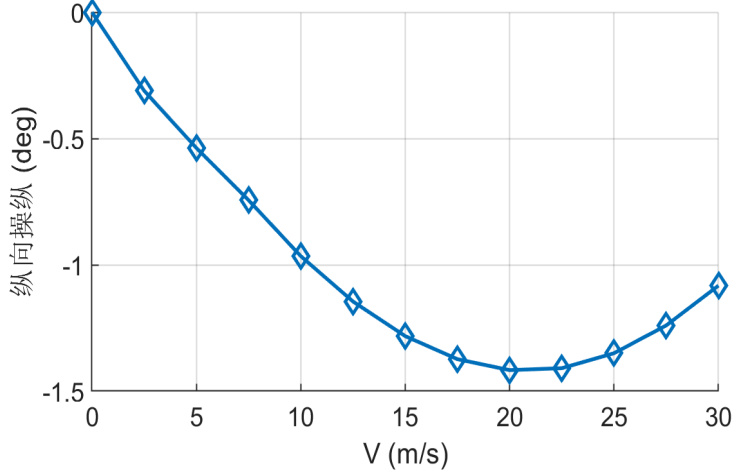


倾转旋翼机配平点趋势总览

Git ec30f6b936d256ec4124a38bffe31a12183faeb2； 数据日期 2026-06-25

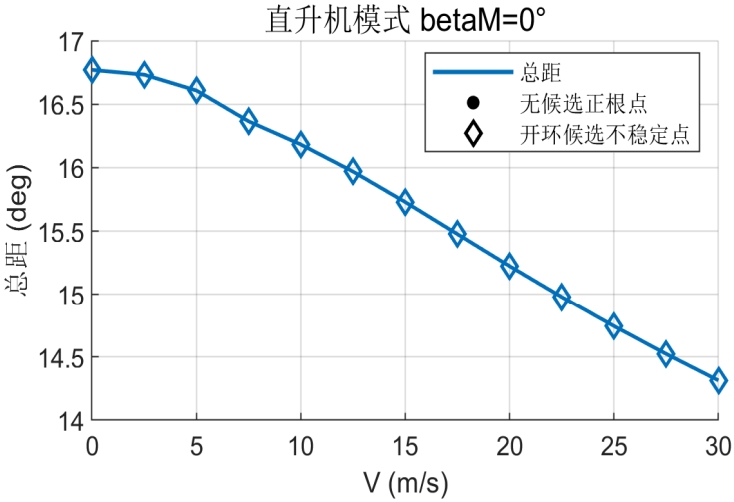

直升机模式
速度范围: 0.0-30.0 m/s
点数: 13
总距端点变化: -2.45 deg
纵向周期变距端点变化: -1.08 deg
俯仰姿态端点变化: +1.06 deg
最大残差: 2.9e-09
最小控制余量: 14.31 deg

转换模式 15°
速度范围: 10.0-60.0 m/s
点数: 21
总距端点变化: -1.53 deg
纵向周期变距端点变化: -6.07 deg
俯仰姿态端点变化: -8.71 deg
最大残差: 5.51e-09
最小控制余量: 13.97 deg

转换模式 75°
速度范围: 70.0-150.0 m/s
点数: 33
总距端点变化: +21.99 deg
升降舵端点变化: +17.36 deg
俯仰姿态端点变化: -11.23 deg
最大残差: 3.27e-08
最小控制余量: 4.19 deg

固定翼模式
速度范围: 70.0-150.0 m/s
点数: 33
总距端点变化: +20.52 deg
升降舵端点变化: +18.59 deg
俯仰姿态端点变化: -11.92 deg
最大残差: 2.15e-08
最小控制余量: 2.64 deg