
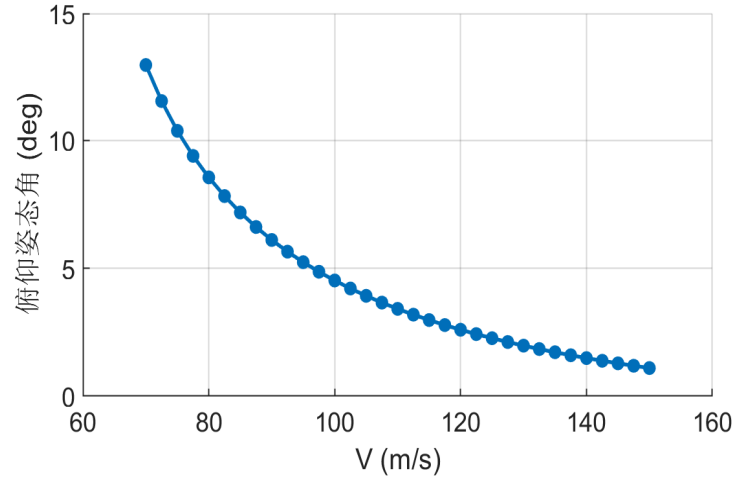
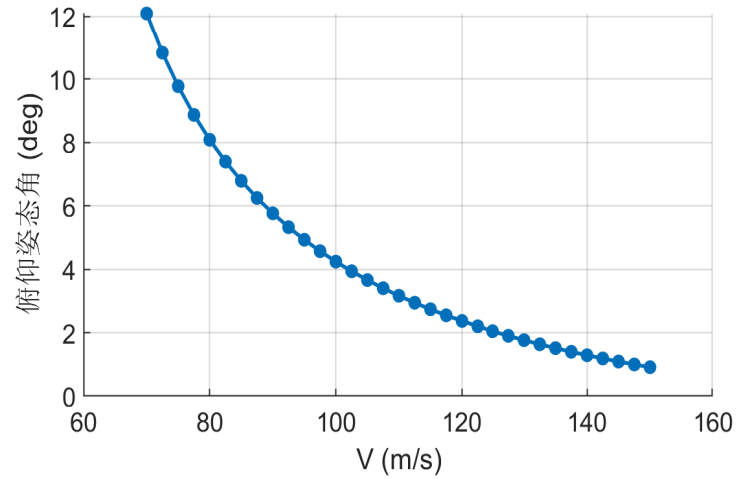
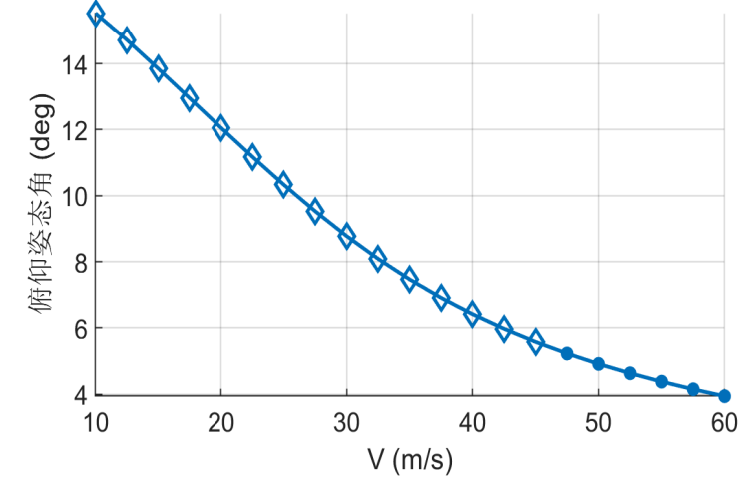
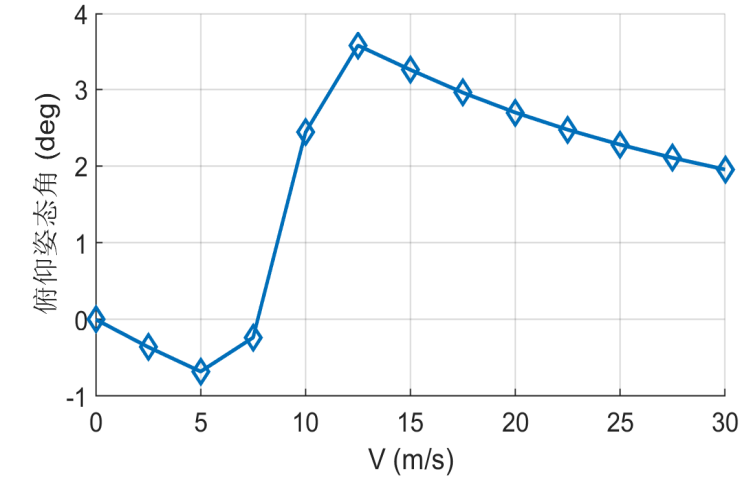
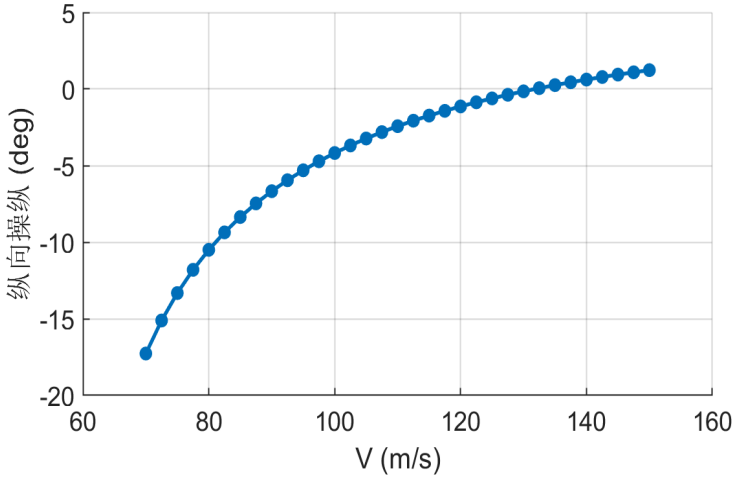
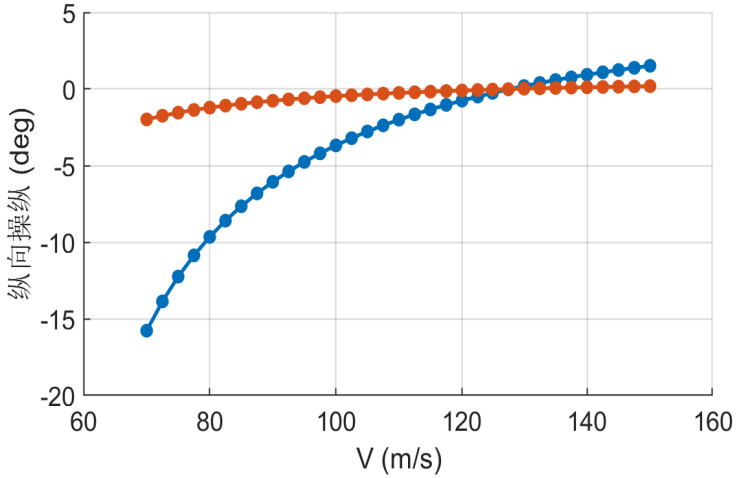
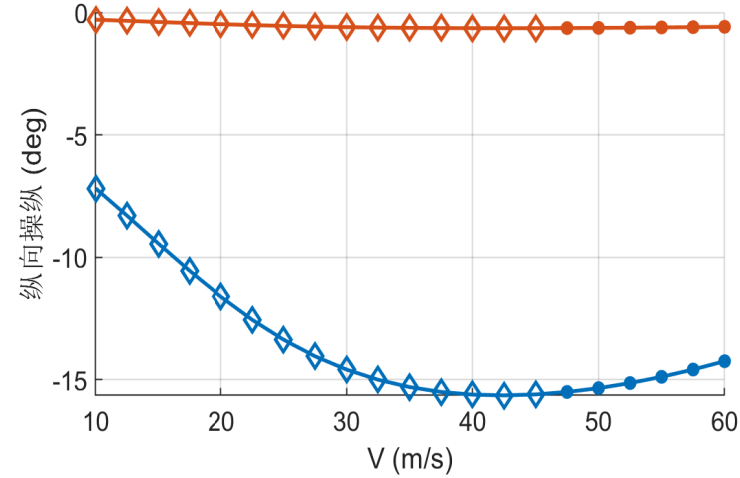
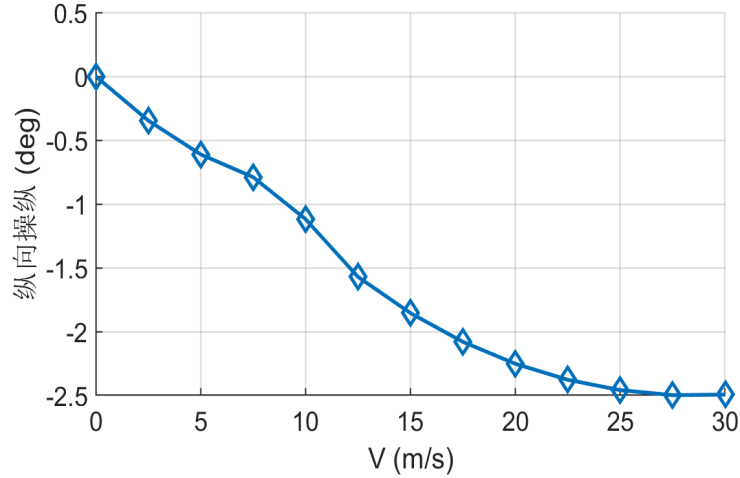
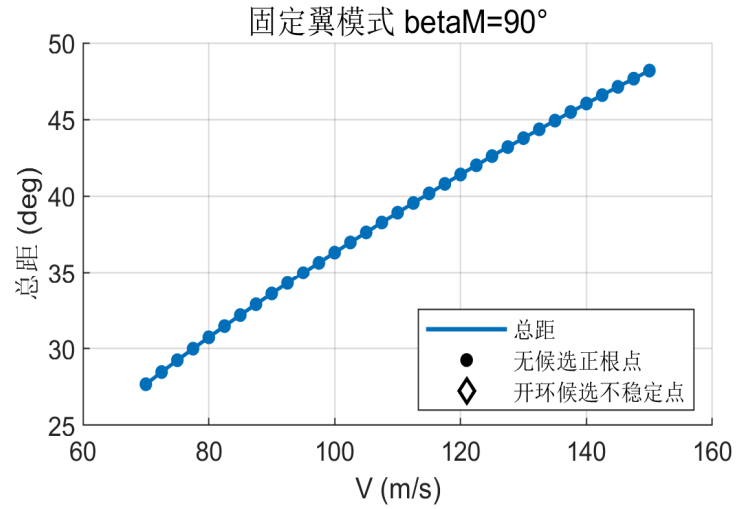
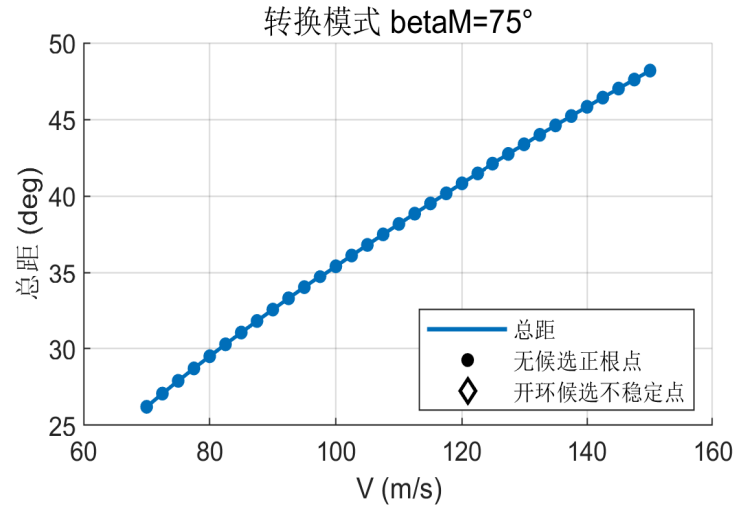
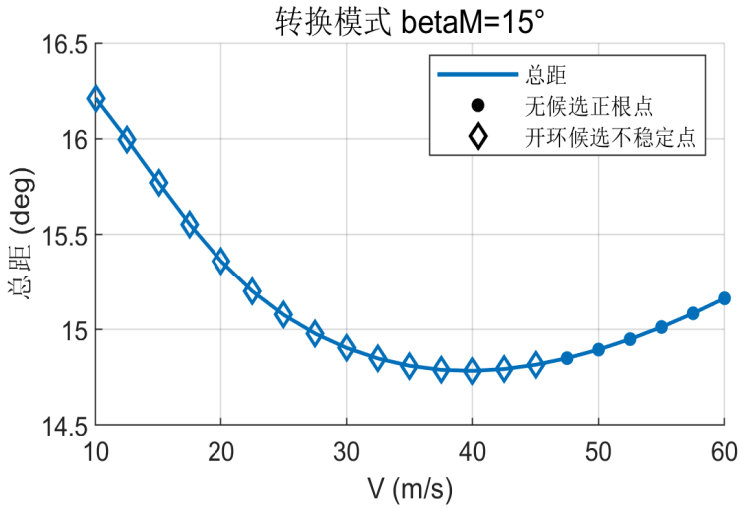


倾转旋翼机配平点趋势总览

Git 58252d515ad538cd460d82c3fd536411ac781eac； 数据日期 2026-06-25

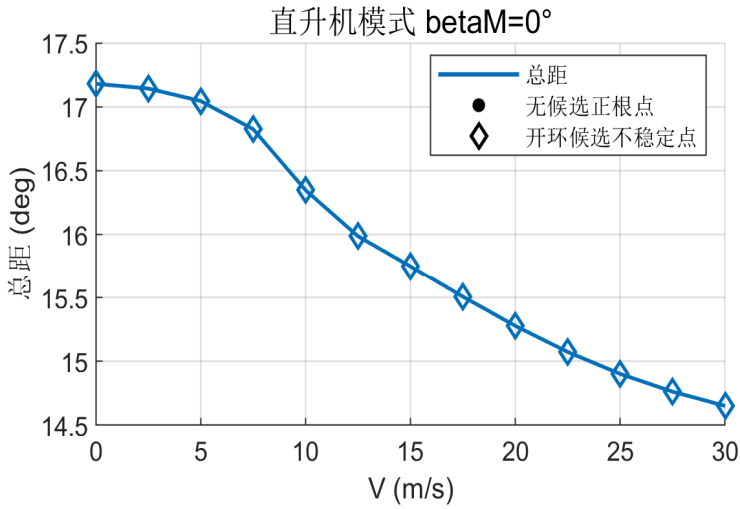

直升机模式

速度范围: 0.0-30.0 m/s

点数: 13

总距端点变化: -2.53 deg

纵向周期变距端点变化: -2.49 deg

俯仰姿态端点变化: +1.95 deg

最大残差: 2.01e-09

最小控制增量: 11.65 deg

转换模式 15°

速度范围: 10.0-60.0 m/s

点数: 21

总距端点变化: -1.05 deg

纵向周期变距端点变化: -7.06 deg

俯仰姿态端点变化: -11.59 deg

最大残差: 3.33e-09

最小控制增量: 11.78 deg

转换模式 75°

速度范围: 70.0-150.0 m/s

点数: 33

总距端点变化: +21.99 deg

升降舵端点变化: +17.30 deg

俯仰姿态端点变化: -11.19 deg

最大残差: 2.21e-08

最小控制增量: 4.22 deg

固定翼模式

速度范围: 70.0-150.0 m/s

点数: 33

总距端点变化: +20.51 deg

升降舵端点变化: +18.50 deg

俯仰姿态端点变化: -11.85 deg

最大残差: 3.61e-08

最小控制增量: 2.72 deg