
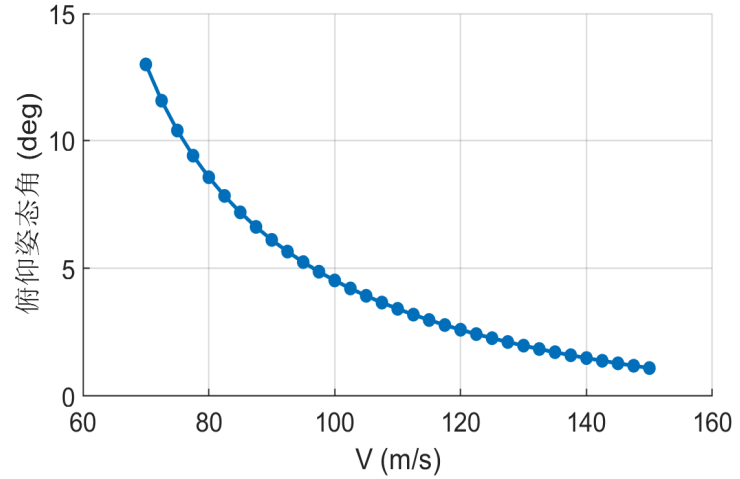
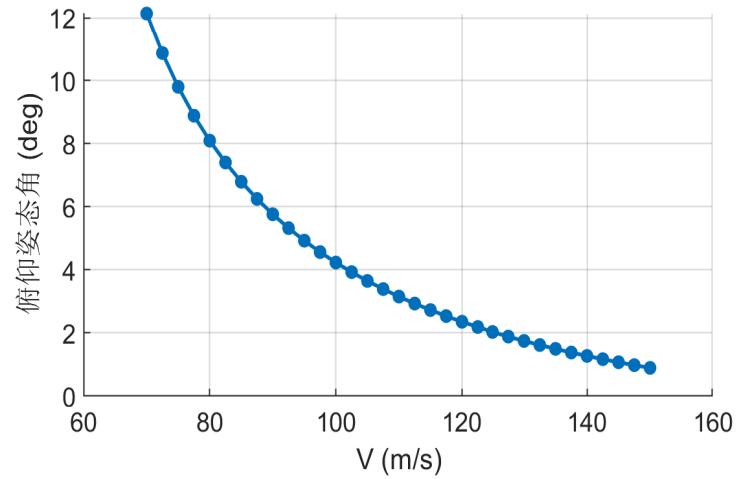
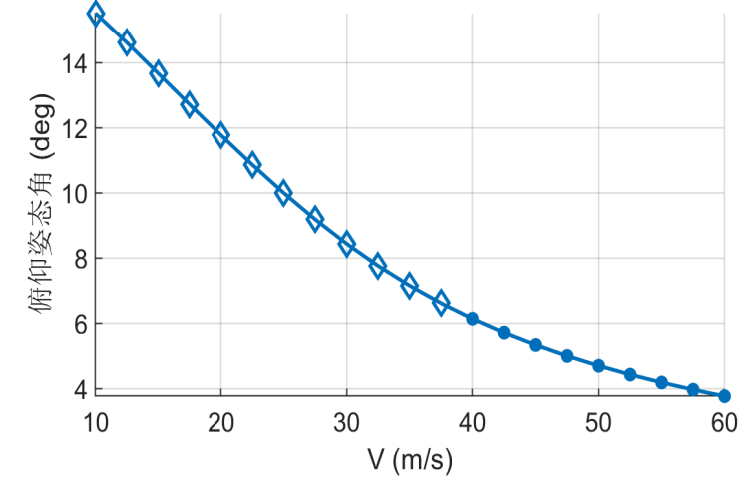
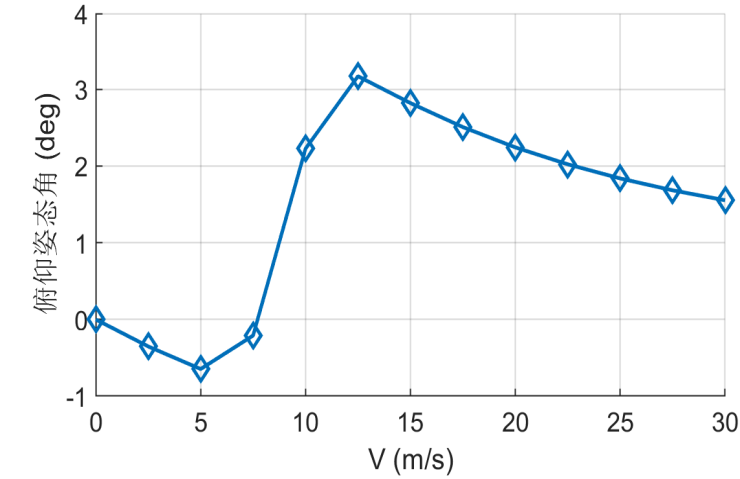
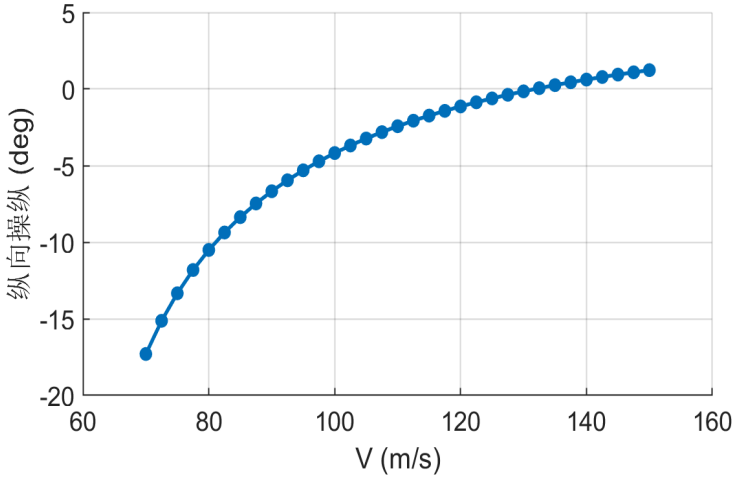
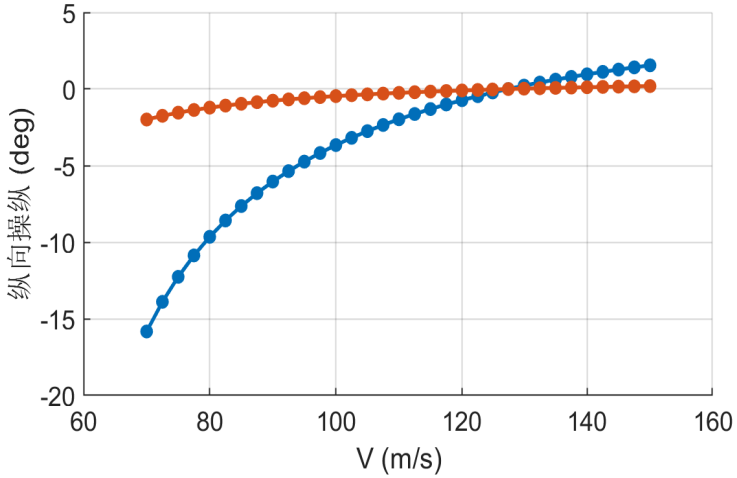
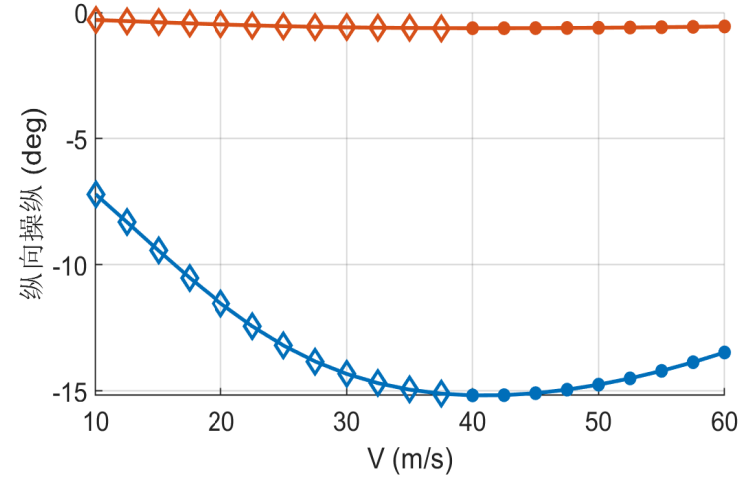
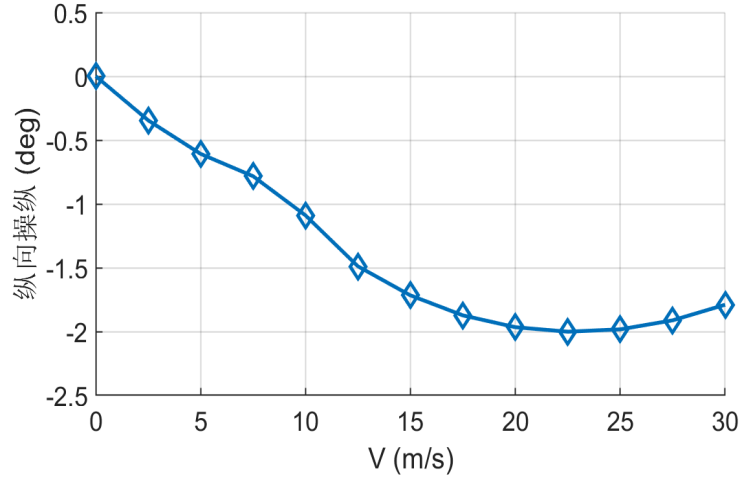
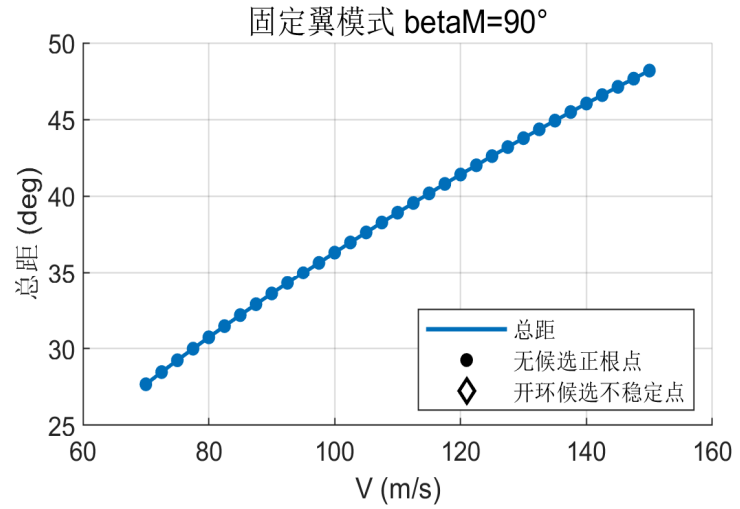
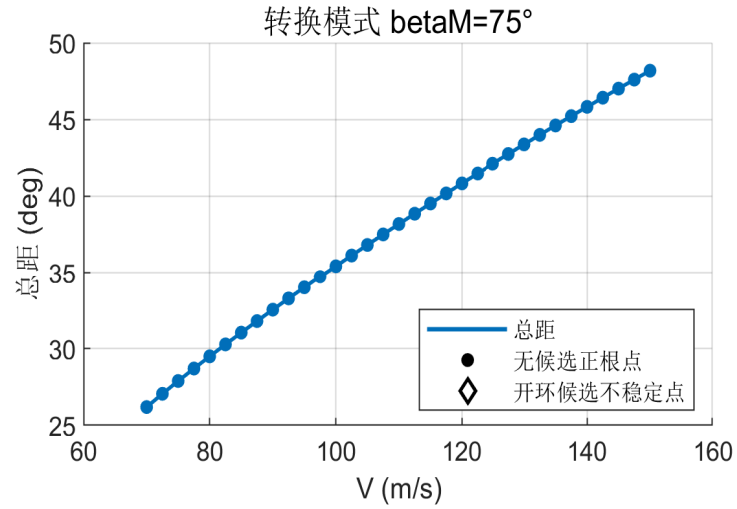
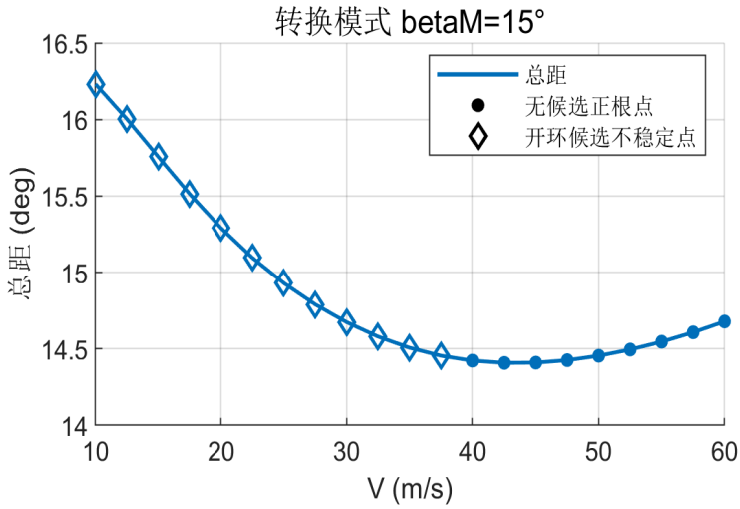


倾转旋翼机配平点趋势总览

Git 976709d1b8b8c14bb44fc35fd7f02f4a5090ff48；数据日期 2026-06-25

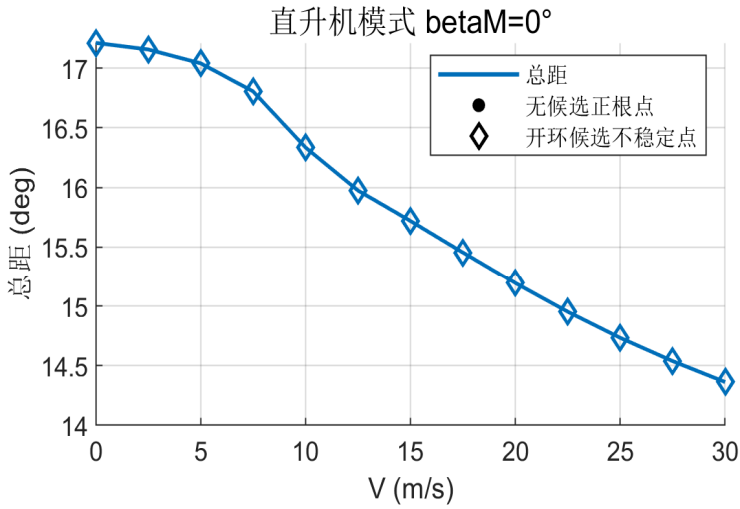

直升机模式

速度范围: 0.0-30.0 m/s

点数: 13

总距端点变化: -2.85 deg

纵向周期变距端点变化: -1.79 deg

俯仰姿态端点变化: +1.55 deg

最大残差: 3.38e-09

最小控制增量: 11.26 deg

转换模式 15°

速度范围: 10.0-60.0 m/s

点数: 21

总距端点变化: -1.55 deg

纵向周期变距端点变化: -6.27 deg

俯仰姿态端点变化: -11.76 deg

最大残差: 3.04e-09

最小控制增量: 11.11 deg

转换模式 75°

速度范围: 70.0-150.0 m/s

点数: 33

总距端点变化: +22.00 deg

升降舵端点变化: +17.38 deg

俯仰姿态端点变化: -11.25 deg

最大残差: 2.45e-08

最小控制增量: 4.17 deg

固定翼模式

速度范围: 70.0-150.0 m/s

点数: 33

总距端点变化: +20.52 deg

升降舵端点变化: +18.53 deg

俯仰姿态端点变化: -11.87 deg

最大残差: 4.63e-08

最小控制增量: 2.70 deg