


DHT11 Experiment

Overview

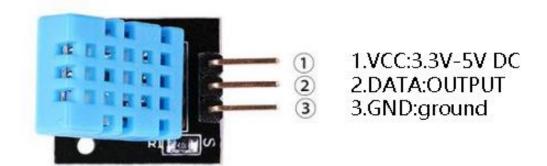

This lesson will teach you how to use DHT11 module, which is simple and easy to use.

It's accurate enough for most projects that need to keep track of humidity and temperature readings.

Again we will be using a Library specifically designed for these sensors that will make our code short and easy to write.

Specification

Please view DHT11-datasheet.pdf.

Path: \Public materials\Datasheet\ DHT11-datasheet.pdf

Hardware required


Material diagram	Material name	Number
	Temp_and_Hum	1
THE CO. CO.	MEGA 2560	1
	USB Cable	1
	Male to Female Jumper wires	several

1



Component Introduction

Temp and humidity sensor:

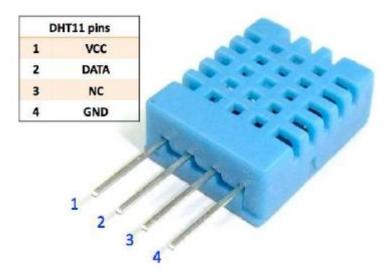

DHT11 digital temperature and humidity sensor is a composite Sensor contains a calibrated digital signal output of the temperature and humidity. Application of a dedicated digital modules collection technology and the temperature and humidity sensing technology, to ensure that the product has high reliability and excellent long-term stability. The sensor includes a resistive sense of wet components and an NTC temperature measurement devices, and connected with a high-performance 8-bit microcontroller.

Applications: HVAC, dehumidifier, testing and inspection equipment, consumer goods, automotive, automatic control, data loggers, weather stations, home appliances, humidity regulator, medical and other humidity measurement and control.

Product parameters

Relative humidity: Resolution: 16Bit Repeatability: ±1% RH Accuracy: At 25°C ±5% RH

Interchangeability: fully interchangeable Response time: 1 / e (63%) of 25°C 6s

1m / s air 6s

Hysteresis: <± 0.3% RH

Long-term stability: <± 0.5% RH / yr in

Temperature:
Resolution: 16Bit
Repeatability: ±0.2°C
Range: At 25°C ±2°C

Response time: 1 / e (63%) 10S

Electrical Characteristics Power supply: DC 3.5 ~ 5.5V


Supply Current: measurement 0.3mA standby 60µA



Sampling period: more than 2 seconds Pin Description:


- 1, the VDD power supply $3.5 \sim 5.5 \text{V}$ DC
- 2 DATA serial data, a single bus
- 3, NC, empty pin
- 4, GND ground, the negative power

Typical Application

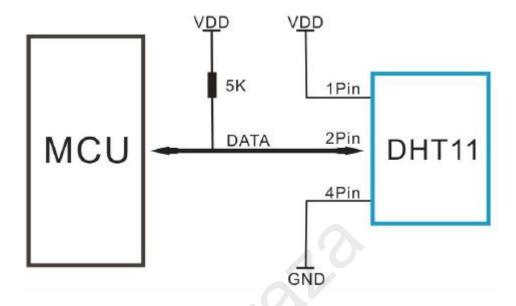


Connection

Schematic

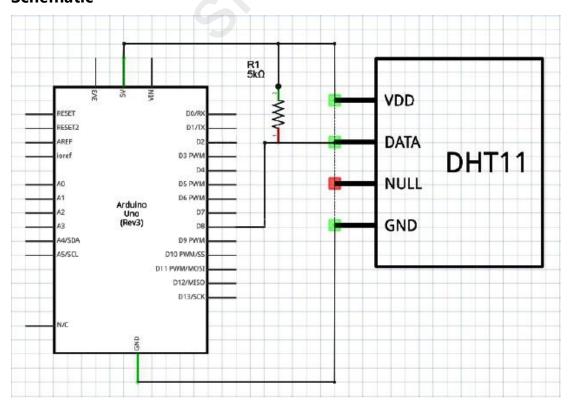



Connection diagram

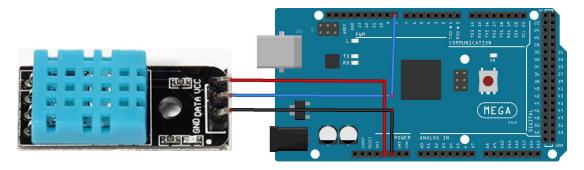

Sample code


Note: sample code under the Sample code folder.

You need to add the DHT11 to the Arduino library file directory, otherwise the compiler does not pass. Please refer to 'How to add library files.docx'.

```
#include <dht11.h>
dht11 DHT11;
#define DHT11PIN 8
void setup(void)
{
  Serial.begin(9600);
void loop(void)
{
  DHT11.read(DHT11PIN);
  Serial.print("TMEP=");
  Serial.print(DHT11.temperature);
  Serial.print(" C");
  Serial.print('\t');
  Serial.print("HUM=");
  Serial.print(DHT11.humidity);
  Serial.println(" %");
  delay(500);
}
```




Example picture

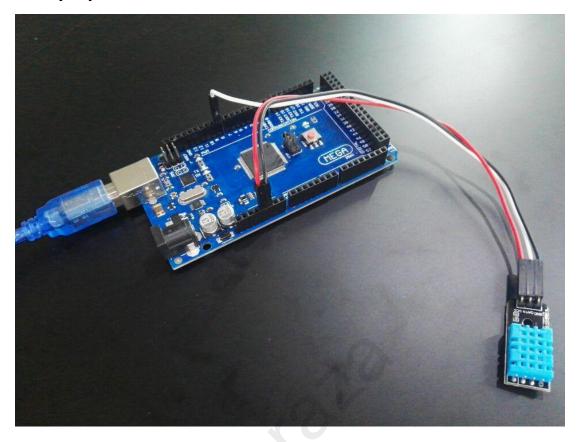



Result

Upload the program then open the monitor, we can see the data as below:(It shows the temperature of the environment)

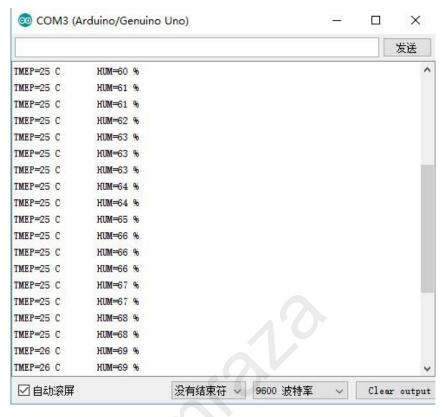

6



Language reference

Tips: Click on the following name to jump to the web page. If you fail to open, use the Adobe reader to open this document. Serial

Application effect

Open the serial port monitor, you will see some different value return by DHT11.

* We are a leading manufacturer of electronic components for Arduino and Raspberry Pi.

* Official website: http://www.smraza.com/

* We have a professional engineering team dedicated to providing tutorials and support to help you get started.

* If you have any technical questions, please feel free to contact our support staff via email at support@smraza.com

* We truly hope you enjoy the product, for more great products please visit our

Amazon US store: http://www.amazon.com/shops/smraza

Amazon CA store: https://www.amazon.ca/shops/AMIHZKLK542FQ
Amazon UK store: http://www.amazon.co.uk/shops/AVEAJYX3AHG8Q
Amazon DE store: http://www.amazon.de/shops/AVEAJYX3AHG8Q
Amazon IT store: http://www.amazon.it/shops/AVEAJYX3AHG8Q
Amazon ES store: https://www.amazon.es/shops/AVEAJYX3AHG8Q

^{*} About Smraza: