

Get started quickly

If you feel that you don't know how to follow the document, you can directly view our pre-recorded hands-on instructional video.

Power on the system

1. Connect the serial cable

Connect one end of the matching TypeC cable to the serial port/power port of the development board, and the other end to the USB port of the computer. After the connection is successful, the onboard red power light will light up. By default, the system will automatically install the serial device driver. If it is not installed automatically, you can use the driver wizard to install it automatically.

- For Windows systems, there will be an additional serial port device at the port (COM and LPT) in the Windows device manager, usually `USB-Enhanced-SERIAL CH9102` starting with . You need to pay attention to the specific COM number behind it for subsequent connections.



As shown in the figure above, the COM number is 96, and the serial number we use for the next connection is 96.

- For Linux systems, you can check whether there is an additional /dev/tty<> device. Generally, the device node is /dev/ttyACM0.

```

[68941.006706] usb 3-2: New USB device strings: Mfr=0, Product=2, SerialNumber=3
[68941.006707] usb 3-2: Product: USB Single Serial
[68941.006708] usb 3-2: SerialNumber: 533B021749
[68941.009665] cdc_acm 3-2:1.0: ttyACM0: USB ACM device
[69042.771777] usb 3-2: USB disconnect, device number 7
[69047.291398] usb 3-2: new full-speed USB device number 8 using xhci_hcd
[69047.549455] usb 3-2: New USB device found, idVendor=1a86, idProduct=55d4, bcd
Device= 4.43
[69047.549460] usb 3-2: New USB device strings: Mfr=0, Product=2, SerialNumber=3
[69047.549462] usb 3-2: Product: USB Single Serial
[69047.549464] usb 3-2: SerialNumber: 533B021741
[69047.551548] cdc_acm 3-2:1.0: ttyACM0: USB ACM device

```


2. Open the serial console

Get serial tool

Use serial tools such as PuTTY or MobaXterm to develop board devices.

- The putty tool can be obtained by visiting the page <https://www.chiark.greenend.org.uk/~sgtatham/putty/>.
- MobaXterm can be obtained by visiting the page <https://mobaxterm.mobatek.net/> (recommended).


Use putty to log in to the serial port

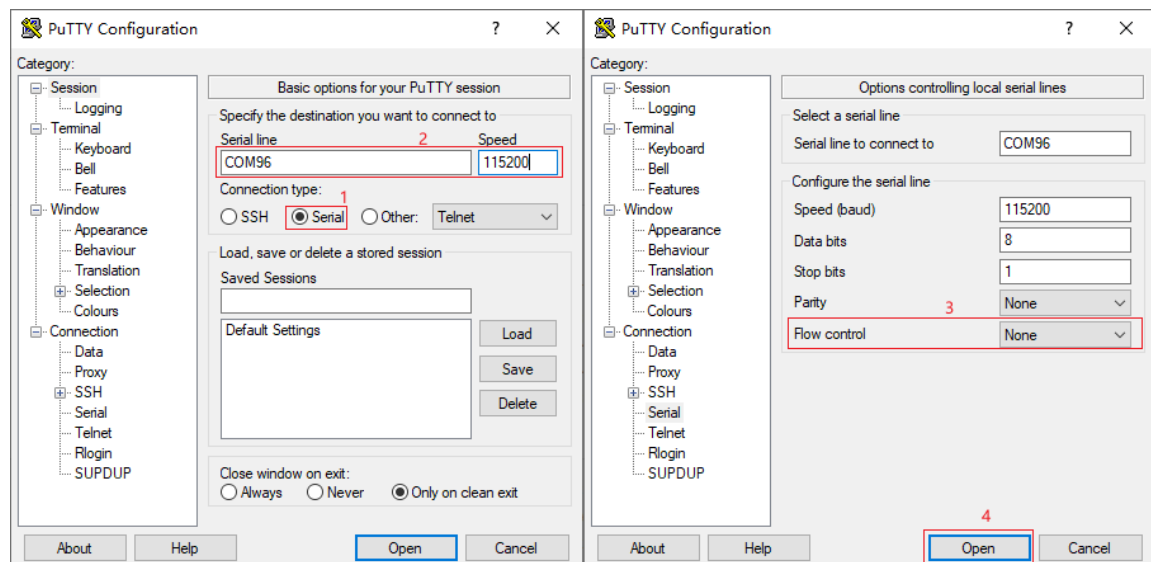

Use MobaXterm to log in to the serial port


Open MobaXterm, click "Session" in the upper left corner, select "Serial" in the pop-up interface, and select the port number (the port number COM21 displayed in the previous device manager), baud rate (Speed 115200), flow control (Flow Control: none), and finally click "OK".

The steps are shown in the figure below. **Note: You must select none for Flow Control, otherwise you will not be able to input data to the serial port in MobaXterm**

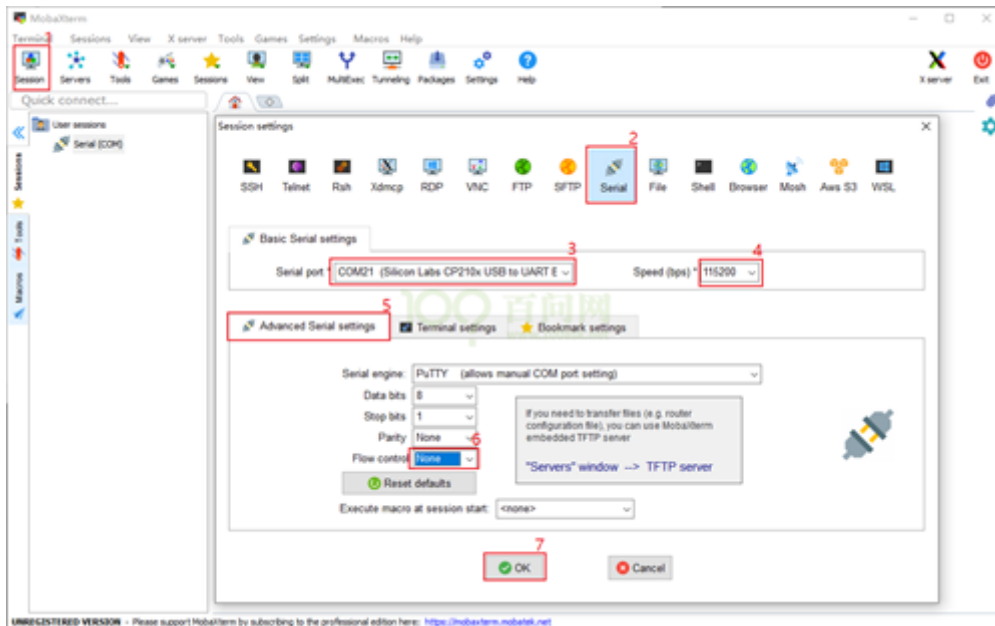

3. Enter the system shell

After using the serial port tool to open the serial port successfully, you can directly press the Enter key to enter the shell. Of course, you can also press the **Reset** reset to view the complete system information.

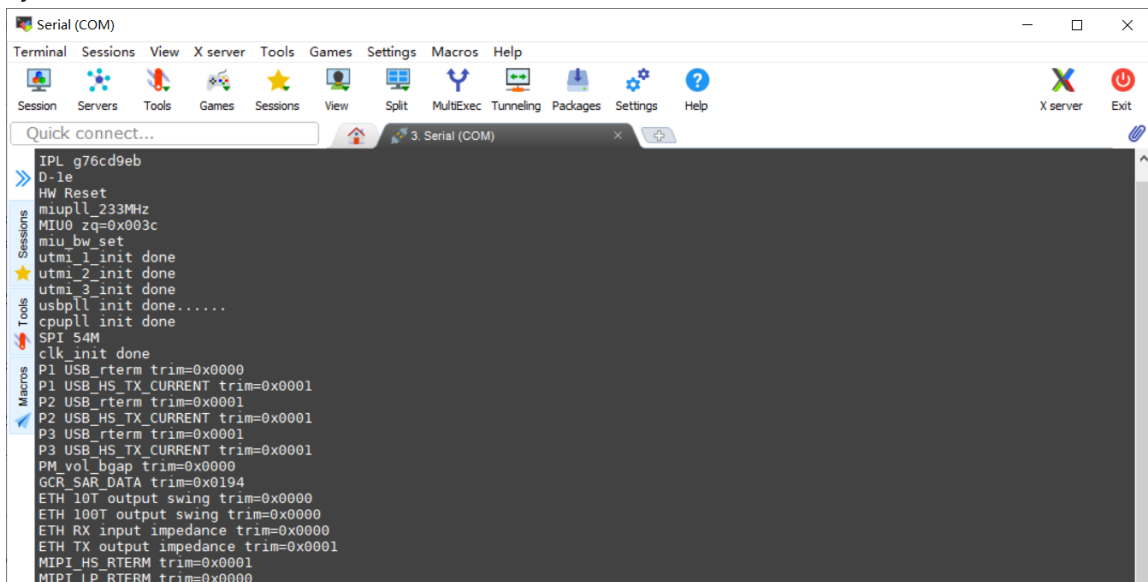

Note: The original system of Xingchen has no login password, and directly starts to enter the shell terminal in the file system.

Expansion hardware

connection module

Connect 7 inch screen module

- Connect Video Tutorial
- Module introduction

Connect the backplane

- Connect Video Tutorial
- Introduction to the bottom plate

Briefly describe the development process

Overview of the debugging environment