



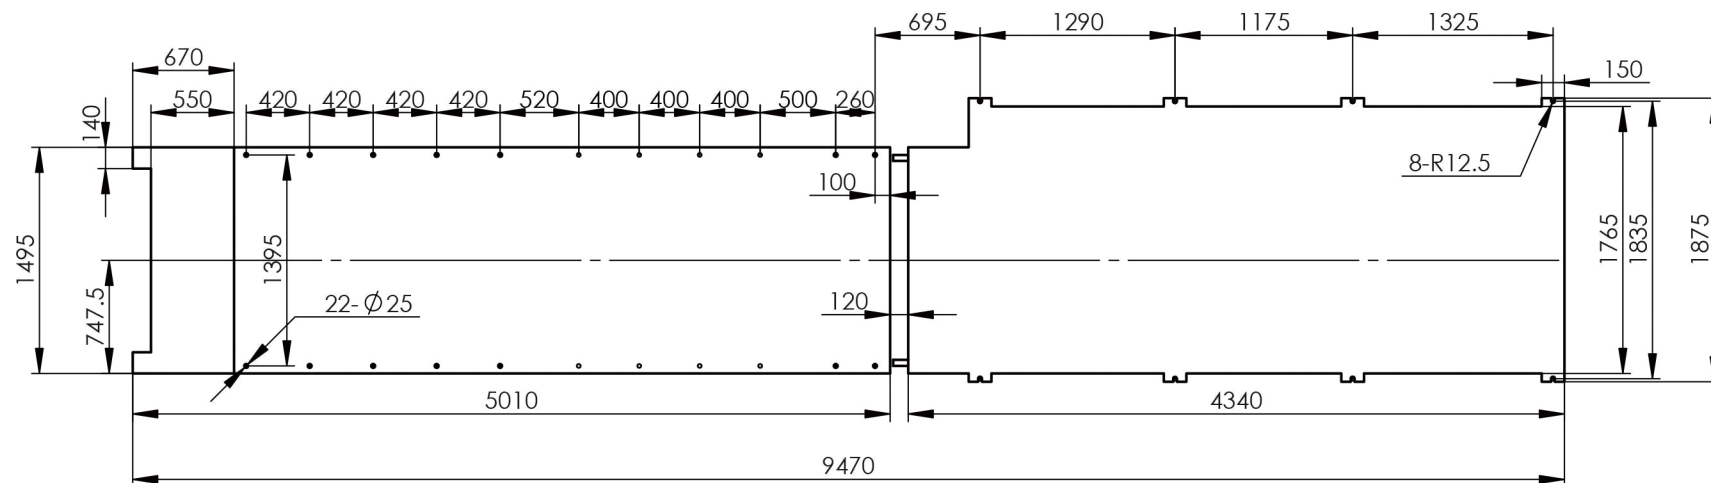

cebar & cement

ground

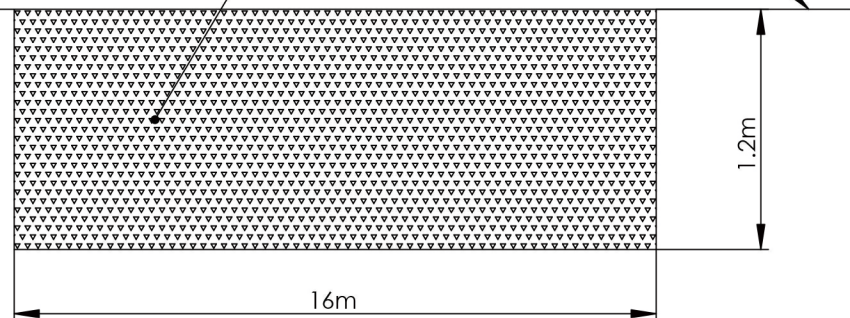

U680TS Machine Frame

1. Foundation depth should be 1.2m and divided into three layers by three D16 mm rebar in each 0.4m depth.
2. Planish the ground horizontally and put a 10mm iron plate under each machine frame pad.
3. Foundation ground bearing capacity should larger than 10T/m.
4. Machine must connected with earth wire.
5. This is just a foundation drawing, please refer outside dimension to real machine.

Ningbo Ouyilai Machinery Manufacturing Co.,Ltd

www.ouyilai.com