



VOLTEX INNOVATION

ACCELERATING ADVANCE AUTOMATION

VOLTEX INNOVATION

Item	Tag No.	Type	Order Code	Price	Spare Part
1	DPIT-60901	Differential Pressure Transmitter	PMD55B-2Q8L7/0	76,500.00	
2	DPIT-61310	Differential Pressure Transmitter	PMD55B-2NTN7/0	77,568.00	
3	DPIT-61312	Differential Pressure Transmitter	PMD55B-2NTN7/0	77,568.00	
4	DPT-40201	Differential Pressure Transmitter			
5	DPT-60202	Differential Pressure Transmitter	PMD55B-2Q8M4/0	76,500.00	
6	DPT-60203	Differential Pressure Transmitter	PMD55B-2Q8M4/0	76,500.00	
7	DPT-61301	Differential Pressure Transmitter	PMD55B-2NTN7/0	77,568.00	
8	DPT-61302	Differential Pressure Transmitter	PMD55B-2NTN7/0	77,568.00	

DPIT-61310, DPIT-61312, DPT-61301, DPT-61302

Deltabar PMD55B


Model no.: PMD55B-2NTN7/0

(PMD55B-BGBADJH37LBASAJA1B+NTNZQ1)

BG	Approval: ATEX/IEC II 1/2D, 2D Ex ta/tb IIIC Da/Db
BA	Output: 2-wire 4-20mA HART
D	Display; Operation: Segment display w/o buttons + Bluetooth
J	Housing; Material: Dual compartment; Alu, coated
H	Electrical Connection: Thread NPT1/2, IP66/68 NEMA Type 4X/6P
3	Pressure Type: Differential
7L	Sensor Range: 16bar/1.6MPa/240psi
B	Calibration; Unit: Nominal value; mbar/bar
A	Installation: Horizontal impulse line, left side high pressure, with side vent
SAJ	Process Connection: NPT1/4-18 IEC61518 UNF7/16-20, 316L
A	Membrane Material: 316L
1	Fill Fluid: Silicone oil
B	Seal: PTFE
NT	>>Accessory Mounted: Manifold, 5 valve, 316L, PTFE packing, FNPT1/2, IEC61518-A, (DA63M-BB2BBB)
NZ	>>Accessory Mounted: Mounted backside of manifold
Q1	>>Accessory Enclosed: Mounting bracket, wall/pipe, 316L



Drawing 2D

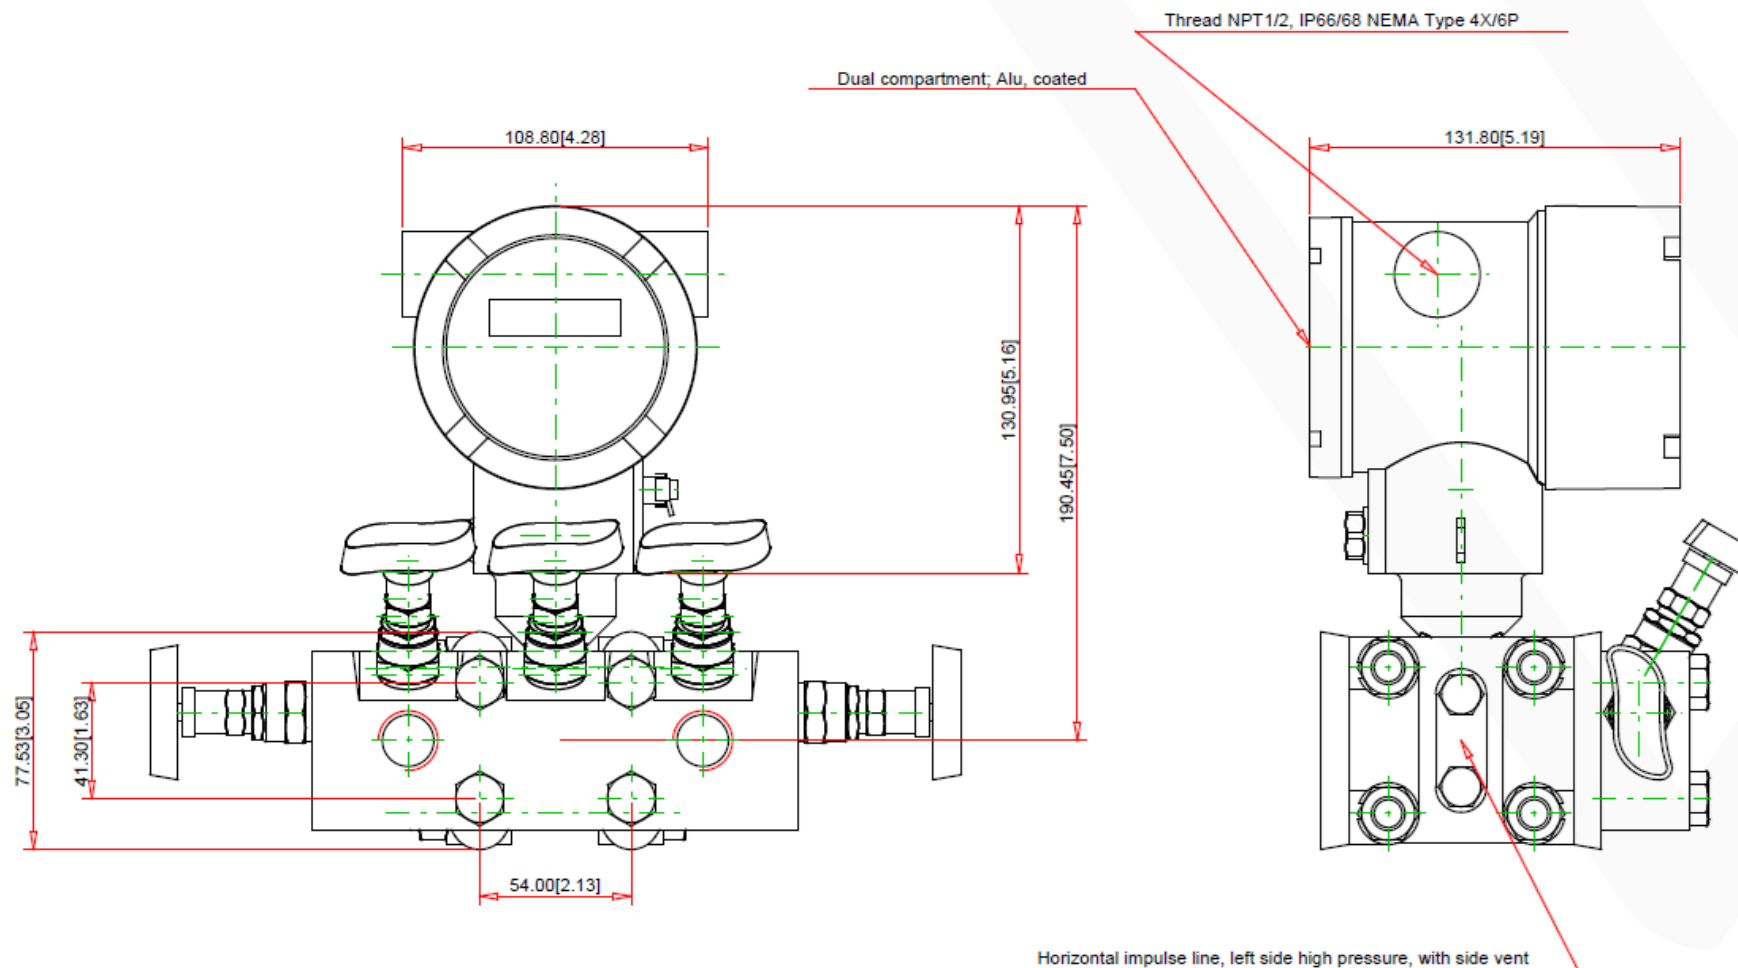

DPIT- 60901

Deltabar PMD55B


Model no.: PMD55B-2Q8L7/0

(PMD55B-AABADJH37MBASAJA1B+NTNZQ1)

AA	Approval: Non-hazardous area
BA	Output: 2-wire 4-20mA HART
D	Display; Operation: Segment display w/o buttons + Bluetooth
J	Housing; Material: Dual compartment; Alu, coated
H	Electrical Connection: Thread NPT1/2, IP66/68 NEMA Type 4X/6P
3	Pressure Type: Differential
7M	Sensor Range: 40bar/4MPa/600psi
B	Calibration; Unit: Nominal value; mbar/bar
A	Installation: Horizontal impulse line, left side high pressure, with side vent
SAJ	Process Connection: NPT1/4-18 IEC61518 UNF7/16-20, 316L
A	Membrane Material: 316L
1	Fill Fluid: Silicone oil
B	Seal: PTFE
NT	>>Accessory Mounted: Manifold, 5 valve, 316L, PTFE packing, FNPT1/2, IEC61518-A, (DA63M-BB2BBB)
NZ	>>Accessory Mounted: Mounted backside of manifold
Q1	>>Accessory Enclosed: Mounting bracket, wall/pipe, 316L



Drawing 2D

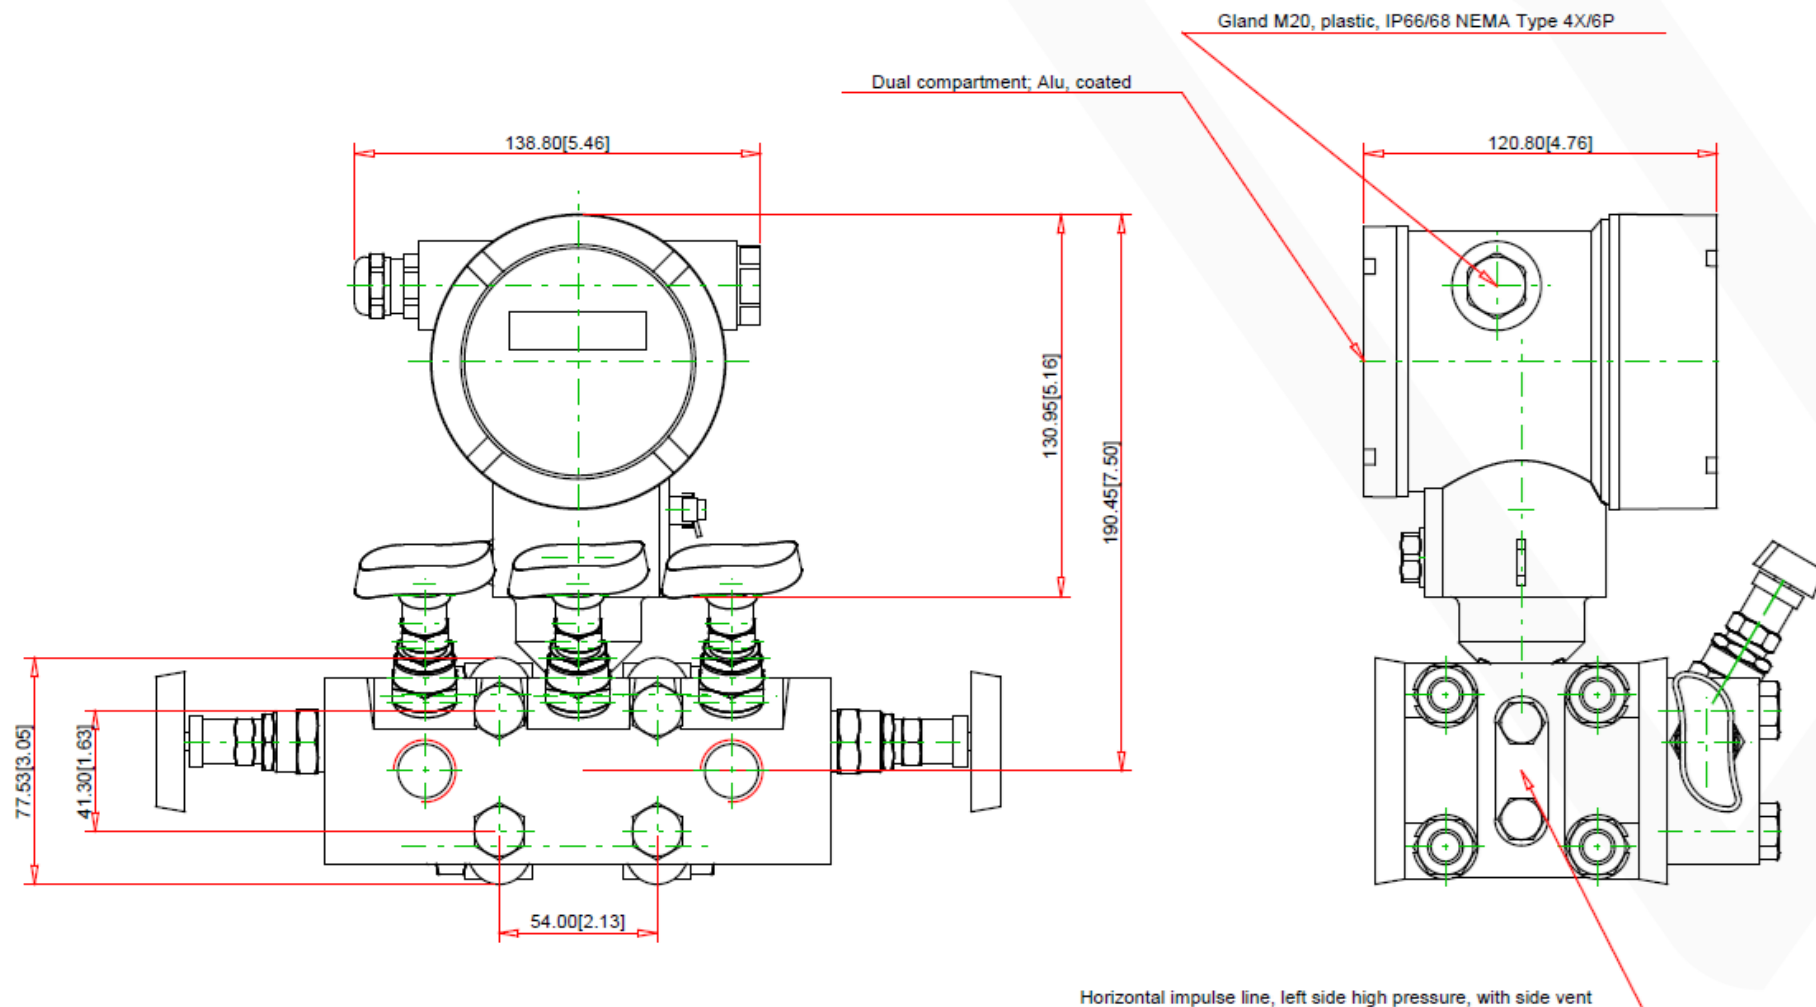

DPT-60202, DPT-60203

Deltabar PMD55B

Model no.: PMD55B-2Q8M4/0

(PMD55B-AABADJH37HBASAJA1B+NTNZQ1)

AA	Approval: Non-hazardous area
BA	Output: 2-wire 4-20mA HART
D	Display; Operation: Segment display w/o buttons + Bluetooth
J	Housing; Material: Dual compartment; Alu, coated
H	Electrical Connection: Thread NPT1/2, IP66/68 NEMA Type 4X/6P
3	Pressure Type: Differential
7H	Sensor Range: 3bar/300kPa/45psi
B	Calibration; Unit: Nominal value; mbar/bar
A	Installation: Horizontal impulse line, left side high pressure, with side vent
SAJ	Process Connection: NPT1/4-18 IEC61518 UNF7/16-20, 316L
A	Membrane Material: 316L
1	Fill Fluid: Silicone oil
B	Seal: PTFE
NT	>>Accessory Mounted: Manifold, 5 valve, 316L, PTFE packing, FNPT1/2, IEC61518-A, (DA63M-BB2BBB)
NZ	>>Accessory Mounted: Mounted backside of manifold
Q1	>>Accessory Enclosed: Mounting bracket, wall/pipe, 316L



Drawing 2D

