



VOLTEX INNOVATION

# **ACCELERATING ADVANCE AUTOMATION**

**VOLTEX INNOVATION**

| Item | Tag No.                  | Type               | Order Code     | Price      | Spare Part          |
|------|--------------------------|--------------------|----------------|------------|---------------------|
| 1    | FT-40201                 | Coliolis mass flow | 8E3B50-14000/0 | 445,500.00 |                     |
| 2    | FT-40202                 | Electro-Magnetic   | 5P3B50-355V8/0 | 158,000.00 |                     |
| 3    | FT-60201                 | Thermal mass       | 6I3BL3-83L4/0  | 254,700.00 |                     |
| 4    | FT-60210                 | Thermal mass       |                |            |                     |
| 5    | FT-60211                 | Thermal mass       |                |            |                     |
| 6    | FT-60221                 | Thermal mass       | 6I3BL3-83L4/0  | 254,700.00 |                     |
| 7    | FT-60261FA to FT-60261FR | Ultra-sonic flow   |                |            |                     |
| 8    | FT-60307                 | Thermal mass       | 6F3B1H-3ND2/0  | 290,000.00 |                     |
| 9    | FT-60901                 | Vortex 4"          | 7F2C1H-2EPA8/0 | 239,000.00 | Pipe 6" use flow 4" |
| 11   | FT-60902                 | Vortex 3"          | 7F2C80-2JQJ7/0 | 229,000.00 | Pipe 4" use flow 3" |
| 12   | FT-61101                 | Thermal mass       | 6F3B1H-3ND2/0  | 290,000.00 |                     |
| 13   | FT-90301                 | Electro-Magnetic   | 5P3B1H-286C7/0 | 180,600.00 |                     |
| 14   | FT-91001                 | Coliolis mass flow | 8E3B50-1RP84/0 | 487,600.00 |                     |
| 15   | FT-93001                 | Electro-Magnetic   | 5P3B80-2KAM5/0 | 167,600.00 |                     |


## FT- 40201

Promass E 300, 8E3B50, DN50 2"

Model no.: 8E3B50-14000/0

(8E3B50-AAIBABDFADSAAASHA2+AA)

- AA Approval; Transmitter + Sensor: Non-hazardous area
- I Power Supply: AC 100...240V/DC 24V
- BA Output; Input 1: 4-20mA HART
- B Output; Input 2: 4-20mA
- D Output; Input 3: Configurable I/O default off
- F Display; Operation: 4-line illum.; touch control
- A Housing: Alu, coated
- D Electrical Connection: Thread NPT1/2
- SA Meas. Tube Mat., Wetted Parts Surface: Stainl. steel, not polished
- AAS Process Connection: Cl.150 RF, 1.4404/316/316L, flange ASME B16.5
- H Flow Calibration: 0.15% Mass
- A2 Device Model: 2
- AA >Operation Language Display: English

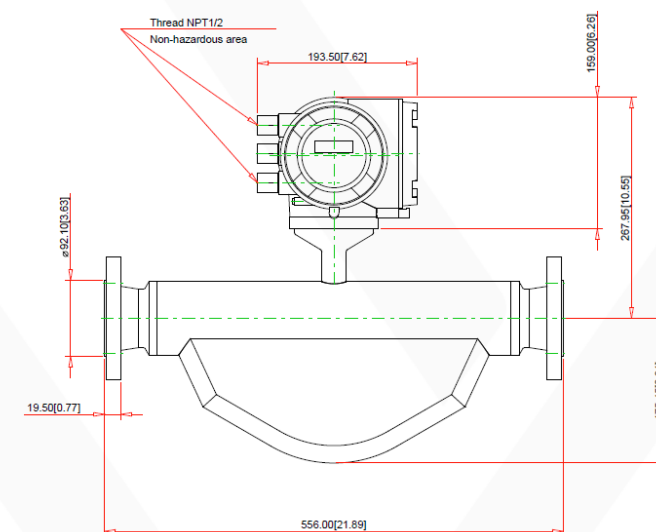


## FT- 40202

Promag P 300, 5P3B50, DN50 2"

Model no.: 5P3B50-355V8/0

(5P3B50-AAIBADDFADEA1S0BA2+AA)

- AA Approval; Transmitter + Sensor: Non-hazardous area
- I Power Supply: AC 100...240V/DC 24V
- BA Output; Input 1: 4-20mA HART
- D Output; Input 2: Configurable I/O default off
- D Output; Input 3: Configurable I/O default off
- F Display; Operation: 4-line illum.; touch control
- A Housing: Alu, coated
- D Electrical Connection: Thread NPT1/2
- E Liner: PTFE
- A1S Process Connection: Cl.150, stainl. steel, flange ASME B16.5
- 0 Electrodes: 1.4435/316L
- B Flow Calibration: 0.2%
- A2 Device Model: 2
- AA >Operation Language Display: English

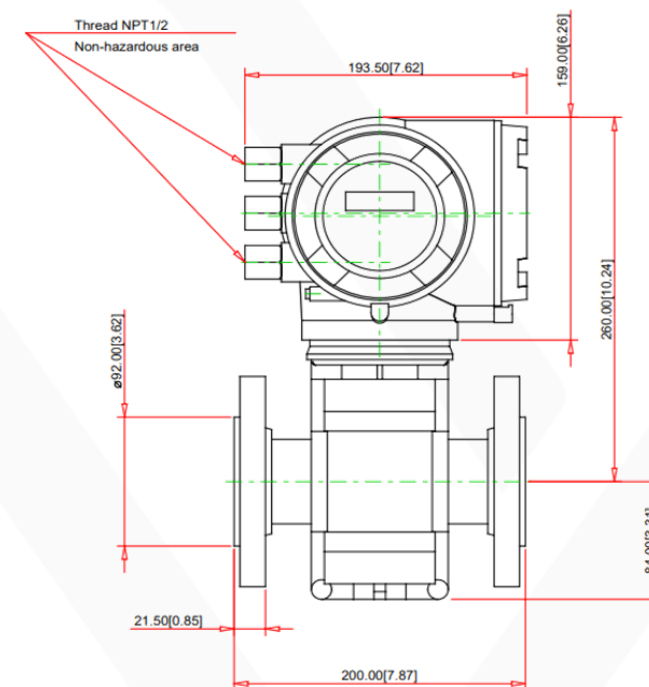


## FT- 60201, 60221

t-mass I 300, 6I3BL3, 435mm 17"

Model no.: 6I3BL3-83L4/0

(6I3BL3-AAIBADDFADSANA2AAGA2+AA)

- AA Approval; Transmitter + Sensor: Non-hazardous area
- I Power Supply: AC 100...240V/DC 24V
- BA Output; Input 1: 4-20mA HART
- D Output; Input 2: Configurable I/O default off
- D Output; Input 3: Configurable I/O default off
- F Display; Operation: 4-line illum.; touch control
- A Housing: Alu, coated
- D Electrical Connection: Thread NPT1/2
- SA Sensor Version; Sensor; Insertion Tube: Unidirectional; stainl. steel; stainl. steel
- NA2 Process Connection: 1" NPT, compression fitting
- AA Seal: PEEK, -40...+ 140oC
- G Flow Calibration: Factory calibration
- A2 Device Model: 2
- AA >Operation Language Display: English

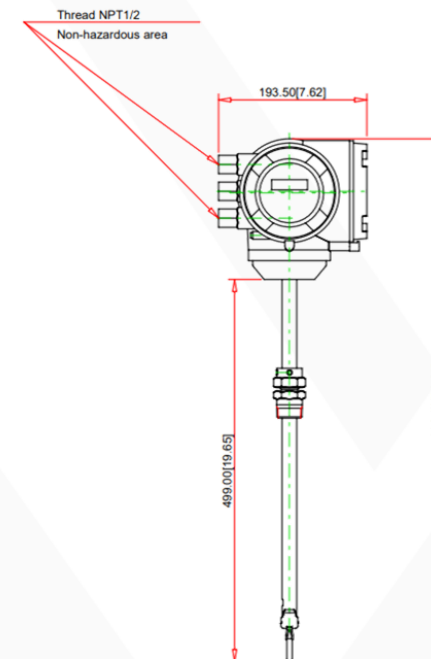

## FT- 60307, 61101

t-mass F 300, 6F3B1H, DN100 4"

Model no.: 6F3B1H-3ND2/0

(6F3B1H-AAIBADDFADSAAASGA2+AA)

AA Approval; Transmitter + Sensor: Non-hazardous area

I Power Supply: AC 100...240V/DC 24V

BA Output; Input 1: 4-20mA HART

D Output; Input 2: Configurable I/O default off

D Output; Input 3: Configurable I/O default off

F Display; Operation: 4-line illum.; touch control

A Housing: Alu, coated

D Electrical Connection: Thread NPT1/2


SA Sensor Version; Sensor; Meas.Tube: Unidirectional; stainl. steel; stainl. steel

AAS Process Connection: Cl.150 RF Sch.40, flange ASME B16.5

G Flow Calibration: Factory calibration

A2 Device Model: 2

AA >Operation Language Display: English

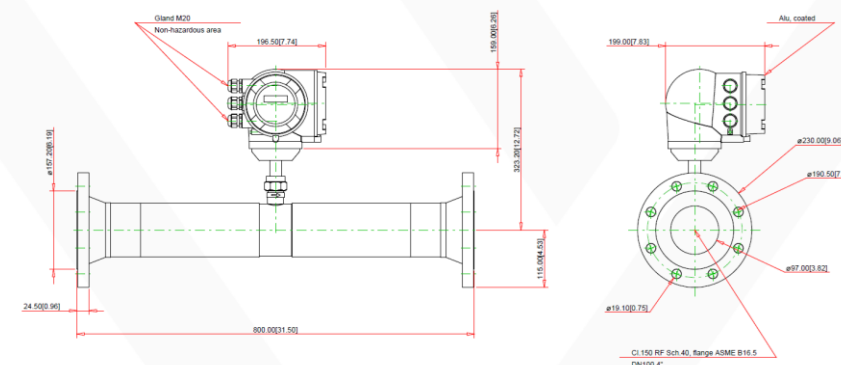




# FT- 60901

Prowirl F 200, 7F2C1H, DN100 4"

Model no.: 7F2C1H-2EPA8/0

(7F2C1H-AABECADDAAEABSKA1+AA)

- AA Approval: Non-hazardous area
- B Output; Input: 4-20mA HART, pulse/freq./switch output
- E Display; Operation: SD03 4-line, illum.; touch control + data backup function
- C Housing: GT20 dual compartment, alu, coated, compact
- A Cable, Remote Version: Not used
- D Electrical Connection: Thread NPT1/2
- DA Sensor Version; DSC-Sensor; Meas. Tube: Mass steam; 316L; 316L (integrated pressure-/temp.measurement), -200...+400oC/-328...+750oF
- A DSC-Sensor Seal: Graphite, -200oC... +400oC, -328oF...752oF
- E Pressure component: Pressure cell 40bar/580psi abs
- ABS Process Connection: Cl.300 RF Sch.40, flange ASME B16.5
- K Flow Calibration: 0.75% volume 3-point
- A1 Device Model: 1
- AA >Operation Language Display: English

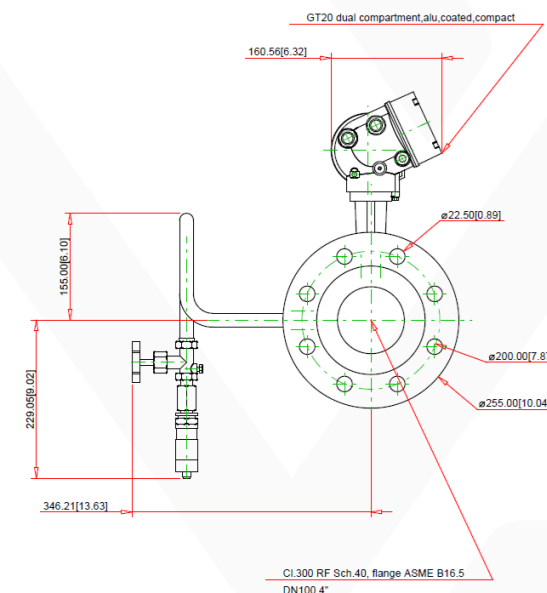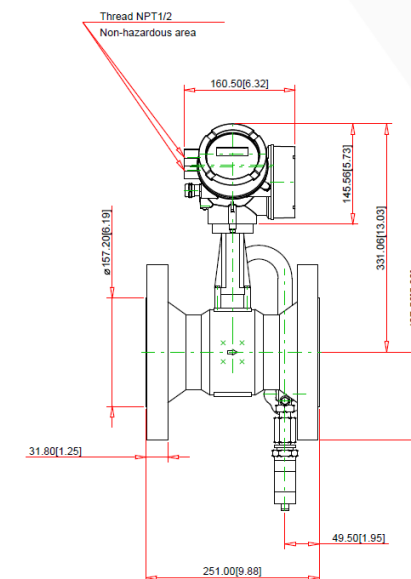




## FT- 60902

Prowirl F 200, 7F2C80, DN80 3"


Model no.: 7F2C80-2JQJ7/0

(7F2C80-AABECADDAAEABSKA1+AA)

- AA Approval: Non-hazardous area
- B Output; Input: 4-20mA HART, pulse/freq./switch output
- E Display; Operation: SD03 4-line, illum.; touch control + data backup function
- C Housing: GT20 dual compartment, alu, coated, compact
- A Cable, Remote Version: Not used
- D Electrical Connection: Thread NPT1/2
- DA Sensor Version; DSC-Sensor; Meas. Tube: Mass steam; 316L; 316L (integrated pressure-/temp.measurement), -200...+400oC/-328...+750oF
- A DSC-Sensor Seal: Graphite, -200oC... +400oC, -328oF...752oF
- E Pressure component: Pressure cell 40bar/580psi abs
- ABS Process Connection: Cl.300 RF Sch.40, flange ASME B16.5
- K Flow Calibration: 0.75% volume 3-point
- A1 Device Model: 1
- AA >Operation Language Display: English

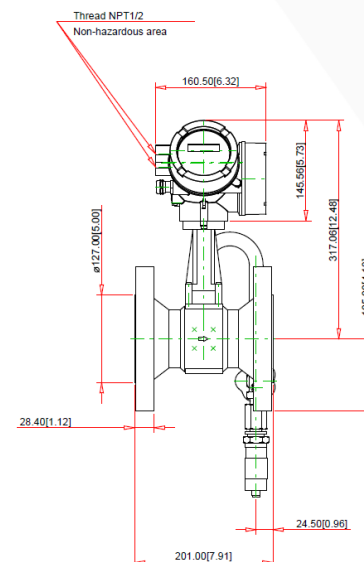

WV V für Maß - mm finisch

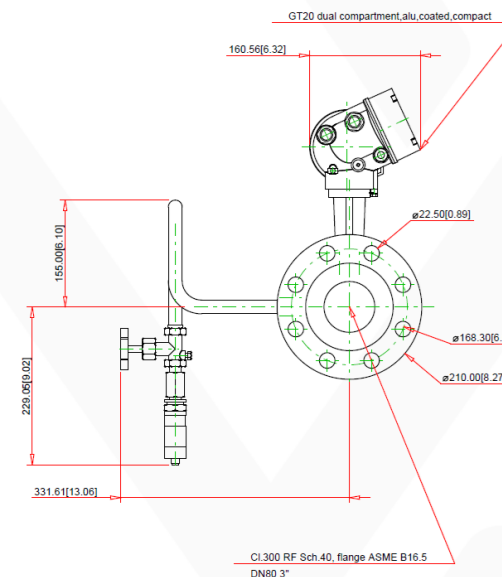


## FT- 90301

Promag P 300, 5P3B1H, DN100 4"

Model no.: 5P3B1H-286C7/0

(5P3B1H-AAIBADDFADEA1S0AA2+AA)

- AA Approval; Transmitter + Sensor: Non-hazardous area
- I Power Supply: AC 100...240V/DC 24V
- BA Output; Input 1: 4-20mA HART
- D Output; Input 2: Configurable I/O default off
- D Output; Input 3: Configurable I/O default off
- F Display; Operation: 4-line illum.; touch control
- A Housing: Alu, coated
- D Electrical Connection: Thread NPT1/2
- E Liner: PTFE
- A1S Process Connection: Cl.150, stainl. steel, flange ASME B16.5
- 0 Electrodes: 1.4435/316L
- A Flow Calibration: 0.5%
- A2 Device Model: 2
- AA >Operation Language Display: English

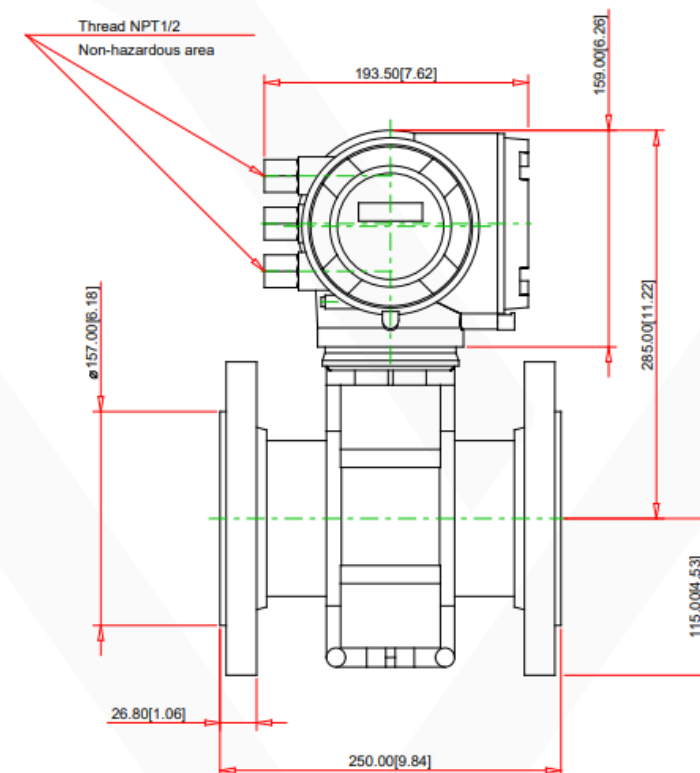


## FT- 91001

Promass E 300, 8E3B50, DN50 2"

Model no.: 8E3B50-1RP84/0

(8E3B50-BDDBADDFADSAAASHA2+AA)

- BD Approval; Transmitter + Sensor: ATEX+IECEEx; Z0/1, Z21, Ex d, IIC/IIIC
- D Power Supply: DC 24V
- BA Output; Input 1: 4-20mA HART
- D Output; Input 2: Configurable I/O default off
- D Output; Input 3: Configurable I/O default off
- F Display; Operation: 4-line illum.; touch control
- A Housing: Alu, coated
- D Electrical Connection: Thread NPT1/2
- SA Meas. Tube Mat., Wetted Parts Surface: Stainl. steel, not polished
- AAS Process Connection: Cl.150 RF, 1.4404/316/316L, flange ASME B16.5
- H Flow Calibration: 0.15% Mass
- A2 Device Model: 2
- AA >Operation Language Display: English

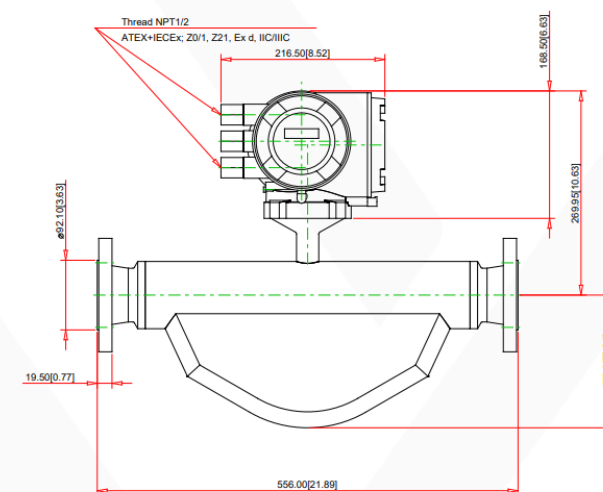

## FT- 93001

Promag P 300, 5P3B80, DN80 3"

Model no.: 5P3B80-2KAM5/0

(5P3B80-AAIBADDFADEA1S0AA2+AA)

- AA Approval; Transmitter + Sensor: Non-hazardous area
- I Power Supply: AC 100...240V/DC 24V
- BA Output; Input 1: 4-20mA HART
- D Output; Input 2: Configurable I/O default off
- D Output; Input 3: Configurable I/O default off
- F Display; Operation: 4-line illum.; touch control
- A Housing: Alu, coated
- D Electrical Connection: Thread NPT1/2
- E Liner: PTFE
- A1S Process Connection: Cl.150, stainl. steel, flange ASME B16.5
- 0 Electrodes: 1.4435/316L
- A Flow Calibration: 0.5%
- A2 Device Model: 2
- AA >Operation Language Display: English

