



TF-20DFS




Fire Safe Design

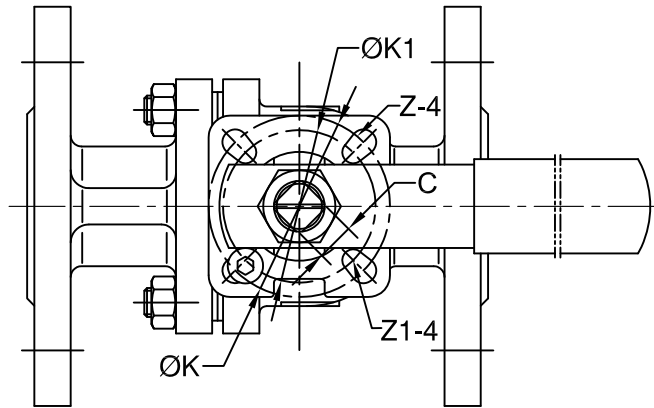

Before Fire Sealing



After Fire Sealing

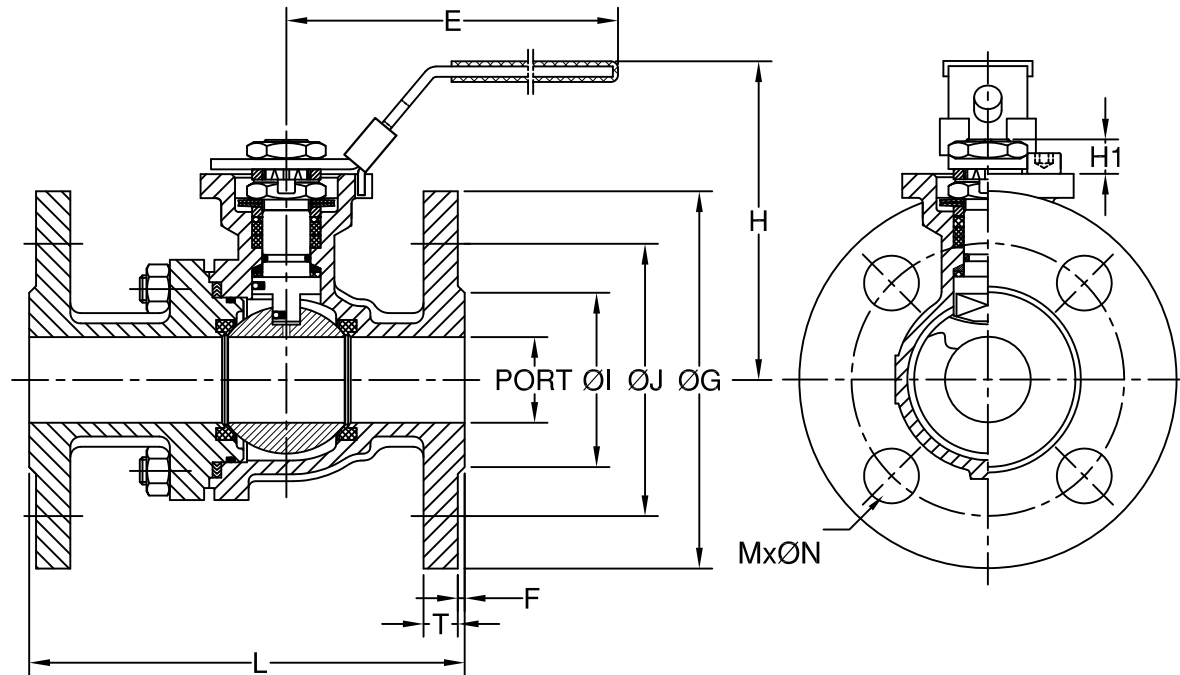

Design & Features:

- * Valve Body & Cap is Investment Casting : ASTM A351 CF8M
- * NACE MR 0175 is available upon request
NACE Bolt & Nut Material: ASTM A193 B8MA CLASS 1A / A194 8MA
- * Ball & Stem Surface by Polishing
- * Valves Design According to ASME B16.34
- * Double Seal Design
- * Blow-Out Proof Stem & Anti-Static (Ball-Stem-Body) Design
- * ISO 5211 Direct-Mount Flanged with Actuator
- * API 607(VI) / ISO10497(III) Fire Safe Approved
- * Pressure / Temperature Rating According to ASME B16.34
- * Flange Dimensions According to ASME B16.5 CLASS 300 RF
- * Face to Face According to ASME B16.10 CLASS 300 RF
- * Cold Working Pressure : 49.6 Bar
- * Pressure Tested Accordance With API 598
- Shell Test: 75 bar by Water
- Seat Closure : 6 bar by Air
- * Tn: Torque(N-m)
- * Wg:Weight(Kg)

DIMENSIONS

SIZE		PORT	L	E	H	H1	ØG	ØJ	ØI	T	F	M	ØN	C	ØK	ØK1	Z-4	Z1-4	Tn	Wg
DN15	1/2"	15.0	140.0	120.0	86.0	8.0	95.0	66.7	34.9	12.7	2.0	4	16.0	9.0	42.0 / F04	36.0 / F03	6.0	6.0	6.5	-
DN20	3/4"	20.0	152.0	120.0	95.0	8.0	115.0	82.6	42.9	14.3	2.0	4	19.0	9.0	42.0 / F04	36.0 / F03	6.0	6.0	10.0	-
DN25	1"	25.0	165.0	145.0	101.0	10.0	125.0	88.9	50.8	15.9	2.0	4	19.0	11.0	50.0 / F05	42.0 / F04	7.0	6.0	13.0	-
DN32	1-1/4"	32.0	178.0	145.0	106.0	10.0	135.0	98.4	63.5	17.5	2.0	4	19.0	11.0	50.0 / F05	42.0 / F04	7.0	6.0	17.0	-
DN40	1-1/2"	38.0	190.0	190.0	125.0	14.0	155.0	114.3	73.0	19.1	2.0	4	22.3	14.0	70.0 / F07	50.0 / F05	9.0	7.0	23.0	-
DN50	2"	50.0	216.0	190.0	132.0	14.0	165.0	127.0	92.1	20.7	2.0	8	19.0	14.0	70.0 / F07	50.0 / F05	9.0	7.0	36.0	-


DESCRIPTION

TF-20DFS, Two Piece Split Body Full Bore API 607/ISO10497 Fire Safe Flange Ball Valves , ASME CLASS 300 RF.


CODE		L015		DRAWING NO.	-		DATE	20/09/09
DATE	REVISION	20.09.09	A0	DRAWN BY	SUNNY	20.09.09		
UNIT		mm		CHECK BY	SUNNY	20.09.09		
SCALE		FREE		APPROVED BY	FRADY	20.09.09		



TF-20DFS

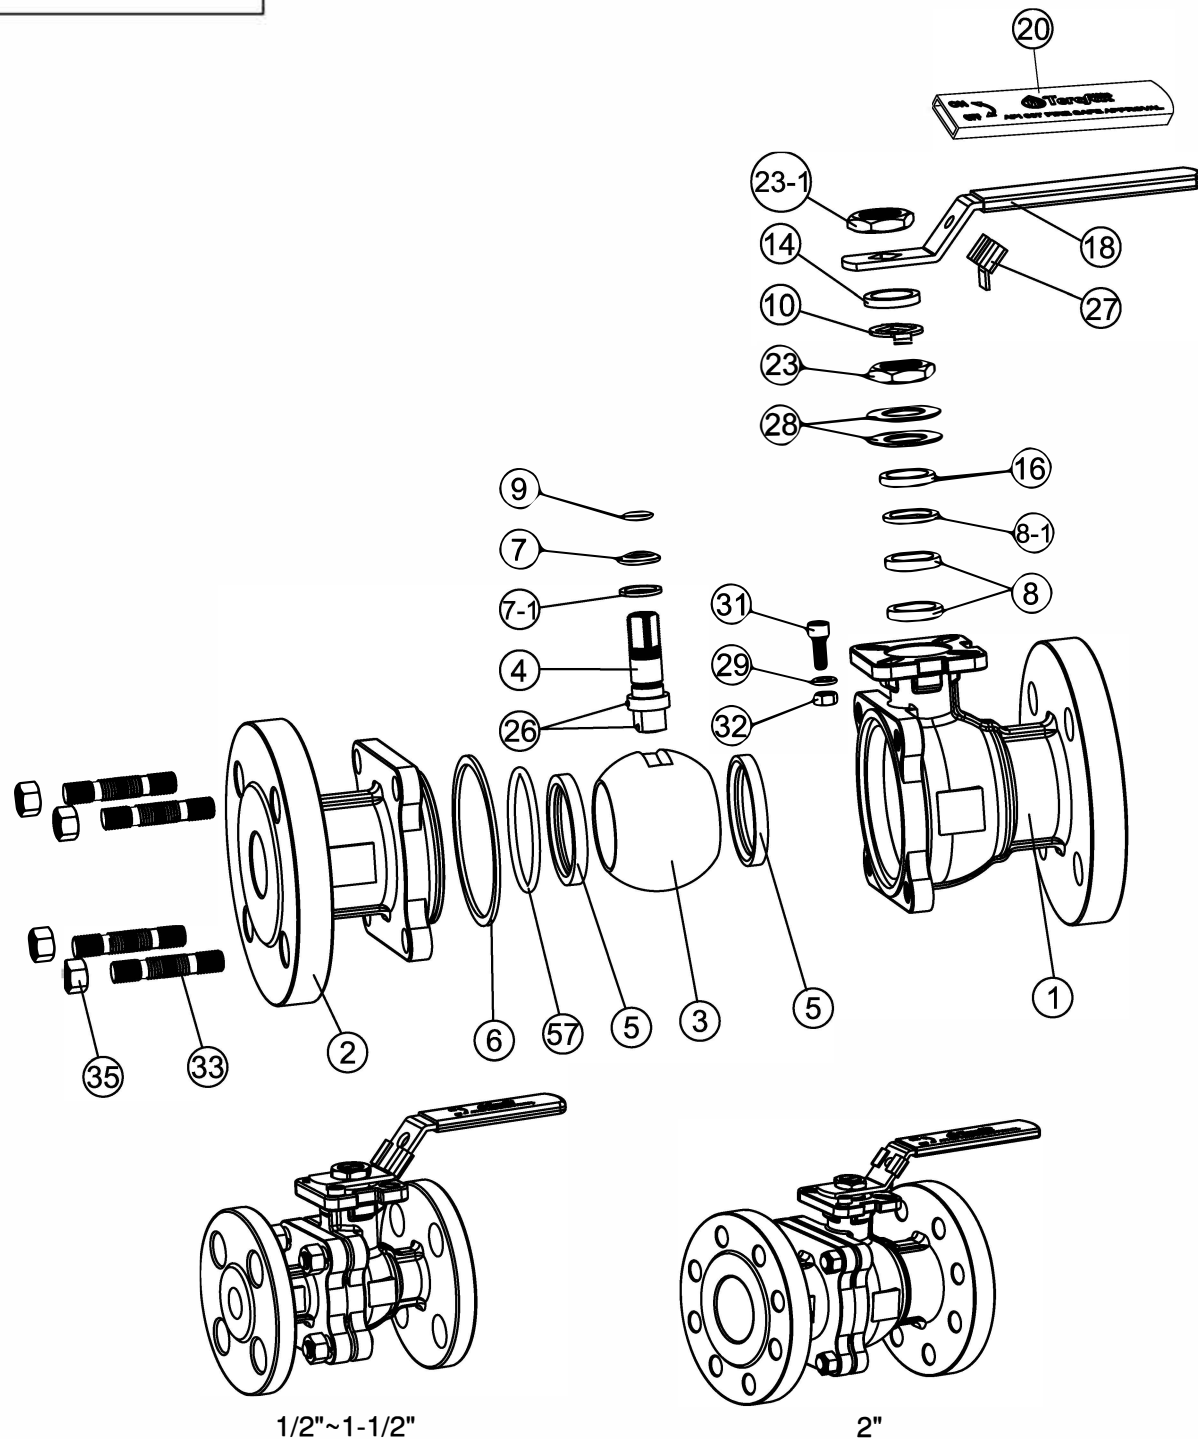

NO.	PART NAME	MATERIAL	QTY	REPAIR KIT
1	BODY	ASTM A351 Gr.CF8M	1	
2	CAP	ASTM A351 Gr.CF8M	1	
3	BALL	ASTM A182 F316	1	
4	STEM	ASTM A276 Gr.316	1	
5	SEAT	TFM1600 RTFE /PTFE	2	✓
6	BODY SEAL	GRAPHITE+SS316	1	✓
7	THRUST WASHER	GRAPHITE	1	✓
7-1	THRUST WASHER	PTFE+25%G.F.	1	✓
8	STEM PACKING	GRAPHITE	1SET	✓
8-1	STEM PACKING	PTFE+25%G.F.	1	
9	STEM O-RING	VITON	1	
10	STOP RING	ASTM A276 Gr.304	1	
14	GLAND	ASTM A276 Gr.304	1	
16	PACKING GLAND	ASTM A276 Gr.304	1	
18	HANDLE	ASTM A276 Gr.304	1	
20	HANDLE COVER	PLASTIC	1	
23	STEM NUT	ASTM A276 Gr.304	1	
23-1	HANDLE NUT	ASTM A276 Gr.304	1	
26	ANTI-STATIC DEVICE	ASTM A276 Gr.316	2	
27	LOCKING DEVICE	ASTM A276 Gr.304	1	
28	BELLEVILLE WASHER	ASTM A276 Gr.304	1SET	
29	WASHER	ASTM A276 Gr.304	1	
31	STOP PIN	ASTM A276 Gr.304	1	
32	PIN NUT	ASTM A276 Gr.304	1	
33	BODY STUD	ASTM A193 GR.B8	1 SET	
35	BODY NUT	ASTM A194 GR.8	1 SET	
57	BODY O-RING	VITON	1	✓

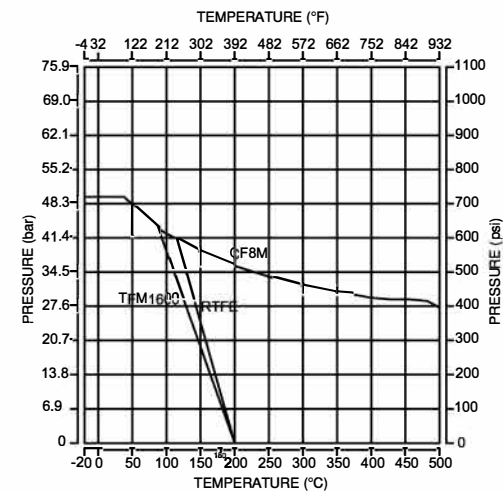

* Shiny Surface by Polishing Including:
 - Outside Diameter of Flange
 - Raised Face of Flange
 - Mating Surface of Flange
 - ISO 5211 Top Flange Surface
 - Port Inside Polished


DESCRIPTION

TF-20DFS, Two Piece Split Body Full Bore API 607/ISO10497 Fire Safe Flange Ball Valves , ASME CLASS 300 RF.





CODE		L015		DRAWING NO.		-		DATE	20/09/09
DATE	REVISION	20.09.09	A0	DRAWN BY		SUNNY	20.09.09		
UNIT		mm		CHECK BY		SUNNY	20.09.09		
SCALE		FREE		APPROVED BY		FRADY	20.09.09		



TF-20DFS

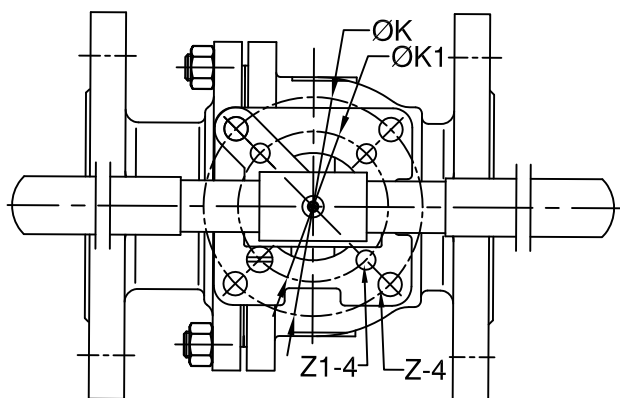

Fire Safe Design

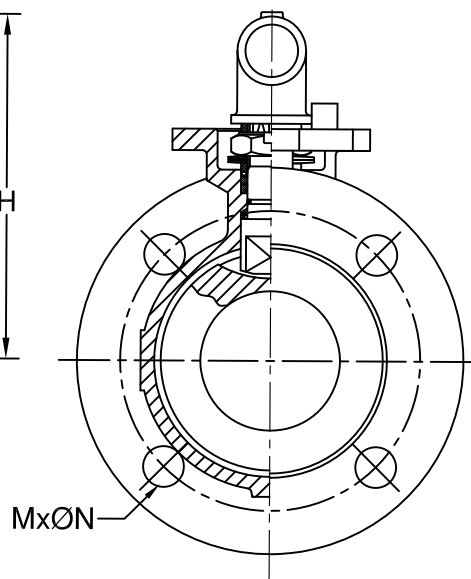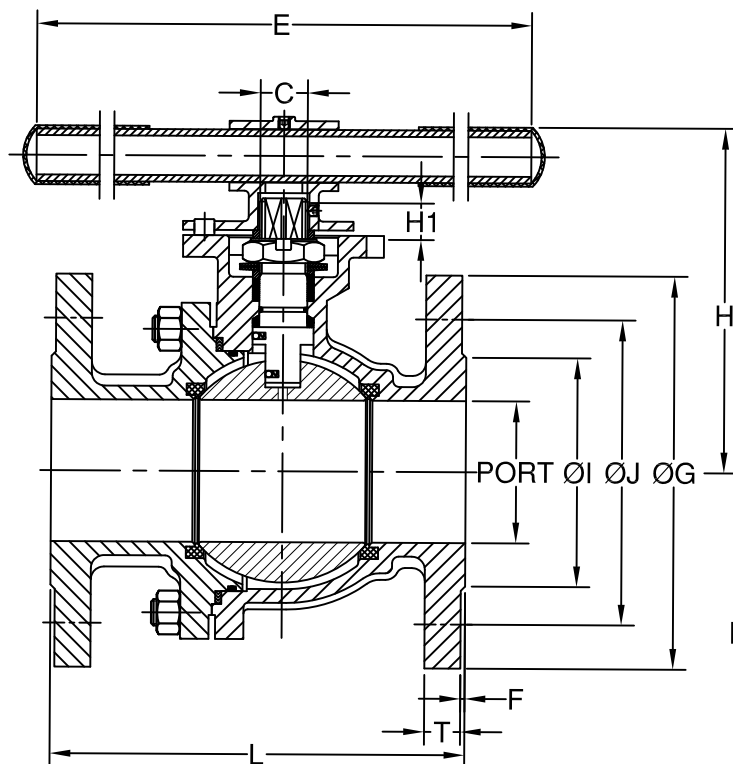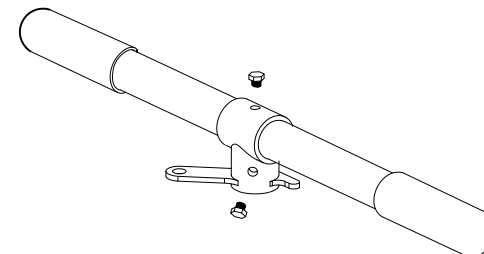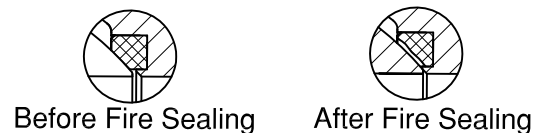

Design & Features:

- * Valve Body & Cap is Investment Casting : ASTM A351 CF8M
- * NACE MR 0175 is available upon request
- * NACE Bolt & Nut Material: ASTM A193 B8MA CLASS 1A / A194 8MA
- * Ball & Stem Surface by Polishing
- * Valves Design According to ASME B16.34
- * Double Seal Design
- * Blow-Out Proof Stem & Anti-Static (Ball-Stem-Body) Design
- * ISO 5211 Direct-Mount Flanged with Actuator
- * API 607(VI) /ISO10497(III) Fire Safe Approved
- * Pressure / Temperature Rating According to ASME B16.34
- * Flange Dimensions According to ASME B16.5 CLASS 300 RF
- * Face to Face According to ASME B16.10 CLASS 300 RF
- * Cold Working Pressure : 49.6 Bar
- * Pressure Tested Accordance With API 598
- Shell Test: 75 bar by Water
- Seat Closure : 6 bar by Air
- * Tn: Torque(N-m)
- * Wg:Weight(Kg)

DIMENSIONS

SIZE	PORT	L	E	H	H1	ØG	ØJ	ØI	T	F	M	ØN	C	ØK	ØK1	Z-4	Z1-4	Tn	Wg	
DN65	2-1/2"	65.0	241.0	450.0	163.0	17.0	190.0	149.2	104.8	23.9	2.0	8	22.3	17.0	102.0 / F10	70.0 / F07	11.0	9.0	58.0	-
DN80	3"	78.0	282.0	450.0	171.0	17.0	210.0	168.3	127.0	27.0	2.0	8	22.3	17.0	102.0 / F10	70.0 / F07	11.0	9.0	70.0	-
DN100	4"	100.0	305.0	450.0	199.0	19.0	255.0	200.0	157.2	30.2	2.0	8	22.3	19.0	102.0 / F10	70.0 / F07	11.0	9.0	120.0	-
DN125	5"	125.0	381.0	650.0	279.0	27.0	280.0	235.0	186.0	33.4	2.0	8	22.3	27.0	125.0 / F12		13.0		-	-
DN150	6"	150.0	403.0	650.0	300.0	27.0	320.0	269.9	215.9	35.0	2.0	12	22.3	27.0	125.0 / F12		13.0		-	-


DESCRIPTION

TF-20DFS, Two Piece Split Body Full Bore API 607/ISO10497 Fire Safe Flange Ball Valves , ASME CLASS 300 RF.


CODE	L015	DRAWING NO.	-	DATE	20/09/09
DATE	REVISION	20.09.09	A0	DRAWN BY	SUNNY
UNIT	mm	CHECK BY	SUNNY	20.09.09	
SCALE	FREE	APPROVED BY	FRADY	20.09.09	



TF-20DFS

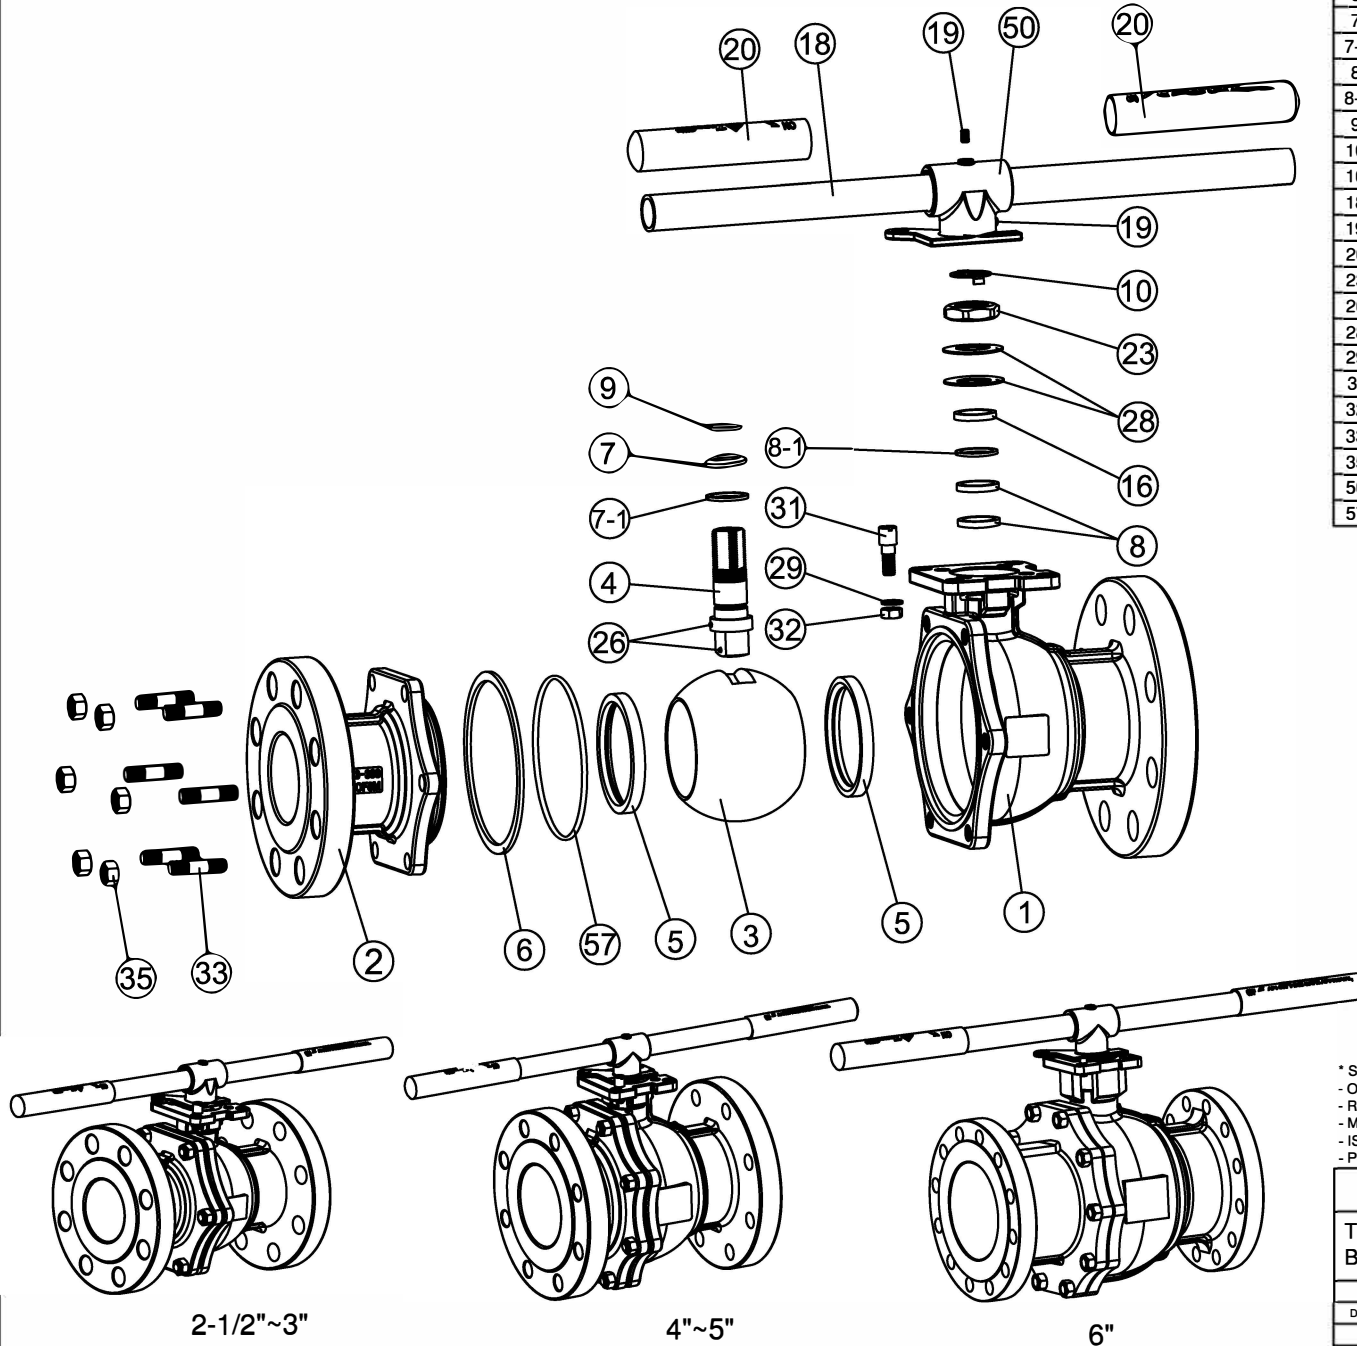

NO.	PART NAME	MATERIAL	QTY	REPAIR KIT
1	BODY	ASTM A351 Gr.CF8M	1	
2	CAP	ASTM A351 Gr.CF8M	1	
3	BALL	ASTM A182 Gr.F316	1	
4	STEM	ASTM A276 Gr.316	1	
5	SEAT	TFM1600 RTFE/PTFE	2	✓
6	BODY SEAL	GRAPHITE+SS316	1	✓
7	THRUST WASHER	GRAPHITE	1	✓
7-1	THRUST WASHER	PTFE+25%G.F.	1	✓
8	STEM PACKING	GRAPHITE	1 SET	✓
8-1	STEM PACKING	PTFE+25%G.F.	1	✓
9	STEM O-RING	VITON	1	✓
10	STOP RING	ASTM A276 Gr.304	1	
16	PACKING GLAND	ASTM A276 Gr.304	1	
18	STEEL PIPE	ASTM A276 Gr.304	1	
19	SCREW	ASTM A276 Gr.304	2	
20	HANDLE COVER	PLASTIC	2	
23	STEM NUT	ASTM A276 Gr.304	1	
26	ANTI-STATIC DEVICE	ASTM A276 Gr.316	2	
28	BELLEVILLE WASHER	ASTM A276 Gr.304	1 SET	
29	WASHER	ASTM A276 Gr.304	1	
31	STOP PIN	ASTM A276 Gr.304	1	
32	PIN NUT	ASTM A276 Gr.304	1	
33	BODY STUD	ASTM A193 Gr.B8	1 SET	
35	BODY NUT	ASTM A194 Gr.8	1 SET	
50	HANDLE ADAPTER	ASTM A351 Gr.CF8	1	
57	BODY O-RING	VITON	1	✓

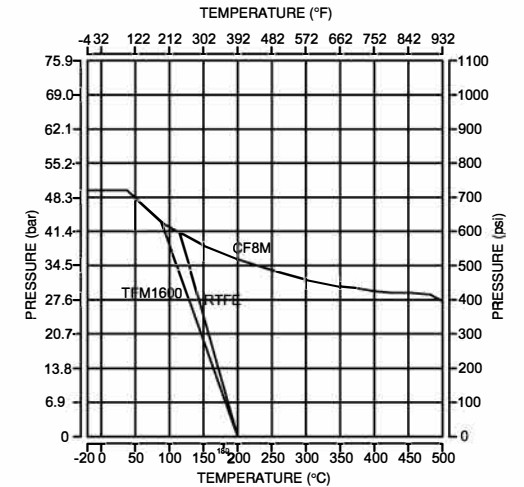

* Shiny Surface by Polishing Including:
 - Outside Diameter of Flange
 - Raised Face of Flange
 - Mating Surface of Flange
 - ISO 5211 Top Flange Surface
 - Port Inside Polished

DESCRIPTION

TF-20DFS, Two Piece Split Body Full Bore API 607/ISO10497 Fire Safe Flange Ball Valves , ASME CLASS 300 RF.

CODE	L015	DRAWING NO.	-	DATE	20/09/09
DATE	REVISION	20.09.09	A0	DRAWN BY	SUNNY
UNIT	mm	CHECK BY	SUNNY	20.09.09	
SCALE	FREE	APPROVED BY	FRADY	20.09.09	

NOTE :


1. Material : PVC
2. Color :
 - Letter : White
 - Base : Red
3. Brass buckle




	CODE	DRAWING NO.	DESCRIPTION	APPROVED BY	CHECK BY	DRAWN BY	REVISION	MATERIAL	UNIT
	L015	Tag- API 607	API 607 FIRE SAFE LABEL	SUNNY	SUNNY	FRADY	2020.09.09	MATERIALS LIST	mm

NOTE :


1. Material : SS304
2. Color :
 - Letter & Line : Black
 - Base : Natural
3. If the size is not suitable, adjust the proportion according to the actual size of the valve

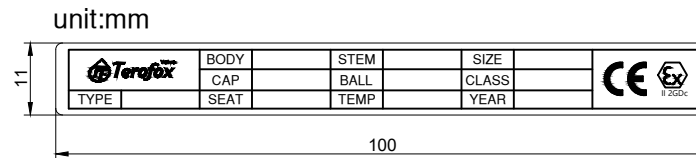

1/2"~1"

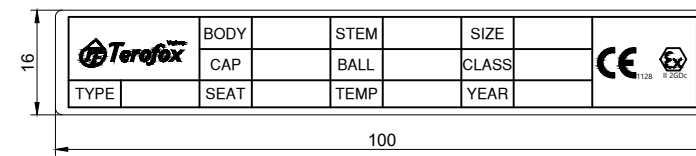

1-1/4"~2"

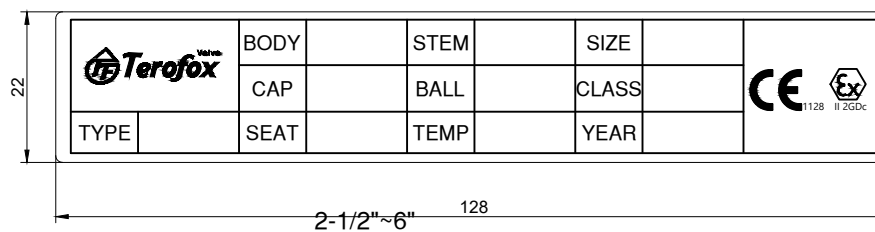

	CODE	DRAWING NO.	DESCRIPTION	APPROVED BY	CHECK BY	DRAWN BY	REVISION	MATERIAL	UNIT
	L015	NP-MA-BV-1	NAME PLATE FOR FLANGE TYPE BALL VALVE CE&ATEX (CLASS300)	SUNNY	SUNNY	FRADY	2020.09.09	MATERIALS LIST	mm