



TF-20DFS




Fire Safe Design

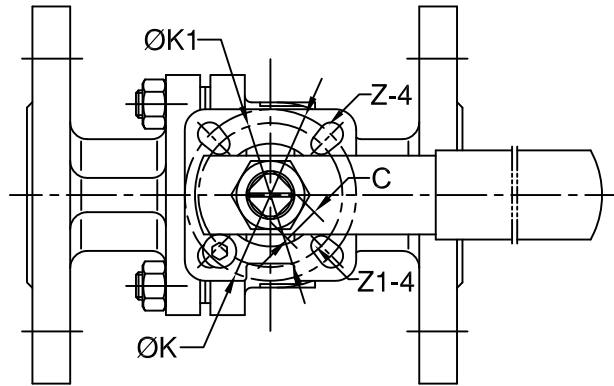

Before Fire Sealing



After Fire Sealing

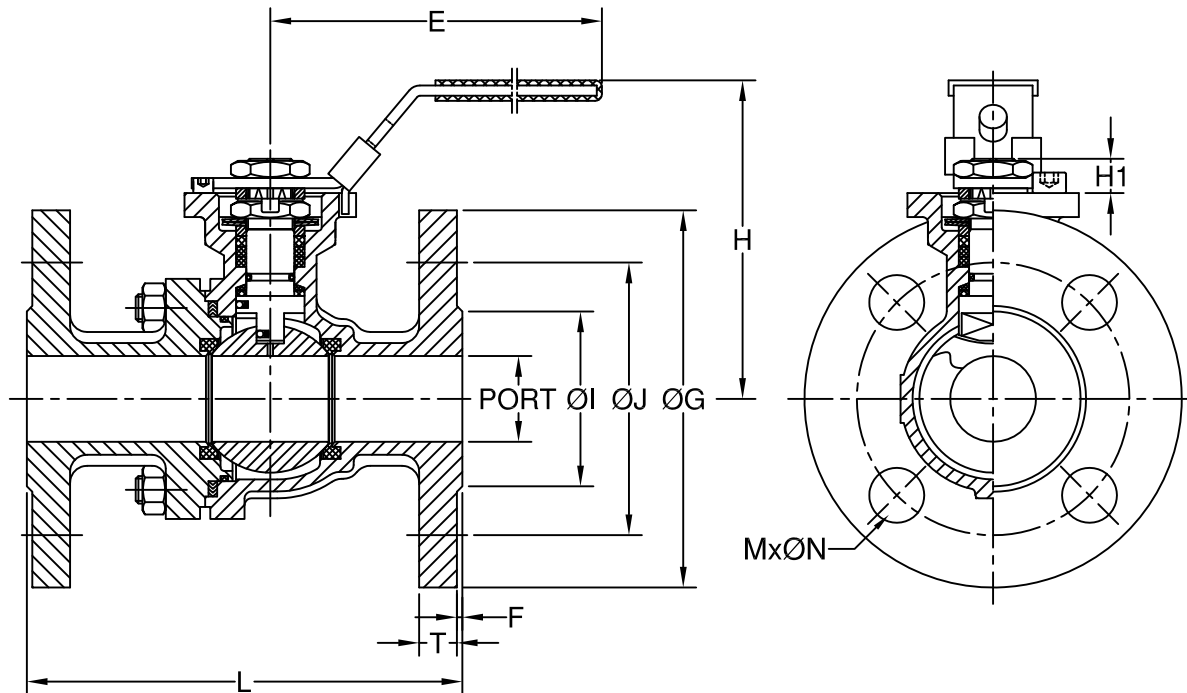

Design & Features:

- * Valve Body & Cap is Investment Casting : ASTM A351 CF8M
- * NACE MR 0175 is available upon request
NACE Bolt & Nut Material: ASTM A193 B8MA CLASS 1A / A194 8MA
- * Ball & Stem Surface by Polishing
- * Valves Design According to ASME B16.34
- * Double Seal Design
- * Blow-Out Proof Stem & Anti-Static (Ball-Stem-Body) Design
- * ISO 5211 Direct-Mount Flanged with Actuator
- * API 607(VI) / ISO10497(III) Fire Safe Approved
- * Pressure / Temperature Rating According to ASME B16.34
- * Flange Dimensions According to ASME B16.5 CLASS150 RF Flanged Fitting
- * Face to Face According to ASME B16.10 CLASS 150 RF
- * Cold Working Pressure : 19.0 Bar
- * Pressure Tested Accordance With API 598
- Shell Test: 30 bar by Water
- Seat Closure : 6 bar by Air
- * Tn: Torque(N-m)
- * Wg:Weight(Kg)

DIMENSIONS


SIZE	PORT	L	E	H	H1	ØG	ØJ	ØI	T	F	M	ØN	C	ØK	ØK1	Z-4	Z1-4	Tn	Wg	
DN15	1/2"	15.0	108.0	120.0	85.0	8.0	90.0	60.3	34.9	8.0	2.0	4	16.0	9.0	42.0 / F04	36.0 / F03	6.0	6.0	6.5	1.7
DN20	3/4"	20.0	117.0	120.0	87.0	8.0	100.0	69.9	42.9	8.9	2.0	4	16.0	9.0	42.0 / F04	36.0 / F03	6.0	6.0	10.0	2.1
DN25	1"	25.0	127.0	145.0	93.0	10.0	110.0	79.4	50.8	9.6	2.0	4	16.0	11.0	50.0 / F05	42.0 / F04	7.0	6.0	13.0	2.8
DN32	1-1/4"	32.0	140.0	145.0	103.0	10.0	115.0	88.9	63.5	11.2	2.0	4	16.0	11.0	50.0 / F05	42.0 / F04	7.0	6.0	17.0	3.8
DN40	1-1/2"	38.0	165.0	190.0	123.0	14.0	125.0	98.4	73.0	12.7	2.0	4	16.0	14.0	70.0 / F07	50.0 / F05	9.0	7.0	23.0	6.0
DN50	2"	50.0	178.0	190.0	132.0	14.0	150.0	120.7	92.1	14.3	2.0	4	19.0	14.0	70.0 / F07	50.0 / F05	9.0	7.0	36.0	8.8

DESCRIPTION


TF-20DFS, Two Piece Split Body Full Bore API 607/ISO10497 Fire Safe Flange Ball Valves , ASME CLASS 150 RF.

CODE		L015		DRAWING NO.	-		DATE	20/09/10
DATE	REVISION	20.10.27	A1	DRAWN BY	SUNNY	20.10.27		
UNIT		mm	CHECK BY	JACK	20.10.27			
SCALE		FRFE	APPROVED BY	FRADY	20.10.27			

TF-20DFS

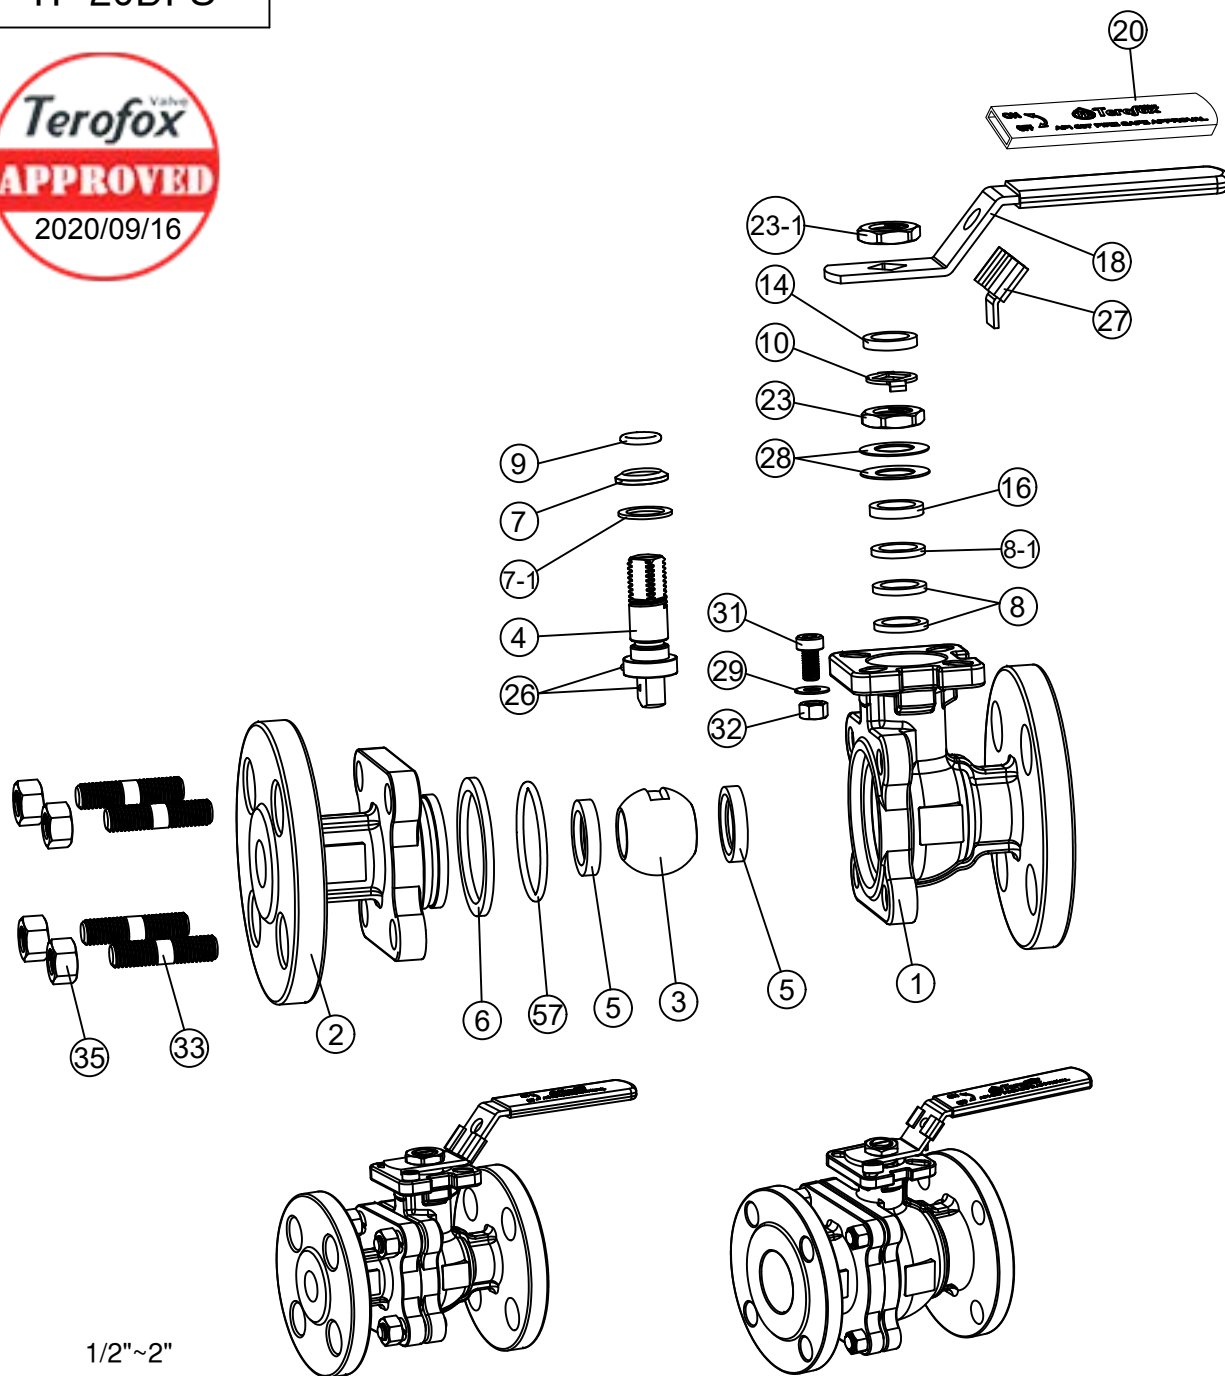

NO.	PART NAME	MATERIAL	QTY	REPAIR KIT
1	BODY	ASTM A351 Gr.CF8M	1	
2	CAP	ASTM A351 Gr.CF8M	1	
3	BALL	ASTM A182 F316	1	
4	STEM	ASTM A276 Gr.316	1	
5	SEAT	TFM1600	2	✓
6	BODY SEAL	GRAPHITE+SS316	1	✓
7	THRUST WASHER	GRAPHITE	1	✓
7-1	THRUST WASHER	PTFE+25%G.F.	1	✓
8	STEM PACKING	GRAPHITE	1SET	✓
8-1	STEM PACKING	PTFE+25%G.F.	1	✓
9	STEM O-RING	VITON	1	✓
10	STOP RING	ASTM A276 Gr.304	1	
14	GLAND	ASTM A276 Gr.304	1	
16	PACKING GLAND	ASTM A276 Gr.304	1	
18	HANDLE	ASTM A276 Gr.304	1	
20	HANDLE COVER	PLASTIC	1	
23	STEM NUT	ASTM A276 Gr.304	1	
23-1	HANDLE NUT	ASTM A276 Gr.304	1	
26	ANTI-STATIC DEVICE	ASTM A276 Gr.316	2	
27	LOCKING DEVICE	ASTM A276 Gr.304	1	
28	BELLEVILLE WASHER	ASTM A276 Gr.304	1SET	
29	WASHER	ASTM A276 Gr.304	1	
31	STOP PIN	ASTM A276 Gr.304	1	
32	PIN NUT	ASTM A276 Gr.304	1	
33	BODY STUD	ASTM A193 GR.B8	1 SET	
35	BODY NUT	ASTM A194 GR.8	1 SET	
57	BODY O-RING	VITON	1	✓

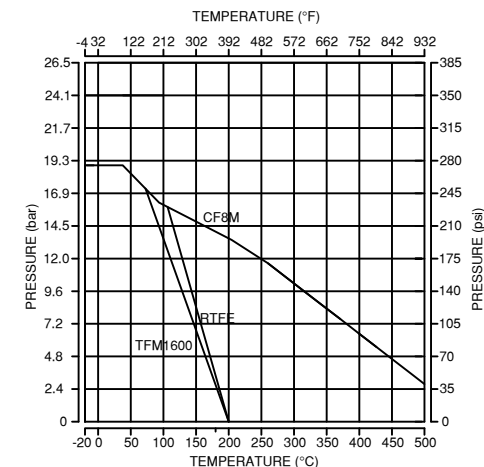

* Shiny Surface by Polishing Including:
 - Outside Diameter of Flange
 - Raised Face of Flange
 - Mating Surface of Flange
 - ISO 5211 Top Flange Surface
 - Port Inside Polished

DESCRIPTION


TF-20DFS, Two Piece Split Body Full Bore API 607/ISO10497 Fire Safe Flange Ball Valves , ASME CLASS 150 RF.

CODE	L015	DRAWING NO.	-	DATE	20/09/10
DATE	REVISION	20.09.10	A0	DRAWN BY	SUNNY
UNIT	mm	CHECK BY	MICHAEL	20.09.10	
SCALE	FREE	APPROVED BY	FRADY	20.09.10	







1/2"~2"

TF-20DFS

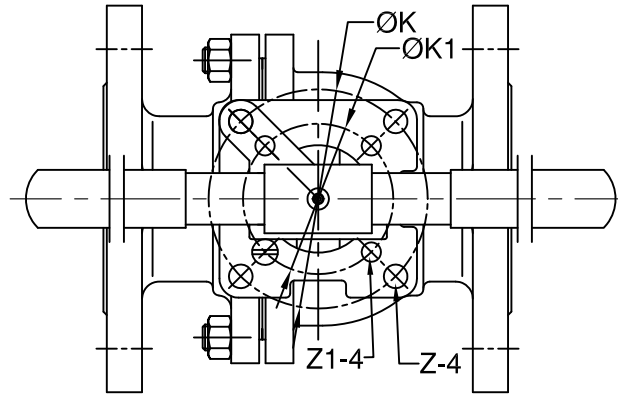

Fire Safe Design

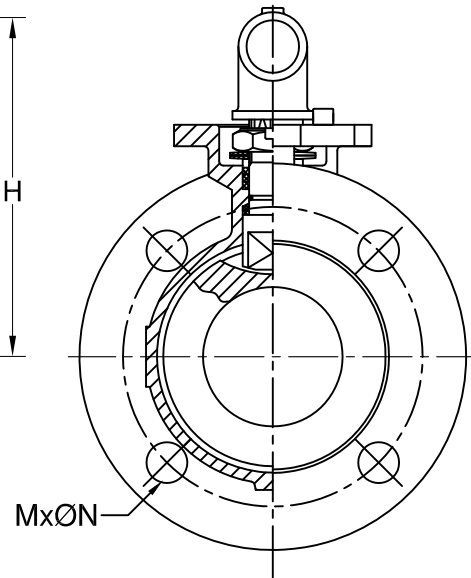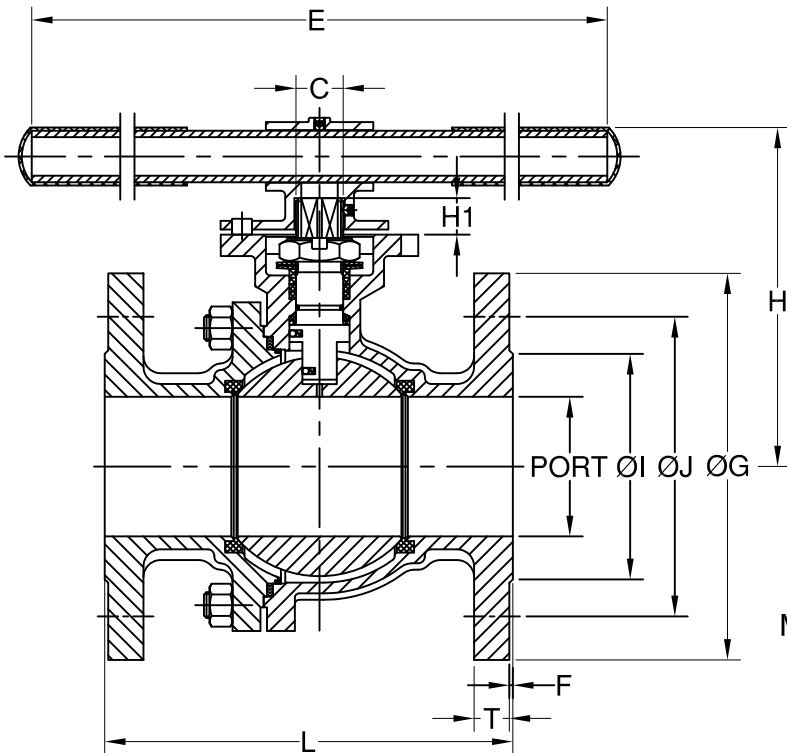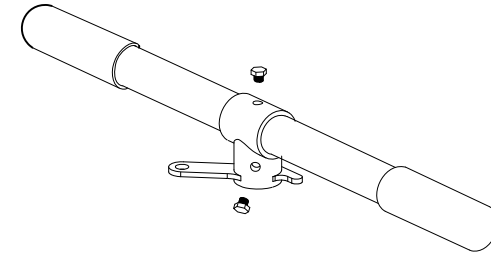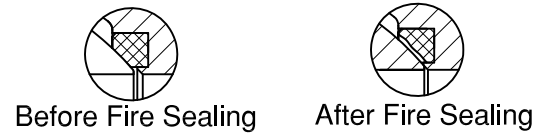

Design & Features:

- * Valve Body & Cap is Investment Casting : ASTM A351 CF8M
- * NACE MR 0175 is available upon request
NACE Bolt & Nut Material: ASTM A193 B8MA CLASS 1A / A194 8MA
- * Ball & Stem Surface by Polishing
- * Valves Design According to ASME B16.34
- * Double Seal Design
- * Blow-Out Proof Stem & Anti-Static (Ball-Stem-Body) Design
- * ISO 5211 Direct-Mount Flanged with Actuator
- * API 607(VI) / ISO10497(III) Fire Safe Approved
- * Pressure / Temperature Rating According to ASME B16.34
- * Flange Dimensions According to ASME B16.5 CLASS150 RF Flanged Fitting
- * Face to Face According to ASME B16.10 CLASS 150 RF
- * Cold Working Pressure : 19.0 Bar
- * Pressure Tested Accordance With API 598
- Shell Test: 30 bar by Water
- Seat Closure : 6 bar by Air
- * Tn: Torque(N-m)
- * Wg:Weight(Kg)

DIMENSIONS

SIZE	PORT	L	E	H	H1	ØG	ØJ	ØI	T	F	M	ØN	C	ØK	ØK1	Z-4	Z1-4	Tn	Wg	
DN65	2-1/2"	65.0	190.0	450.0	158.0	17.0	180.0	139.7	104.8	15.9	2.0	4	19.0	17.0	102.0 / F10	70.0 / F07	11.0	9.0	58.0	14.6
DN80	3"	78.0	203.0	450.0	165.0	17.0	190.0	152.4	127.0	17.5	2.0	4	19.0	17.0	102.0 / F10	70.0 / F07	11.0	9.0	70.0	18.4
DN100	4"	100.0	229.0	450.0	190.0	19.0	230.0	190.5	157.2	22.3	2.0	8	19.0	19.0	102.0 / F10	70.0 / F07	11.0	9.0	120.0	30.0





DESCRIPTION

TF-20DFS, Two Piece Split Body Full Bore API 607/ISO10497 Fire Safe Flange Ball Valves , ASME CLASS 150 RF.


CODE		L015		DRAWING NO.	-		DATE	20/09/10
DATE	REVISION	20.10.27	A1	DRAWN BY	SUNNY	20.10.27		
UNIT		mm		CHECK BY	JACK	20.10.27		
SCALE		FREE		APPROVED BY	FRADY	20.10.27		



TF-20DFS

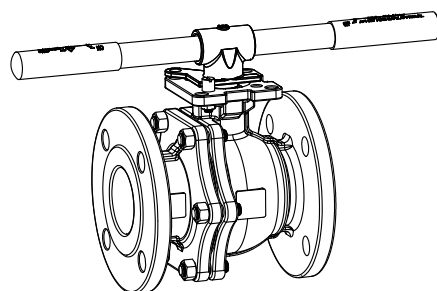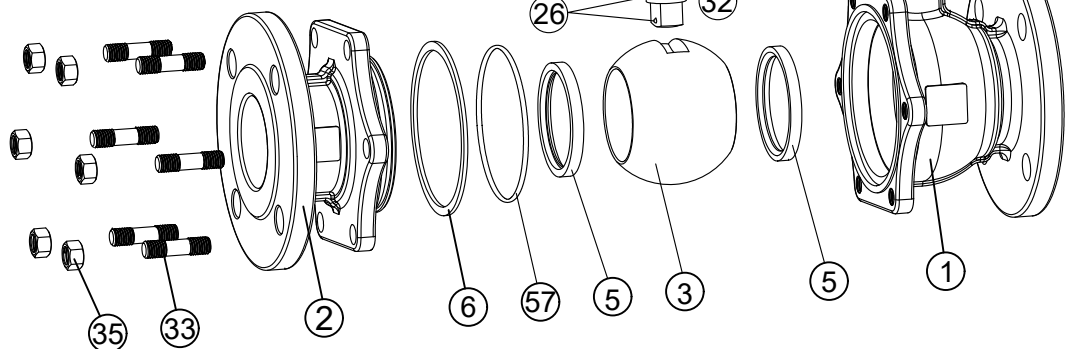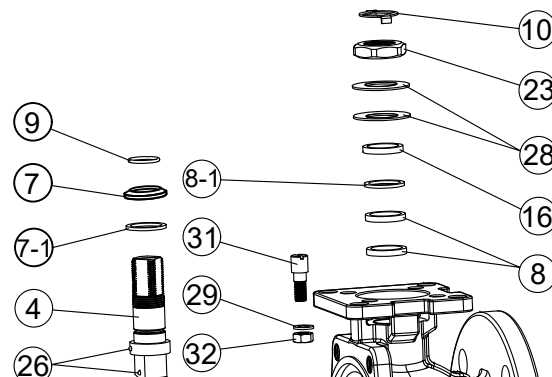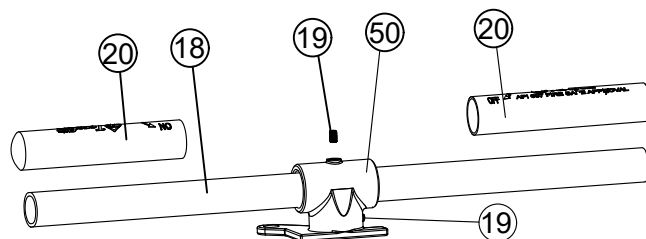


2-1/2"~3"

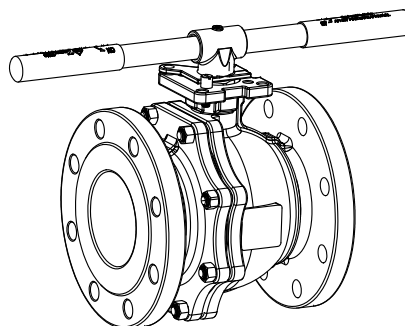

4"

NO.	PART NAME	MATERIAL	QTY	REPAIR KIT
1	BODY	ASTM A351 Gr.CF8M	1	
2	CAP	ASTM A351 Gr.CF8M	1	
3	BALL	ASTM A182 Gr.F316	1	
4	STEM	ASTM A276 Gr.316	1	
5	SEAT	TFM1600	2	✓
6	BODY SEAL	GRAPHITE+SS316	1	✓
7	THRUST WASHER	GRAPHITE	1	✓
7-1	THRUST WASHER	PTFE+25%G.F.	1	✓
8	STEM PACKING	GRAPHITE	1 SET	✓
8-1	STEM PACKING	PTFE+25%G.F.	1	✓
9	STEM O-RING	VITON	1	✓
10	STOP RING	ASTM A276 Gr.304	1	
16	PACKING GLAND	ASTM A276 Gr.304	1	
18	STEEL PIPE	ASTM A276 Gr.304	1	
19	SCREW	ASTM A276 Gr.304	2	
20	HANDLE COVER	PLASTIC	2	
23	STEM NUT	ASTM A276 Gr.304	1	
26	ANTI-STATIC DEVICE	ASTM A276 Gr.316	2	
28	BELLEVILLE WASHER	ASTM A276 Gr.304	1 SET	
29	WASHER	ASTM A276 Gr.304	1	
31	STOP PIN	ASTM A276 Gr.304	1	
32	PIN NUT	ASTM A276 Gr.304	1	
33	BODY STUD	ASTM A193 Gr.B8	1 SET	
35	BODY NUT	ASTM A194 Gr.8	1 SET	
50	HANDLE ADAPTER	ASTM A351 Gr.CF8	1	
57	BODY O-RING	VITON	1	✓

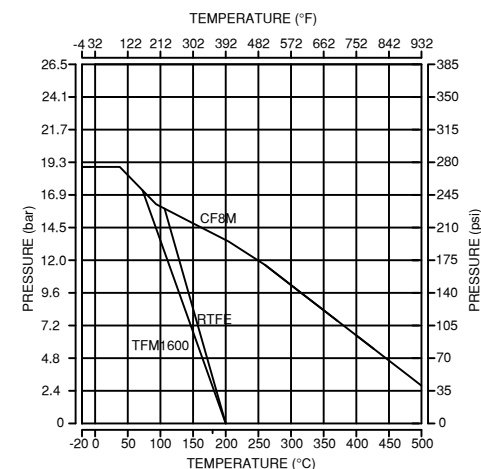

* Shiny Surface by Polishing Including:
 - Outside Diameter of Flange
 - Raised Face of Flange
 - Mating Surface of Flange
 - ISO 5211 Top Flange Surface
 - Port Inside Polished

DESCRIPTION


TF-20DFS, Two Piece Split Body Full Bore API 607/ISO10497 Fire Safe Flange Ball Valves , ASME CLASS 150 RF.

CODE	L015	DRAWING NO.	-	DATE	20/09/10
DATE	REVISION	20.09.10	A0	DRAWN BY	SUNNY
UNIT	mm	CHECK BY	MICHAEL	20.09.10	
SCALE	FREE	APPROVED BY	FRADY	20.09.10	



NOTE :

1. 材質: SS304 · 不可有磁性。
2. 顏色: 不鏽鋼底 · 黑色字體及外框。
3. 厚度 0.4mm。
4. 去除毛刺跟尖角。
5. 如實際閥件與上規定銘版大小尺寸不適合 · 得以按比例放大 · 但仍以內容清晰為主。
6. 1/2"~1"使用NP-MA-BV-00
1-1/4"~2"使用NP-MA-BV-01
2-1/2"以上使用NP-MA-BV-02

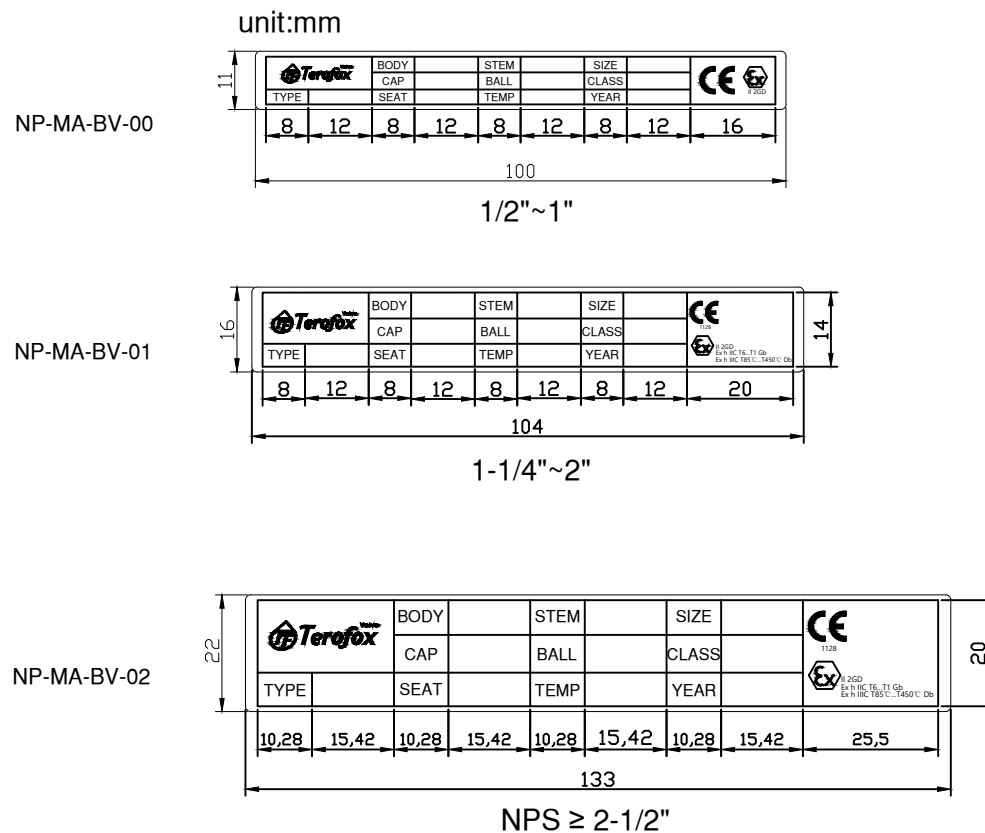

	CODE	DRAWING NO.	DESCRIPTION	APPROVED BY	CHECK BY	DRAWN BY	REVISION	MATERIAL	UNIT
	L015	NP-MA-BV-1	NAME PLATE FOR FLANGE TYPE BALL VALVE CE&ATEX (CLASS300)	SUNNY	SUNNY	FRADY	2021.01.13	MATERIALS LIST	mm

NOTE :

1. Material : PVC
2. Color :
 - Letter : White
 - Base : Red
3. Brass buckle



	CODE	DRAWING NO.	DESCRIPTION	APPROVED BY	CHECK BY	DRAWN BY	REVISION	MATERIAL	UNIT
	L015	Tag- API 607	API 607 FIRE SAFE LABEL	SUNNY	SUNNY	FRADY	2020.09.09	MATERIALS LIST	mm