

Economic Style Electric Actuator ITQ Series



INNOBIZ
기술혁신형중소기업




NEW ITQ 0040

- Suitable for on-off small ball / plug valves and damper automation.
- By combination of spur gears, provide very high efficiency
- The motor is a specially designed induction motor that produces high starting torques and thermally protected from overheating.
- Manual operation by Hex Wrench and dome position indication
- Compact and light weight.
- High duty cycle.

NEW



Indicator

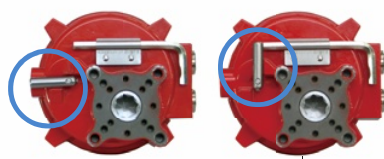

14mm Double Square Female Shaft
Declutchable lever



Manual
Hex Wrench



Cam Set

RPC (Option)
(Remote Position Controller)
Input & Output Signal
4~20mADC

PERFORMANCE


Model	Rate Torque (Nm)	Duty Cycle (%)	Operating Time (Sec.)			Stem Adaption (Double Square Female Shaft)	Rated current (A)			Motor Insulation Class	Weight (kgs)	No of Handwheel Turn
			50Hz	60Hz	DC24V (No Load)		1Phase AC		DC			
							110V	220V	24V			
ITQ 0040	40	50	16	13	7	14X14mm	0.27	0.21	0.8	B	2.5	6

STANDARD SPECIFICATION

Enclosure	IP67, O-ring Sealed
Main Power	110/220VAC/1Ph/50/60Hz, 24VDC
Duty cycle(on-off)	S2 : 30 min
Duty cycle(modulating)	S4 : 50%
Motor	Induction motor
Limit switches	2 ea for each travel
Space heater	2W
Manual operation	Declutchable Lever & shaft on bottom
Indicator	Continuous Mechanical position indicator
Mounting	ISO F03/F04/F05/F07 flange with double square female shaft
Travel angle	90° ± 5°
Cable entries	2-M20×1.5(option : 2-PF(PT)½")
Terminal block	Spring loaded push type
Surface protection	Anodized polyester coating
Ambient temperature	-20°C~+70°C
Humidity(R.H)	90%


WIRING

ITQ 0040 110/220 ON/OFF

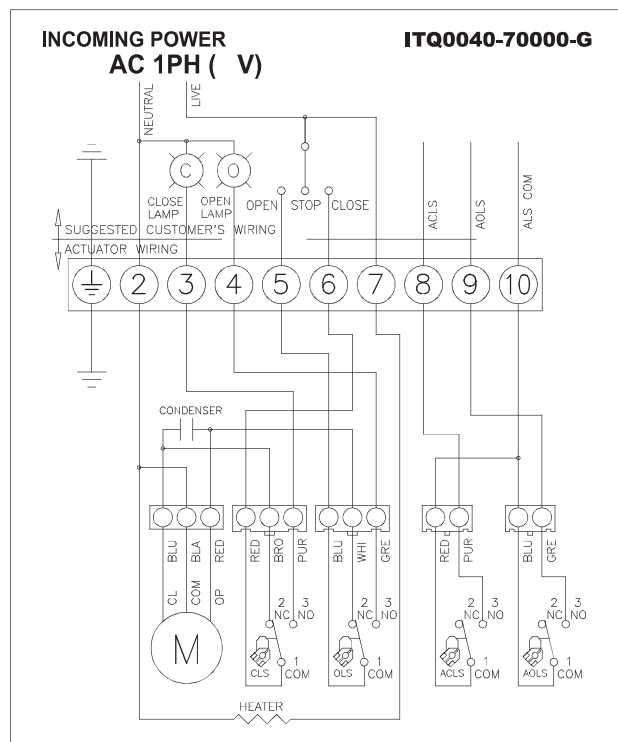

CLS : CLOSE LIMIT SWITCH (250VAC 3A)
 OLS : OPEN LIMIT SWITCH (250VAC 3A)
 *EACH ACTUATOR SHOULD BE POWERED THROUGH ITS OWN INDIVIDUAL SWITCH OR RELAY CONTACTS TO PREVENT CROSS FEED BETWEEN TWO OR MORE ACTUATORS.

LIMIT SWITCHES OPERATION		
SWITCH	CLOSE ←	INTERMEDIATE → OPEN
CLS 1-2		
CLS 1-3		
OLS 1-2		
OLS 1-3		

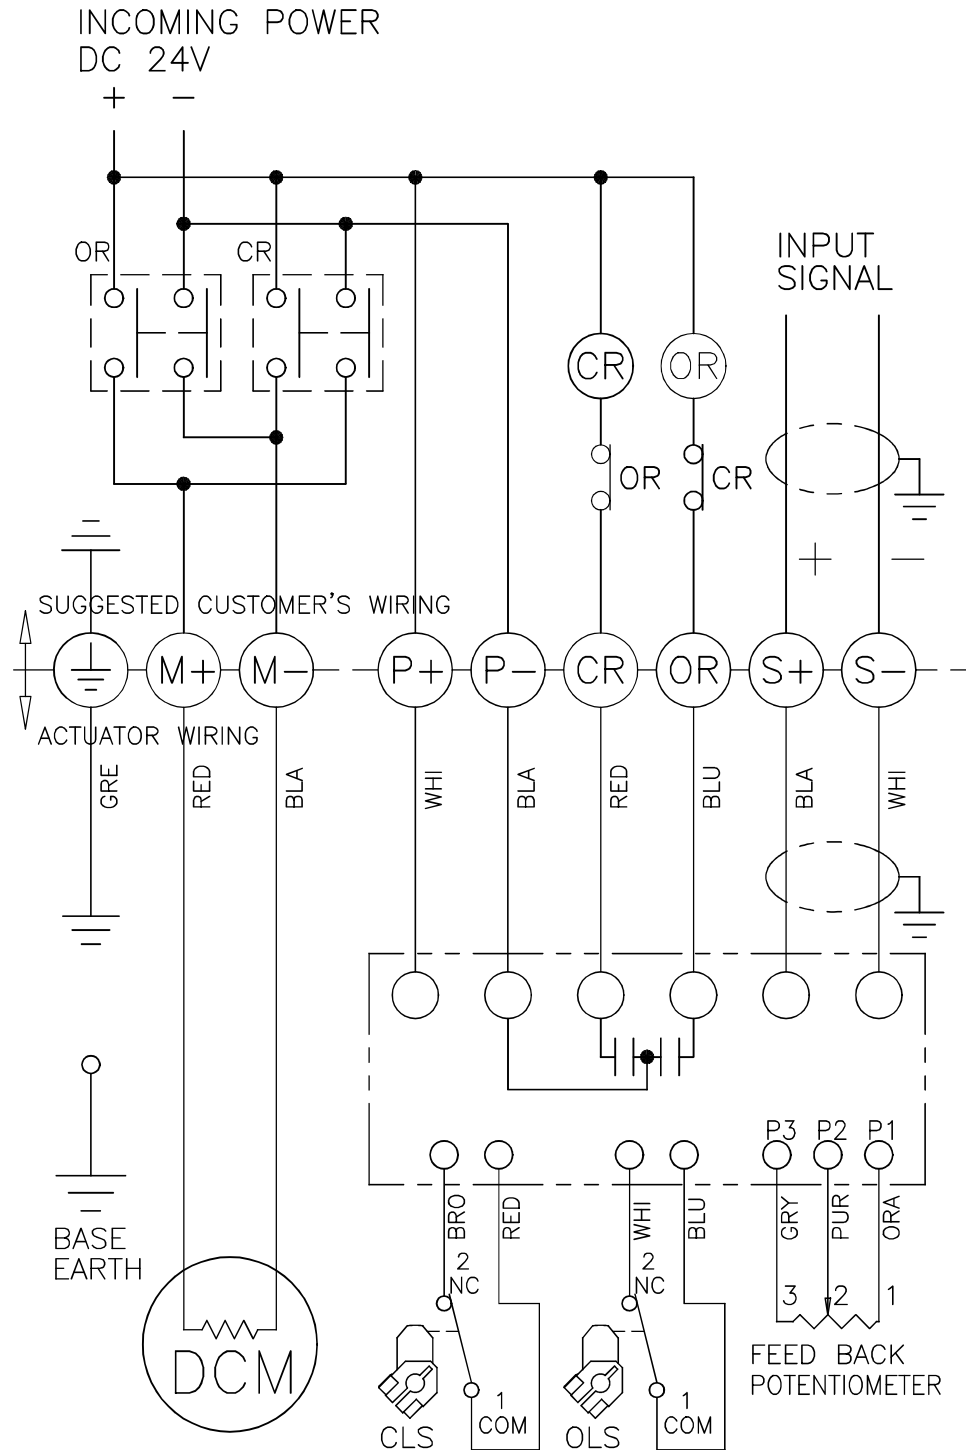

		 i-tork CONTROLS http://www.i-tork.com	DRAWN	DESIGN	CHECKED	APPROVER
			C.S.CHO	C.S.CHO	C.J.CHU	
		PART NAME	ISSU. DEPT.	DATE	SIZE	PROGRAM
		DC 24V WIRING DIAGRAM	ITCDR	2013.09.23	A4	AUTO CAD
		OPTION NAME	DWG NO ITQ0040-90500-F			
ITQ-0040						
APP'L,FILE		RPC				