


Technical Data

Tie in for Instrument Equipment

P&ID : 3-25-001-803-PD-01
P&ID for LPG SYSTEM

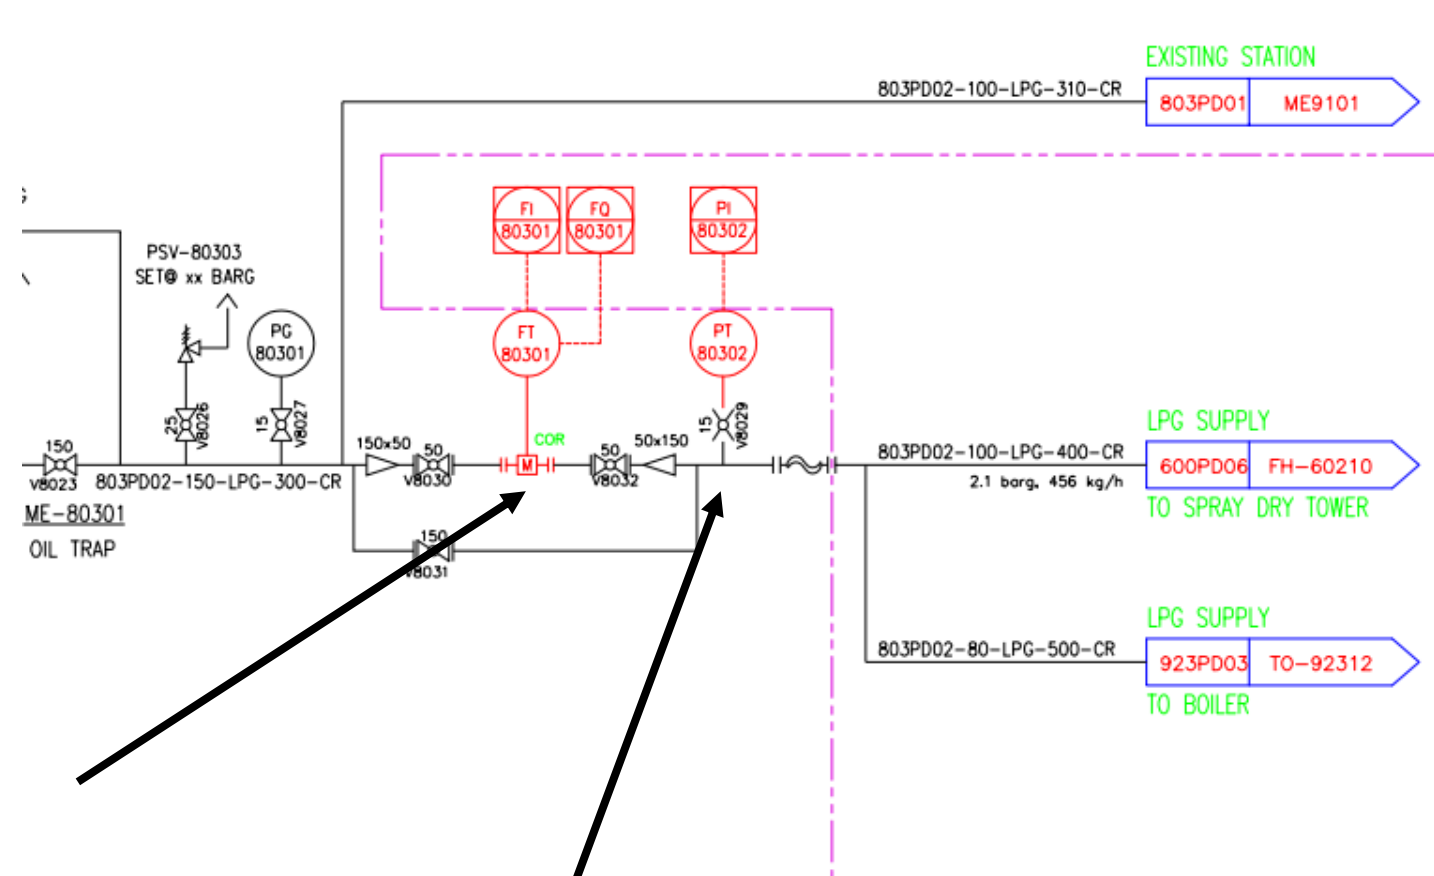

FI-80301 Flow outlet LPG line
Process Connection : Flange 2" DN50 CL150
Spool pitch L : 556mm, 21.89 in

PT-80302 Pressure outlet LPG line
Process Connection : Thread MNPT ½"

FT-80301

Promass E 300, 8E3B50, **DN50 2"**

Model no.: 8E3B50-1RP84/0

(8E3B50-BDDBADDFADSAAASHA2+AA)

BD Approval; Transmitter + Sensor: ATEX+IECEX; Z0/1, Z21, Ex d, IIC/IIIC

D Power Supply: DC 24V

BA Output; Input 1: 4-20mA HART

D Output; Input 2: Configurable I/O default off

D Output; Input 3: Configurable I/O default off

F Display; Operation: 4-line illum.; touch control

A Housing: Alu, coated

D Electrical Connection: Thread NPT1/2

SA Meas. Tube Mat., Wetted Parts Surface: Stainl. steel, not polished

AAS **Process Connection: Cl.150 RF, 1.4404/316/316L, flange ASME B16.5**

H Flow Calibration: 0.15% Mass


A2 Device Model: 2

AA >Operation Language Display: English



FT-80301

Drawing

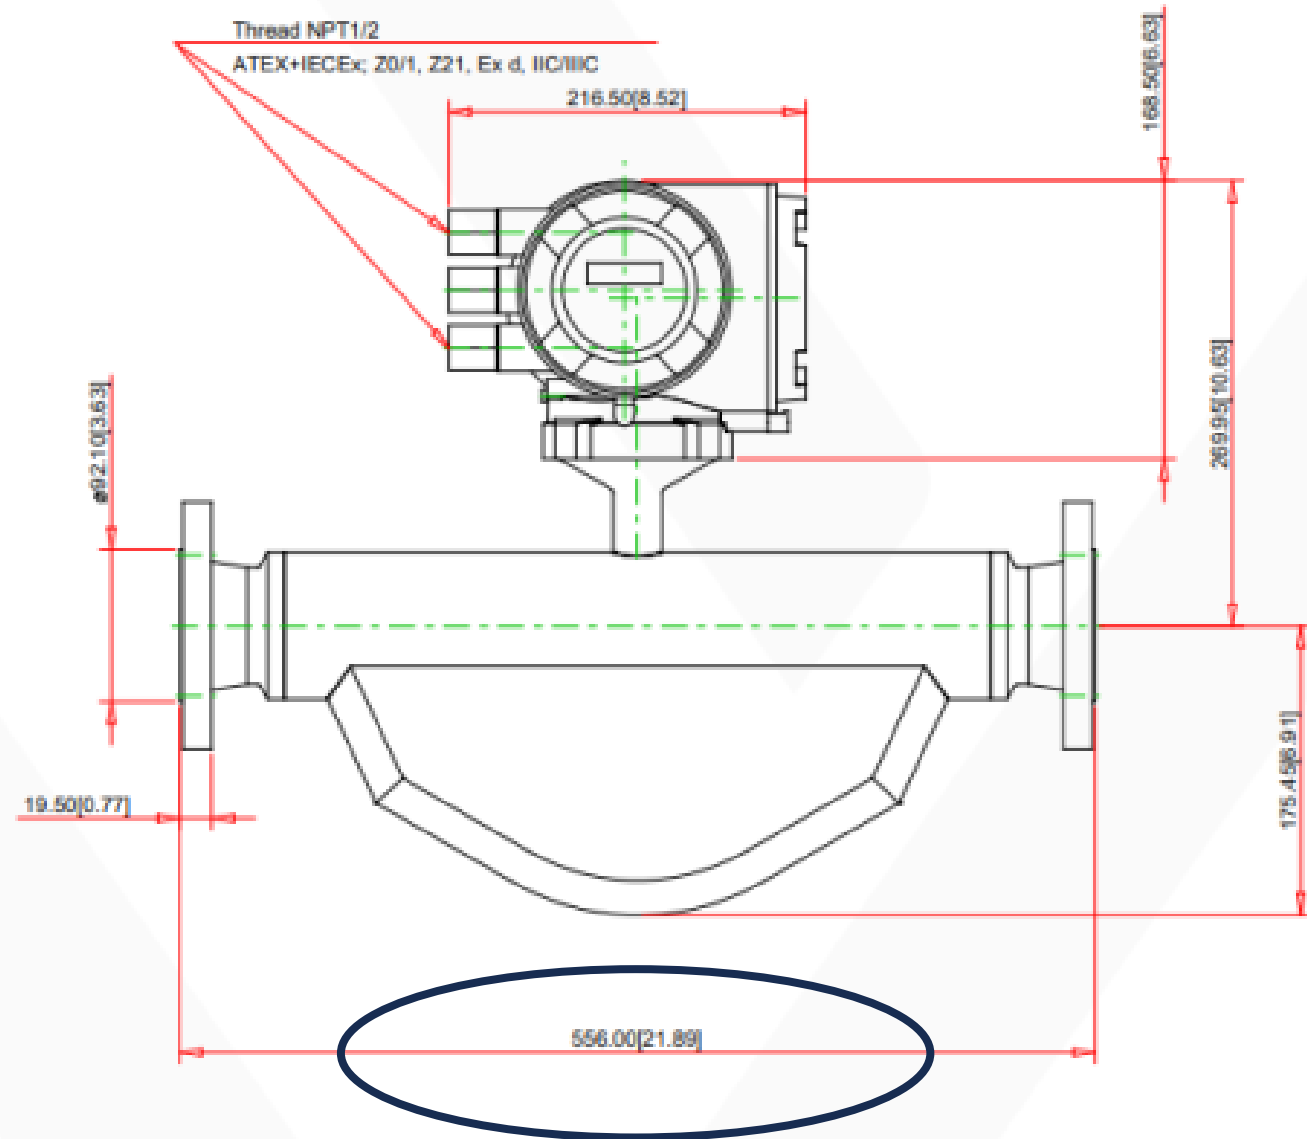

PT-80302

Cerabar PMC51B

Model no.: PMC51B-11NT2/0


(PMC51B-BABADJH63PBA1VWJG)

- BA Approval: ATEX/IEC II 1G Ex ia IIC T6 Ga
- BA Output: 2-wire 4-20mA HART
- D Display; Operation: Segment display w/o buttons + Bluetooth
- J Housing; Material: Dual compartment; Alu, coated
- H Electrical Connection: Thread NPT1/2, IP66/68 NEMA Type 4X/6P
- 6 Pressure Type: Gauge
- 3P Sensor Range: 10bar/1MPa/150psi
- B Calibration; Unit: Sensor range; mbar/bar
- A1 **Process Connection, Sealing Surface: Thread ASME B1.20.1, NPT**
- VWJ **Process Connection: MNPT1/2, hole 11.4mm, 316L**
- G Seal: EPDM



PT-80302


Drawing 2D

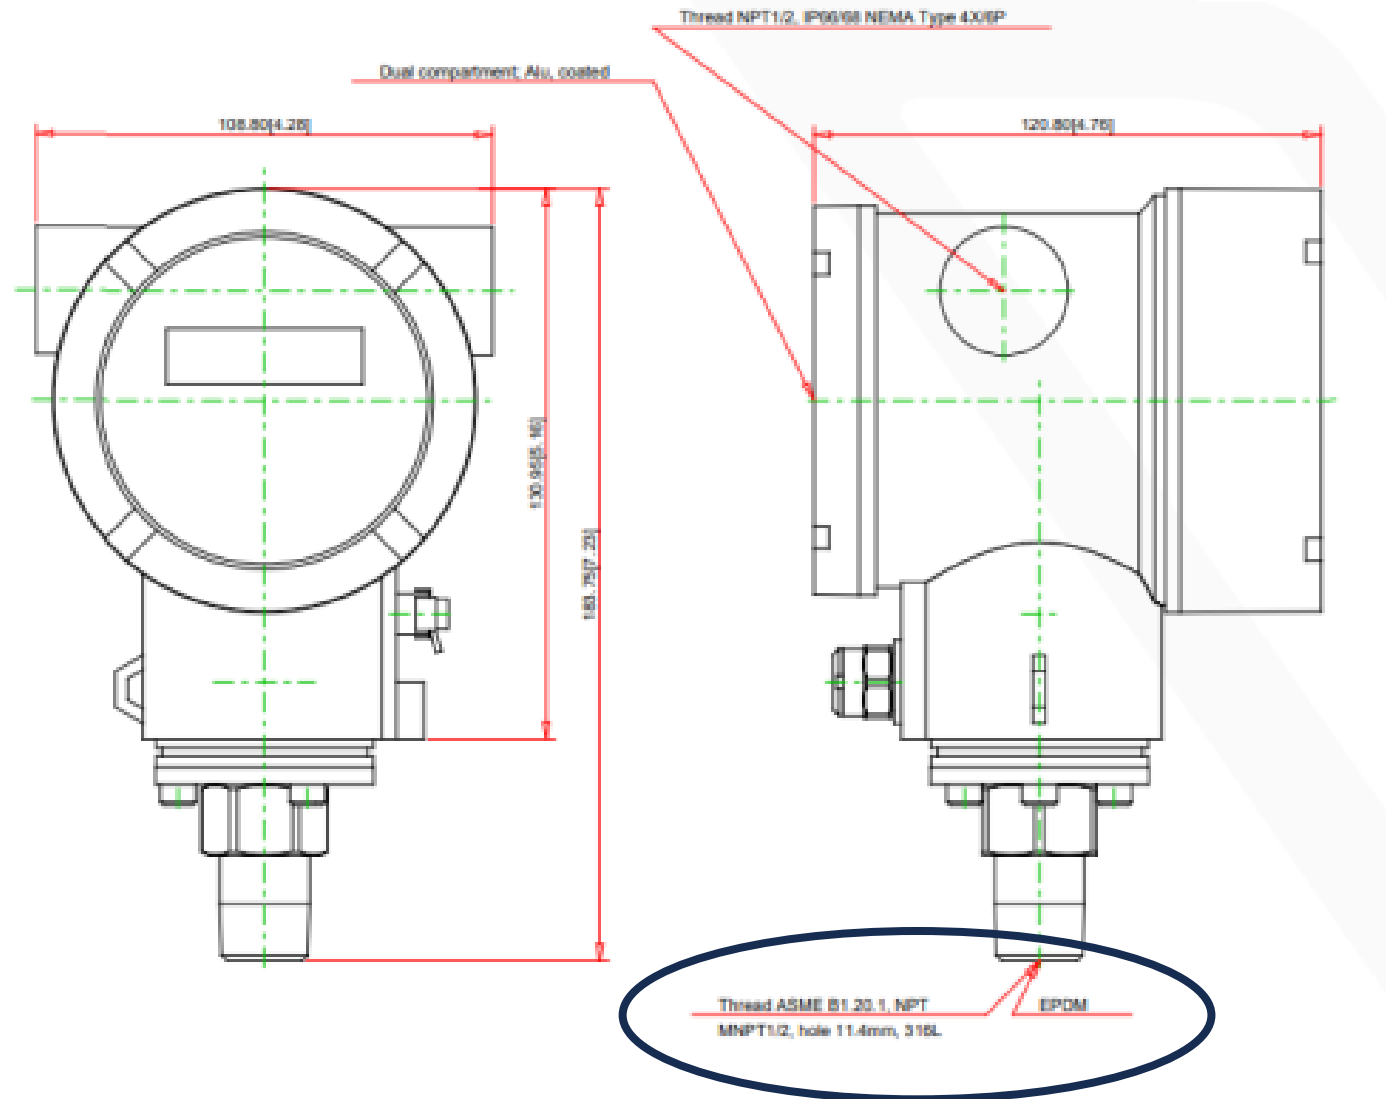

P&ID : 3-25-001-930-PD-01

& FLOOR CLEANING

P&ID for Process water Distribution

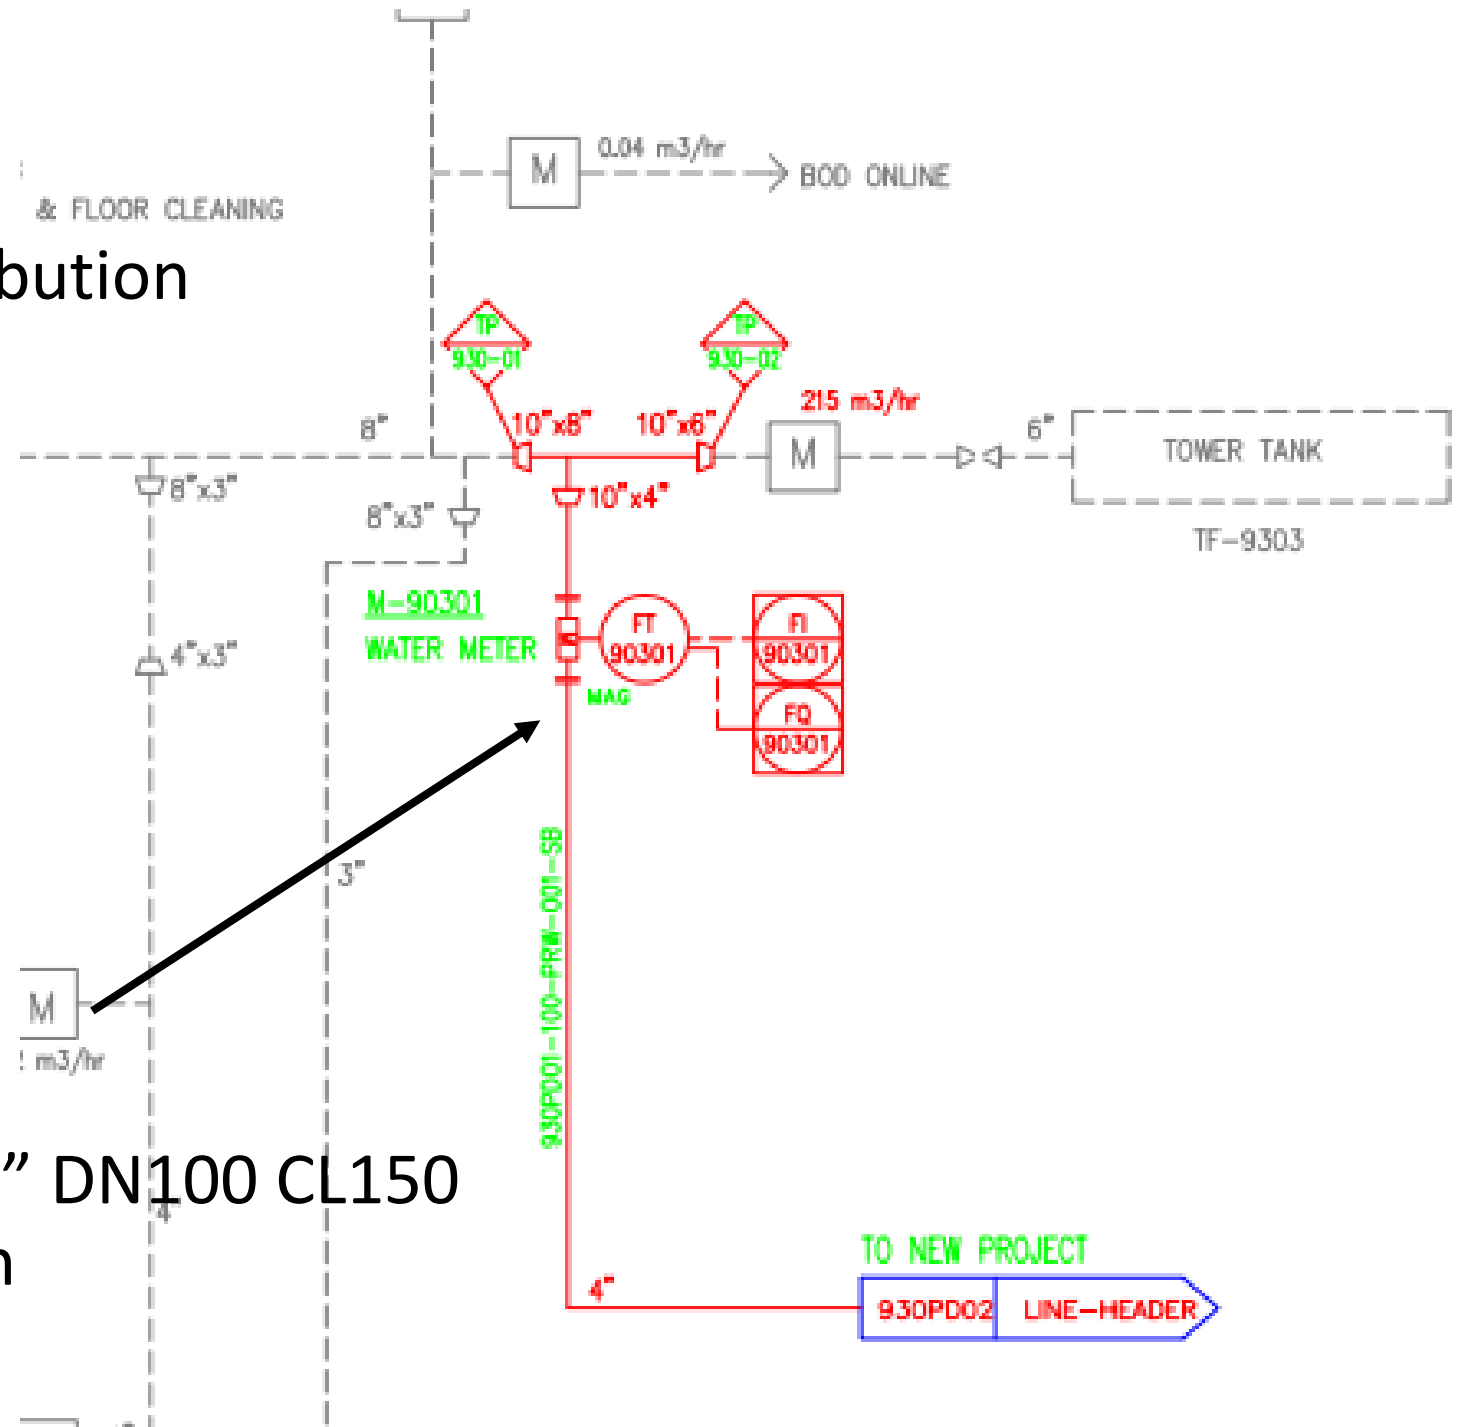

FI-90301 Process Water

Process Connection : Flange 4" DN100 CL150

Spool pitch L : 250mm, 9.84 in

FT-90301

Promag P 300, 5P3B1H, **DN100 4"**

Model no.: 5P3B1H-286C7/0

(5P3B1H-AAIBADDFADEA1S0AA2+AA)

AA Approval; Transmitter + Sensor: Non-hazardous area

I Power Supply: AC 100...240V/DC 24V

BA Output; Input 1: 4-20mA HART

D Output; Input 2: Configurable I/O default off

D Output; Input 3: Configurable I/O default off

F Display; Operation: 4-line illum.; touch control

A Housing: Alu, coated

D Electrical Connection: Thread NPT1/2

E Liner: PTFE

A1S **Process Connection: Cl.150, stainl. steel, flange ASME B16.5**

0 Electrodes: 1.4435/316L

A Flow Calibration: 0.5%

A2 Device Model: 2

AA >Operation Language Display: English



FT-90301
Drawing

