


Make my node reachable for Blend Core.

Follow YES / NO. Public reachability is the goal; port forwarding is only one route.

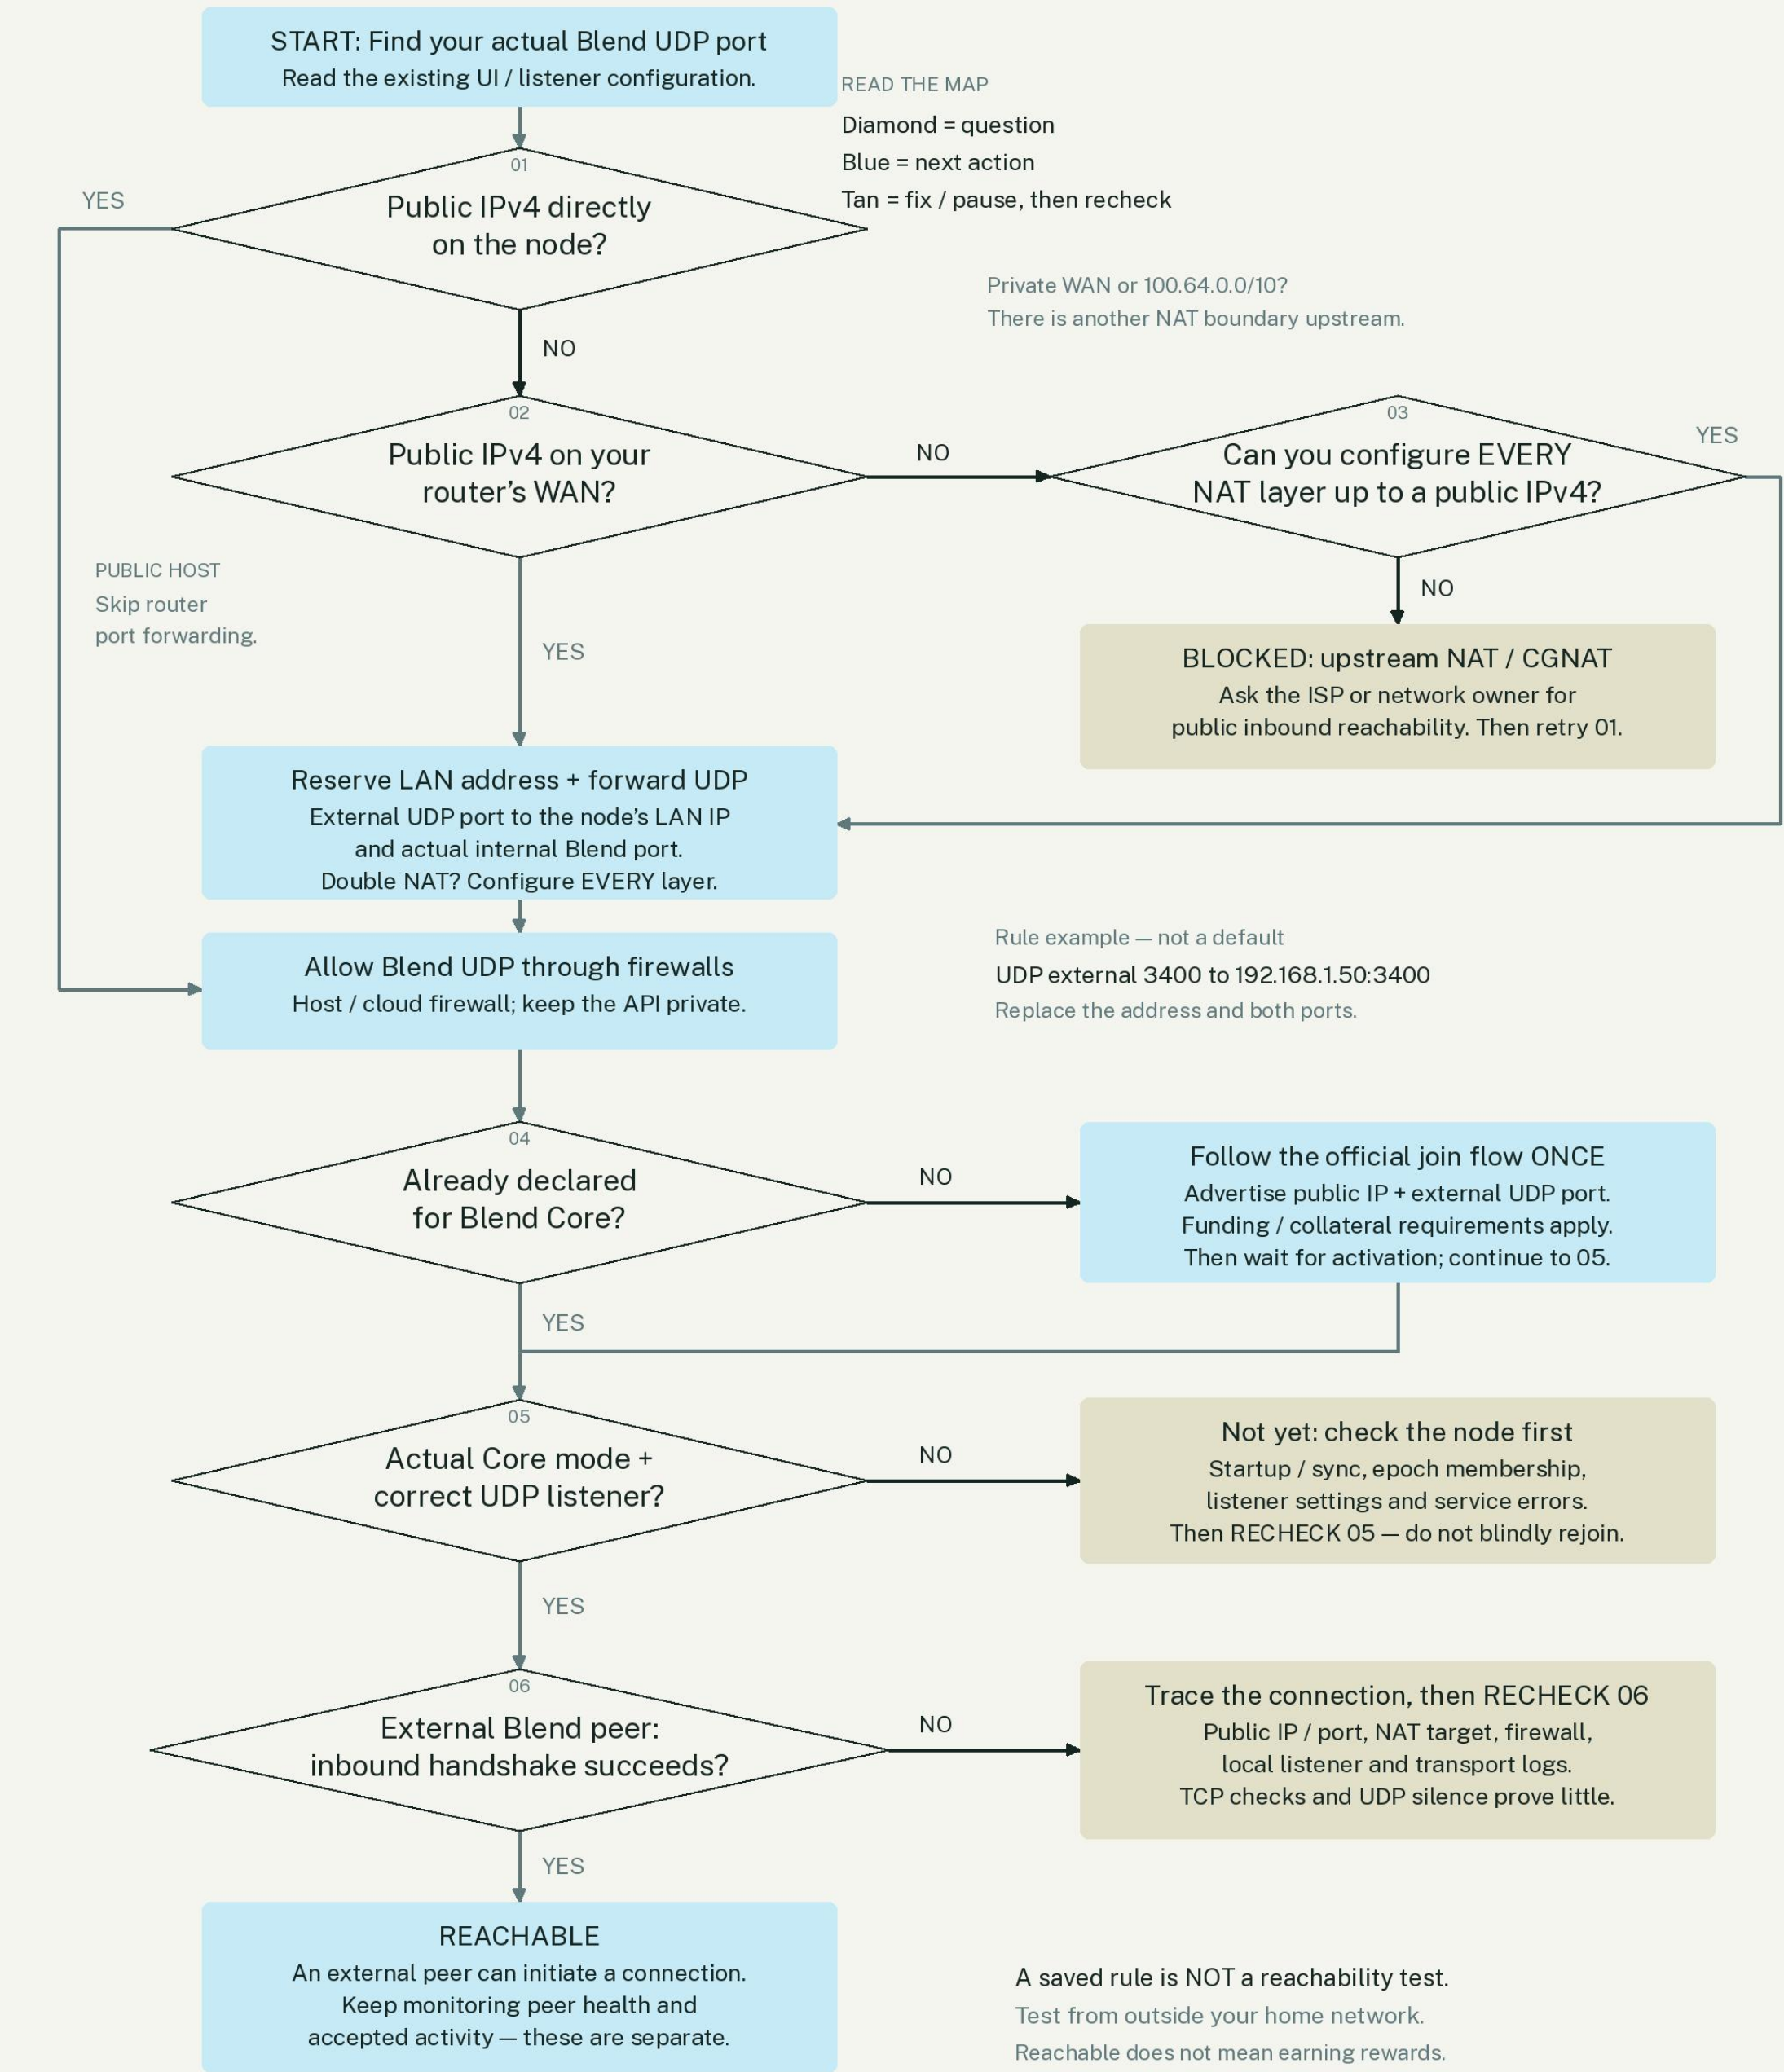

KEEP IT SAFE
UDP, not TCP. No DMZ. Keep firewalls on. Do not publish RPC/API or router administration.
Configure NAT before joining. Check actual Core mode and the listener after activation.
IPv4 decision map. Native IPv6 needs its supported addressing and firewall setup.