

4

3

2

1

F

F

E

E

D

D

C





C

B


B

A

A

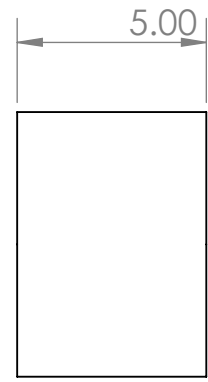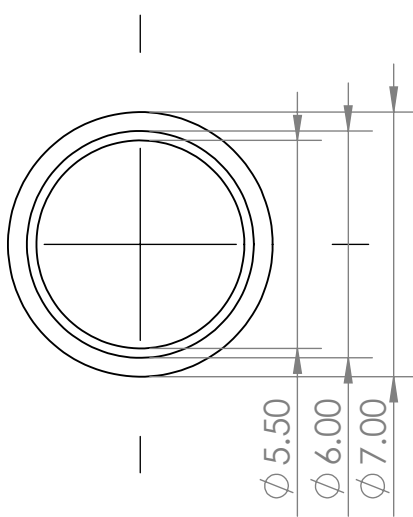

SECCIÓN A-A



3D PRINTING PARAMETERS			CREATED BY RULOBOT TEAM 08/06/2025	APPROVED BY WILMER DE JESÚS REYES 08/12/2025		
PARAMETER	TYPICAL VALUE	DESCRIPTION		EVENT WRO SINGAPORE INTERNATIONAL FINAL		
LAYER HEIGHT	0.20 mm	Vertical resolution per layer.	DOCUMENT NAME RULOBOT_ASSEMBLY	MATERIAL PLA		
WALL THICKNESS	1.2 mm (≈3 walls)	Number of perimeter walls.		REV REV1		
INFILL DENSITY	15-35 %	Internal structure fill percentage.	TITLE Stopper	DATE OF ISSUE 08/12/2025		
PRINTING SPEED	~60 mm/s (standard)	Linear print speed of nozzle.		SHEET 1		
NOZZLE TEMPERATURE	210-220 °C (PLA)	Extruder temperature.				
BED TEMPERATURE	60 °C (PLA)	Heated bed temperature.				
COOLING FAN SPEED	100 %	Improves surface finish and overhangs.				
SUPPORTS	Disabled	Optional for overhangs.	MANUFACTURING TECHNOLOGY FDM 3D PRINTING			
ADHESION TYPE	None	No special adhesion; PEI textured plate.				

4

3

2

1