


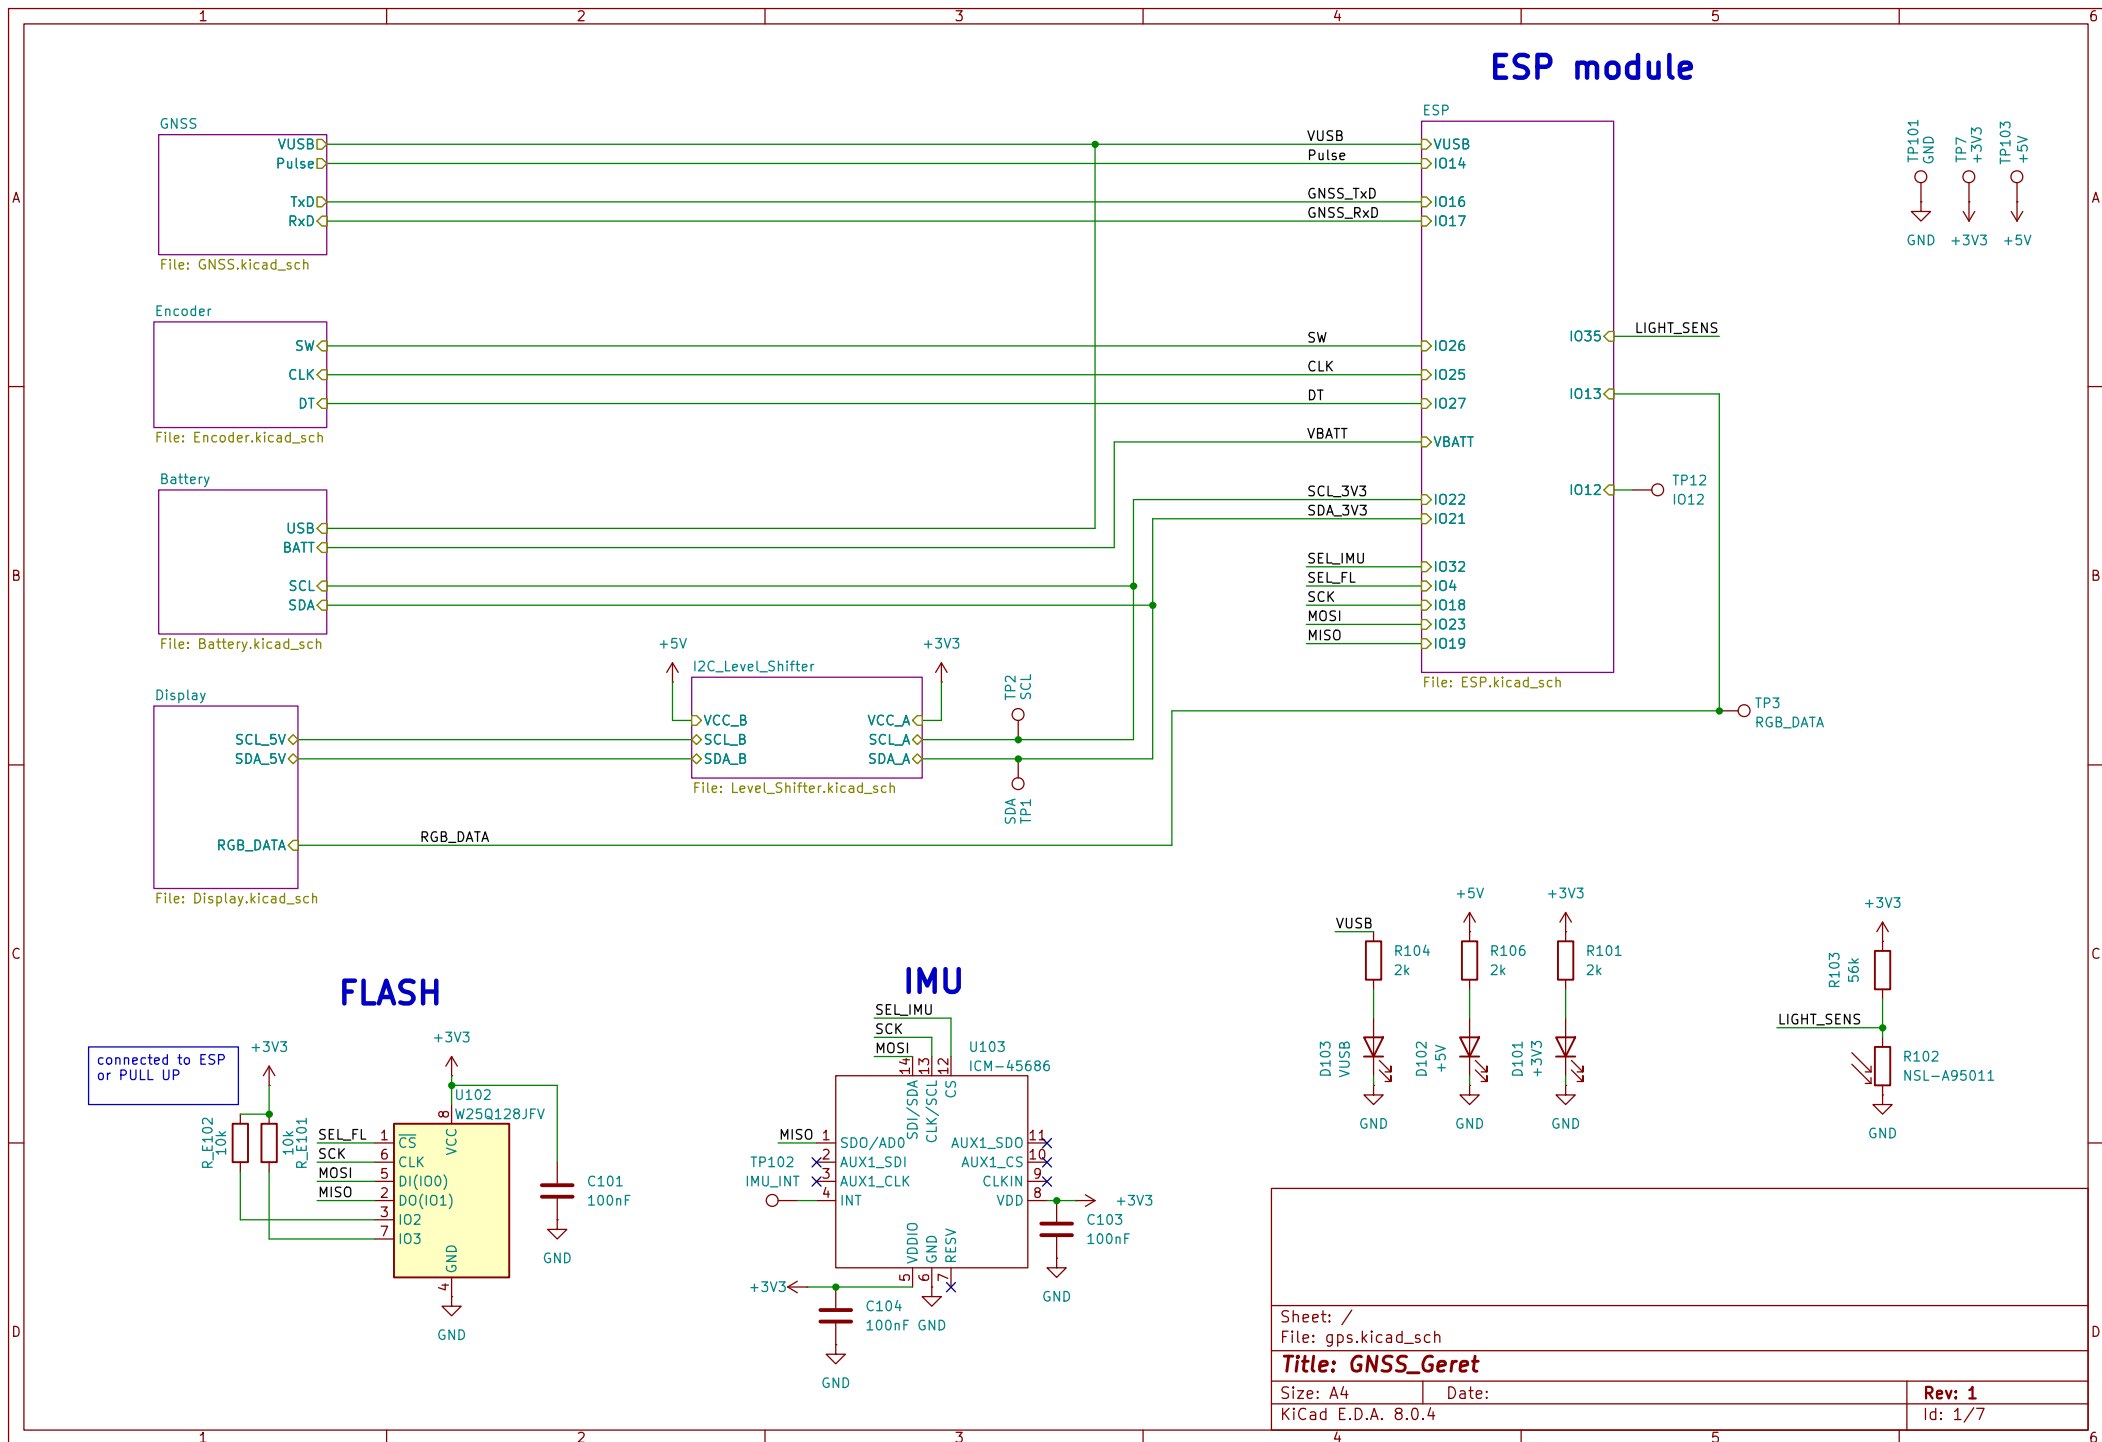
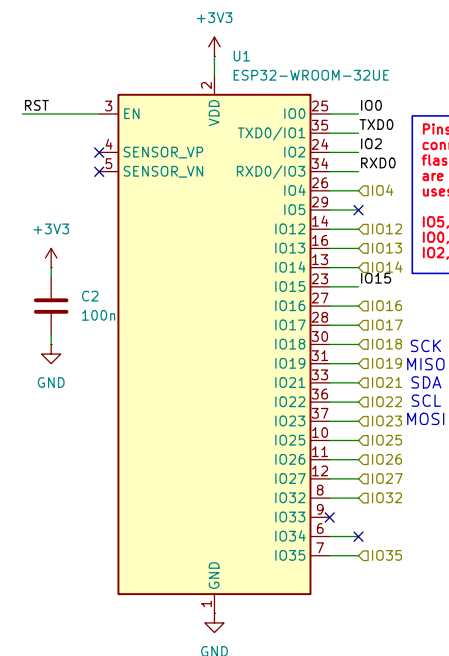






The diagram illustrates a USB-to-3V3 converter circuit. It features a USB Type-A connector (D4, M2) with VUSB and VBATT pins. A diode (D3, M2) and a 10k resistor (R12) are connected to the VBATT pin. The IC (U201, RT9080-33GJ5) has its VIN connected to the VUSB line through a 200k resistor (R11). The IC's EN pin is connected to the VUSB line through a 10uF capacitor (C11). The IC's VOUT pin is connected to the +3V3 output line. The output line is filtered with a 10uF capacitor (C3) and a 22uF capacitor (C201, C-Polarized). A 600mA current limit is indicated for the output.

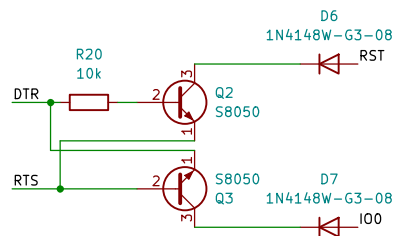

Pins GPIO6 to GPIO11 are connected to the integrated SPI flash integrated on the module and are not recommended for other uses.

IO5, 14, 15 are active HIGH at boot
IO0, 5, 15 must be HI at boot
IO2, 12 must be LO at boot

Sheet: /ESP/
File: ESP.kicad_sch


Title:

Size: A4	Date:
----------	-------

SIZE: A1	
KiCad E.D.A. 8.0.4	

Rev:	
------	--

Id: 2/7

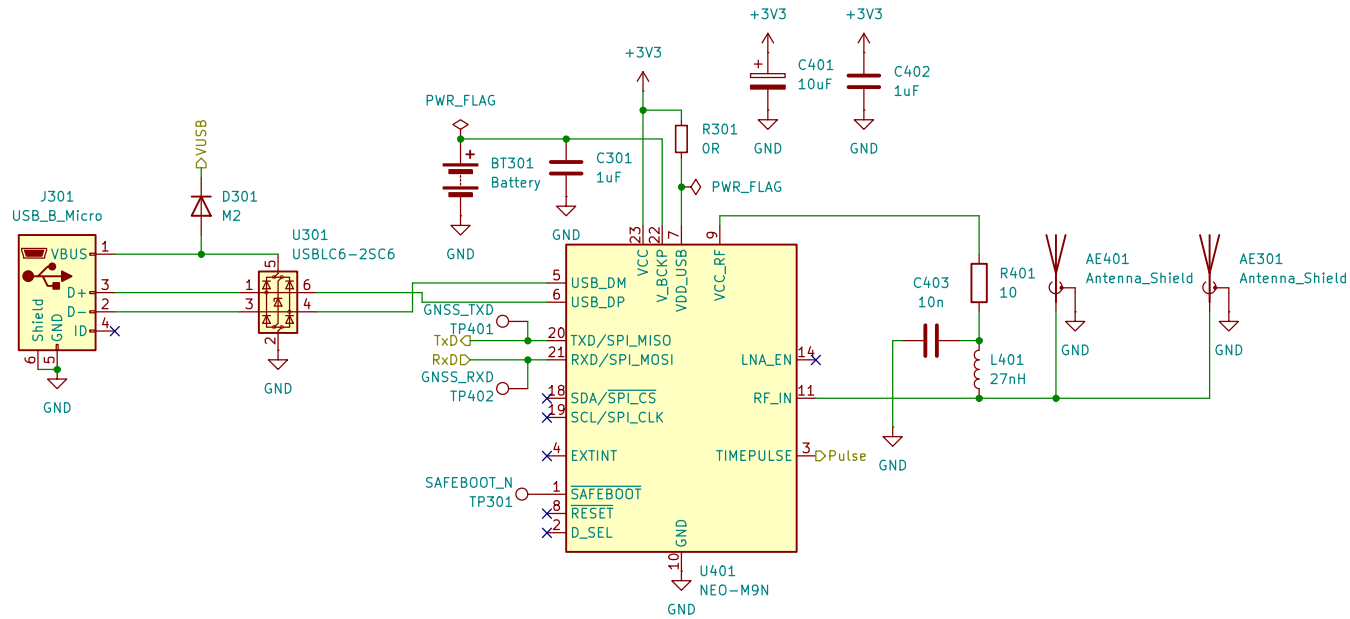

Sheet: /GNSS/
File: GNSS.kicad_sch


Title:

Size: A4
KiCad E.D.A. 8.0.4


Date:

Rev:
Id: 3/7

7seg displays and 7seg driver

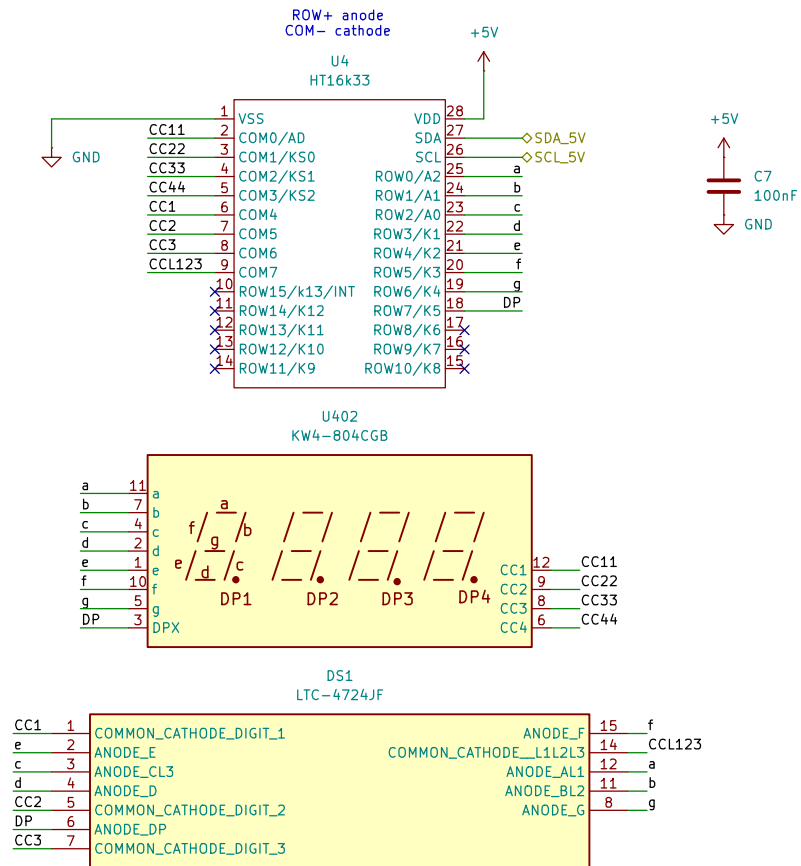

RGB 7seg displays

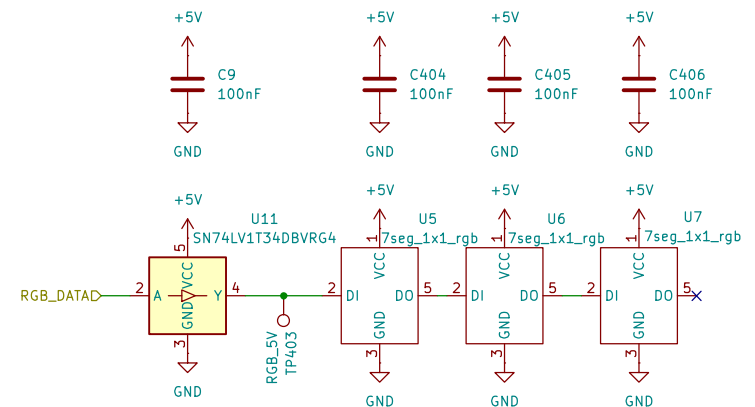

Sheet: /Display/
File: Display.kicad_sch


Title: GNSS_Geret

Size: A4 Date:

KiCad E.D.A. 8.0.4

Rev: 1

Id: 4/7

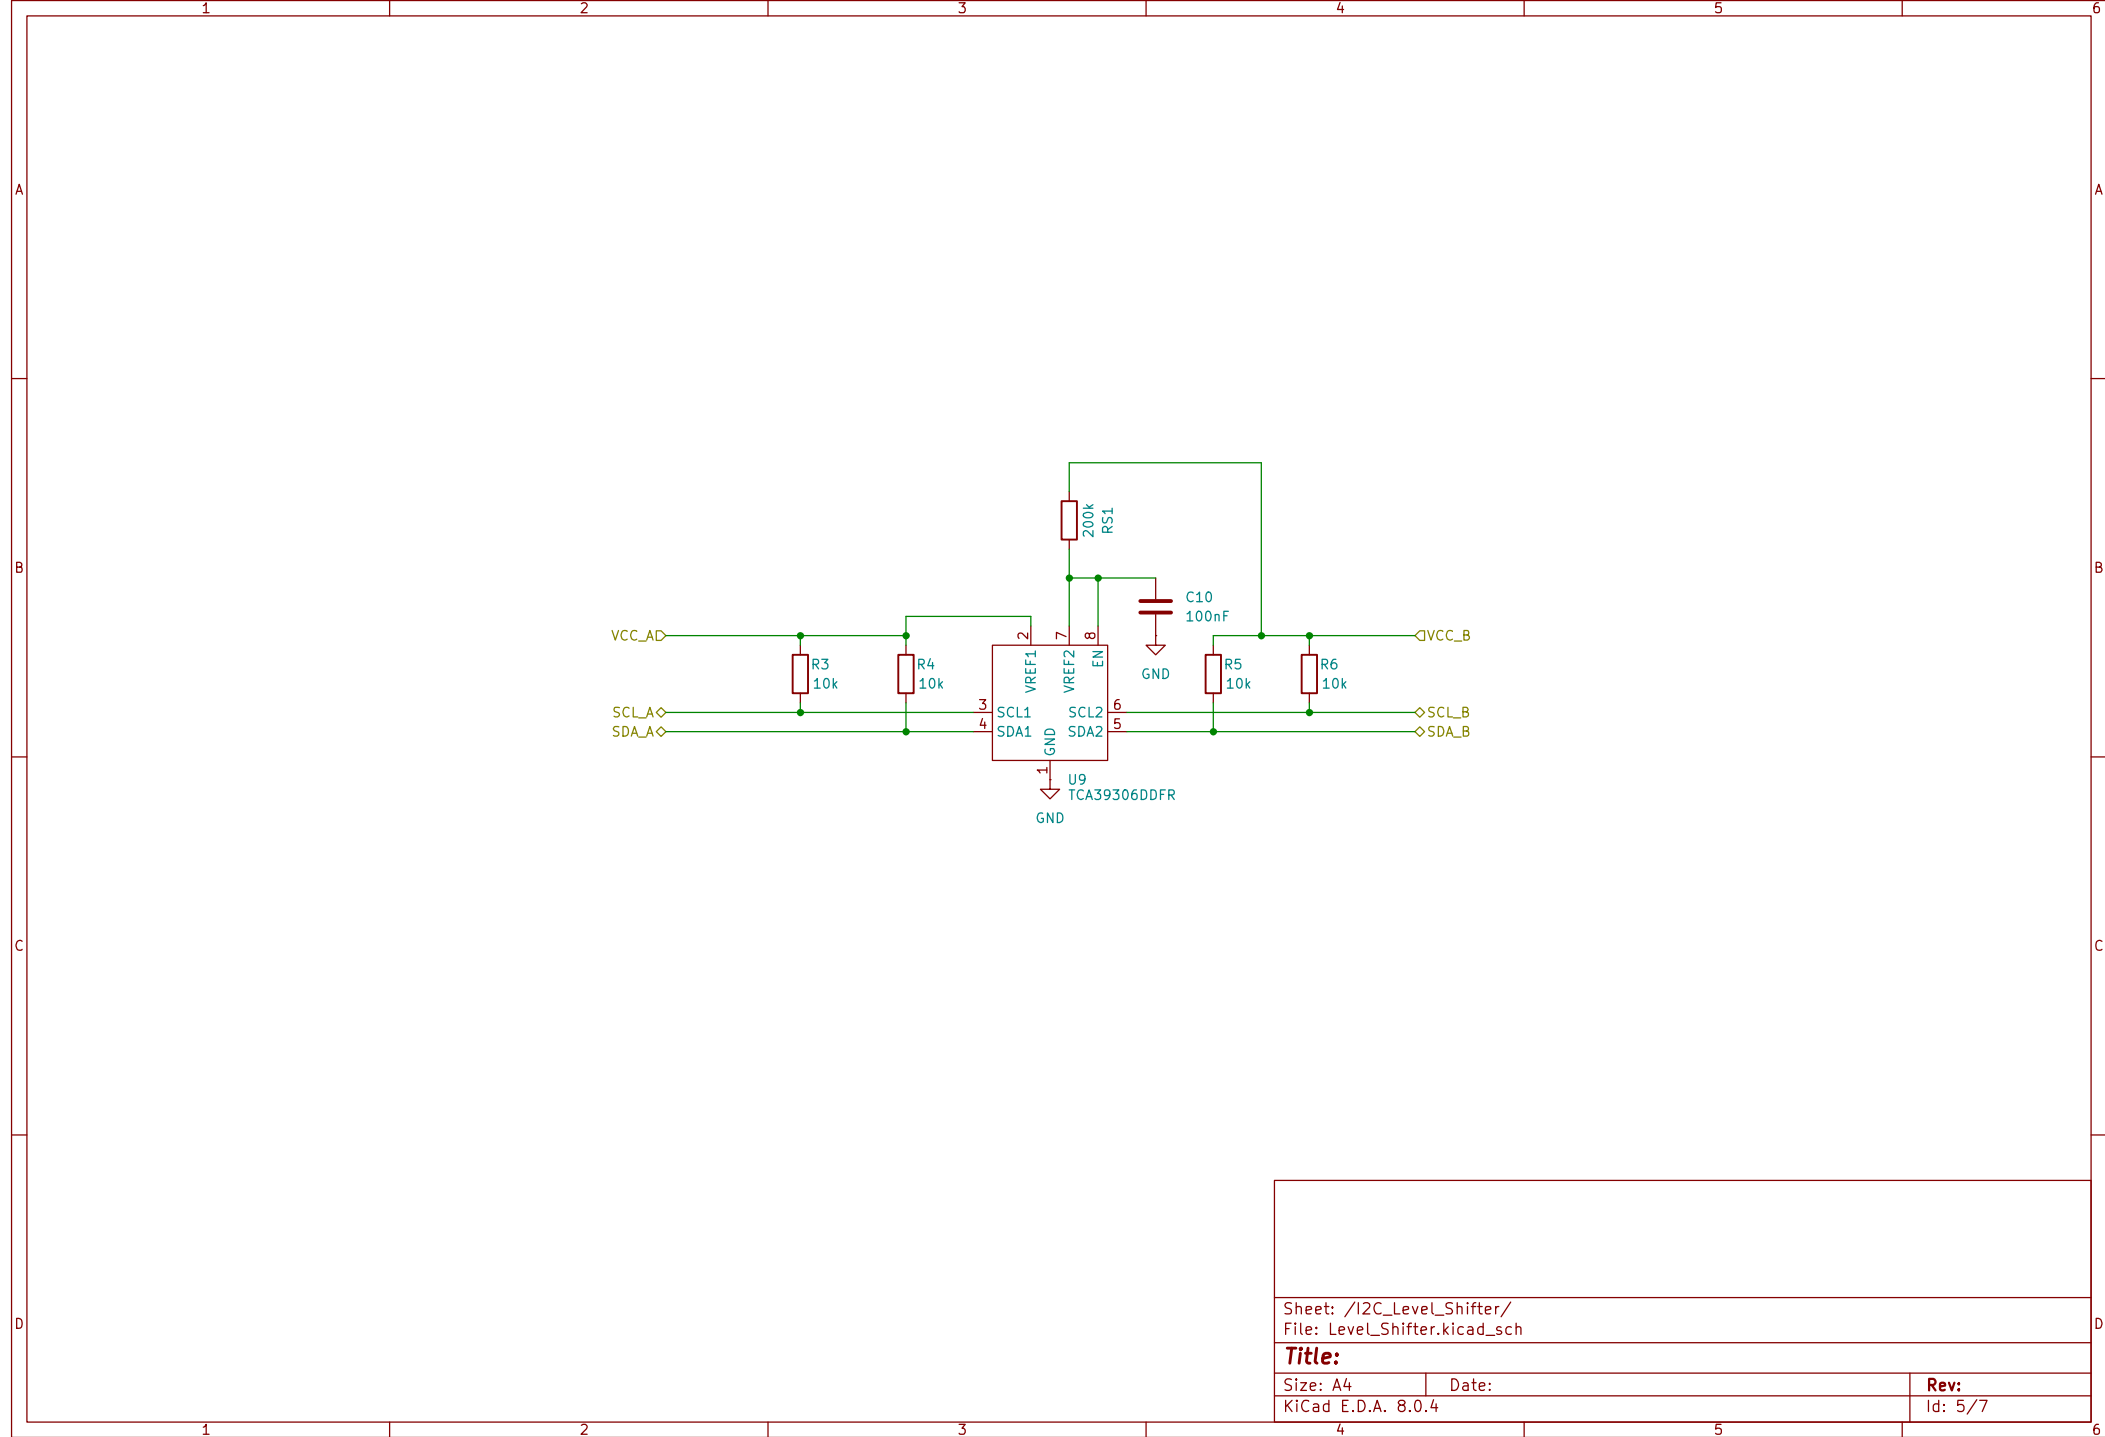



Rev:
Id: 6/7

