

Flume mooring specification — OSU Large Wave Flume (HWRL), 1:50 test articles

REV D, 2026-10-02: the 4×4 platform resized to a 2.4 m square (buoy centres on a 0.8 m grid, the HSFP test matrix's footprint). Supersedes rev C.1 73a516d: the same method, two cord sets, anchors and checks. The single buoy and the cluster are unchanged; the platform's lines, loads, extreme set and checks are re-derived for its new size. Generated by `build_spec.py` and `mooring_figures.py` from FloatSim results; basis DESIGN-BASIS.md Phases F–G and J.

Summary

	single buoy	cluster	4×4 platform
anchors (under water, on the side walls)	x ±5.0, y ±1.83, z -0.50 m	x ±5.0, y ±1.83, z -0.15 m	x ±5.0, y ±1.83, z -0.15 m
attachment points	slender radial collar r = 0.2 m on the spar, 4 points (4 lines) at z = -0.50 m	each of the 4 spars (4 lines) at z = -0.15 m	the 8 up-/down-stream row spars at z = -0.15 m (4 two-leg bridles, 8 legs)
pretension at rest per line/leg, both sets (set by tension or calm tilt)	2.40 N	1.44 N	1.44 N
operational cord (response tests, $H \leq 0.12$ m)	k 2.01 N/m (−13 / +30 %), L0 3.930 m, pre-stretch at rest 1195 mm, elongation ≥ 2.21 m (56 % of L0)	k 4.15 N/m (−13 / +30 %), L0 4.589 m, pre-stretch at rest 346 mm, elongation ≥ 0.63 m (14 % of L0)	k 8.36 N/m (−13 / +30 %), L0 3.665 / 3.874 m, pre-stretch at rest 172 mm, elongation ≥ 0.43 m (12 % of L0)
extreme cord ($H = 0.2\text{--}0.5$ m)	the same cord (one set)	k ×5: k 20.75 N/m (minimum; −0 / +30 %), L0 4.866 m, pre-stretch at rest 69 mm, elongation ≥ 1.33 m (27 % of L0)	k ×5.5: k 45.96 N/m (minimum; −0 / +30 %), L0 3.806 / 4.014 m, pre-stretch at rest 31 mm, elongation ≥ 1.14 m (30 % of L0)
anchor working load ×3 (max of both sets)	10.6 N	66.4 N	246.9 N
anchor rating (specified, every anchor)	≥ 300 N	≥ 300 N	≥ 300 N
set identification: surge pull stiffness, operational / extreme (threshold)	one set	15.0 / 73.2 N/m (extreme if ≥ 33 N/m)	61.7 / 330.0 N/m (extreme if ≥ 143 N/m)
calm static tilt, FloatSim: operational / extreme	0.00° (collar)	1.00° / 1.00°	1.00° / 1.00°
$H = 0.5$ m max surge (limit +1.0 m)	0.68 m (predicted cases)	0.97 m (extreme set; operational set 3.39 m)	0.94 m (extreme set; operational set 3.51 m)

- **Procedure:** 1. Response series ($H \leq 0.12$ m) on the operational set. 2. Swap the cords to the extreme set: same anchors, attachment points and AT-REST tension, so the same calm geometry. 3. Extreme series in increasing H with live offset monitoring. 4. The buoy's extremes LAST, with a height ramp, watching yaw: 3 of its cases have no reliable FloatSim prediction.
- **A static pull is REQUIRED before every extreme series to identify the set.**
- Both sets give the same 1° calm tilt, so the tilt cannot tell them apart.
- The pull stiffness can: cluster 15.0 → 73.2 N/m (×4.9), platform 61.7 → 330.0 N/m (×5.3).
- On the operational cords, extreme waves drift the cluster / platform 3.39 m (mean 3.27 m) / 3.51 m (mean 3.40 m) and overload those cords.
- **Installation checks, each set** (§5): calm static tilt (the pretension check), static pull (which also identifies the set), surge/sway decays. The cords creep: 1.00° at installation relaxes to ~0.87° over a test day. **Re-check daily before the first run**, against the §5 thresholds.
- **Buoy collar:** a SLENDER rod or wire spreader, round section ≤ 25 mm; a disk would add ≈ 21 kg.
- **⚠ Platform wall clearance (rev D): 0.49 m per side**, against the Phase B criterion 4 (body-to-wall clearance ≥ 0.6 m). The 2.4 m square spans 2.69 m across the 3.66 m flume with its heave plates.
- The sidewall study for this platform (`./platform-12buoy/flume-wall-effect`, 2026-10-01) finds the walls change its free-decay heave period by −0.49 %, its heave RAO by ≤ 3.2 % and its excitation by ≤ 2.9 %: no more than at 0.80 m. The dynamic data are not compromised.
- The criterion's geometric margin is not met: **a decision for Xabier** (accept 0.49 m, or reduce the platform).

- **Facility assumptions F1–F7** (next page) must be confirmed with HWRL before buying hardware: F1 underwater wall anchors; F2 every anchor rated ≥ 300 N (platform working load 246.9 N).

Facility assumptions to CONFIRM WITH HWRL BEFORE BUYING HARDWARE

None of these is a confirmed facility fact. The design rests on all of them.

#	Assumption	Value this specification uses	If it proves false
F1	Anchors can be fixed on the side walls under water, at each article's attachment depth	anchors at $x = \pm 5.0$ m, $y = \pm 1.83$ m, $z = -0.50$ m (buoy), -0.15 m (cluster), -0.15 m (platform)	A higher or lower anchor slopes the line. Its vertical pull at the attachment adds calm tilt and tilt coupling, so the attachment sweep must be re-run for the real anchor depth.
F2	Wall anchor rating	every wall anchor rated ≥ 300 N . Working loads, the larger of the two cord sets ($\times 3$ on the FloatSim peak): buoy 10.6 N, cluster 66.4 N, platform 246.9 N; the platform's governs	An anchor rated below 246.9 N cannot carry the platform's extreme set. The platform's extreme series then stops at a lower H, or needs more anchors. The cluster and buoy need far less.
F3	Wave height per period, steepness	$H/\lambda \leq 0.08$ at 2.7 m depth: H 0.5 m only for $T \geq 2.01$ s (and from 2.35 s by the 3° tilt rule), H 0.35 m for $T \geq 1.675$ s	Cases outside the wavemaker envelope drop out.
F4	Water depth	2.7 m	The drift bound falls for deeper water; periods unchanged.
F5	Test-section position vs the wavemaker and beach	a clean regular-wave window $\geq 2\text{--}3$ min at the article, which sits on the flume centreline	Shorter windows do not settle the lightly damped resonances ($\zeta \approx 3\text{--}4$ %).
F6	Tracking field of view	surge $-0.3 \dots +1.0$ m (down-flume), sway ± 0.1 m, plus the article footprint (platform 2.69 m wide at 45°)	With the extreme set, H = 0.5 m stays within +1.0 m at the two worst periods run (§3b). A smaller window needs a stiffer extreme set.
F7	Soft-mooring cord, usable submerged, in two stiffnesses per article	elastic cord: the operational set (secant stiffness within $-13 / +30$ % of target) and the extreme set (a MINIMUM stiffness, $-0 / +30$ %), stiffness and elongation per the tables; submerged weight ≈ 0.02 N/m; creep / relaxation ≈ 4 % of the stretch per decade of time (assumed, §4; confirm with the datasheet)	Without it, the lines need farther anchors (longer lines, lower strain) or another soft element. Redesign. A different creep rate changes the §5 creep table and the re-tension times.


1. Layout and the two cord sets

- An X-spread of four soft lines to the side walls, 20.1° off the flume axis. The platform's four lines are 2-leg bridles (8 legs) to the two row spars of each up- and down-stream half-row.
- **Attachments are below still water, and each anchor is at the same depth**, so every line runs level (figures in §2):
- **single buoy**: a slender radial collar of $r = 0.2$ m on the spar at $z = -0.50$ m, one line at the point facing each anchor (§4);
- **cluster**: each spar at $z = -0.15$ m;
- **platform**: the 8 up- and down-stream row spars at $z = -0.15$ m.
- **Rev D**: the platform is the 2.4 m square (buoy centres at $x, y = \pm 0.4 / \pm 1.2$ m), flat-on to the flume. Its attachment height, cord stiffness and pretension are re-derived by the same sweep and rule (§3a), and its extreme set by the same k scan (§3b).
- Each line or leg is an **elastic cord**, with short stiff leads or shackles if needed, of unstretched length L_0 . It is pre-stretched to the pretension T_0 when attached: the tension at rest $\approx k \times (\text{chord} - L_0)$.
- **Two cord sets** (rev C):
- The **operational set** is rev B unchanged. It is used for every response test ($H \leq 0.12$ m), and it disturbs the article least (§3a). Calm static tilt $\leq 1^\circ$ is now CONFIRMED by Xabier.
- The **extreme set** is a stiffer cord at the same at-rest tension on the same anchors and attachment points. It is used for the $H = 0.2\text{--}0.5$ m load and survival tests, and keeps the article in the tracking window (§3b).
- The buoy needs no second set: its predicted $H = 0.5$ m offsets stay inside ± 1.0 m.
- Why two sets:
- Rev B's decision rule omitted the confirmed excursion criterion (Phase B criterion 4).
- The conflict itself is real: minimal interference needs soft lines, and station-keeping in extreme waves needs stiff ones.
- Two cord sets resolve it without compromising either design.
- Frame for all coordinates (the TRUE flume frame): the origin is at the article's calm centre, on the flume centreline, at still water. x runs down-flume (the wave direction), y across, z up.
- What is conservative in these numbers:
- the **drift sum**: the full recorded fixed-body drift bound, applied in-run at each spar's waterline, plus FloatSim's own mean wave force on the moving body;
- **working loads $\times 3$** and **elongation capacity $\times 1.25$** on the worst predicted FloatSim values.


2. Per-article arrangement and line tables

The **up-flume lines (anchors at $x = -5$ m)** carry the drift and set every peak value. **Buy and rig every line of a set to its up-flume values**, so the lines are interchangeable.

2a. Single buoy

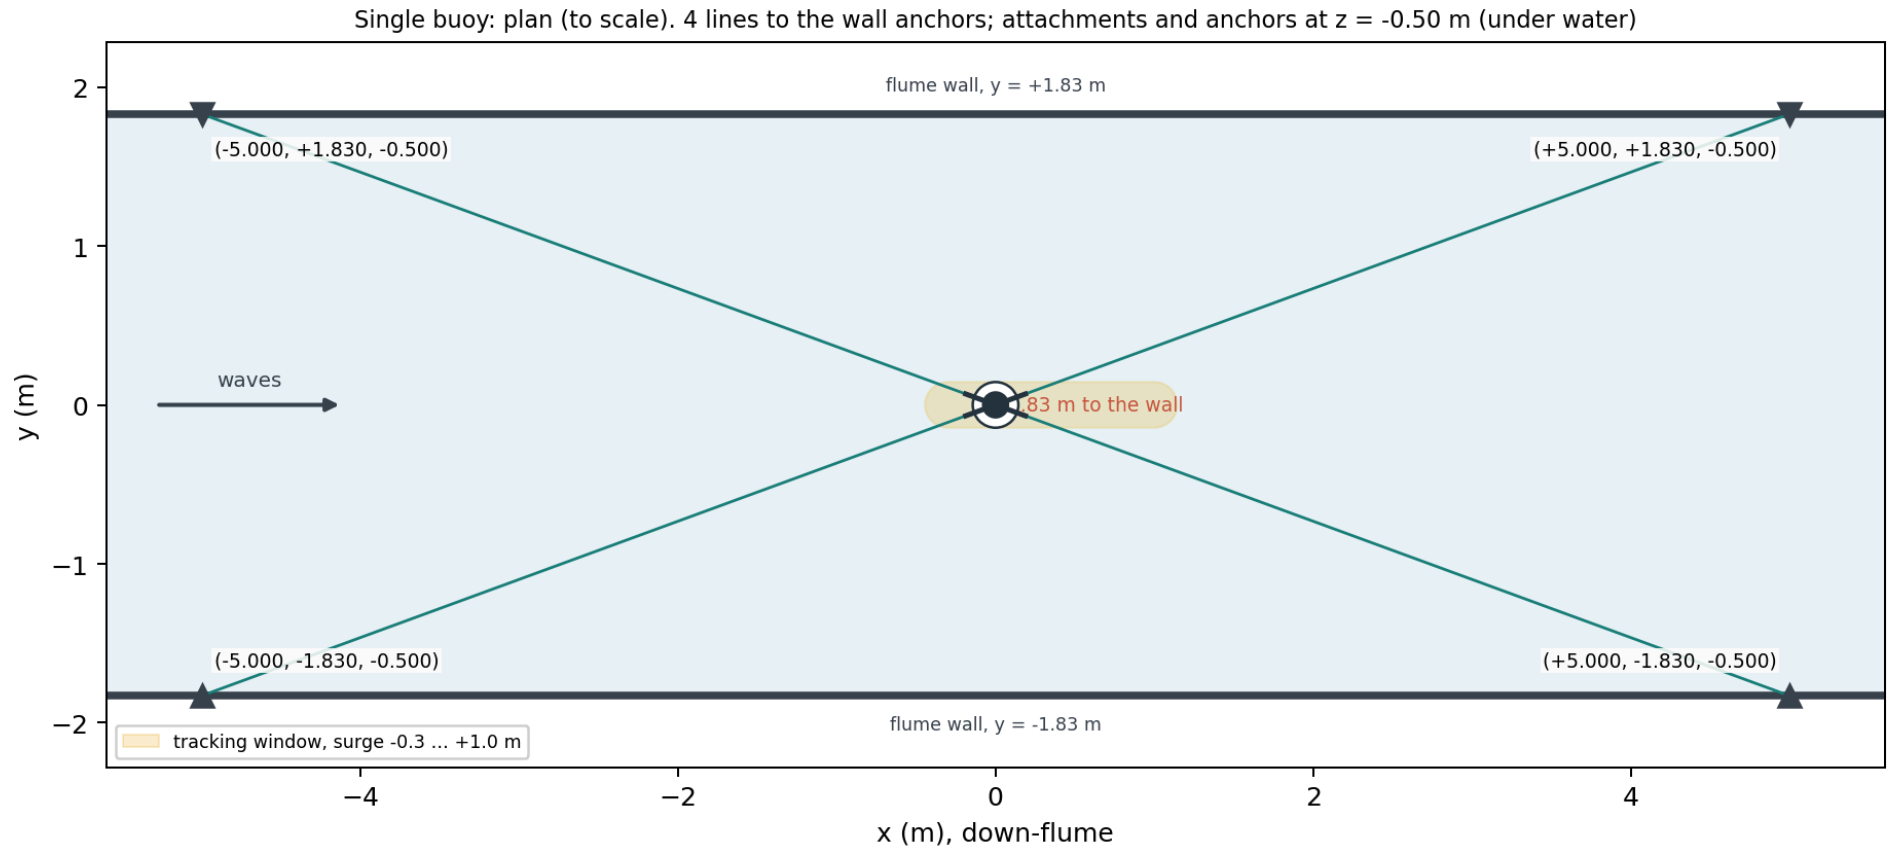

Single buoy: plan, to scale (mooring_figures.py, from spec_statics.json)

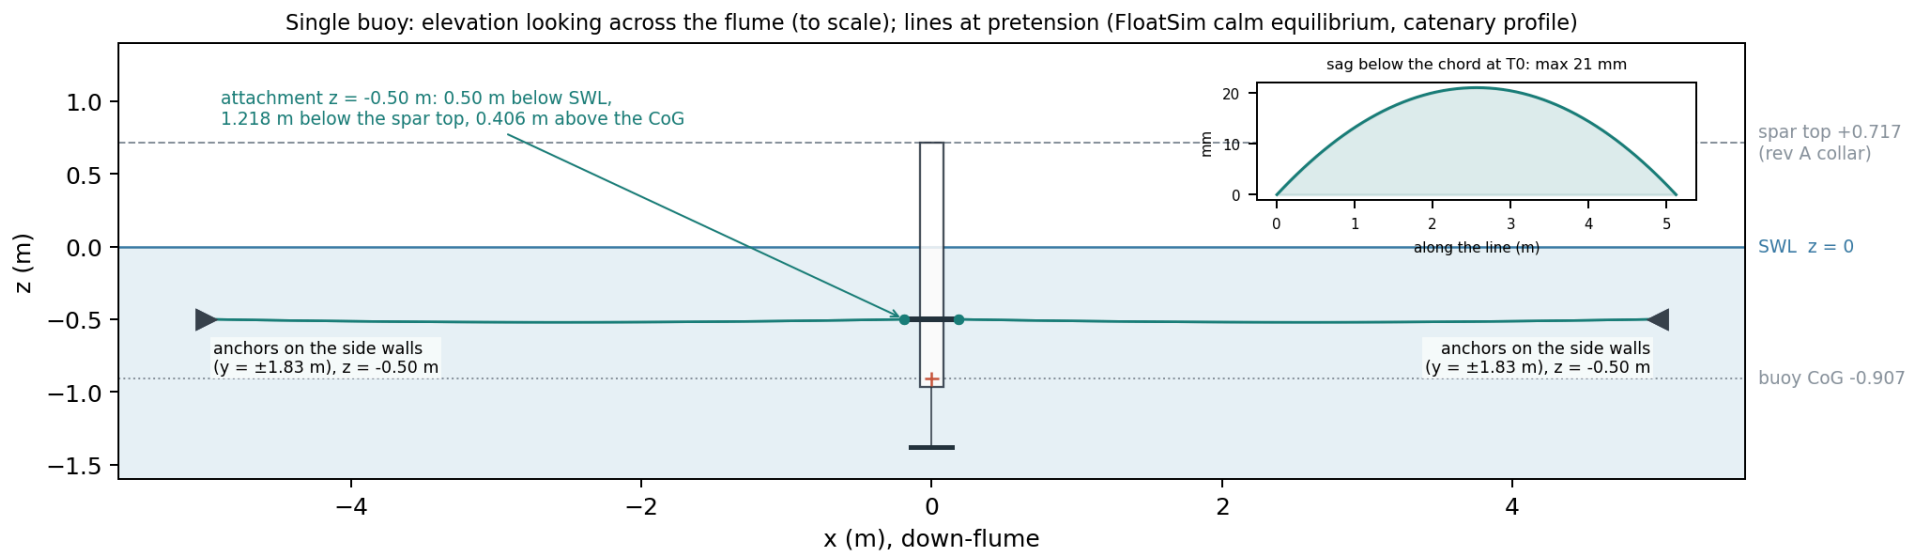

Single buoy: elevation looking across the flume, to scale


One cord set (response and extreme tests; its predicted $H = 0.5$ m offsets stay within ± 1 m). Peaks over every predicted run (\$5):

line	anchor (x, y, z) m	attachment (x, y, z) m	L0 unstretched	k target (band -13 / +30 %)	pretension T_0 (at rest)	at-rest stretch	peak stretch	elongation capacity $\times 1.25$	max tension	working load $\times 3$
1 (buoy)	(-5.000, +1.830, -0.500)	(-0.188, +0.069, -0.501)	3.930 m	2.01 N/m (1.75–2.61)	2.40 N (2.40)	1195 mm	1.76 m	2.21 m (56 % of L0)	3.54 N	10.6 N
2 (buoy)	(-5.000, -1.830, -0.500)	(-0.188, -0.069, -0.501)	3.930 m	2.01 N/m (1.75–2.61)	2.40 N (2.40)	1195 mm	1.76 m	2.21 m (56 % of L0)	3.54 N	10.6 N
3 (buoy)	(+5.000, +1.830, -0.500)	(+0.188, +0.069, -0.501)	3.930 m	2.01 N/m (1.75–2.61)	2.40 N (2.40)	1195 mm	1.27 m	1.58 m (40 % of L0)	2.54 N	7.6 N
4 (buoy)	(+5.000, -1.830, -0.500)	(+0.188, -0.069, -0.501)	3.930 m	2.01 N/m (1.75–2.61)	2.40 N (2.40)	1195 mm	1.27 m	1.58 m (40 % of L0)	2.54 N	7.6 N


Anchors (working-load limit = $3 \times$ the larger design load of the cord sets):

anchor (x, y, z) m	lines	design load, the cord set	anchor working-load limit $\times 3$ (max of the sets)
(-5.000, +1.830, -0.500)	1	3.54 N	10.6 N
(-5.000, -1.830, -0.500)	2	3.54 N	10.6 N
(+5.000, +1.830, -0.500)	3	2.54 N	7.6 N
(+5.000, -1.830, -0.500)	4	2.54 N	7.6 N

2b. Cluster (4 buoys at 45°)

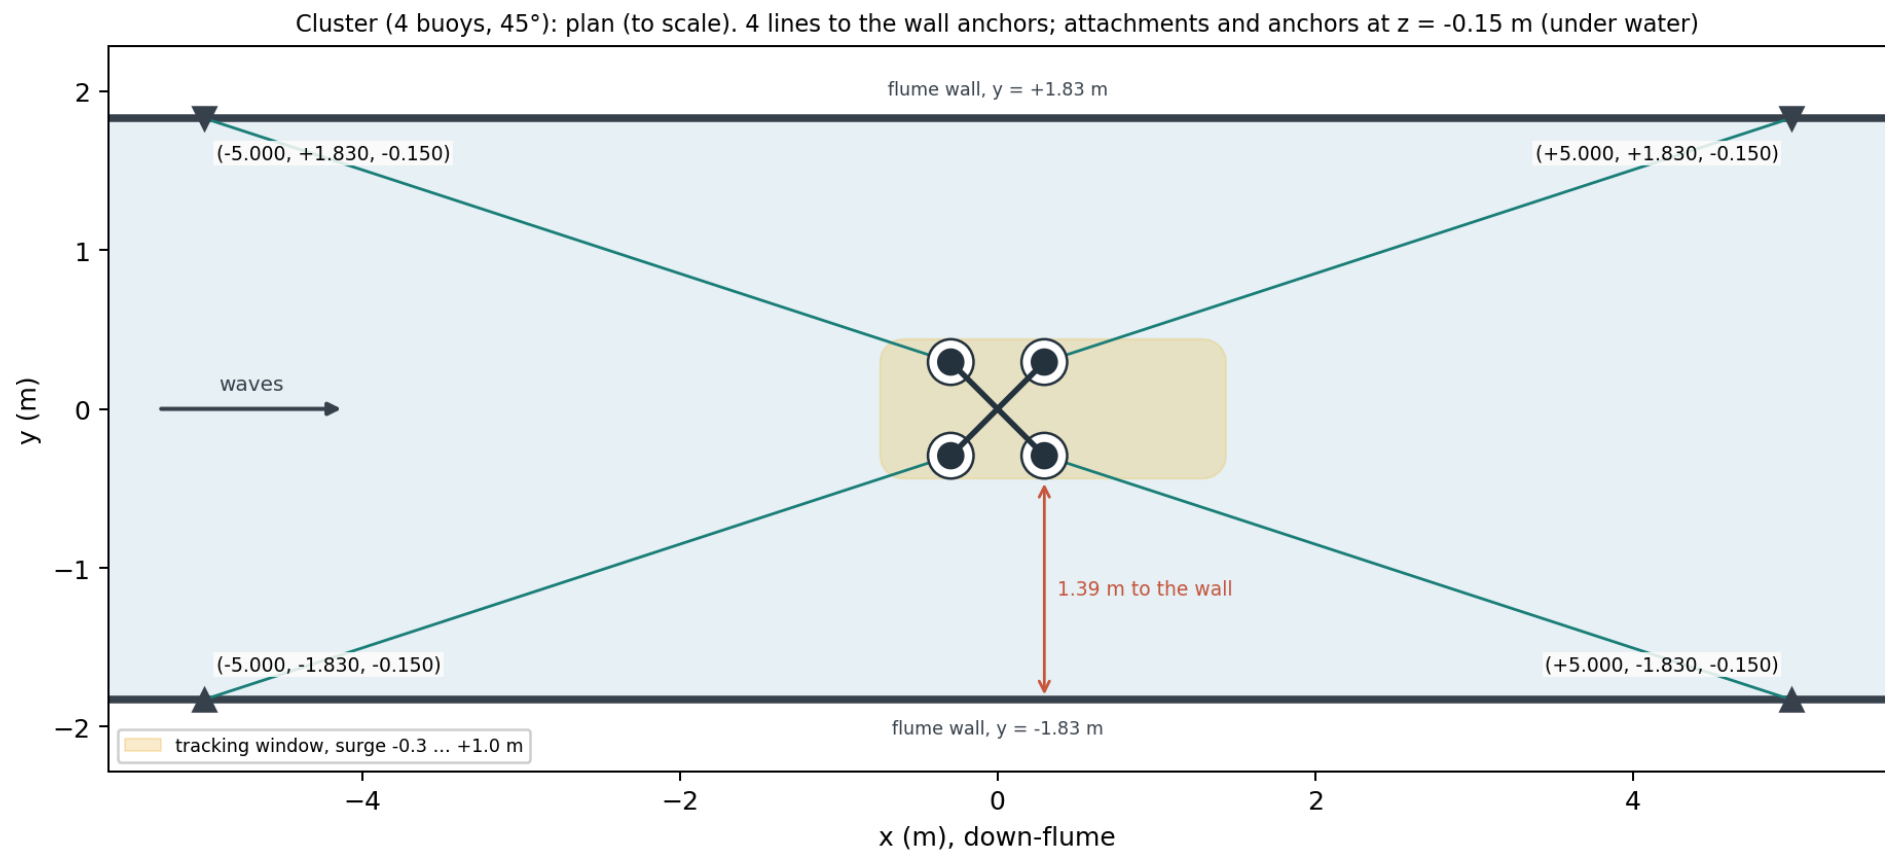

Cluster (4 buoys, 45°): plan, to scale (mooring_figures.py, from spec_statics.json)

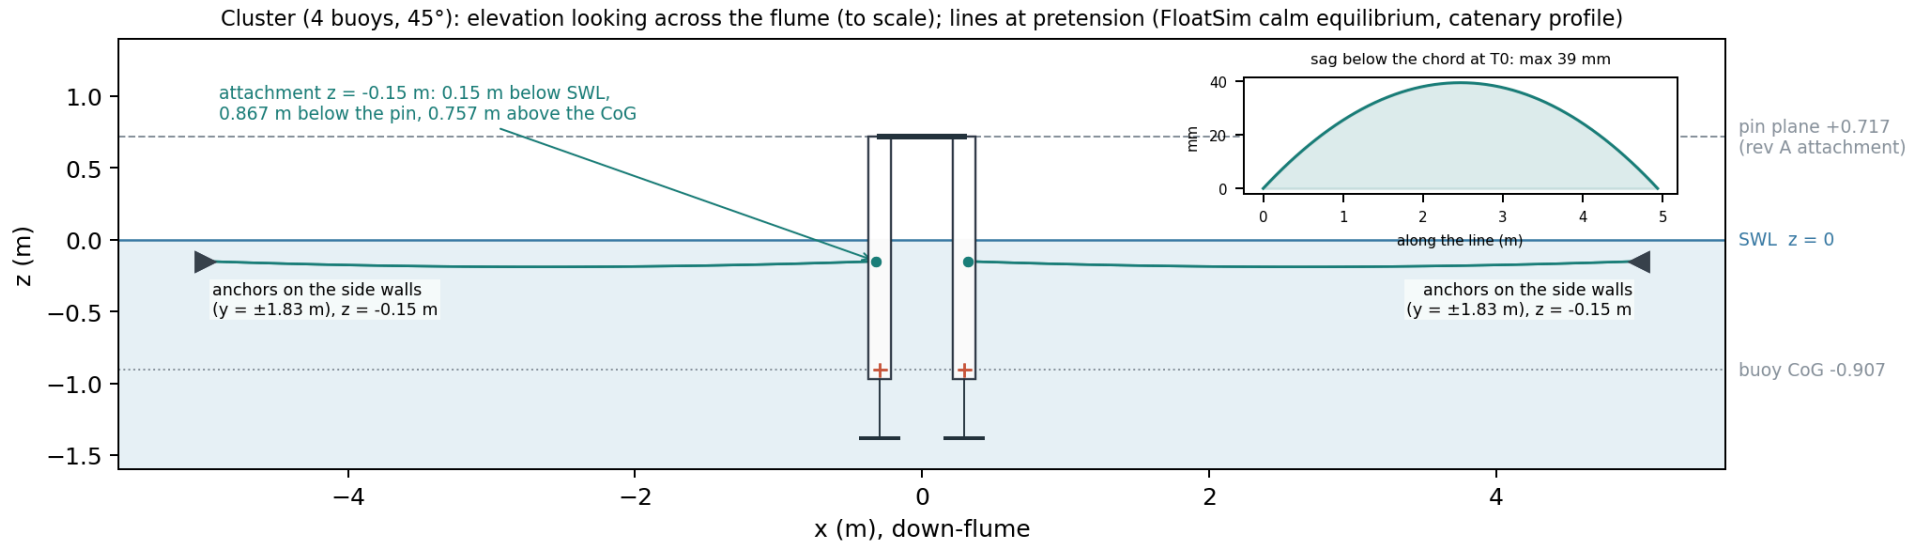

Cluster (4 buoys, 45°): elevation looking across the flume, to scale

Operational cord set (response tests, $H \leq 0.12$ m). Peaks over its moored operational runs (§5):

line	anchor (x, y, z) m	attachment (x, y, z) m	L0 unstretched	k target (band -13 / +30 %)	pretension T0 (at rest)	at-rest stretch	peak stretch	elongation capacity $\times 1.25$	max tension	working load $\times 3$
1 (buoy2)	(-5.000, +1.830, -0.150)	(-0.322, +0.303, -0.150)	4.589 m	4.15 N/m (3.61–5.40)	1.49 N (1.44)	346 mm	0.50 m	0.63 m (14 % of L0)	2.09 N	6.3 N
2 (buoy3)	(-5.000, -1.830, -0.150)	(-0.322, -0.303, -0.150)	4.589 m	4.15 N/m (3.61–5.40)	1.49 N (1.44)	346 mm	0.50 m	0.63 m (14 % of L0)	2.09 N	6.3 N
3 (buoy1)	(+5.000, +1.830, -0.150)	(+0.322, +0.303, -0.150)	4.589 m	4.15 N/m (3.61–5.40)	1.49 N (1.44)	346 mm	0.50 m	0.62 m (14 % of L0)	2.06 N	6.2 N
4 (buoy4)	(+5.000, -1.830, -0.150)	(+0.322, -0.303, -0.150)	4.589 m	4.15 N/m (3.61–5.40)	1.49 N (1.44)	346 mm	0.50 m	0.62 m (14 % of L0)	2.06 N	6.2 N

Extreme cord set, k $\times 5$ (load / survival tests, $H = 0.2\text{--}0.5$ m). Same anchors, attachments and nominal T0. Its stiffness is a MINIMUM: a softer cord puts $H = 0.5$ m past +1 m, so the band is $-0 / +30$ %. Peaks over its $H = 0.5$ m runs (§5):


line	anchor (x, y, z) m	attachment (x, y, z) m	L0 unstretched	k target (band +0 / +30 %)	pretension T0 (at rest)	at-rest stretch	peak stretch	elongation capacity $\times 1.25$	max tension	working load $\times 3$
1 (buoy2)	(-5.000, +1.830, -0.150)	(-0.322, +0.303, -0.150)	4.866 m	20.75 N/m (20.75–26.98)	1.73 N (1.44)	69 mm	1.07 m	1.33 m (27 % of L0)	22.12 N	66.4 N
2 (buoy3)	(-5.000, -1.830, -0.150)	(-0.322, -0.303, -0.150)	4.866 m	20.75 N/m (20.75–26.98)	1.73 N (1.44)	69 mm	1.07 m	1.33 m (27 % of L0)	22.12 N	66.4 N
3 (buoy1)	(+5.000, +1.830, -0.150)	(+0.322, +0.303, -0.150)	4.866 m	20.75 N/m (20.75–26.98)	1.73 N (1.44)	69 mm	0.00 m	0.01 m (0 % of L0)	0.10 N	0.3 N
4 (buoy4)	(+5.000, -1.830, -0.150)	(+0.322, -0.303, -0.150)	4.866 m	20.75 N/m (20.75–26.98)	1.73 N (1.44)	69 mm	0.00 m	0.01 m (0 % of L0)	0.10 N	0.3 N

Anchors (working-load limit = $3 \times$ the larger design load of the cord sets):


anchor (x, y, z) m	lines	design load, operational	design load, extreme	anchor working-load limit $\times 3$ (max of the sets)
--------------------	-------	--------------------------	----------------------	--

(-5.000, +1.830, -0.150)	1	2.09 N	22.12 N	66.4 N
(-5.000, -1.830, -0.150)	2	2.09 N	22.12 N	66.4 N
(+5.000, +1.830, -0.150)	3	2.06 N	0.10 N	6.2 N
(+5.000, -1.830, -0.150)	4	2.06 N	0.10 N	6.2 N

2c. 4×4 platform (16 buoys at 45°)

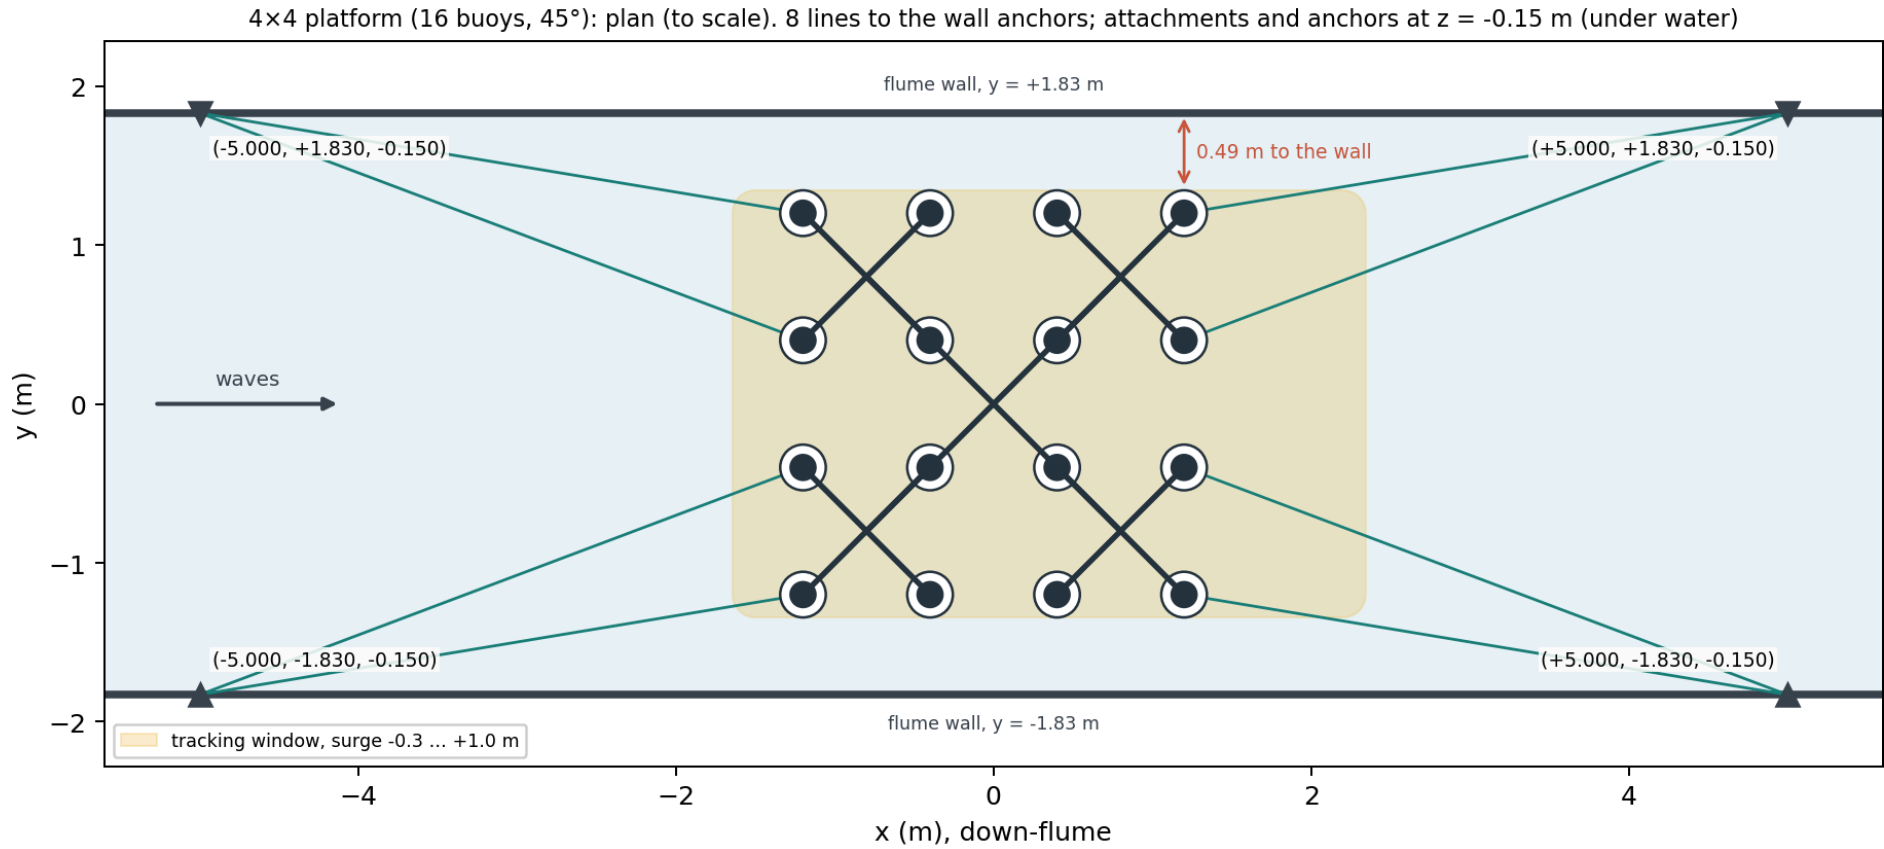

4×4 platform (16 buoys, 45°): plan, to scale (mooring_figures.py, from spec_statics.json)

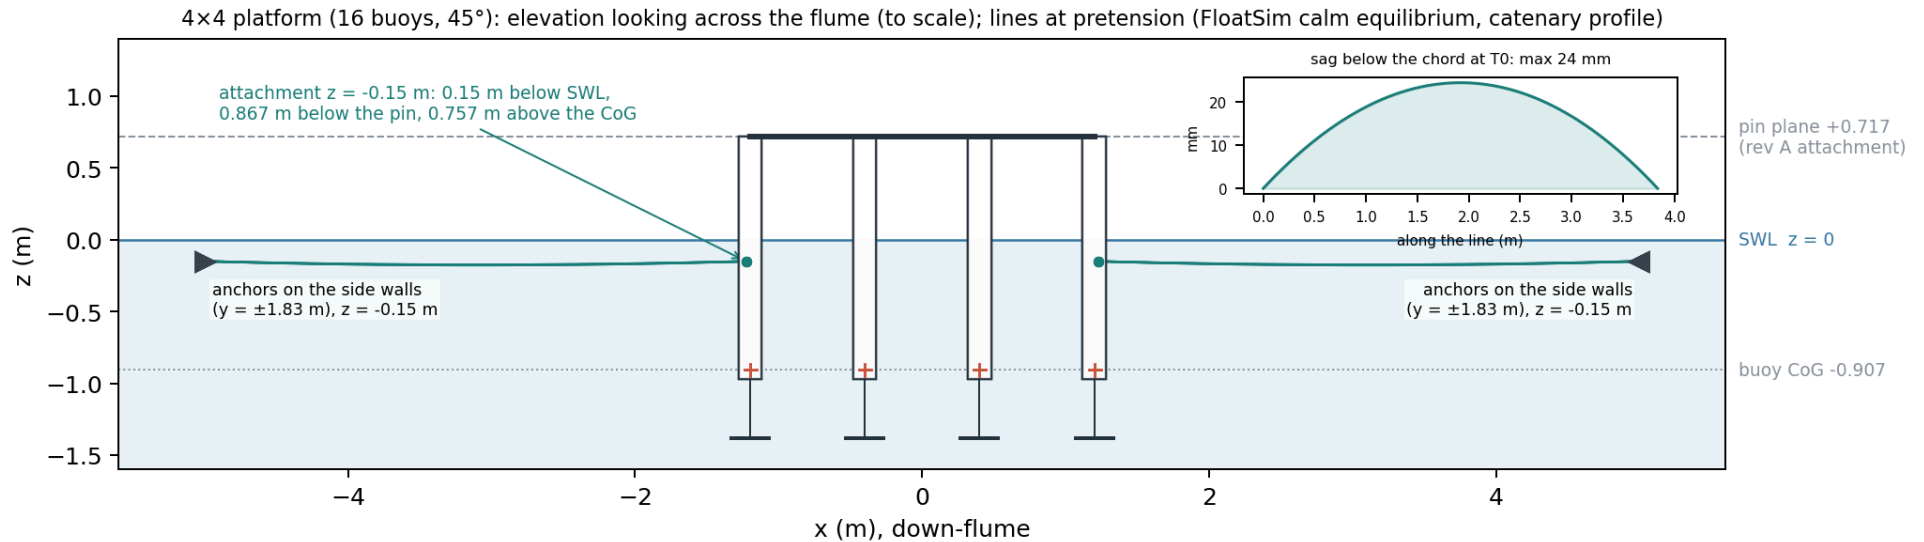

4×4 platform (16 buoys, 45°): elevation looking across the flume, to scale

Operational cord set (response tests, $H \leq 0.12$ m). Peaks over its moored operational runs (§5):

line	anchor (x, y, z) m	attachment (x, y, z) m	L0 unstretched	k target (band -13 / +30 %)	pretension T0 (at rest)	at-rest stretch	peak stretch	elongation capacity $\times 1.25$	max tension	working load $\times 3$
1 (buoy6)	(-5.000, +1.830, -0.150)	(-1.228, +1.205, -0.150)	3.665 m	8.36 N/m (7.27–10.86)	1.56 N (1.44)	172 mm	0.34 m	0.43 m (12 % of L0)	2.88 N	8.6 N
2 (buoy7)	(-5.000, +1.830, -0.150)	(-1.226, +0.410, -0.150)	3.874 m	8.36 N/m (7.27–10.86)	1.56 N (1.44)	172 mm	0.34 m	0.42 m (11 % of L0)	2.81 N	8.4 N
3 (buoy10)	(-5.000, -1.830, -0.150)	(-1.226, -0.410, -0.150)	3.874 m	8.36 N/m (7.27–10.86)	1.56 N (1.44)	172 mm	0.34 m	0.42 m (11 % of L0)	2.81 N	8.4 N
4 (buoy11)	(-5.000, -1.830, -0.150)	(-1.228, -1.205, -0.150)	3.665 m	8.36 N/m (7.27–10.86)	1.56 N (1.44)	172 mm	0.34 m	0.43 m (12 % of L0)	2.88 N	8.6 N
5 (buoy1)	(+5.000, +1.830, -0.150)	(+1.228, +1.205, -0.150)	3.665 m	8.36 N/m (7.27–10.86)	1.56 N (1.44)	172 mm	0.31 m	0.38 m (10 % of L0)	2.57 N	7.7 N
6 (buoy4)	(+5.000, +1.830, -0.150)	(+1.226, +0.410, -0.150)	3.874 m	8.36 N/m (7.27–10.86)	1.56 N (1.44)	172 mm	0.30 m	0.38 m (10 % of L0)	2.51 N	7.5 N
7 (buoy13)	(+5.000, -1.830, -0.150)	(+1.226, -0.410, -0.150)	3.874 m	8.36 N/m (7.27–10.86)	1.56 N (1.44)	172 mm	0.30 m	0.38 m (10 % of L0)	2.51 N	7.5 N
8 (buoy16)	(+5.000, -1.830, -0.150)	(+1.228, -1.205, -0.150)	3.665 m	8.36 N/m (7.27–10.86)	1.56 N (1.44)	172 mm	0.31 m	0.38 m (10 % of L0)	2.57 N	7.7 N

Extreme cord set, $k \times 5.5$ (load / survival tests, $H = 0.2$ – 0.5 m). Same anchors, attachments and nominal T0. Its stiffness is a MINIMUM: a softer cord puts $H = 0.5$ m past $+1$ m, so the band is $-0 / +30$ %. Peaks over its $H = 0.5$ m runs (§5):

line	anchor (x, y, z) m	attachment (x, y, z) m	L0 unstretched	k target (band +0 / +30 %)	pretension T0 (at rest)	at-rest stretch	peak stretch	elongation capacity $\times 1.25$	max tension	working load $\times 3$
1 (buoy6)	(-5.000, +1.830, -0.150)	(-1.228, +1.205, -0.150)	3.806 m	45.96 N/m (45.96–59.74)	2.11 N (1.44)	31 mm	0.91 m	1.14 m (30 % of L0)	42.02 N	126.1 N
2 (buoy7)	(-5.000, +1.830, -0.150)	(-1.226, +0.410, -0.150)	4.014 m	45.96 N/m (45.96–59.74)	2.11 N (1.44)	31 mm	0.88 m	1.10 m (27 % of L0)	40.26 N	120.8 N
3 (buoy10)	(-5.000, -1.830, -0.150)	(-1.226, -0.410, -0.150)	4.014 m	45.96 N/m (45.96–59.74)	2.11 N (1.44)	31 mm	0.88 m	1.10 m (27 % of L0)	40.26 N	120.8 N

4 (buoy11)	(-5.000, -1.830, -0.150)	(-1.228, -1.205, -0.150)	3.806 m	45.96 N/m (45.96–59.74)	2.11 N (1.44)	31 mm	0.91 m	1.14 m (30 % of L0)	42.02 N	126.1 N
5 (buoy1)	(+5.000, +1.830, -0.150)	(+1.228, +1.205, -0.150)	3.806 m	45.96 N/m (45.96–59.74)	2.11 N (1.44)	31 mm	0.00 m	0.00 m (0 % of L0)	0.06 N	0.2 N
6 (buoy4)	(+5.000, +1.830, -0.150)	(+1.226, +0.410, -0.150)	4.014 m	45.96 N/m (45.96–59.74)	2.11 N (1.44)	31 mm	0.00 m	0.00 m (0 % of L0)	0.06 N	0.2 N
7 (buoy13)	(+5.000, -1.830, -0.150)	(+1.226, -0.410, -0.150)	4.014 m	45.96 N/m (45.96–59.74)	2.11 N (1.44)	31 mm	0.00 m	0.00 m (0 % of L0)	0.06 N	0.2 N
8 (buoy16)	(+5.000, -1.830, -0.150)	(+1.228, -1.205, -0.150)	3.806 m	45.96 N/m (45.96–59.74)	2.11 N (1.44)	31 mm	0.00 m	0.00 m (0 % of L0)	0.06 N	0.2 N

Anchors (working-load limit = 3 × the larger design load of the cord sets):


anchor (x, y, z) m	lines	design load, operational	design load, extreme	anchor working-load limit ×3 (max of the sets)
(-5.000, +1.830, -0.150)	1, 2	5.69 N	82.28 N	246.9 N
(-5.000, -1.830, -0.150)	3, 4	5.69 N	82.28 N	246.9 N
(+5.000, +1.830, -0.150)	5, 6	5.08 N	0.12 N	15.2 N
(+5.000, -1.830, -0.150)	7, 8	5.08 N	0.12 N	15.2 N

3. Design: the attachment height (rev B) and the extreme cord set (rev C)

3a. Attachment height and the operational set

- Rev A attached at the pin plane (+0.717 m) to remove calm-water tilt. At the design pretension and stiffness its tilt period shifts **buoy -9.2 % against ± 1.42 %, cluster -8.8 % against ± 1.19 %, platform -9.3 % against ± 1.01 %**, several times what the resonance tolerates.
- The two effects act about different points:
- The static pretension moment acts about the PIN.
- The dynamic coupling ($\approx k \cdot h^2$) acts about the tilt mode's rotation centre, near the CoG.
- **The rule** (select, do not ask). HARD criteria:
- tilt-period shift vs the unmoored article $\leq \zeta/3$ (ζ at $H = 0.04$ m);
- heave shift ≤ 1 %;
- calm static tilt $\leq 1^\circ$ (now confirmed);
- surge ≥ 14 s;
- no slack in the operational band with the drift sum.
- Selection: the most pretension, then the attachment closest to the waterline, then the stiffest surge.

Design rationale (attachment_sweep.py): each point is the sweep table's row, i.e. the most pretension allowed at that height (filled = passes every hard criterion)

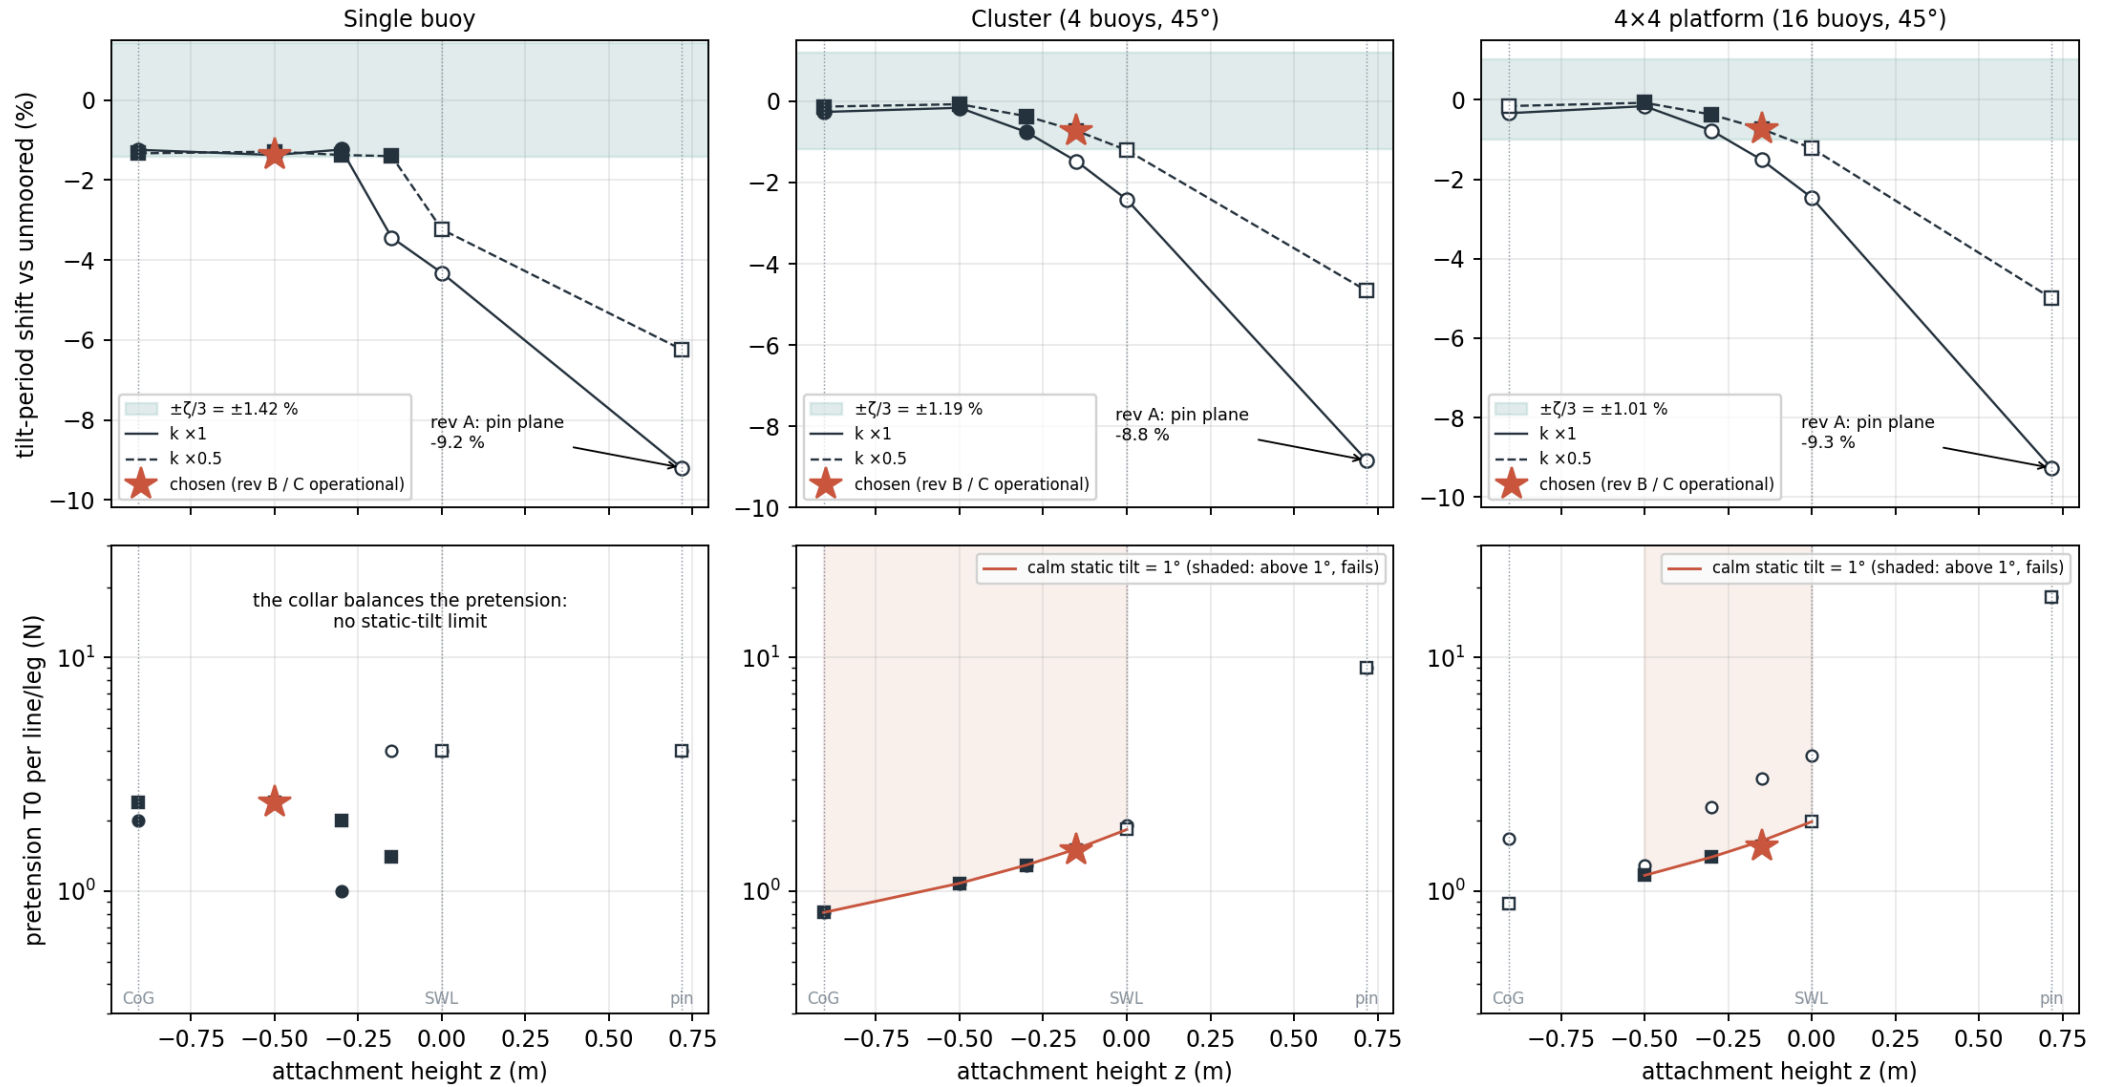

Design rationale: tilt-period shift and pretension against attachment height (the sweep table's rows)

The sweep. Each row is the most pretension that passes at that height and k . Where none passes, it is the most that keeps the static tilt and the operational band, and the row shows what fails.

The static tilt is the estimate, except in the chosen rows (FloatSim's settle):

article	attachment z	k	T0 per line/leg	tilt shift (limit)	heave shift	calm static tilt	surge	op. T_min/T0	verdict
buoy	pin +0.717 m	$\times 1$	4.00 N	-9.19 % (1.42)	-0.83 %	0.00°	16.4 s	0.80	fails: tilt -9.19 %

buoy	pin +0.717 m	×0.5	4.00 N	-6.23 % (1.42)	-0.83 %	0.00°	22.6 s	0.90	fails: tilt -6.23 %
buoy	+0.00 m	×1	4.00 N	-4.32 % (1.42)	-0.83 %	0.00°	16.4 s	0.90	fails: tilt -4.32 %
buoy	+0.00 m	×0.5	4.00 N	-3.23 % (1.42)	-0.83 %	0.00°	22.6 s	0.95	fails: tilt -3.23 %
buoy	-0.15 m	×1	4.00 N	-3.43 % (1.42)	-0.83 %	0.00°	16.4 s	0.92	fails: tilt -3.43 %
buoy	-0.15 m	×0.5	1.40 N	-1.40 % (1.42)	-0.29 %	0.00°	23.4 s	0.88	pass
buoy	-0.30 m	×1	1.00 N	-1.23 % (1.42)	-0.21 %	0.00°	16.8 s	0.75	pass
buoy	-0.30 m	×0.5	2.00 N	-1.37 % (1.42)	-0.42 %	0.00°	23.2 s	0.94	pass
buoy	-0.50 m	×1	2.40 N	-1.37 % (1.42)	-0.50 %	0.00°	16.6 s	0.94	CHOSEN
buoy	-0.50 m	×0.5	2.40 N	-1.29 % (1.42)	-0.50 %	0.00°	23.1 s	0.96	pass
buoy	-0.91 (CoG) m	×1	2.00 N	-1.24 % (1.42)	-0.42 %	0.00°	16.6 s	0.94	pass
buoy	-0.91 (CoG) m	×0.5	2.40 N	-1.33 % (1.42)	-0.50 %	0.00°	23.1 s	0.96	pass
cluster	pin +0.717 m	×1	9.01 N	-8.83 % (1.19)	-0.49 %	0.00°	16.2 s	0.63	fails: tilt -8.83 %
cluster	pin +0.717 m	×0.5	9.01 N	-4.66 % (1.19)	-0.49 %	0.00°	22.7 s	0.82	fails: tilt -4.66 %
cluster	+0.00 m	×1	1.92 N	-2.42 % (1.19)	-0.10 %	1.05°	16.4 s	0.15	fails: tilt -2.42 %, static 1.05°, op slack 0.1498 (even the least T0 that keeps the operational band taut)
cluster	+0.00 m	×0.5	1.83 N	-1.21 % (1.19)	-0.10 %	1.00°	23.1 s	0.55	fails: tilt -1.21 %
cluster	-0.15 m	×1	1.52 N	-1.48 % (1.19)	-0.08 %	1.00°	16.4 s	0.15	fails: tilt -1.48 %
cluster	-0.15 m	×0.5	1.49 N	-0.73 % (1.19)	-0.08 %	1.00°	23.1 s	0.56	CHOSEN
cluster	-0.30 m	×1	1.29 N	-0.76 % (1.19)	-0.07 %	1.00°	16.5 s	0.26	pass
cluster	-0.30 m	×0.5	1.29 N	-0.37 % (1.19)	-0.07 %	1.00°	23.2 s	0.63	pass
cluster	-0.50 m	×1	1.08 N	-0.16 % (1.19)	-0.06 %	1.00°	16.5 s	0.52	pass
cluster	-0.50 m	×0.5	1.08 N	-0.07 % (1.19)	-0.06 %	1.00°	23.2 s	0.66	pass
cluster	-0.91 (CoG) m	×1	0.81 N	-0.26 % (1.19)	-0.05 %	1.00°	16.8 s	0.24	pass
cluster	-0.91 (CoG) m	×0.5	0.81 N	-0.13 % (1.19)	-0.04 %	1.00°	23.4 s	0.58	pass
platform	pin +0.717 m	×1	18.05 N	-9.27 % (1.01)	-0.22 %	0.00°	16.0 s	0.64	fails: tilt -9.27 %
platform	pin +0.717 m	×0.5	18.05 N	-5.00 % (1.01)	-0.22 %	0.00°	22.4 s	0.82	fails: tilt -5.00 %
platform	+0.00 m	×1	3.78 N	-2.46 % (1.01)	-0.09 %	1.91°	16.2 s	0.15	fails: tilt -2.46 %, static 1.91° (even the least T0 that keeps the operational band taut)
platform	+0.00 m	×0.5	1.98 N	-1.22 % (1.01)	-0.05 %	1.00°	22.9 s	0.19	fails: tilt -1.22 %
platform	-0.15 m	×1	3.03 N	-1.51 % (1.01)	-0.07 %	1.85°	16.2 s	0.15	fails: tilt -1.51 %, static 1.85° (even the least T0 that keeps the operational band taut)
platform	-0.15 m	×0.5	1.56 N	-0.74 % (1.01)	-0.04 %	1.00°	22.9 s	0.20	CHOSEN
platform	-0.30 m	×1	2.28 N	-0.77 % (1.01)	-0.06 %	1.63°	16.2 s	0.15	fails: static 1.63° (even the least T0 that keeps the operational band taut)
platform	-0.30 m	×0.5	1.40 N	-0.37 % (1.01)	-0.04 %	1.00°	22.9 s	0.34	pass
platform	-0.50 m	×1	1.29 N	-0.16 % (1.01)	-0.04 %	1.11°	16.3 s	0.15	fails: static 1.11° (even the least T0 that keeps the operational band taut)
platform	-0.50 m	×0.5	1.17 N	-0.07 % (1.01)	-0.03 %	1.00°	23.0 s	0.50	pass
platform	-0.91 (CoG) m	×1	1.67 N	-0.34 % (1.01)	-0.04 %	1.91°	16.2 s	0.15	fails: static 1.91°, op slack 0.1485 (even the least T0 that keeps the operational band taut)
platform	-0.91 (CoG) m	×0.5	0.89 N	-0.16 % (1.01)	-0.02 %	1.01°	23.1 s	0.14	fails: static 1.01°, op slack 0.1434 (even the least T0 that keeps the operational band taut)

- **Residual interference:**
- The operational set still shifts the tilt resonance, within $\zeta/3$ and modelled by FloatSim.
- That is acceptable for validating FloatSim.

- It **must be declared** in any claim about the free (unmoored) response.
- ⚠ **The buoy's yaw vs tilt conflict:**
- The collar's pretension stiffens pitch and yaw together ($\propto T_0 \cdot r$), so every buoy design that passes $\zeta/3$ has a yaw period ≥ 1.12 s.
- FloatSim finds part of the buoy's extreme band unstable in yaw (§6).
- A pitch-neutral collar (e.g. a cross-flume bar) is a follow-up.

3b. The extreme cord set




Why: the operational set at $H = 0.5$ m (rev B's runs):


article	set	case (drift sum)	min / max line tension	slack lines: peak re-tension	mean offset (range)	max tilt	max yaw	line above the local surface	validity
cluster	operational (rev B)	H 0.5 m, T 2.35 s	0.04 / 15.23 N	stay slack (≤ 0.05 N, their hanging weight): no re-tension in the wave train	3.27 m (3.15–3.39) > +1 m	15.3°	0.70°	breaks the surface by 0.19 m	indicative (tilt > 5.7°)
cluster	operational (rev B)	H 0.5 m, T 2.65 s	0.05 / 12.01 N	stay slack (≤ 0.05 N, their hanging weight): no re-tension in the wave train	2.53 m (2.46–2.61) > +1 m	12.9°	0.47°	breaks the surface by 0.18 m	indicative (tilt > 5.7°)
platform	operational (rev B)	H 0.5 m, T 2.35 s	0.03 / 29.51 N	stay slack (≤ 0.04 N, their hanging weight): no re-tension in the wave train	3.40 m (3.30–3.51) > +1 m	22.4°	1.41°	breaks the surface by 0.18 m	indicative (tilt > 5.7°)
platform	operational (rev B)	H 0.5 m, T 2.65 s	0.03 / 25.16 N	stay slack (≤ 0.04 N, their hanging weight): no re-tension in the wave train	2.87 m (2.80–2.95) > +1 m	19.1°	1.19°	breaks the surface by 0.16 m	indicative (tilt > 5.7°)

Selection:

- The rule: the smallest cord stiffness, as a multiple of the operational k , that keeps the article inside the tracking window at $H = 0.5$ m. It is checked at $T = 2.35$ s (the largest admissible drift) and 2.65 s (the tilt/heave resonance), with the conservative drift sum applied in-run (FloatSim).
- Two readings of "inside the window":
- The confirmed criterion 4 is mean offset + dynamic amplitude ≤ 1.0 m, i.e. the run's maximum surge. **The spec uses it.**
- The mean offset alone (Xabier's wording) would allow $\times 4.5$ (cluster) and $\times 5$ (platform).
- Chosen: **cluster $\times 5$, platform $\times 5.5$.**

article	k ($\times$ operational)	$T = 2.35$ s: mean / max surge	$T = 2.65$ s: mean / max surge	peak line tension	slack lines: peak re-tension	verdict (max surge ≤ 1.0 m, both periods)
cluster	$\times 3.5$ (14.53 N/m)	1.18 / 1.30 m	0.87 / 1.02 m	20.02 N	0.07 N	fails
cluster	$\times 4$ (16.60 N/m)	1.04 / 1.17 m	0.77 / 0.92 m	20.80 N	0.08 N	fails
cluster	$\times 4.5$ (18.68 N/m)	0.93 / 1.07 m	0.69 / 0.84 m	21.48 N	0.09 N	fails (mean alone passes)
cluster	$\times 5$ (20.75 N/m)	0.83 / 0.98 m	0.62 / 0.78 m	22.12 N	0.09 N	CHOSEN
cluster	$\times 5.5$ (22.83 N/m)	0.76 / 0.91 m	0.57 / 0.73 m	22.76 N	0.10 N	pass
cluster	$\times 6$ (24.90 N/m)	0.69 / 0.85 m	0.53 / 0.68 m	23.44 N	0.12 N	pass
cluster	$\times 5$ FINAL (at-rest-matched T_0)	0.82 / 0.97 m	0.61 / 0.77 m	22.12 N	0.10 N	PASS: the spec
platform	$\times 4$ (33.42 N/m)	1.10 / 1.22 m	0.86 / 1.01 m	38.38 N	0.05 N	fails
platform	$\times 5$ (41.78 N/m)	0.90 / 1.02 m	0.71 / 0.87 m	40.41 N	0.06 N	fails (mean alone passes)
platform	$\times 5.5$ (45.96 N/m)	0.82 / 0.95 m	0.65 / 0.82 m	41.97 N	0.06 N	CHOSEN
platform	$\times 6$ (50.13 N/m)	0.76 / 0.90 m	0.61 / 0.78 m	43.83 N	0.07 N	pass
platform	$\times 6.5$ (54.31 N/m)	0.71 / 0.85 m	0.57 / 0.74 m	45.71 N	0.07 N	pass
platform	$\times 5.5$ FINAL (at-rest-matched T_0)	0.81 / 0.94 m	0.64 / 0.81 m	42.02 N	0.06 N	PASS: the spec

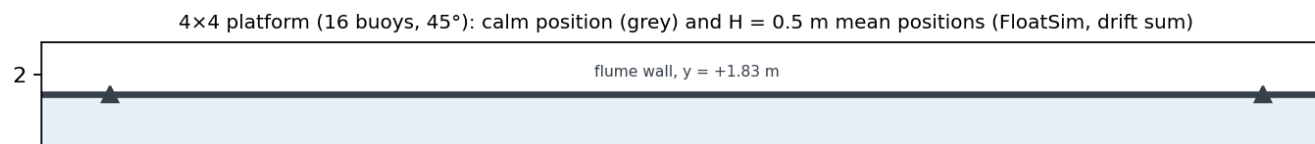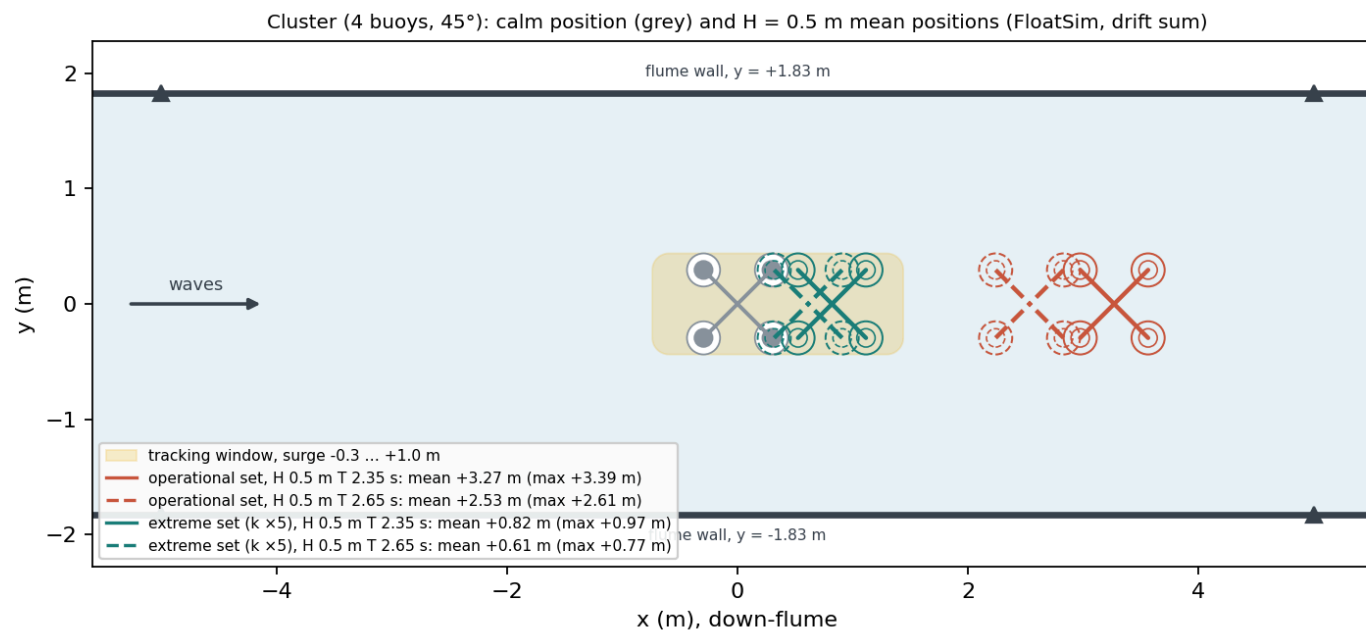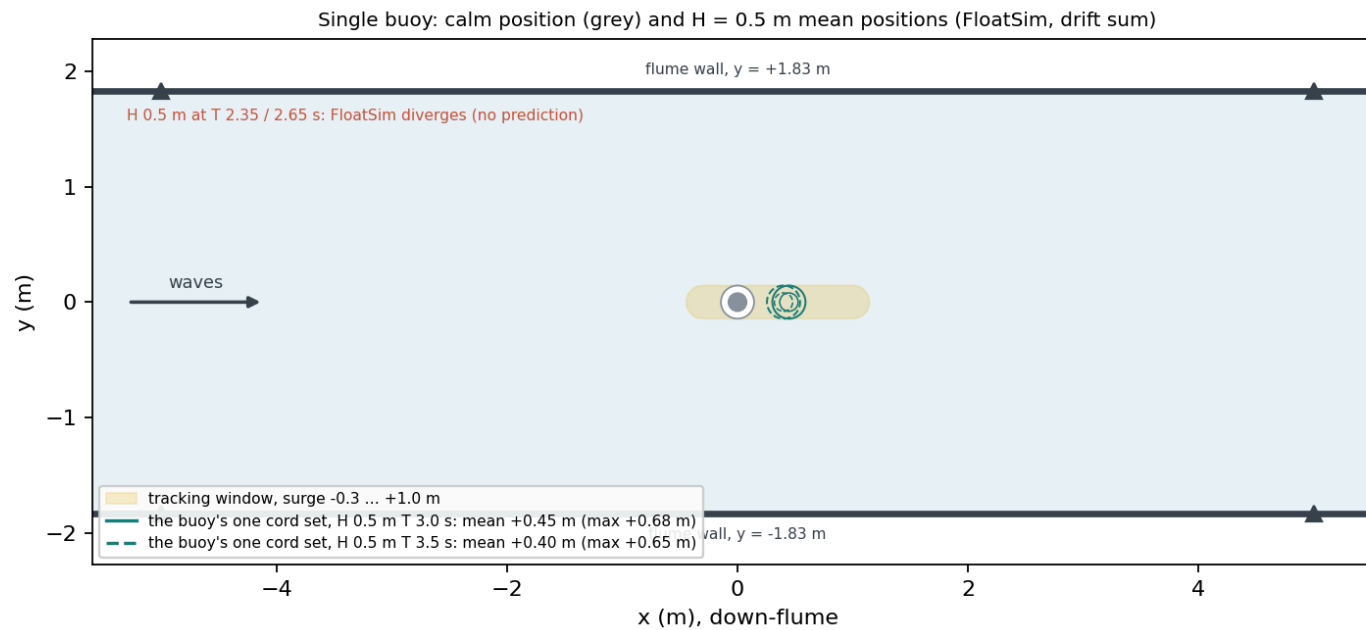

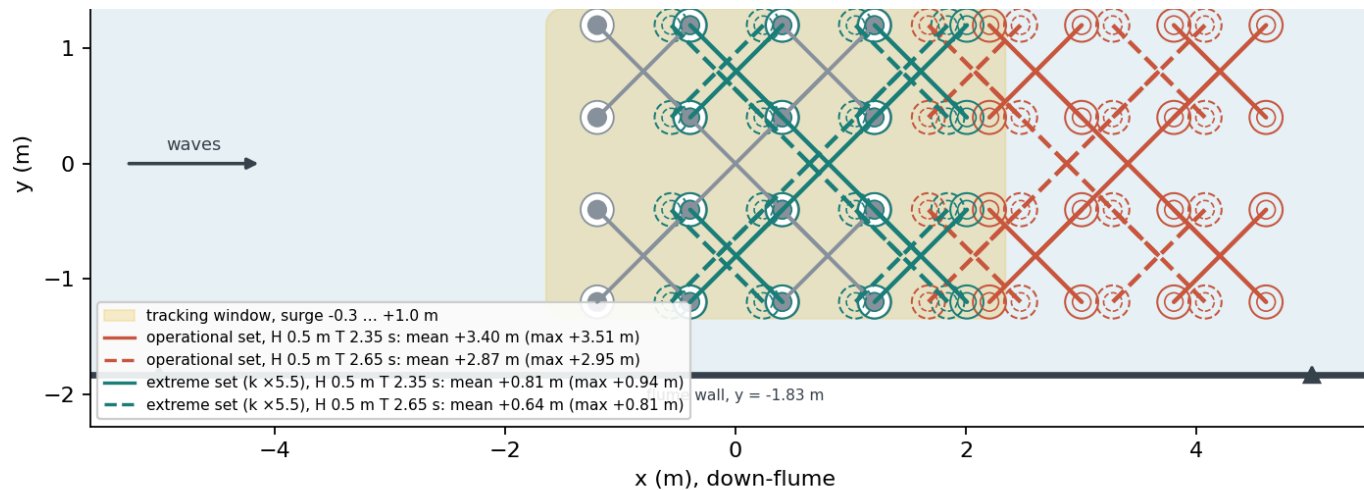

$H = 0.5$ m mean positions of both cord sets against the tracking window (FloatSim, drift sum)

- **Declared, not criteria:** these tests measure loads and survival, and the tank and the model see the same mooring. The extreme set's modal periods against the unmoored article: cluster tilt -3.77 %, heave -0.09 %, surge 10.4 s, platform tilt -4.34 %, heave -0.05 %, surge 9.8 s.
- **Criterion 2 (surge ≥ 14 s): ACCEPTED as DECLARED** for this set (Xabier, 2026-09-25), on the same basis as the tilt shift.
- The criterion limits how much the mooring changes the wave-driven response. For the extreme set that change is declared, not a criterion: these tests measure loads and survival, and the tank and FloatSim see the same mooring.
- Recorded: surge periods cluster 10.5 s / platform 9.9 s. The wave-frequency surge is amplified by $1/(1 - (T/T_{\text{surge}})^2)$: cluster +13 % (T_{surge} 10.5 s) / platform +14 % (T_{surge} 9.9 s) at $T = 3.5$ s. The regular-wave matrix has no difference-frequency forcing.
- The reason: criteria 2 and 4 cannot both hold at $H = 0.5$ m (≥ 14 s caps the stiffness at about $\times 2.8$ (cluster) / $\times 2.7$ (platform), which leaves ≥ 1.5 m of offset, extrapolated from the k scans).
- **Criterion 4, the tracking window, governs for this set.**
- **Pretension: the same AT-REST tension, not the same nominal T_0 .**
- The code's nominal T_0 is the tension at the design (untilted) chord. The calm 1° tilt moves each attachment $\delta \approx 14$ mm towards its anchor, so the at-rest tension is $T_0 - k \cdot \delta$, and a stiffer cord loses more.
- The extreme set is therefore tensioned to the operational set's at-rest tension. Its line forces at the calm geometry are then identical, so **the operational settle is its calm equilibrium: the same $1.00^\circ / 1.00^\circ$ calm tilt, no new settle.** FloatSim's joint-projected static residual at the operational settle: cluster 0.0077 N with the operational lines, 0.0073 N with the extreme lines (nominal T_0 instead: 0.13 N); platform 0.0088 N with the operational lines, 0.0087 N with the extreme lines (nominal T_0 instead: 0.29 N) (extreme_set_residuals.json).
- Its L_0 and nominal T_0 in the tables implement this.
- **Raising T_0** (optional): Not run, because there is nothing to cut. In the final runs the down-flume lines go slack and **stay slack through the wave train** (their peak is their hanging weight). Their pre-stretch is far below the mean offset, and it stays so even at the 3° calm-tilt cap ($T_0 \approx 3 \times$ the at-rest tension: pre-stretch cluster 208 mm against a mean offset ≥ 0.61 m; platform 94 mm against a mean offset ≥ 0.64 m). Raising T_0 would only add to the up-flume peak.

4. Hardware

- **Elastic cord, usable submerged: two sets for the cluster and platform, one for the buoy.**
- It must hold its secant stiffness over the working stretch (at-rest to peak):
- the operational set within $-13 / +30$ % of the target;
- the extreme set **at or above** its target, up to $+30$ %: softer moves the $H = 0.5$ m cases out of the tracking window.
- Required elongation capacity: the tables ($\times 1.25$ on the FloatSim peak stretch). If the cord is shorter than L_0 (a stiff lead in series), its strain rises in proportion.
- Hysteresis is not modelled. It damps the slow modes and shifts the mean position by half the loading/unloading gap, which the pull test measures.
- **Cord creep / relaxation (rev C.1): an ASSUMPTION to confirm against the purchased cord's datasheet.**
- Wet natural rubber: ~ 4 % of the stretch per decade of time in tension (dry $\sim 2.4\text{--}4$ %). Sources: A. N. Gent (ed.), *Engineering with Rubber*, ch. 7 "Creep, stress relaxation and set"; "Long-time creep in a pure-gum rubber vulcanizate: influence of humidity and atmospheric oxygen", PMC6728486.
- At the nearly fixed calm geometry this is a relaxation of the at-rest tension: ~ 87 % of it is left one day after tensioning ($1 \text{ min} \rightarrow 1 \text{ day} = 3.2 \text{ decades}$).
- The same allowance is applied to the pull stiffness, assuming the modulus relaxes like the tension.
- If the datasheet gives another rate, scale the §5 creep table (tension left = $1 - \text{rate} \times \log_{10}(\text{minutes since tensioning})$).
- **Pulley and counterweight (constant tension): rejected** (rev A §3). All its restoring is geometric, so it is far too soft in surge.
- **Buoy collar: a SLENDER spreader.** The collar is under water, an appendage the model does not include:
- It has 4 arms of $r = 0.2$ m, 0.8 m in total. The added-mass budget is **0.4 kg**, so a round section is at most **25 mm** in diameter (added mass $\approx \pi r^2 D^2 / 4$ per metre in heave).
- A 10 mm rod adds 0.06 kg and carries the peak line tension (3.54 N at the arm tip) at ≈ 7 MPa of bending stress at the root, fine in aluminium or steel. A tensioned wire spreader is also acceptable.
- **A disk is NOT acceptable:** a solid disk of $r = 0.2$ m would add ≈ 21 kg of heave added mass (the heave plate's own is ≈ 7.9 kg).

5. Installation checks (each cord set, installed, before any waves)

- **Calm static tilt: the pretension check.**
- On the cluster and platform the calm tilt IS the pretension gauge: FloatSim gives 1.00° / 1.00° (operational) and 1.00° / 1.00° (extreme) at the design T0 (cluster / platform).
- It is linear in the at-rest tension: $\approx 0.70^\circ/\text{N}$ / $0.70^\circ/\text{N}$.
- The extreme set's pre-stretch is only 69 mm / 31 mm, so a length error of a few mm is a large T0 error. **Set the extreme set's T0 by tension or by the calm tilt, not by length.**
- The buoy's collar balances the pretension (calm tilt 0): measure its line tension directly.
- **Creep allowance and the daily re-check (rev C.1).**
- The at-rest tension, the calm tilt and the pull stiffness relax with time since tensioning (§4 assumption). **Compare every reading with the expected value for its time since tensioning:**

time since tensioning	tension left	calm tilt, cluster and platform (both sets)	at-rest tension: buoy / cluster / platform (per leg)	surge pull K, operational: cluster / platform	surge pull K, extreme: cluster / platform
1 min	100.0 %	1.00°	2.40 / 1.44 / 1.44 N	15.0 / 61.7 N/m	73.2 / 330.0 N/m
10 min	96.0 %	0.96°	2.30 / 1.38 / 1.38 N	14.4 / 59.2 N/m	70.2 / 316.8 N/m
1 h	92.9 %	0.93°	2.23 / 1.33 / 1.33 N	14.0 / 57.3 N/m	68.0 / 306.5 N/m
4 h	90.5 %	0.90°	2.17 / 1.30 / 1.30 N	13.6 / 55.8 N/m	66.2 / 298.6 N/m
8 h	89.3 %	0.89°	2.14 / 1.28 / 1.28 N	13.4 / 55.1 N/m	65.3 / 294.6 N/m
24 h	87.4 %	0.87°	2.10 / 1.25 / 1.25 N	13.1 / 53.9 N/m	63.9 / 288.3 N/m

- **Daily re-check, before the first run of each day**, and whenever a set is re-installed:
- read the calm tilt (cluster, platform) or the line tension (buoy);
- **re-tension to the installation value (1.00°, or the tabled at-rest tension) if the reading is below the threshold below;**
- a reading more than 0.05° (or 5 % of the tension) BELOW the creep table for its time since tensioning means slip or damage, not creep: inspect the cord and fittings.

article	cord set	re-tension below: calm tilt / at-rest tension (per line/leg)	basis	reached, at the assumed creep, after
cluster	operational	0.52° / 0.74 N	operational no-slack margin ($T_{\min} \geq 0.15 T_{\text{rest}}$ at $H = 0.12$ m near the tilt resonance)	never (> 1 year)
cluster	extreme	0.72° / 1.03 N	tracking window at $H = 0.5$ m (max surge 0.968 m + 80 mm per N of lost tension, FloatSim)	never (> 1 year)
platform	operational	0.96° / 1.38 N	operational no-slack margin ($T_{\min} \geq 0.15 T_{\text{rest}}$ at $H = 0.12$ m near the tilt resonance)	~8 min
platform	extreme	none / none (the window margin exceeds the whole tension)	tracking window at $H = 0.5$ m (max surge 0.940 m + 27 mm per N of lost tension, FloatSim)	never (> 1 year)
buoy	one set	— / 2.23 N	yaw period ≤ 1.157 s, 15 % clear of the $T_p/2$ parametric zone (1.36 s); yaw 1.12 s at 2.40 N, $\propto 1/\sqrt{T_0}$	~54 min

- ⚠ **The platform's operational set** keeps its design margin only for ~8 min after tensioning. Its lines stay taut much longer (down to 0.82°, ~24 days); only the $\geq 0.15 T_{\text{rest}}$ margin, thin in the $H = 0.12$ m cases near the tilt resonance, is at stake. **Re-tension it before the first run of each day AND immediately before its $H = 0.12$ m cases near the tilt resonance (2.7–3.1 s).**
- ⚠ **The buoy** crosses its yaw threshold ~54 min after tensioning. **Re-tension it before the first run of each day AND immediately before its extreme series.**
- **Pull-test acceptance band, with the creep allowance** (both cord sets; the low edge moves with the tension left, the high edge stays):

article	cord set	surge pull K target	acceptance at 1 min / 1 h / 1 day after tensioning (low edge × tension left; high edge +30 %)
cluster	operational	15.0 N/m	13.1–19.6 / 12.2–19.6 / 11.4–19.6 N/m
cluster	extreme	73.2 N/m	73.2–95.1 / 68.0–95.1 / 63.9–95.1 N/m
platform	operational	61.7 N/m	53.7–80.2 / 49.9–80.2 / 46.9–80.2 N/m
platform	extreme	330.0 N/m	330.0–429.0 / 306.5–429.0 / 288.3–429.0 N/m

- The identification thresholds (below) are unaffected: the two sets differ about 5×, and a day's creep moves each by ~13 %.

- **Cord-set identification: a static pull, REQUIRED before every extreme series.**
- The two sets have the same at-rest tension and the same 1° calm tilt, so the calm tilt cannot tell which set is installed. The surge pull stiffness differs cluster 15.0 → 73.2 N/m (×4.9), platform 61.7 → 330.0 N/m (×5.3).
- Pull the article down-flume through its centre at the attachment depth, by 0.25–0.5 m, and read force against offset. **It is the extreme set only if the stiffness is above the threshold** (the geometric mean of the two sets' values):

article	cord set	surge pull stiffness K	pull force at 0.25 / 0.5 m	reads as the extreme set if K ≥
cluster	operational	15.0 N/m	3.7 / 6.4 N	33 N/m
cluster	extreme	73.2 N/m	12.0 / 21.6 N	33 N/m
platform	operational	61.7 N/m	12.9 / 21.0 N	143 N/m
platform	extreme	330.0 N/m	48.0 / 91.4 N	143 N/m

- **Getting it wrong:** extreme waves (H = 0.5 m) on the operational cords drift the cluster / platform **3.39 m (mean 3.27 m) / 3.51 m (mean 3.40 m)** (FloatSim, rev B runs), far past the +1.0 m tracking window. They also **overload the operational cords**: cluster peak tension 15.2 N against their working load 6.3 N, stretch 3.67 m against their elongation capacity 0.63 m; platform peak tension 29.5 N against their working load 8.6 N, stretch 3.53 m against their elongation capacity 0.43 m.
- **Static pull and decays:**
- the static pull is a horizontal pull through the article centre at the attachment depth, force against offset;
- the free decays start from ~0.3 m surge and ~0.1 m sway;
- both are compared with the FloatSim predictions below.
- The buoy's yaw decay is not predictable in FloatSim.

article	cord set	surge period	sway period	yaw period	surge pull K / F at 0.25, 0.5 m	sway pull K / F at 0.1 m	yaw pull K / M at 5°	calm static tilt (FloatSim settle)
buoy	one set	16.6 s	26.4 s	1.12 s	7.31 N/m / 1.83, 3.65 N	2.60 N/m / 0.260 N	2.00 N·m/rad / 0.174 N·m	0.00°
cluster	operational	23.1 s	51.6 s	24.78 s	15.05 N/m / 3.72, 6.36 N	2.64 N/m / 0.264 N	3.06 N·m/rad / 0.268 N·m	1.00°
cluster	extreme	10.5 s	28.2 s	18.75 s	73.17 N/m / 11.96, 21.61 N	8.83 N/m / 0.877 N	5.35 N·m/rad / 0.471 N·m	1.00°
platform	operational	22.9 s	60.8 s	32.72 s	61.71 N/m / 12.92, 21.02 N	7.71 N/m / 0.773 N	53.33 N·m/rad / 4.683 N·m	1.00°
platform	extreme	9.9 s	31.0 s	17.09 s	329.97 N/m / 48.00, 91.38 N	29.55 N/m / 2.719 N	195.52 N·m/rad / 13.908 N·m	1.00°

The surge and sway periods are the round-1 FloatSim decays scaled by $\sqrt{(K_{decay} / K)}$ (same effective mass).

6. Predicted envelope

Operational set, operational band (cluster and platform; FloatSim, the moored design, the drift sum):

article	case (drift sum)	min / max line tension	T_min / T0 (≥ 0.15)	mean offset (range)	max tilt	max yaw	validity
cluster	H 0.12 m, T 1.4 s	1.04 / 1.83 N	0.73 PASS	0.07 m (0.05–0.09)	2.5°	7.9e-04°	LEVEL1 valid
cluster	H 0.12 m, T 2.84 s	0.81 / 2.09 N	0.56 PASS	-0.00 m (-0.04–0.04)	17.6°	2.1e-02°	indicative (tilt > 5.7°)
platform	H 0.12 m, T 1.4 s	0.89 / 1.99 N	0.62 PASS	0.06 m (0.06–0.06)	1.7°	2.8e-03°	LEVEL1 valid
platform	H 0.12 m, T 2.9 s	0.26 / 2.88 N	0.18 PASS	0.01 m (-0.05–0.06)	17.3°	2.8e-02°	indicative (tilt > 5.7°)

Extreme set, H = 0.5 m (cluster and platform; FloatSim, the drift sum):

article	set	case (drift sum)	min / max line tension	slack lines: peak re-tension	mean offset (range)	max tilt	max yaw	line above the local surface	validity
cluster	extreme, k $\times 5$	H 0.5 m, T 2.35 s	0.06 / 22.12 N	stay slack (≤ 0.07 N, their hanging weight): no re-tension in the wave train	0.82 m (0.66–0.97)	21.6°	0.92°	breaks the surface by 0.18 m	indicative (tilt > 5.7°)
cluster	extreme, k $\times 5$	H 0.5 m, T 2.65 s	0.06 / 20.28 N	stay slack (≤ 0.10 N, their hanging weight): no re-tension in the wave train	0.61 m (0.45–0.77)	30.5°	0.81°	breaks the surface by 0.17 m	indicative (tilt > 5.7°)
platform	extreme, k $\times 5.5$	H 0.5 m, T 2.35 s	0.04 / 41.42 N	stay slack (≤ 0.05 N, their hanging weight): no re-tension in the wave train	0.81 m (0.67–0.94)	26.1°	2.21°	breaks the surface by 0.16 m	indicative (tilt > 5.7°)
platform	extreme, k $\times 5.5$	H 0.5 m, T 2.65 s	0.05 / 42.02 N	stay slack (≤ 0.06 N, their hanging weight): no re-tension in the wave train	0.64 m (0.47–0.81)	30.7°	1.85°	breaks the surface by 0.15 m	indicative (tilt > 5.7°)

Single buoy (one cord set; FloatSim, the drift sum, dt = 0.0025 s, 210 s).

- *stable*: yaw at round-off.
- *yaw grows*: the model grows yaw, still < 1° at the end of the run.
- *diverges*: no prediction.

H	T	FloatSim	max tilt	max yaw	T_min / T0	max tension	slack lines: peak re-tension	surge range
0.04 m	2.75 s	stable	9.4°	3.6e-11°	0.97	2.46 N	none	-0.04–0.04 m
0.12 m	2.45 s	stable	9.5°	2.9e-11°	0.94	2.55 N	none	-0.01–0.01 m
0.12 m	2.55 s	stable	12.7°	1.1e-09°	0.93	2.57 N	none	-0.01–0.02 m
0.12 m	2.65 s	stable	15.8°	1.5e-10°	0.93	2.57 N	none	-0.04–0.05 m
0.12 m	2.75 s	stable	16.8°	1.1e-09°	0.95	2.53 N	none	-0.07–0.07 m
0.2 m	2.35 s	stable	11.9°	4.3e-11°	0.88	2.69 N	none	0.02–0.07 m
0.2 m	2.65 s	yaw grows	20.9°	8.2e-05°	0.88	2.71 N	none	-0.01–0.10 m
0.2 m	2.75 s	yaw grows	22.0°	2.0e-03°	0.91	2.62 N	none	-0.07–0.11 m
0.2 m	3.5 s	stable	5.2°	1.2e-11°	0.93	2.57 N	none	-0.08–0.13 m
0.35 m	2.0 s	yaw grows	10.9°	2.2e-05°	0.53	3.54 N	none	0.40–0.52 m
0.35 m	2.35 s	yaw grows	18.0°	1.3e-05°	0.60	3.38 N	none	0.29–0.39 m
0.35 m	2.65 s	diverges: no prediction	—	—	—	—	—	—

0.35 m	3.0 s	yaw grows	23.4°	2.0e-06°	0.85	2.76 N	none	-0.08–0.30 m
0.35 m	3.5 s	stable	9.4°	4.7e-11°	0.80	2.88 N	none	-0.05–0.31 m
0.5 m	2.35 s	diverges: no prediction	—	—	—	—	—	—
0.5 m	2.65 s	diverges: no prediction	—	—	—	—	—	—
0.5 m	3.0 s	yaw grows	29.5°	2.5e-06°	0.56	3.50 N	none	0.22–0.68 m
0.5 m	3.5 s	stable	14.0°	4.8e-11°	0.55	3.49 N	none	0.15–0.65 m

- **Operational band ($H \leq 0.12$ m): no slack, for every article.**
- **Small-angle validity:** FloatSim here is LEVEL1 (valid to 0.1 rad = 5.7°).
- Every prediction near the tilt resonance, line loads included, is **indicative**.
- All the extremes are beyond it. LEVEL2 decides whether the buoy's divergence is physical.
- **Snap loads are not modelled.** FloatSim's line is quasi-static (no line inertia). The "peak re-tension" is the quasi-static tension when a slack line comes taut again. A real snatch can exceed it.
- **Yaw of the cluster and platform in the extremes.**
- It is forced by the 1e-5 asymmetry of the coupled radiation kernel (DESIGN-BASIS §C6).
- Only the peak was kept, so whether it is steady or growing is not established.
- Phase D's proposed flag is 0.5°.

7. Test procedure

Every test day, before the first run: the daily re-check (\$5, creep allowance), with re-tensioning below the thresholds. Also re-tension the platform's operational set before its $H = 0.12$ m near-resonance cases, and the buoy before its extreme series.

1. **Install the operational set.** Check each line's T0 through the calm tilt (cluster and platform) or the tension (buoy). Then run the static pull and the decays (\$5), reading each against the creep table for its time since tensioning.
2. **Response series ($H \leq 0.12$ m)** with the operational set.
3. **Swap the cords to the extreme set** at the same anchors, attachment points and at-rest tension. Set it by tension or calm tilt (1°), then repeat the \$5 checks against the extreme-set rows.
4. **Before EVERY extreme series: the static pull (\$5), REQUIRED.** It must read above the identification threshold, which confirms the extreme cords are on. The calm tilt cannot tell the sets apart.
5. **Extreme series in increasing H** ($0.2 \rightarrow 0.35 \rightarrow 0.5$ m) at each period, with live offset monitoring. Stop a case if the down-flume offset approaches the tracking limit (e.g. 0.9 m of the +1.0 m) or a line nears its working load. Slack of the down-flume lines is allowed.
6. **The buoy's extremes LAST** (it has one cord set), with a height ramp ($0.2 \rightarrow 0.35 \rightarrow 0.5$ m). Watch yaw and roll, and **stop on any growth of yaw**. Three cases ($H = 0.35$ m at 2.65 s, $H = 0.5$ m at 2.35 and 2.65 s) have no reliable FloatSim prediction.
7. Heading 0 (waves along the flume axis) for every article. Skip cases with $H/\lambda > 0.08$, and $H = 0.5$ m below $T = 2.35$ s.

8. Follow-ups before the test

Item	What it could change
Cord creep / relaxation rate (rev C.1 assumes ~4 %/decade, wet natural rubber)	Confirm with the purchased cord's datasheet or a one-day hold test in water (tension against time). It sets the \$5 creep table and the re-tension times; the platform's operational margin and the buoy's yaw threshold are the sensitive items.
Return swing after the wave train	The down-flume lines stay slack during the train and re-tension when the drift stops and the article swings back. Energy bounds the swing to the mean offset, so their tension stays below the up-flume peak and the same working load covers it. Not simulated.
Drift mechanism	The sum used today adds FloatSim's own mean force to the recorded fixed-body splash-zone bound. A moving-body splash-zone model could lower the offsets and tensions, and so the extreme set's stiffness.
BEM regeneration at NT = 36 (flume databases' 12-sided waterline; ~1.7 h platform BEM)	All heave/tilt resonances ~0.04–0.08 s shorter. The $\zeta/3$ comparison holds (it is relative to the unmoored article).
Full Phase D , both cord sets	The criteria across the whole matrix. The extreme set is verified here only at $H = 0.5$ m, $T = 2.35$ and 2.65 s.
LEVEL2 rerun of the resonant subset	Resonant tilts, line loads and offsets, all indicative today. It also decides the buoy's divergence.
Buoy yaw fix (a pitch-neutral collar, e.g. a cross-flume bar)	Could restore the buoy's $H \geq 0.35$ m extremes near resonance without the tilt shift.
Snatch loads of the extreme set	FloatSim's quasi-static line gives the re-tension tension only. A dynamic line model, or a pull test with a load cell, bounds the snatch.
HWRL confirmations F1–F7	Any of them can force a redesign.