

KW-50 KW-77

Whipped Topping Dispensers





These units will cut your whipped topping costs by up to 40%. The KW-50 produces up to 30 gallons of finished product per hour and the KW-77 produces up to 40 gallons per hour. Either unit is compact, self-contained, and ready to work – all you have to do is place it on your counter and plug it in. Product is refrigerated until dispensed.

Features Include:

- Works with heavy cream and many vegetable-based products
- Flavor flexible use vanilla, chocolate, rum, etc., sweetener or color
- Finished product holds peak for a minimum of 24 hours under refrigeration
- Portable, self-contained; requires NO GAS PROPELLANT or plumbing hook-ups
- Mix tank has continuous refrigeration, dispensing nozzle is chilled
- Easy to clean, can be sanitized in minutes
- Push button operation
- Yields up to 5 to 1
- Available foot switch allows hands-free operation




800-648-4389 • 336-661-9893 • Fax: 336-661-9895 • P.O. Box 4069 • Winston-Salem, NC 27115 www.carpigiani-usa.com • info@carpigiani-usa.com



Carpigiani is also the world's leading provider of hands-on frozen dessert instruction.

Find out more at www.frozendessertuniversity.com

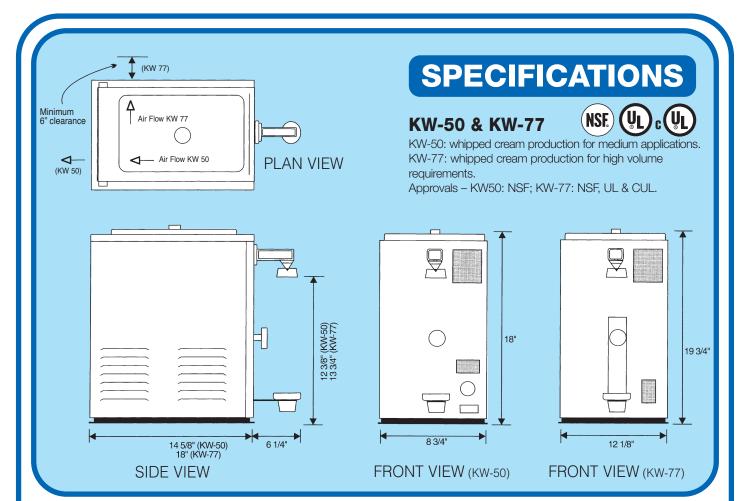

Model KW-50 & KW-77 Description:

Up to 400%
Pressure Injected
Gear
R-134A
Air
Counter Model
Stainless Steel

KM EO.

KW-50:	
Mix Tank Capacity	2 Qts
Mix Tank Refrigeration Control	Thermostat
Pump Motor	0.33 H.P.
Compressor Motor	0.07 H.P.
Frame Construction	Steel Base
Width	8.7 inches (221 mm)
Depth	15 inches (382 mm)
Height	18 inches (459 mm)
Net Weight	64 lbs (29 kgs)
Gross Weight	85 lbs (39 kas)

Carpigiani-USA manufactures a complete line of frozen dessert production equipment: Batch Freezers, Soft Serve Freezers, Yogurt Freezers, Slush Freezers, Milk Shake Machines, Granita Machines, Whipped Topping Dispensers, Frozen Custard Freezers, Specialty and Mix Processing Equipment, Display Cabinets...

Something for everyone!

KW-77:

Mix Tank Capacity	6 Qts
Mix Tank Refrigeration Control _	Electronic
Pump Motor	0.5 H.P.
Compressor Motor	0.09 H.P.
Frame Construction	Welded Steel
Portion Control	Adjustable Electronic
Width	12.75 inches (325 mm)
Depth	18 inches (458 mm)
Height	19.75 inches (502 mm)
Net Weight	119 lbs (54 kgs)

Electrical Requirements (KW-50 & KW-77)

Single Phase,	60 Hz		120 V
Max Breaker /	Fuse size		15 Amps
Electric Cord L	_ength		8 ft

Optional Accessories

Foot Pedal

Distributed by:

All technical data, pictures, and drawings contained in this document are not binding on the manufacturer, nor can the manufacturer be held liable for any modification of the machine, in part or in whole