



## Rotary Gas-Fired Oven Cupola Dome Basic FGR110CB



### STANDARD FEATURES

- Gas Cupola Basic Dome Oven with rotating cooking bedplate chamber.
- Constructed from high refractory premium grade alumina.
- Oven walls average 7" thickness with completely sealed wall enclosures.
- Double gas burner system in stainless steel.
- Internal dome burner and under bedplate gas burner system.
- Thermal insulation made of mineral fibre with high insulating properties; minimum 6" from top to bottom requiring 3" clearance to combustible materials.
- INTELTOUCH-MFI10 Touch Screen Electronic Control System.
- Independent intuitive digital safety controls.
- Programmable time, speed, temperature and flame control system.
- Optimized performance and large productivity.
- Emergency Stop push button.
- 220/60/1

### OPTION

Custom Colors RAL

ITEM:


PROJECT:

DATE:

Rotary Gas-Fired Oven  
Cupola Dome Basic  
FGR110CB



## Rotary Gas-Fired Oven Cupola Dome Basic FGR110CB

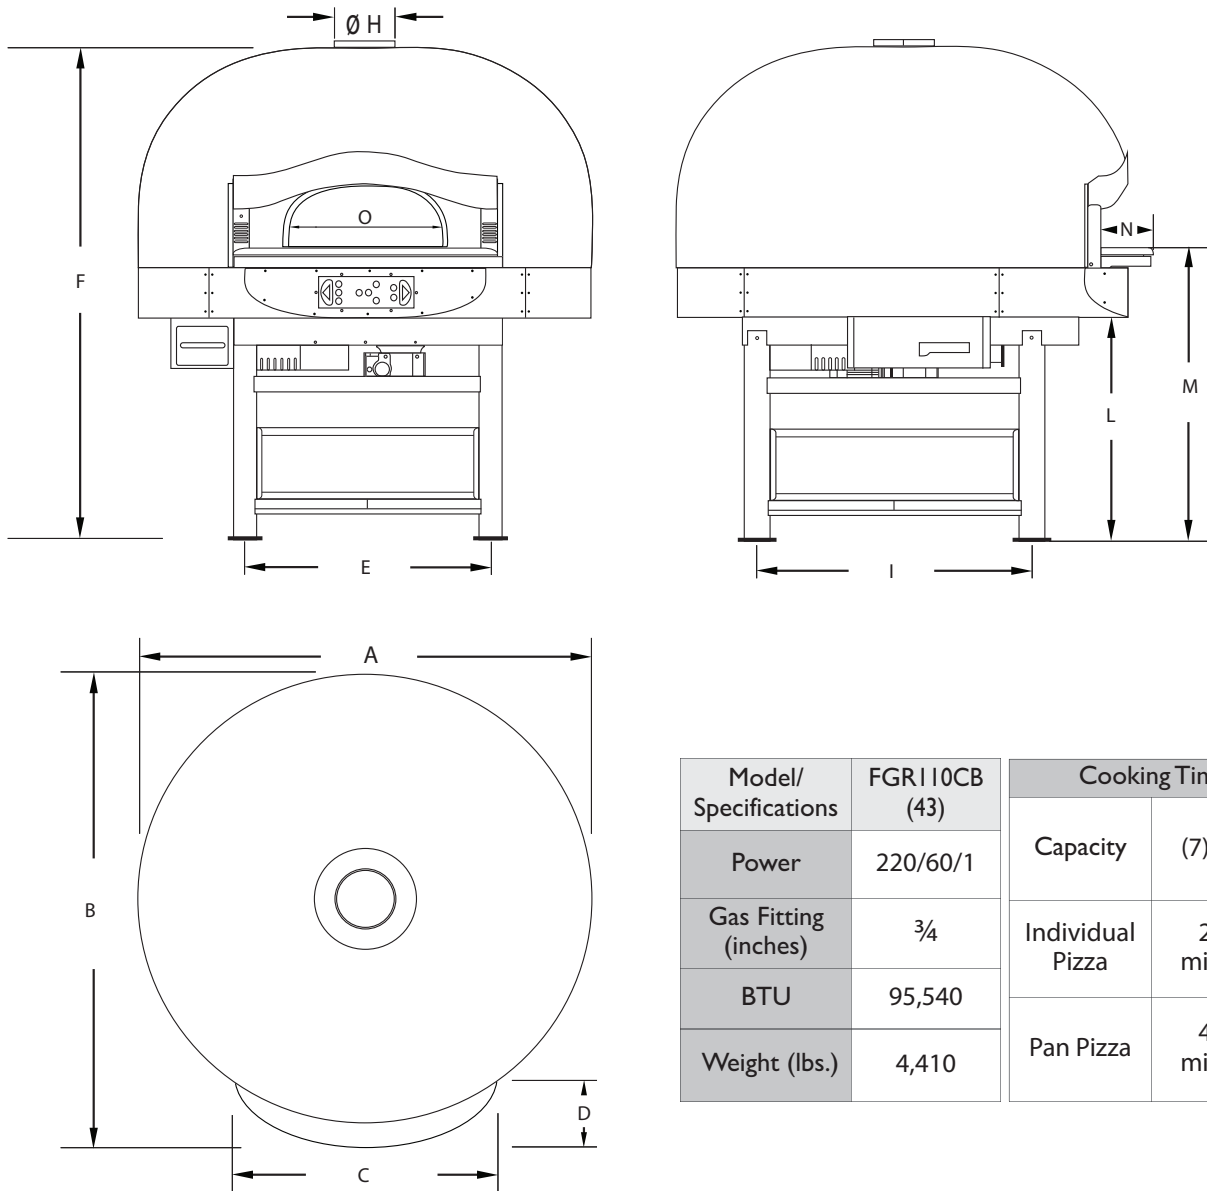

Model/ Specifications	FGR110CB (43)	Cooking Time	
Power	220/60/1	Capacity	(7) x 11"
Gas Fitting (inches)	3/4	Individual Pizza	2 ~ 3 minutes
BTU	95,540	Pan Pizza	4 ~ 6 minutes
Weight (lbs.)	4,410		

Model/ Dimension (inches)	A	B	C	D	E	F	ØH	I	L	M	N	O
FGR-110CB (43)	65.5	70	40.5	12	37	81	10	45.5	32.5	48	10	22



**Rosito Bisani Imports, Inc.**  
940 South La Brea Avenue, Los Angeles CA, 90036  
Tel: 323-937-1888 • Fax: 323-938-0728 • Toll Free: 1-800-848-4444  
E-mail: [sales@rosito-bisani.com](mailto:sales@rosito-bisani.com)

**[www.rosito-bisani.com](http://www.rosito-bisani.com)**

530 South Henderson Road, Suite F, King of Prussia PA, 19406  
Tel: 610-265-5950 • Fax: 888-576-8524

**GAS-FIRED**



*Rosito and Bisani Imports reserve the right to make changes in design specifications and/or to make additional improvements in its products without imposing any obligations upon itself to install them on products previously manufactured. © 2013.*