



309 S. Cloverdale Suite C-41
Seattle, WA. 98108
www.synesso.com
info@synesso.com
206.764.0600

HYDRA/CYNCR 1 GROUP INSTALLATION CHECKLIST



Quick Reference Specifications:

Dimensions: 21"(H) 18"(W) 23"(D)

Weight: 115 lbs (full)



Electrical Requirements: Volts: 208-240/Amps: 20

Plumbing Requirements: Flow: 30GPH (minimum) Pressure: 35psi (minimum) Hardness: 3 GPG (maximum) Fitting: 3/8" MPT w/shut-off

Drainage Requirements: Open gravity drain of 1.25" ID (min) within 4 feet of machine.

The following information will assist you in preparing your location for the installation of your equipment. Please make sure everything is prepared to these specifications *prior* to scheduling your installation. Once everything is complete, check the appropriate **boxes** and sign the bottom of the form.

COUNTER SPACE REQUIREMENTS:

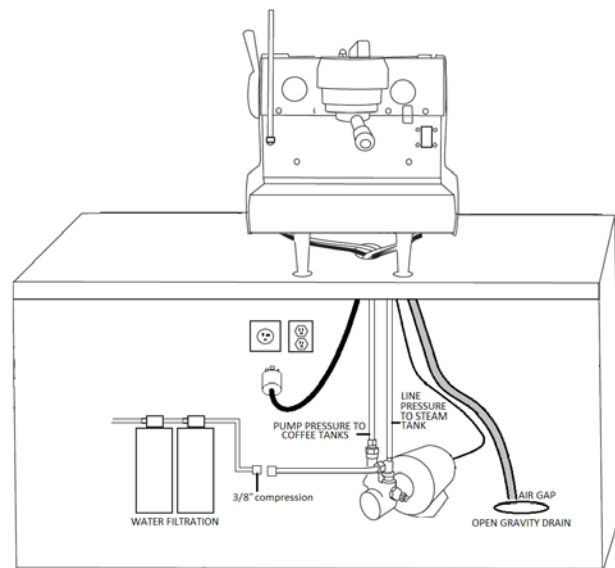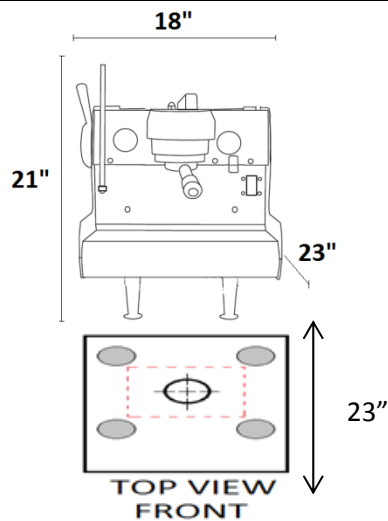

WATER SUPPLY REQUIREMENTS:



*Machine must be supplied with a minimum of 30 Gallons per hour @ 35 PSI.

*A 3/8" MPT is required for hook-up. A shut-off valve must be installed.

*If water hardness levels exceed 3 GPG (Grains per Gallon) a water softener **MUST** be installed.

Exceeding these levels will void the manufacturer's warranty. (Check appropriate box below)

- ☐ I have tested the water hardness and it is 3 GPG or less (see above).
- ☐ I already have a suitable water softener and its output is 3 GPG or less (see above).
- ☐ I have tested the water hardness level and it is written above. Please supply me with the appropriate water softener at time of installation.

ELECTRICAL REQUIREMENTS:

208-240V/20AMP/4000WATT

Dedicated 20 AMP Plug within 4 feet of installation location. **PLEASE NOTE:** The machine will not be supplied with a Cord Cap (Male plug).

DRAINAGE REQUIREMENTS:

Access to open gravity drain no smaller than 1.25" ID (Inner Diameter). Drain **MUST** be within 4 feet of the machine for proper drainage.