

# Rotating Hybrid Gas and Wood Fired Oven - ST FGRi130 Morello Forni




## STANDARD FEATURES


- Hybrid (wood/gas) oven with rotating cooking bedplate chamber.
- Constructed from high refractory premium grade alumina with heavy metal enclosure and stand.
- Oven walls average 7" thickness with completely sealed wall enclosures.
- Operates gas only, wood only, or combination wood and gas.
- Double gas burner system in stainless steel.
- Internal dome burner and under bedplate gas burner system.
- Thermal insulation made of mineral fibre with high insulating properties; minimum 6" from top to bottom requiring 3" clearance to combustible materials
- INTELTOUCH-MF10 Touch Screen Electronic Control System.
- Independent intuitive digital safety controls.
- Programmable time, speed, temperature and flame control system.
- Optimized performance and large productivity.
- Emergency push button to stop.
- 220/60/1

ITEM:		
PROJECT:		
DATE:		



## **Rotating Hybrid** Gas and Wood Fired Oven - ST FGRi130 Morello Forni

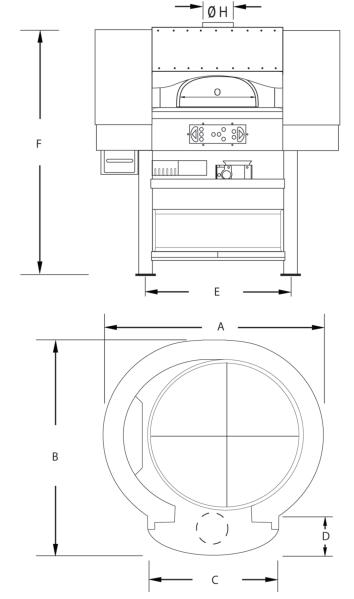



#### **FLUE CONNECTION**

**FLUE CONNECTION**All ovens are provided with an exhaust flue collar  $\ensuremath{\ensuremath{\mathcal{U}}}$ " or  $2\ensuremath{\ensuremath{\mathcal{U}}}$ " in height and 8" or 10" nominal diameter depending on model. The flue collar ( $\ensuremath{\ensuremath{\mathcal{U}}}$ ) is located on oven top to provide a secure connection to the chimney. The oven flue collar is designed to be connected to chimney listed to UL-103HT. When working on gas only ovens, the oven is suitable for connection to Type B Gas Vent when used with the draft hood. When burning wood, an independent Flue evacuation system is required.

### **ELECTRICAL CONNECTION**

Verify the power supply has the same rating as the oven.

These ovens require make-up air to replace combustion air and excess air taken out by the flue. Always check for adequate openings to allow required make-up air flow in. Check table included in operations manual.

Model/	FGR <i>i</i> 130	Cooking Time			
Specifications	(51)				
Power	220/60/1	Capacity	(10) x 11"		
Gas Fitting (inches)	3/4	Individual Pizza	2 ~ 3 minutes		
BTU	169,000	11224			
Weight (lbs.)	5,953	Pan Pizza	4 ~ 6 minutes		

Model/ Dimension (inches)	A	В	С	D	E	F	ØH	I	L	М	N	0
FGR <i>i</i> 130 (51)	83.5	83.5	48	12	45	76.5	10	49.5	32.5	48	10	29.5



#### Rosito Bisani Imports, Inc.

940 South La Brea Avenue, Los Angeles CA, 90036 Tel: 323-937-1888 • Fax: 323-938-0728 • Toll Free: 1-800-848-4444 E-mail: sales@rosito-bisani.com

### www.rosito-bisani.com

530 South Henderson Road, Suite F, King of Prussia PA, 19406 Tel: 610-265-5950 • Fax: 888-576-8524



