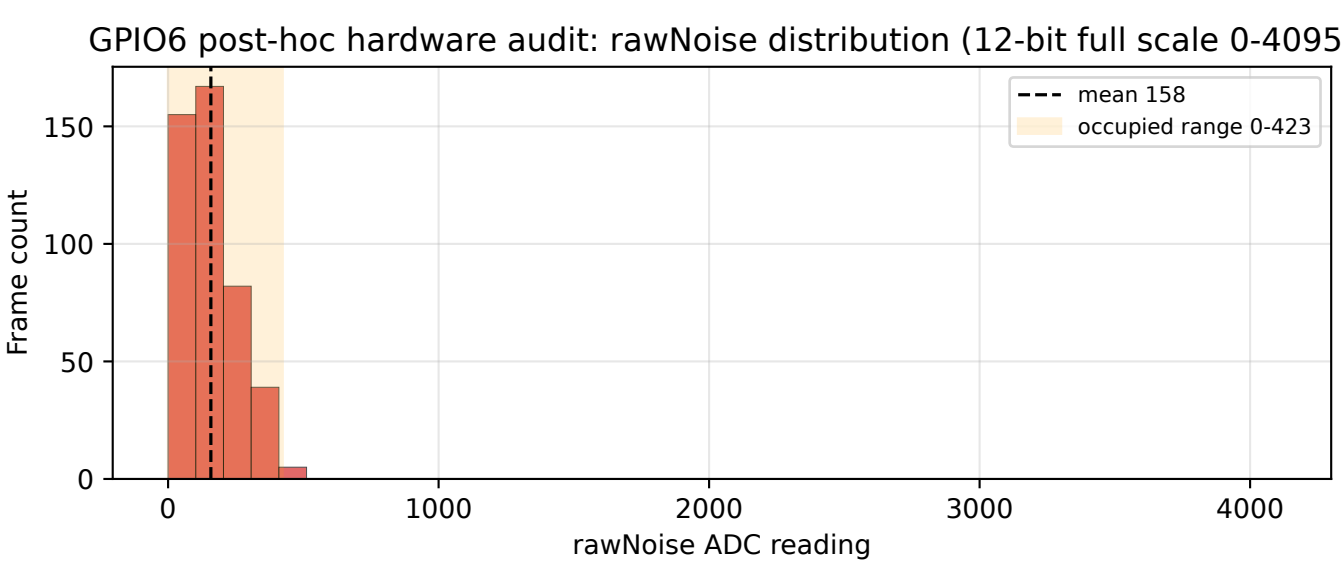
GPIO6 post-hoc hardware audit: rawNoise distribution (12-bit full scale 0-4095)
mean 158
occupied range 0-423
Frame count
0
50
100
150
0
1000
2000
3000
4000
rawNoise ADC reading