


# Logical Topology

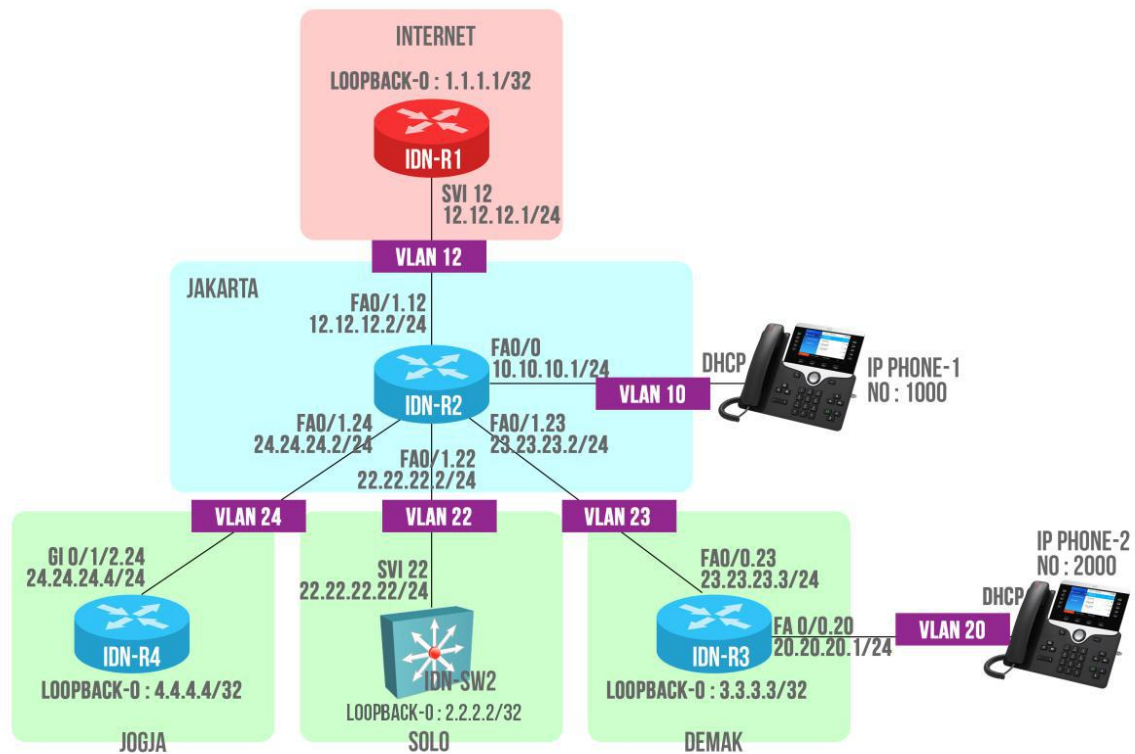

1. Make sure successfully ping to all IP loopback
  - A. 1.1.1.1
  - B. 2.2.2.2
  - C. 3.3.3.3
  - D. 4.4.4.4

from IDN-R2, IDN-R3, IDN-R4 & IDN-SW2
2. Make sure IP Phones successfully dial & receive calls each others
  - A. IP Phone 1000 to 2000
  - B. IP Phone 2000 to 1000
3. Do not change any OSPF Area
  - A. OSPF Area 0 : only in Interface Loopback IDN-R4 & IDN-R3
  - B. OSPF Area 10 : All Connected Interface in IDN-R2, IDN-R3, IDN-R4 & IDN-SW2
4. Do not change or add any new static route
5. No need to change any configuration in ISP Router IDN-R1