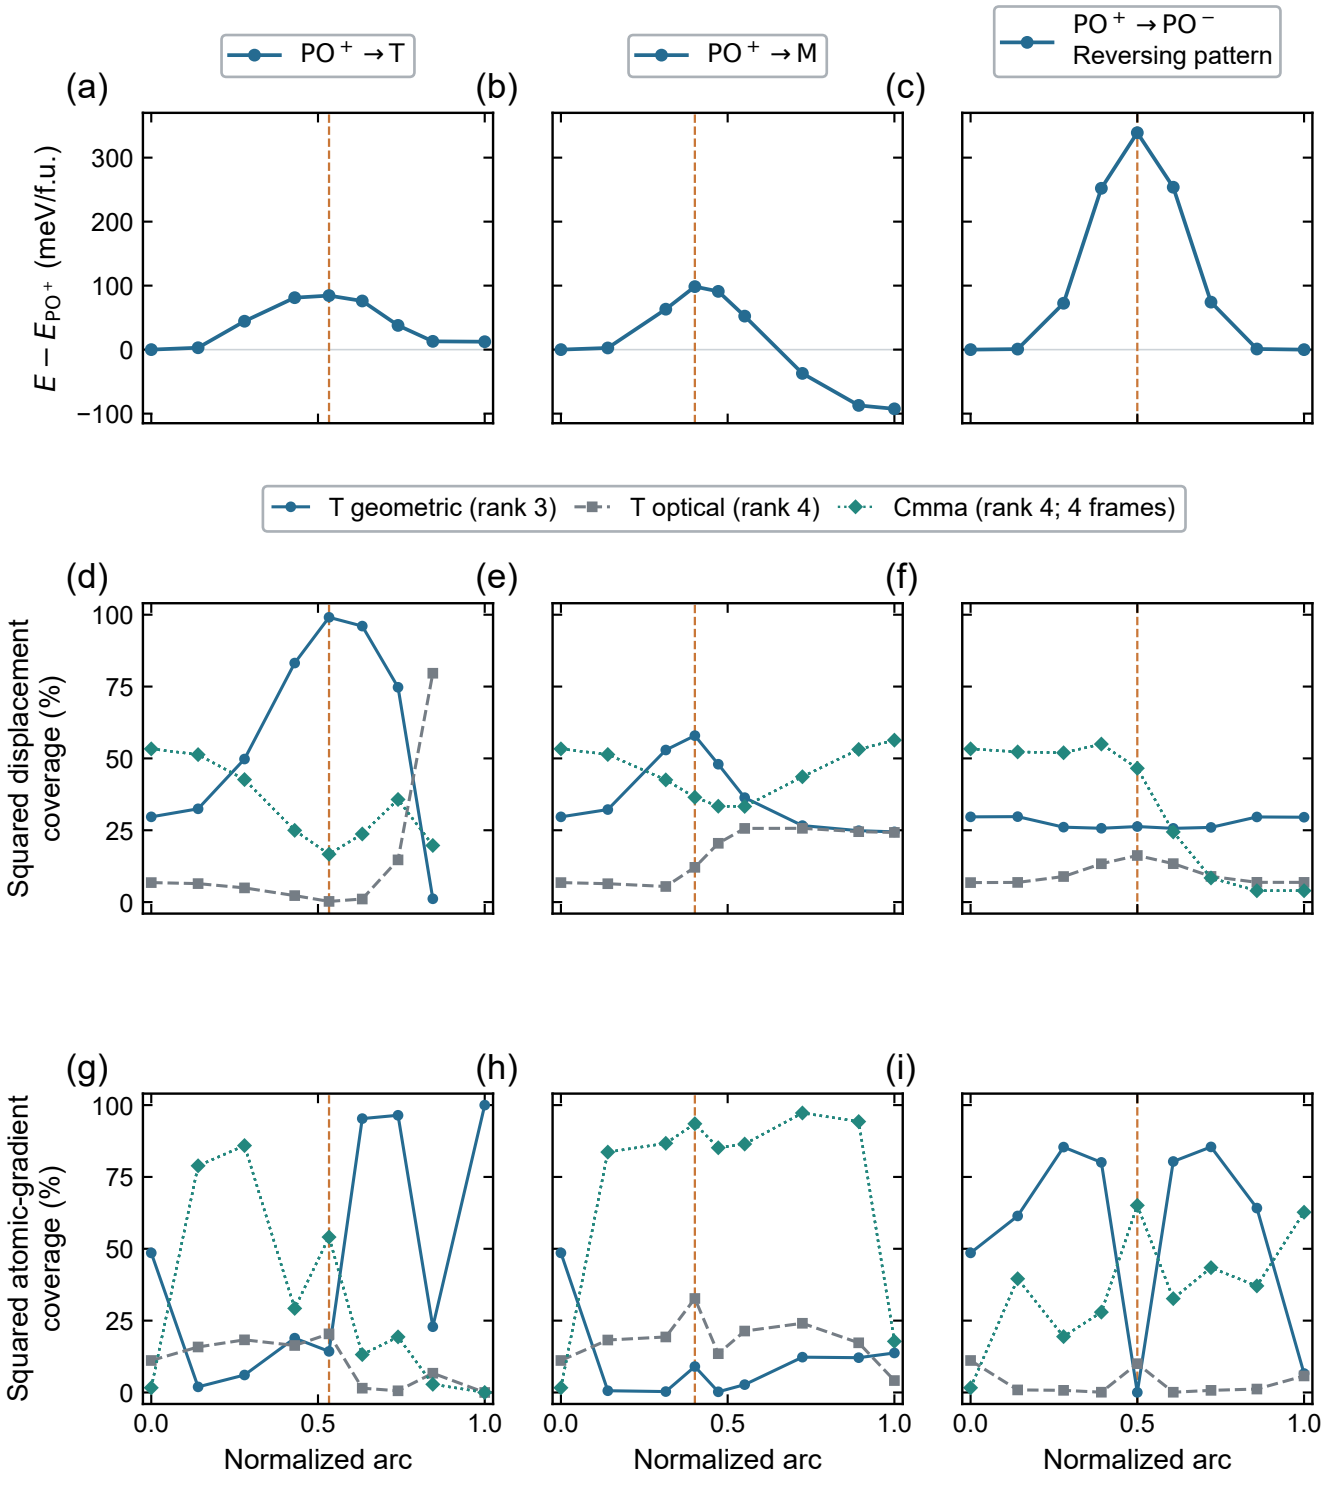
PO⁺ → T
PO⁺ → M
PO⁺ → PO⁻
Reversing pattern
(a)
(b)
(c)
$E - E_{PO^+}$ (meV/f.u.)
300
200
100
0
−100
T geometric (rank 3)
T optical (rank 4)
Cmma (rank 4; 4 frames)
(d)
(e)
(f)
Squared displacement coverage (%)
100
75
50
25
0
(g)
(h)
(i)
Squared atomic-gradient coverage (%)
0.0
0.5
1.0
Normalized arc