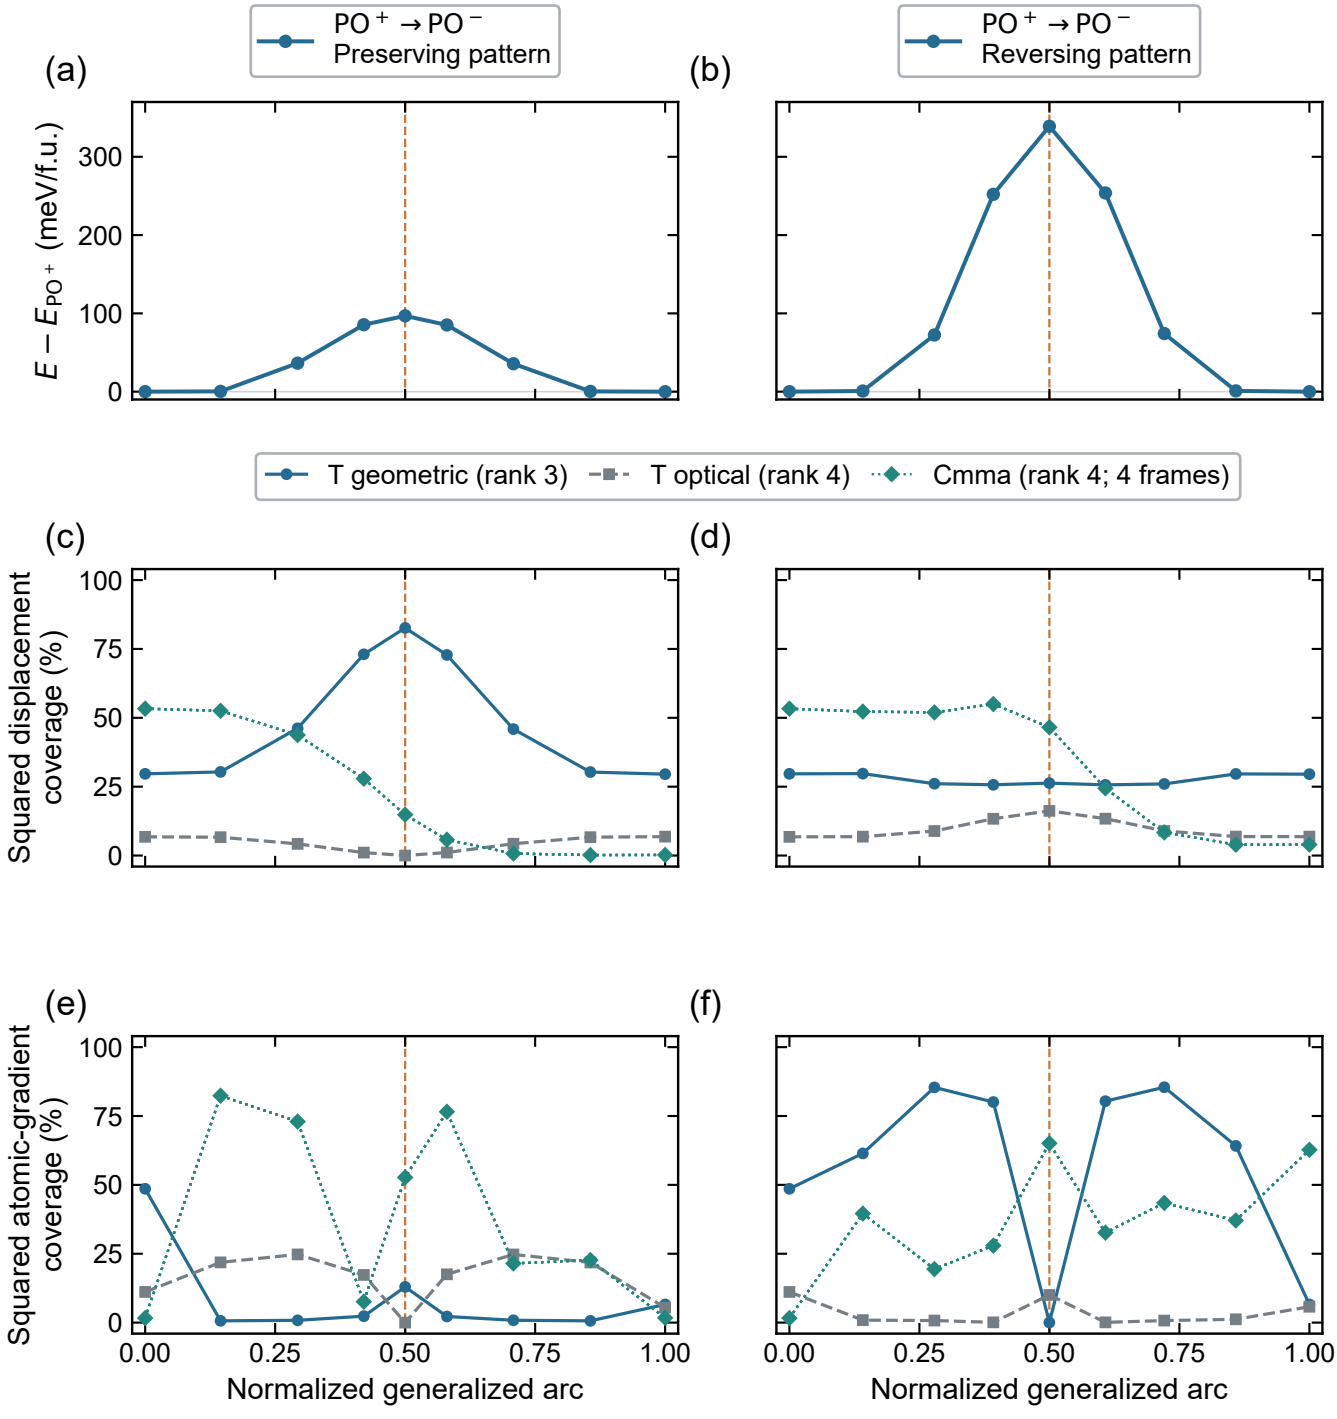
PO⁺ → PO⁻
Preserving pattern
PO⁺ → PO⁻
Reversing pattern
(a)
(b)
$E - E_{PO^+}$ (meV/f.u.)
300
200
100
0
T geometric (rank 3)
T optical (rank 4)
Cmma (rank 4; 4 frames)
(c)
(d)
Squared displacement coverage (%)
100
75
50
25
0
(e)
(f)
Squared atomic-gradient coverage (%)
0.00
0.25
0.50
0.75
1.00
Normalized generalized arc