

Geometric Transformation



What is a Transformation

★ Transformation:

- An operation that changes one configuration into another


★ For images, shapes, *etc.*

- A geometric transformation maps positions that define the object to other positions
- Linear transformation means the transformation is defined by a linear function... which is what matrices are good for.




What is a Transformation?


- ★ A function that maps points x to points x' :
Applications: animation, deformation, viewing,
projection, real-time shadows, ...

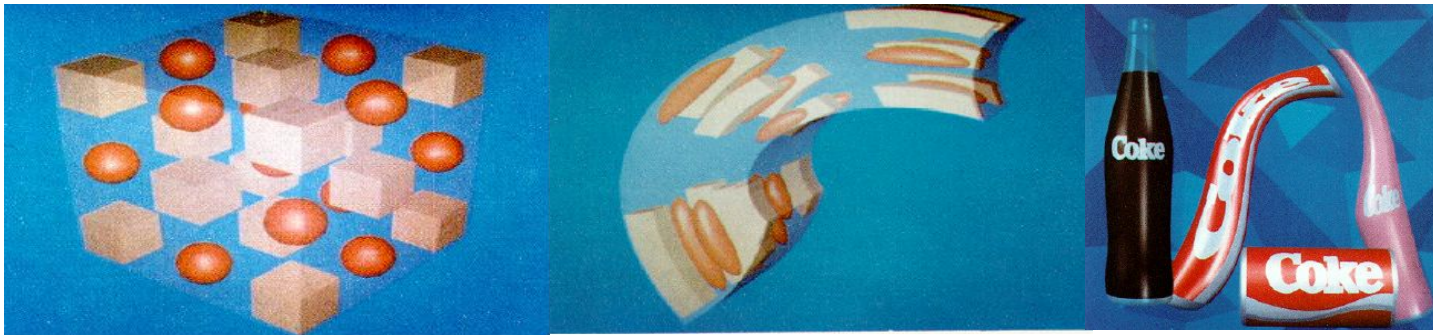


Examples of Transformation




Identity

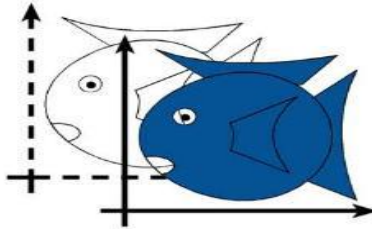


Translation




Rotation




Isotropic
(Uniform)
Scaling

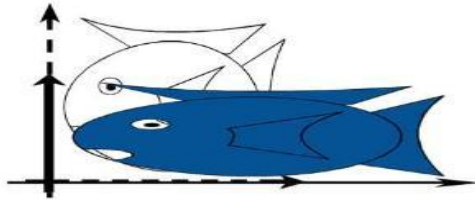

Scaling

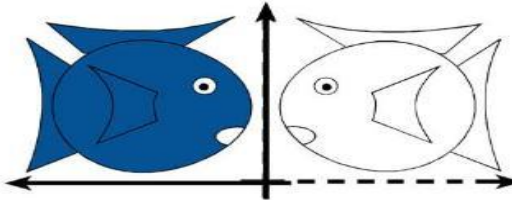


Reflection

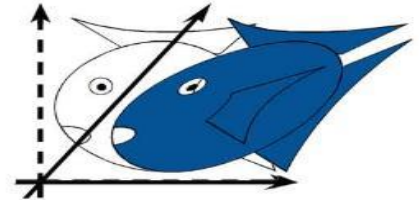


Shear


Simple Transformations




Identity



Translation



Rotation



Isotropic
(Uniform)
Scaling

- ★ Can be combined
- ★ Are these operations invertible?

Yes, except scale = 0


Rigid-Body / Euclidean Transforms

- ★ Preserves distances
- ★ Preserves angles

Rigid / Euclidean

Translation


Identity
Rotation

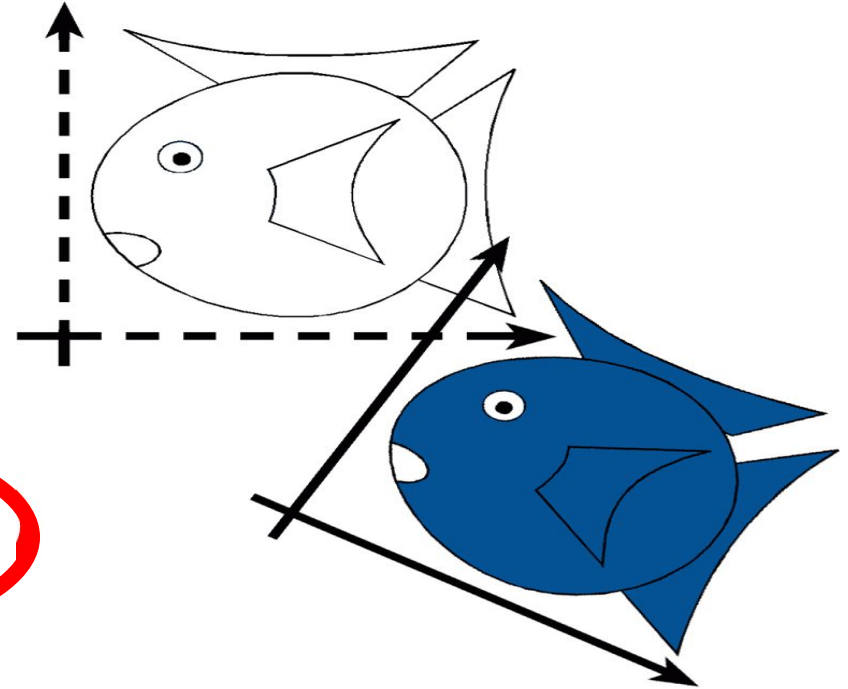

Similitudes / Similarity Transforms

★ Preserves angles

Similitudes



Rigid / Euclidean


Translation

Identity
Rotation


Isotropic
Scaling

Isotropic
(Uniform)
Scaling


Linear Transformations

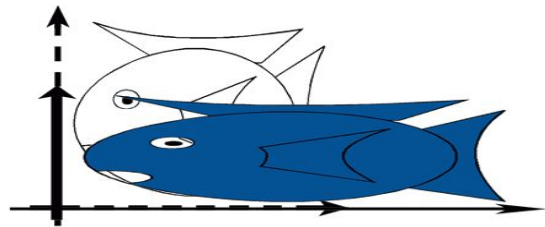

Scaling

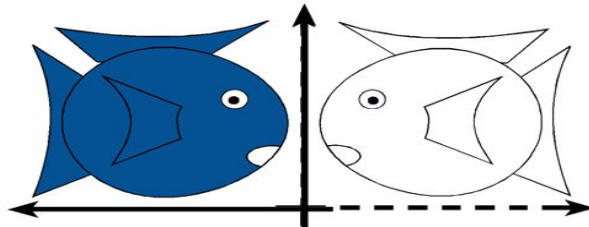


Reflection

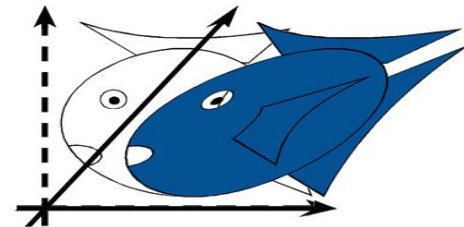

Shear


Similitudes

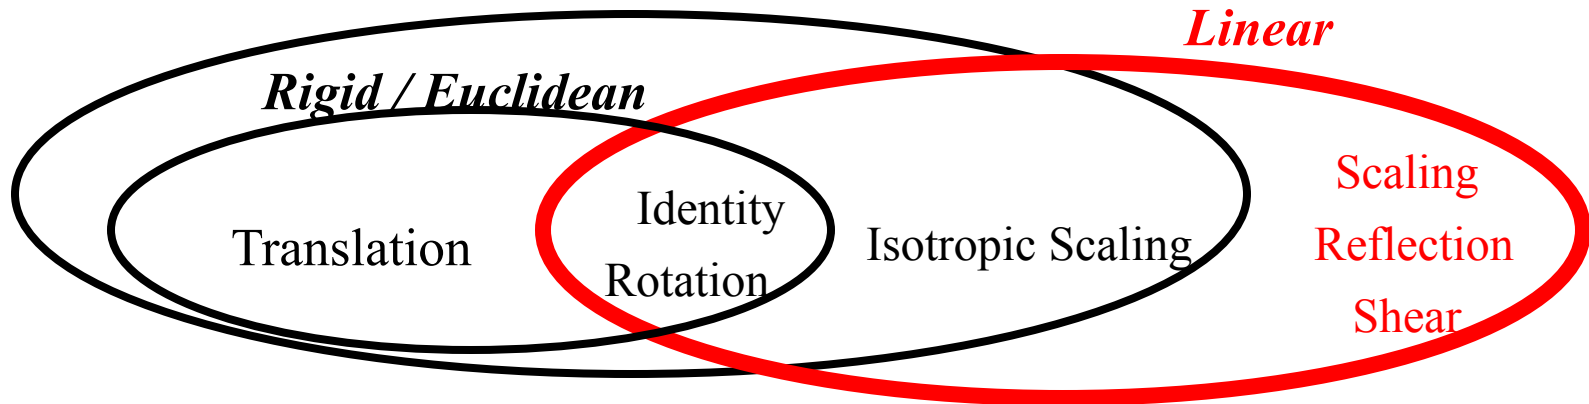

Linear Transformations

Additivity: $L(p + q) = L(p) + L(q)$

Homogeneity: $L(ap) = a L(p)$

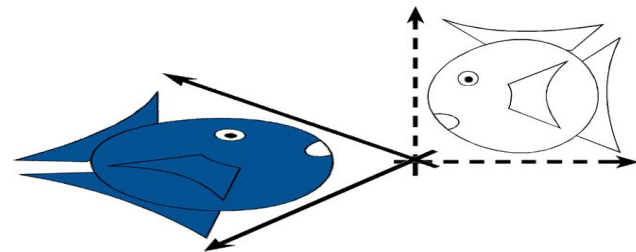

Similitudes

Linear

Rigid / Euclidean

Translat
ion

Identity
Rotation




Isotropic Scaling

Scaling
Reflection
Shear

Affine Transformations



- ★ preserves parallel lines

Affine

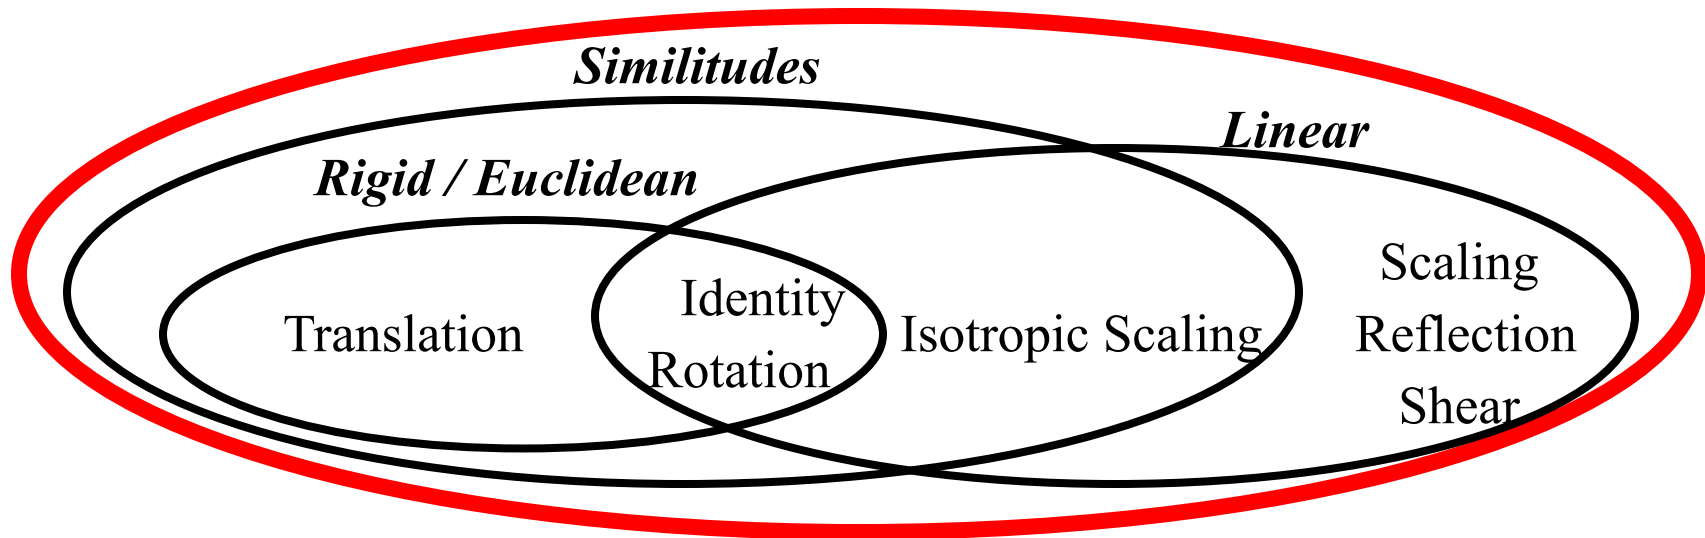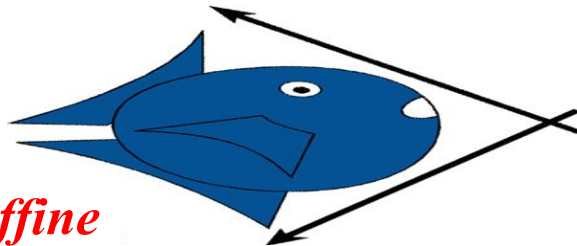

Projective Transformations

★ preserves lines

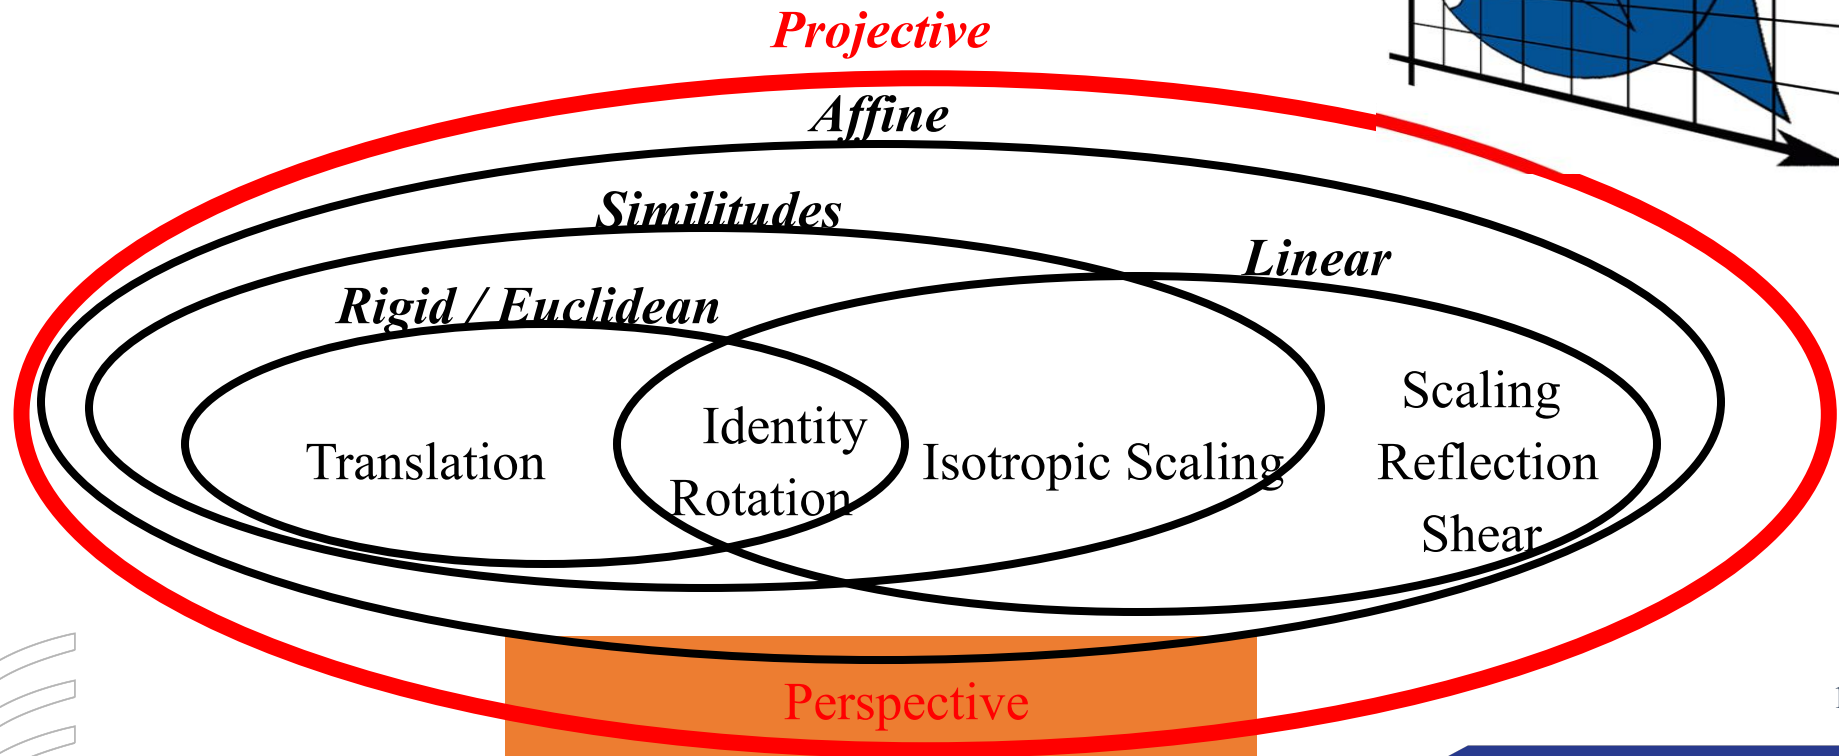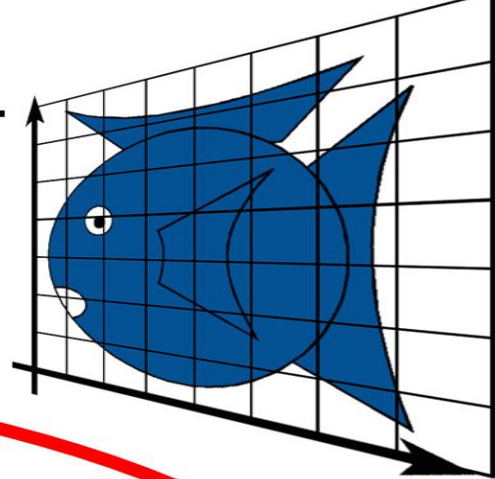

How are Transforms Represented?

$$x' = ax + by + c$$

$$y' = dx + ey + f$$

$$\begin{bmatrix} x' \\ y' \end{bmatrix} = \begin{bmatrix} a & b \\ d & e \end{bmatrix} \begin{bmatrix} x \\ y \end{bmatrix} + \begin{bmatrix} c \\ f \end{bmatrix}$$

$$p' = Mp + t$$

Translation in homogeneous coordinates

$$x' = ax + by + c$$

$$y' = dx + ey + f$$

Cartesian formulation

$$\begin{bmatrix} x' \\ y' \end{bmatrix} = \begin{bmatrix} a & b \\ d & e \end{bmatrix} \begin{bmatrix} x \\ y \end{bmatrix} + \begin{bmatrix} c \\ f \end{bmatrix}$$

$$p' = Mp + t$$

Homogeneous formulation

$$\begin{bmatrix} x' \\ y' \\ 1 \end{bmatrix} = \begin{bmatrix} a & b & c \\ d & e & f \\ 0 & 0 & 1 \end{bmatrix} \begin{bmatrix} x \\ y \\ 1 \end{bmatrix}$$

$$p' = Mp$$

Homogeneous Coordinates

- ★ Translation, scaling and rotation are expressed (non-homogeneously) as:
 - translation: $P' = P + T$
 - Scale: $P' = S \cdot P$
 - Rotate: $P' = R \cdot P$
- ★ Composition is difficult to express, since translation not expressed as a matrix multiplication
- ★ Homogeneous coordinates allow all three to be expressed homogeneously, using multiplication by 3×3 matrices
- ★ W is 1 for affine transformations in graphics

Homogeneous Coordinates

- ★ Add an extra dimension
 - in 2D, we use 3 x 3 matrices
 - In 3D, we use 4 x 4 matrices
- ★ Each point has an extra value, w

$$\begin{pmatrix} x' \\ y' \\ z' \\ w' \end{pmatrix} = \begin{pmatrix} a & b & c & d \\ e & f & g & h \\ i & j & k & l \\ m & n & o & p \end{pmatrix} \begin{pmatrix} x \\ y \\ z \\ w \end{pmatrix}$$

$$p' = \mathbf{M} p$$

Homogeneous Coordinates


- ★ Most of the time $w = 1$, and we can ignore it

$$\begin{pmatrix} x' \\ y' \\ z' \\ 1 \end{pmatrix} = \begin{pmatrix} a & b & c & d \\ e & f & g & h \\ i & j & k & l \\ 0 & 0 & 0 & 1 \end{pmatrix} \begin{pmatrix} x \\ y \\ z \\ 1 \end{pmatrix}$$

- ★ If we multiply a homogeneous coordinate by an *affine matrix*, w is unchanged


Homogeneous Coordinates

- ★ P_{2d} is a projection of P_h onto the $w = 1$ plane
- ★ So an infinite number of points correspond to : they constitute the whole line (tx, ty, tw)

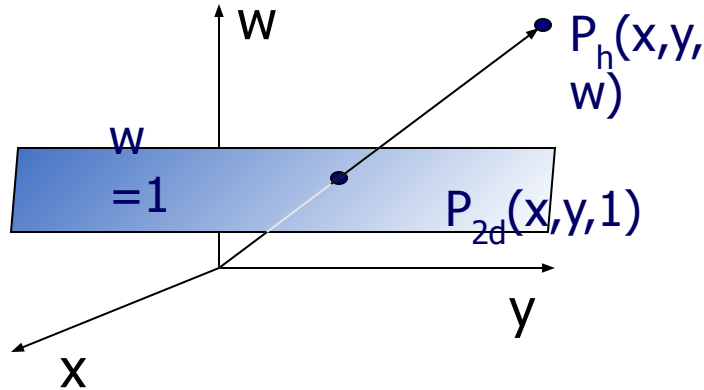

Homogeneous Visualization

- Divide by w to normalize (homogenize)
- $W = 0?$

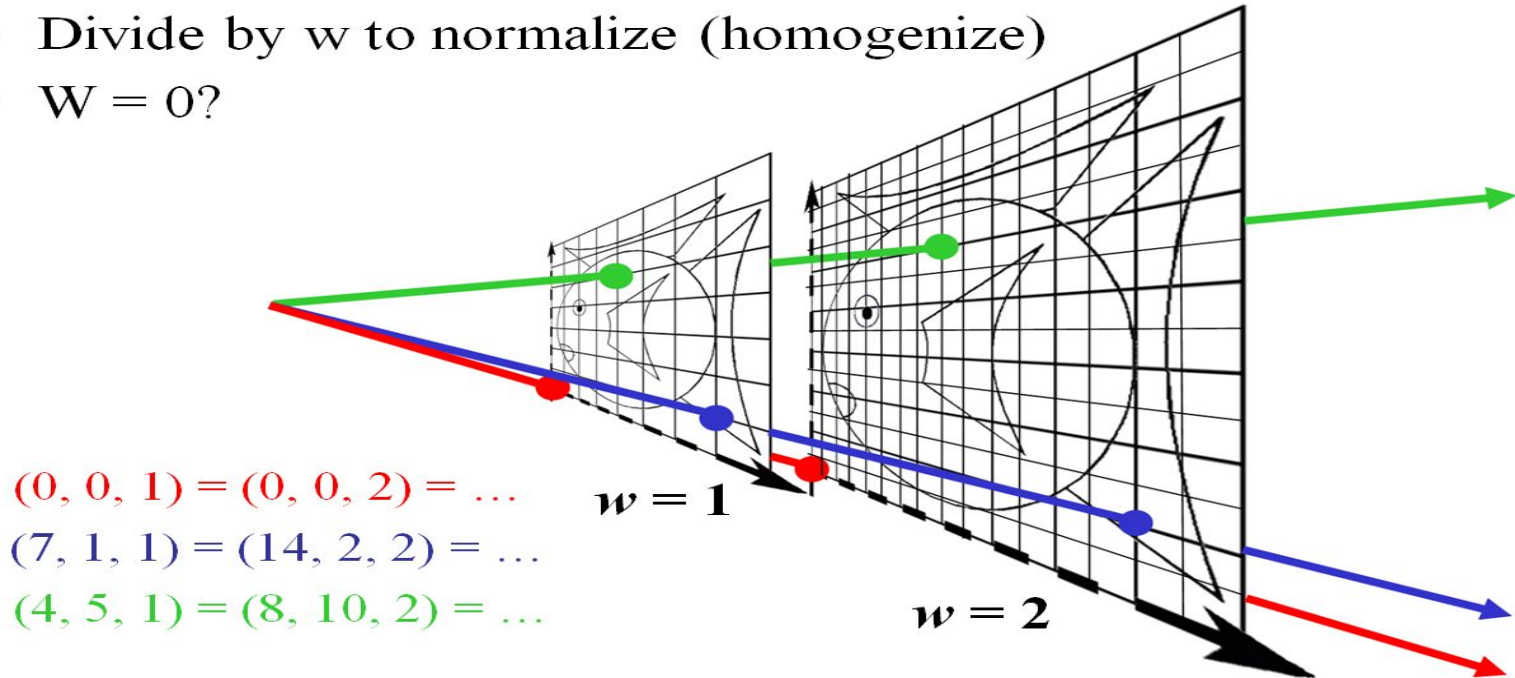

Mechanics of Rigid Transformations



Translate

Rotate

Scale



Translation – 2D

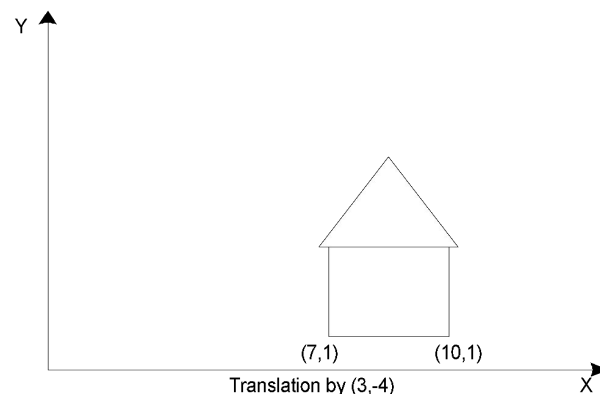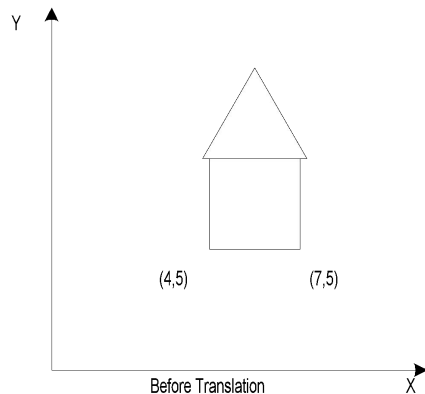



$$\begin{aligned}x' &= x + d_x \\ y' &= y + d_y\end{aligned}$$

$$P = \begin{bmatrix} x \\ y \end{bmatrix} \quad P' = \begin{bmatrix} x' \\ y' \end{bmatrix} \quad T = \begin{bmatrix} d_x \\ d_y \end{bmatrix} \quad P' = P + T$$

Homogeneous Form

$$\begin{bmatrix} x' \\ y' \\ 1 \end{bmatrix} = \begin{bmatrix} 1 & 0 & d_x \\ 0 & 1 & d_y \\ 0 & 0 & 1 \end{bmatrix} * \begin{bmatrix} x \\ y \\ 1 \end{bmatrix}$$

Translation – 3D

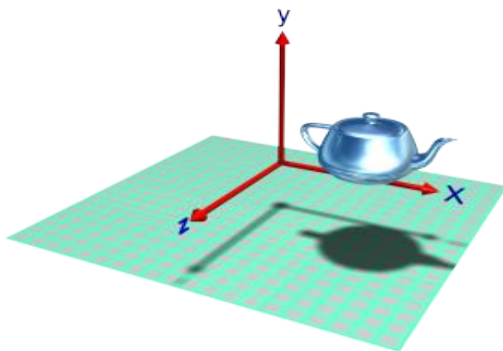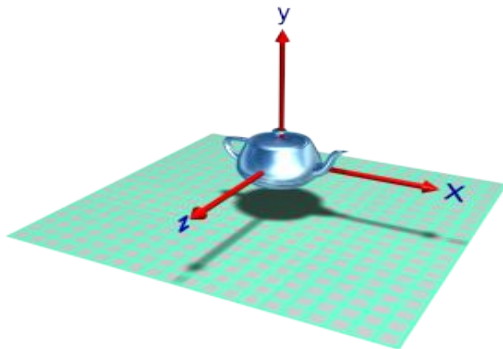

$$x' = x + d_x$$

$$y' = y + d_y$$

$$z' = z + d_z$$




$$\begin{bmatrix} 1 & 0 & 0 & d_x \\ 0 & 1 & 0 & d_y \\ 0 & 0 & 1 & d_z \\ 0 & 0 & 0 & 1 \end{bmatrix} * \begin{bmatrix} x \\ y \\ z \\ 1 \end{bmatrix} = \begin{bmatrix} x + d_x \\ y + d_y \\ z + d_z \\ 1 \end{bmatrix}$$



$$T(d_x, d_y, d_z) * P = P'$$

Scaling – 2D

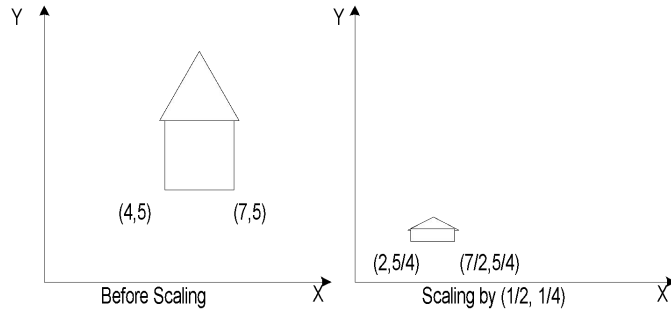

Types of Scaling:

- Differential ($s_x \neq s_y$)
- Uniform ($s_x = s_y$)


$$x' = s_x * x$$

$$y' = s_y * y$$

$$S * P = P'$$

$$\Downarrow \quad \Downarrow \quad \Downarrow$$



$$\begin{bmatrix} s_x & 0 \\ 0 & s_y \end{bmatrix} * \begin{bmatrix} x \\ y \end{bmatrix} = \begin{bmatrix} x * s_x \\ y * s_y \end{bmatrix}$$



Homogenous Form

$$\begin{bmatrix} x' \\ y' \\ 1 \end{bmatrix} = \begin{bmatrix} s_x & 0 & 0 \\ 0 & s_y & 0 \\ 0 & 0 & 1 \end{bmatrix} * \begin{bmatrix} x \\ y \\ 1 \end{bmatrix}$$

Scaling – 3D

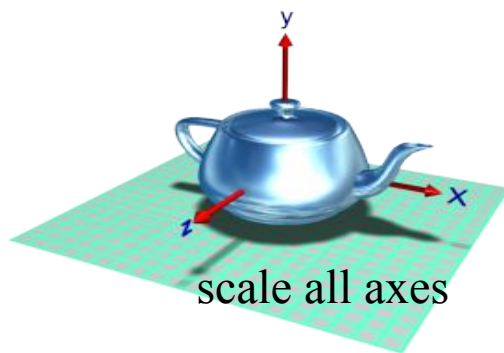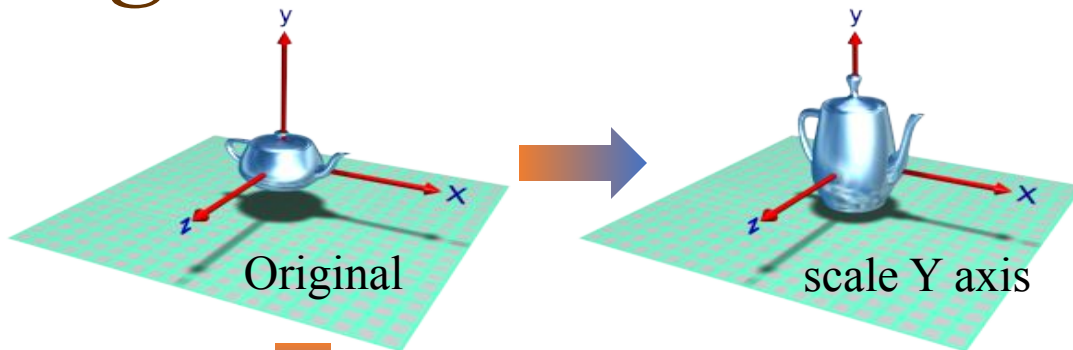

$$x' = s_x * x$$

$$y' = s_y * y$$

$$z' = s_z * z$$

$$S(s_x, s_y, s_z) * P = P'$$

⇓


⇓

⇓

$$\begin{bmatrix} s_x & 0 & 0 & 0 \\ 0 & s_y & 0 & 0 \\ 0 & 0 & s_z & 0 \\ 0 & 0 & 0 & 1 \end{bmatrix} * \begin{bmatrix} x \\ y \\ z \\ 1 \end{bmatrix} = \begin{bmatrix} x * s_x \\ y * s_y \\ z * s_z \\ 1 \end{bmatrix}$$

Rotation – 2D


$$\mathbf{v} = \begin{bmatrix} r \cos \phi \\ r \sin \phi \end{bmatrix}$$
$$\mathbf{v}' = \begin{bmatrix} r \cos(\phi + \theta) \\ r \sin(\phi + \theta) \end{bmatrix}$$

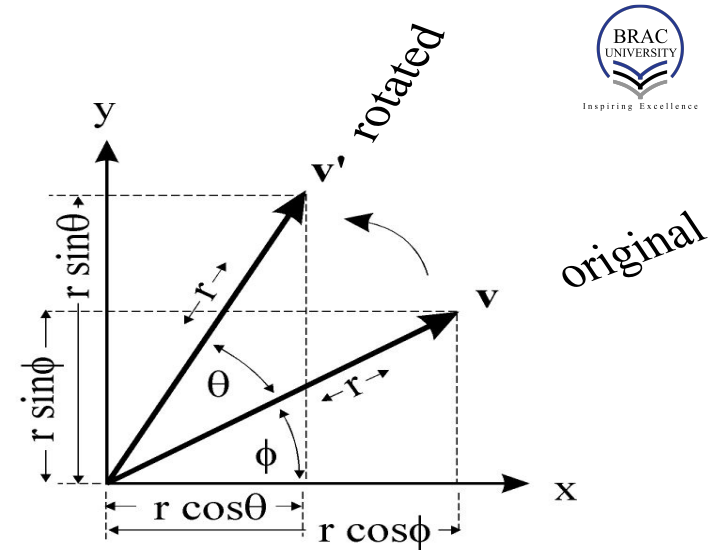

$$\text{expand } (\phi + \theta) \Rightarrow \begin{cases} x' = r \cos \phi \cos \theta - r \sin \phi \sin \theta \\ y' = r \cos \phi \sin \theta + r \sin \phi \cos \theta \end{cases}$$

$$\text{but } \begin{matrix} x = r \cos \phi \\ y = r \sin \phi \end{matrix} \Rightarrow \begin{matrix} x' = x \cos \theta - y \sin \theta \\ y' = x \sin \theta + y \cos \theta \end{matrix}$$

Rotation – 2D

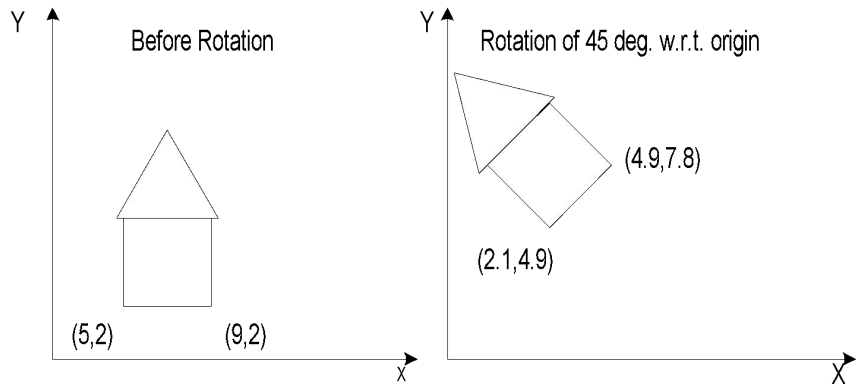

$$x \cdot \cos \theta - y \cdot \sin \theta = x'$$

$$x \cdot \sin \theta + y \cdot \cos \theta = y'$$

$$R \quad * \quad P = \quad P'$$

$$\begin{bmatrix} \cos \theta & -\sin \theta \\ \sin \theta & \cos \theta \end{bmatrix} * \begin{bmatrix} x \\ y \end{bmatrix} = \begin{bmatrix} x \cdot \cos \theta - y \cdot \sin \theta \\ x \cdot \sin \theta + y \cdot \cos \theta \end{bmatrix}$$

Homogenous Form


$$\begin{bmatrix} x' \\ y' \\ 1 \end{bmatrix} = \begin{bmatrix} \cos \theta & -\sin \theta & 0 \\ \sin \theta & \cos \theta & 0 \\ 0 & 0 & 1 \end{bmatrix} * \begin{bmatrix} x \\ y \\ 1 \end{bmatrix}$$

Rotation – 3D

For 3D-Rotation 2 parameters are needed

- ★ Angle of rotation
- ★ Axis of rotation


Rotation about z-axis:

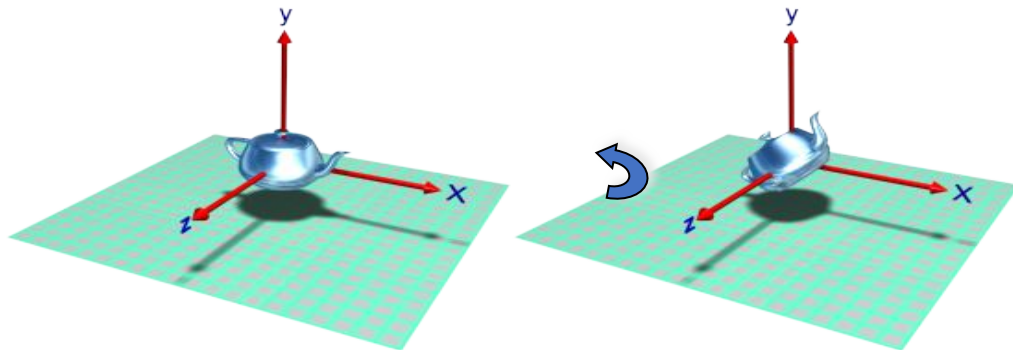

$$\begin{array}{ccccc}
 R_{\theta,k} & * & P & = & P' \\
 \Downarrow & & \Downarrow & & \Downarrow \\
 \begin{bmatrix} \cos \theta & -\sin \theta & 0 & 0 \\ \sin \theta & \cos \theta & 0 & 0 \\ 0 & 0 & 1 & 0 \\ 0 & 0 & 0 & 1 \end{bmatrix} & * & \begin{bmatrix} x \\ y \\ z \\ 1 \end{bmatrix} & = & \begin{bmatrix} x * \cos \theta - y * \sin \theta \\ x * \sin \theta + y * \cos \theta \\ z \\ 1 \end{bmatrix}
 \end{array}$$

Rotation about Z axis: $R_{\theta,k}$

★ About z axis

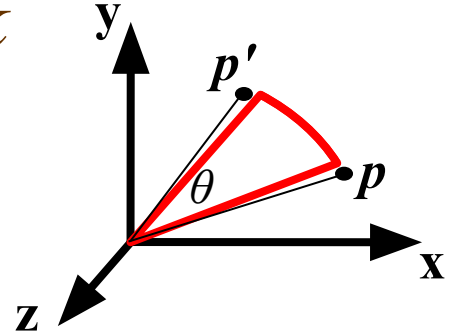

$$\begin{bmatrix} x' \\ y' \\ z' \\ 1 \end{bmatrix} = \begin{pmatrix} \cos \theta & -\sin \theta & 0 & 0 \\ \sin \theta & \cos \theta & 0 & 0 \\ 0 & 0 & 1 & 0 \\ 0 & 0 & 0 & 1 \end{pmatrix} \begin{bmatrix} x \\ y \\ z \\ 1 \end{bmatrix}$$

Rotation about Y-axis & X-axis

About y-axis

$$\begin{array}{ccc}
 R_{\theta,j} & * P = & P' \\
 \Downarrow & \Downarrow & \Downarrow \\
 \begin{bmatrix} \cos \theta & 0 & \sin \theta & 0 \\ 0 & 1 & 0 & 0 \\ -\sin \theta & 0 & \cos \theta & 0 \\ 0 & 0 & 0 & 1 \end{bmatrix} & * \begin{bmatrix} x \\ y \\ z \\ 1 \end{bmatrix} = & \begin{bmatrix} x * \cos \theta + z * \sin \theta \\ y \\ -x * \sin \theta + z * \cos \theta \\ 1 \end{bmatrix}
 \end{array}$$


About x-axis

$$\begin{array}{ccc}
 R_{\theta,i} & * P = & P' \\
 \Downarrow & \Downarrow & \Downarrow \\
 \begin{bmatrix} 1 & 0 & 0 & 0 \\ 0 & \cos \theta & -\sin \theta & 0 \\ 0 & \sin \theta & \cos \theta & 0 \\ 0 & 0 & 0 & 1 \end{bmatrix} & * \begin{bmatrix} x \\ y \\ z \\ 1 \end{bmatrix} = & \begin{bmatrix} x \\ y * \cos \theta - z * \sin \theta \\ y * \sin \theta + z * \cos \theta \\ 1 \end{bmatrix}
 \end{array}$$

Properties of rotation matrix

- ★ The columns of rotation matrix are unit vectors perpendicular to each other
- ★ The column vectors indicate where the unit vectors along the principal axes are transformed
- ★ The rows of rotation matrix are unit vectors perpendicular to each other
- ★ The row vectors indicate the vectors that are transformed into the unit vectors along the principal axes
- ★ The inverse of rotation matrix is its transpose


Mirror Reflection

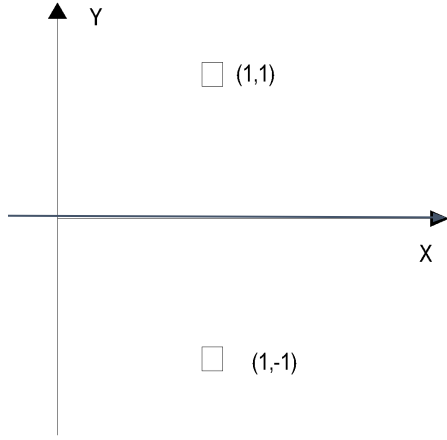

Reflection about X - axis

$$x' = x \quad y' = -y$$

$$M_x = \begin{bmatrix} 1 & 0 & 0 \\ 0 & -1 & 0 \\ 0 & 0 & 1 \end{bmatrix}$$

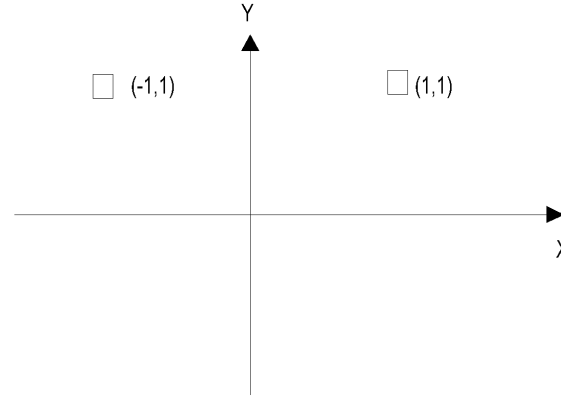

Reflection about Y - axis

$$x' = -x \quad y' = y$$

$$M_y = \begin{bmatrix} -1 & 0 & 0 \\ 0 & 1 & 0 \\ 0 & 0 & 1 \end{bmatrix}$$

Translation(d_x, d_y)

$$\begin{bmatrix} 1 & 0 & d_x \\ 0 & 1 & d_y \\ 0 & 0 & 1 \end{bmatrix}$$

Scale(s_x, s_y)

$$\begin{bmatrix} s_x & 0 & 0 \\ 0 & s_y & 0 \\ 0 & 0 & 1 \end{bmatrix}$$

Rotation(θ)

$$\begin{bmatrix} \cos \theta & -\sin \theta & 0 \\ \sin \theta & \cos \theta & 0 \\ 0 & 0 & 1 \end{bmatrix}$$

Reflection(x axis)

$$\begin{bmatrix} 1 & 0 & 0 \\ 0 & -1 & 0 \\ 0 & 0 & 1 \end{bmatrix}$$

Reflection(y axis)

$$\begin{bmatrix} -1 & 0 & 0 \\ 0 & 1 & 0 \\ 0 & 0 & 1 \end{bmatrix}$$

Shearing Transformation


$$SH_x = \begin{bmatrix} 1 & a & 0 \\ 0 & 1 & 0 \\ 0 & 0 & 1 \end{bmatrix}$$

$$SH_y = \begin{bmatrix} 1 & 0 & 0 \\ b & 1 & 0 \\ 0 & 0 & 1 \end{bmatrix}$$


$$SH_{xy} = \begin{bmatrix} 1 & a & 0 \\ b & 1 & 0 \\ 0 & 0 & 1 \end{bmatrix}$$




unit cube



Sheared in X
direction




Sheared in Y
direction



Sheared in both X
and Y direction

Shear along Z-axis

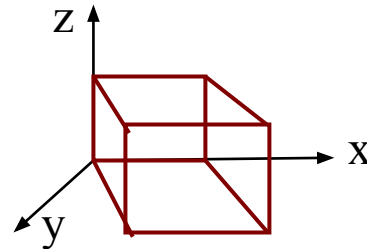


$$SH_{xy}(sh_x, sh_y) * P = P'$$



$$\begin{bmatrix} 1 & 0 & sh_x & 0 \\ 0 & 1 & sh_y & 0 \\ 0 & 0 & 1 & 0 \\ 0 & 0 & 0 & 1 \end{bmatrix} * \begin{bmatrix} x \\ y \\ z \\ 1 \end{bmatrix} = \begin{bmatrix} x + z * sh_x \\ y + z * sh_y \\ z \\ 1 \end{bmatrix}$$

Shear along X-axis




$$\begin{bmatrix} X_{\text{new}} \\ Y_{\text{new}} \\ Z_{\text{new}} \\ 1 \end{bmatrix} = \begin{bmatrix} 1 & 0 & 0 & 0 \\ Sh_y & 1 & 0 & 0 \\ Sh_z & 0 & 1 & 0 \\ 0 & 0 & 0 & 1 \end{bmatrix} \times \begin{bmatrix} X_{\text{old}} \\ Y_{\text{old}} \\ Z_{\text{old}} \\ 1 \end{bmatrix}$$

3D Shearing Matrix

(In X axis)

Shear along Y-axis

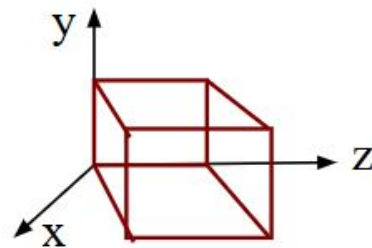

$$\begin{bmatrix} X_{\text{new}} \\ Y_{\text{new}} \\ Z_{\text{new}} \\ 1 \end{bmatrix} = \begin{bmatrix} 1 & Sh_x & 0 & 0 \\ 0 & 1 & 0 & 0 \\ 0 & Sh_z & 1 & 0 \\ 0 & 0 & 0 & 1 \end{bmatrix} \times \begin{bmatrix} X_{\text{old}} \\ Y_{\text{old}} \\ Z_{\text{old}} \\ 1 \end{bmatrix}$$

3D Shearing Matrix
(In Y axis)

Inverse Transforms

- In general: $\mathbf{A}^{-1}$ undoes effect of $\mathbf{A}$
- Special cases:
 - Translation: negate t_x and t_y
 - Rotation: transpose
 - Scale: invert diagonal (axis-aligned scales)
- Others:
 - Invert matrix
 - Invert SVD matrices

Inverse Transformations

Translation : $T_{(dx, dy)}^{-1} = T_{(-dx, -dy)}$

Rotation : $R_{(\theta)}^{-1} = R_{(-\theta)} = R_{(\theta)}^T$

Rotation

: $R_{(\theta)}^{-1} = R_{(-\theta)}$

Scaling

: $S_{(sx, sy)}^{-1} = S_{(1/sx, 1/sy)}$

Mirror Ref

: $M_x^{-1} = M_x$

Ref : $M_x^{-1} = M_x$

$M_y^{-1} = M_y$

$M_y^{-1} = M_y$

Shear

: $Sh_x^{-1} = Sh_{-x}$

: $Sh_y^{-1} = Sh_{-y}$


$Sh_y^{-1} = Sh_{-y}$

Composing Transformations



How are transforms combined?

Scale then Translate

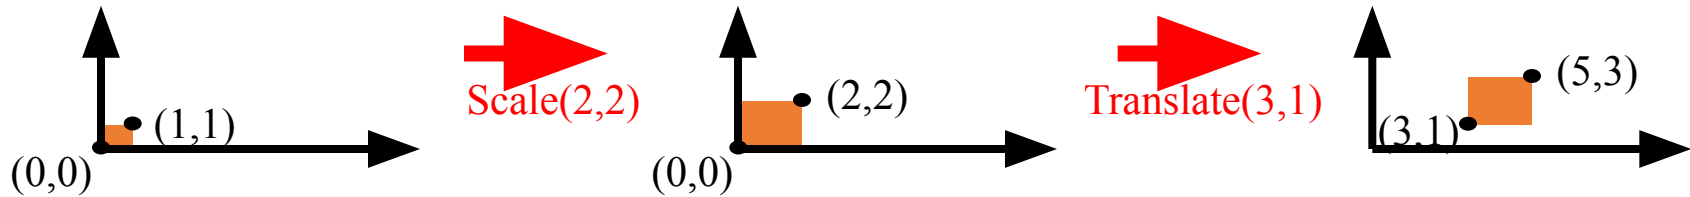


Use matrix multiplication: $p' = T (S p) = TS p$

$$TS = \begin{pmatrix} 1 & 0 & 3 \\ 0 & 1 & 1 \\ 0 & 0 & 1 \end{pmatrix} \begin{pmatrix} 2 & 0 & 0 \\ 0 & 2 & 0 \\ 0 & 0 & 1 \end{pmatrix} = \begin{pmatrix} 2 & 0 & 3 \\ 0 & 2 & 1 \\ 0 & 0 & 1 \end{pmatrix}$$


Caution: matrix multiplication is NOT commutative!

Non-commutative Composition

Scale then Translate: $p' = T (S p) = TS p$

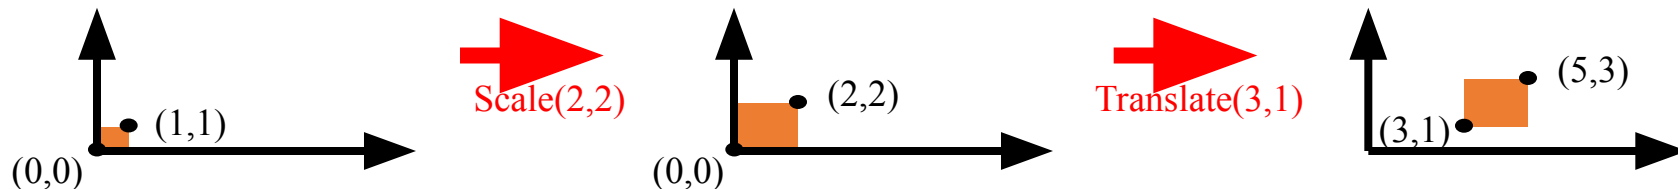

Translate then Scale: $p' = S (T p) = ST p$

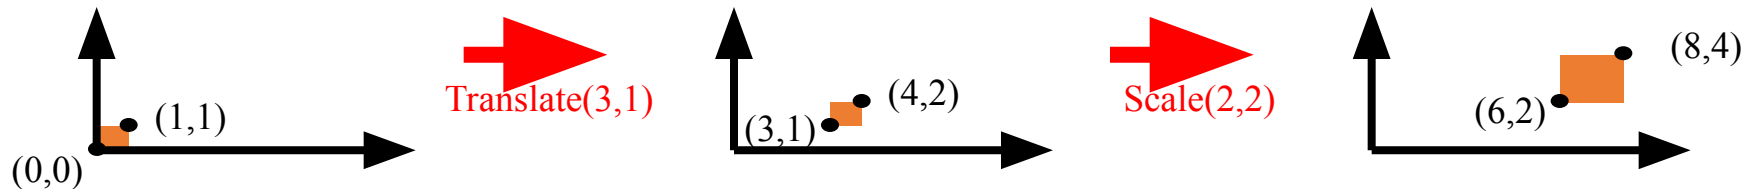

Non-commutative Composition

Scale then Translate: $p' = T (S p) = TS p$

$$TS = \begin{pmatrix} 1 & 0 & 3 \\ 0 & 1 & 1 \\ 0 & 0 & 1 \end{pmatrix} \begin{pmatrix} 2 & 0 & 0 \\ 0 & 2 & 0 \\ 0 & 0 & 1 \end{pmatrix} = \begin{pmatrix} 2 & 0 & 3 \\ 0 & 2 & 1 \\ 0 & 0 & 1 \end{pmatrix}$$

Translate then Scale: $p' = S (T p) = ST p$

$$ST = \begin{pmatrix} 2 & 0 & 0 \\ 0 & 2 & 0 \\ 0 & 0 & 1 \end{pmatrix} \begin{pmatrix} 1 & 0 & 3 \\ 0 & 1 & 1 \\ 0 & 0 & 1 \end{pmatrix} = \begin{pmatrix} 2 & 0 & 6 \\ 0 & 2 & 2 \\ 0 & 0 & 1 \end{pmatrix}$$

Combining Translations, Rotations

- ★ Order matters!! TR is not the same as RT (demo)
- ★ General form for rigid body transforms
- ★ We show rotation first, then translation (commonly used to position objects) on next slide. Slide after that works it out the other way



Rotate then Translate

$$P' = (TR)P = MP = RP + T$$

$$M = \begin{pmatrix} 1 & 0 & 0 & T_x \\ 0 & 1 & 0 & T_y \\ 0 & 0 & 1 & T_z \\ 0 & 0 & 0 & 1 \end{pmatrix} \begin{pmatrix} R_{11} & R_{12} & R_{13} & 0 \\ R_{21} & R_{22} & R_{23} & 0 \\ R_{31} & R_{32} & R_{33} & 0 \\ 0 & 0 & 0 & 1 \end{pmatrix} = \left(\begin{array}{ccc|c} R_{11} & R_{12} & R_{13} & T_x \\ R_{21} & R_{22} & R_{23} & T_y \\ R_{31} & R_{32} & R_{33} & T_z \\ \hline 0 & 0 & 0 & 1 \end{array} \right) = \begin{pmatrix} R & T \\ 0 & 1 \end{pmatrix}$$

Translate then Rotate

$$P' = (RT)P = MP = R(P + T) = RP + RT$$

$$M = \begin{pmatrix} R_{11} & R_{12} & R_{13} & 0 \\ R_{21} & R_{22} & R_{23} & 0 \\ R_{31} & R_{32} & R_{33} & 0 \\ 0 & 0 & 0 & 1 \end{pmatrix} \begin{pmatrix} 1 & 0 & 0 & T_x \\ 0 & 1 & 0 & T_y \\ 0 & 0 & 1 & T_z \\ 0 & 0 & 0 & 1 \end{pmatrix} = \begin{pmatrix} R_{3 \times 3} & R_{3 \times 3} T_{3 \times 1} \\ 0_{1 \times 3} & 1 \end{pmatrix}$$

Associativity of Matrix Multiplication

Create new affine transformations by multiplying sequences of the above basic transformations.

$$\mathbf{q} = \mathbf{CBAp}$$

$$\mathbf{q} = ((\mathbf{CB}) \mathbf{A}) \mathbf{p} = (\mathbf{C} (\mathbf{B} \mathbf{A})) \mathbf{p} = \mathbf{C} (\mathbf{B} (\mathbf{A} \mathbf{p})) \text{ etc.}$$

matrix multiplication is associative.

To transform just a point, better to do $\mathbf{q} = \mathbf{C}(\mathbf{B}(\mathbf{A}\mathbf{p}))$

But to transform many points, best to do

$$\mathbf{M} = \mathbf{CBA}$$

then do $\mathbf{q} = \mathbf{Mp}$ for any point $\mathbf{p}$ to be rendered.

For geometric pipeline transformation, define $\mathbf{M}$ and set it up with the model-view matrix and apply it to any vertex subsequently defined to its setting.



Example Composite Transforms




Rotation of θ about $P(h,k)$: $R_{\theta,P}$

Step 1: Translate $P(-h,-k)$ to origin



Step 2: Rotate θ w.r.t to origin

Step 3: Translate $(0,0)$ to $P(h,k)$


$$\mathbf{R}_{\theta,P} = \mathbf{T}(h, k) * \mathbf{R}_{\theta} * \mathbf{T}(-h, -k)$$

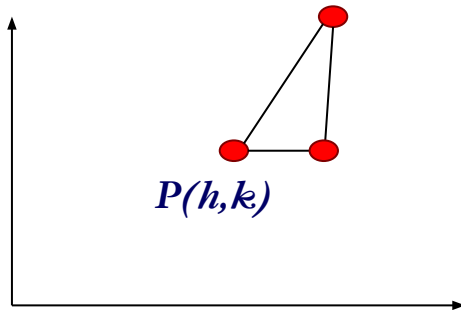

Translate
 $(-h, -k)$

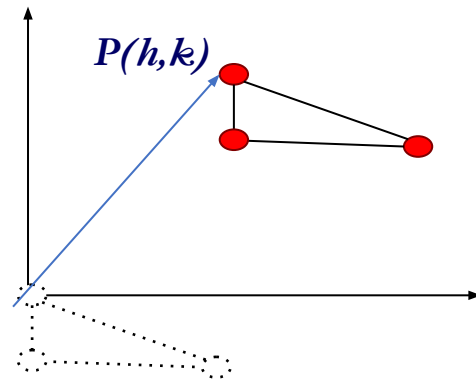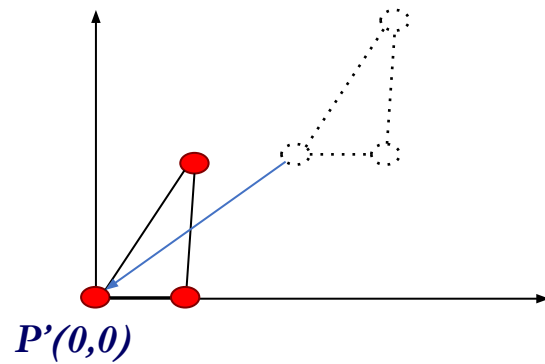Translate
 (h, k)

$$P' = T_{(h,k)} \times R_{(\theta)} \times T_{(-h,-k)} \times P$$

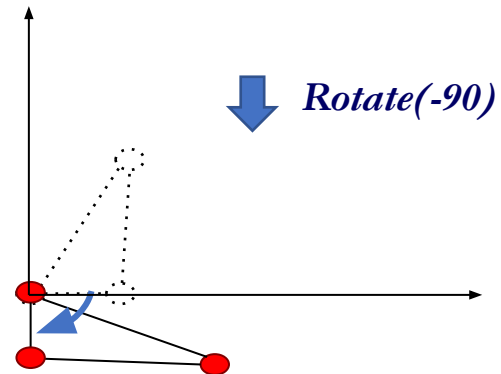Composite matrix, $M = T_{(h,k)} \times R_{(\theta)} \times T_{(-h,-k)}$

$$= \begin{bmatrix} 1 & 0 & h \\ 0 & 1 & k \\ 0 & 0 & 1 \end{bmatrix} \begin{bmatrix} \cos \theta & -\sin \theta & 0 \\ \sin \theta & \cos \theta & 0 \\ 0 & 0 & 1 \end{bmatrix} \begin{bmatrix} 1 & 0 & -h \\ 0 & 1 & -k \\ 0 & 0 & 1 \end{bmatrix}$$

Suppose, a composite transformation is defined as rotating 90 degree counterclockwise with respect to point (5, 5). Calculate the composite transformation matrix in homogeneous form. Then, find the new coordinates of the point (10, 10) after transformation.

Composite matrix, $M = T_{(5,5)} \times R_{(90)} \times T_{(-5,-5)}$

Composite matrix, $M = T_{(5,5)} \times R_{(90)} \times T_{(-5,-5)}$

$$= \begin{bmatrix} 1 & 0 & 5 \\ 0 & 1 & 5 \\ 0 & 0 & 1 \end{bmatrix} \begin{bmatrix} \cos 90 & -\sin 90 & 0 \\ \sin 90 & \cos 90 & 0 \\ 0 & 0 & 1 \end{bmatrix} \begin{bmatrix} 1 & 0 & -5 \\ 0 & 1 & -5 \\ 0 & 0 & 1 \end{bmatrix}$$

$$= \begin{bmatrix} 1 & 0 & 5 \\ 0 & 1 & 5 \\ 0 & 0 & 1 \end{bmatrix} \begin{bmatrix} 0 & -1 & 0 \\ 1 & 0 & 0 \\ 0 & 0 & 1 \end{bmatrix} \begin{bmatrix} 1 & 0 & -5 \\ 0 & 1 & -5 \\ 0 & 0 & 1 \end{bmatrix}$$

$$= \begin{bmatrix} 0 & -1 & 10 \\ 1 & 0 & 0 \\ 0 & 0 & 1 \end{bmatrix}$$

$$P' = M \times P$$

$$= \begin{bmatrix} 0 & -1 & 10 \\ 1 & 0 & 0 \\ 0 & 0 & 1 \end{bmatrix} \begin{bmatrix} 10 \\ 10 \\ 1 \end{bmatrix}$$
$$= \begin{bmatrix} 0 \\ 10 \\ 1 \end{bmatrix}$$

So, the new coordinate of P is (0, 10)


Scaling of $S_{a,b}$ about $P(h,k)$: $R_{S,P}$

Step 1: Translate $P(-h,-k)$ to origin


Step 2: Scale $S_{a,b}$ w.r.t to origin

Step 3: Translate $(0,0)$ to $P(h,k)$


$$R_{S,P} = T(h, k) * S(a, b) * T(-h, -k)$$

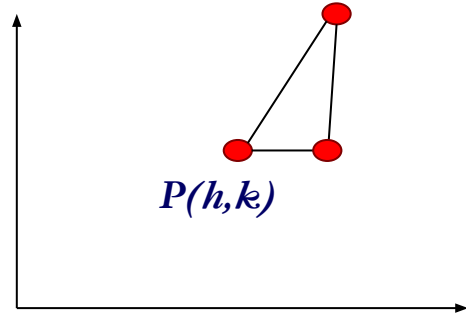


Translate
 $(-h, -k)$

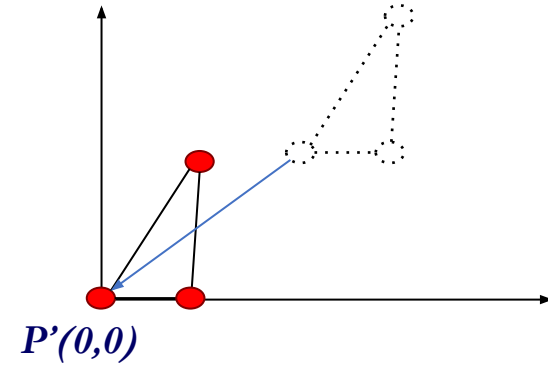

Scale *$(1.5, 1.5)$*

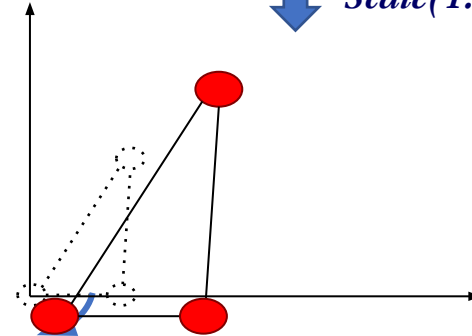

Translate
 (h, k)

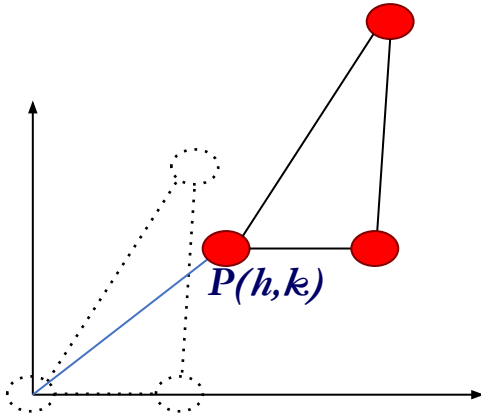

$$P' = T_{(h,k)} \times S_{(a,b)} \times T_{(-h,-k)} \times P$$

Composite matrix, $M = T_{(h,k)} \times S_{(a,b)} \times T_{(-h,-k)}$

$$= \begin{bmatrix} 1 & 0 & h \\ 0 & 1 & k \\ 0 & 0 & 1 \end{bmatrix} \begin{bmatrix} a & 0 & 0 \\ 0 & b & 0 \\ 0 & 0 & 1 \end{bmatrix} \begin{bmatrix} 1 & 0 & -h \\ 0 & 1 & -k \\ 0 & 0 & 1 \end{bmatrix}$$

Suppose, a composite transformation is defined as scaling 2 times in both axis with respect to point (5, 5). Calculate the composite transformation matrix in homogeneous form. Then, find the new coordinates of the point (10, 10) after transformation.

Composite matrix, $M = T_{(5,5)} \times S_{(2,2)} \times T_{(-5,-5)}$


$$\begin{aligned}
 &= \begin{bmatrix} 1 & 0 & 5 \\ 0 & 1 & 5 \\ 0 & 0 & 1 \end{bmatrix} \begin{bmatrix} 2 & 0 & 0 \\ 0 & 2 & 0 \\ 0 & 0 & 1 \end{bmatrix} \begin{bmatrix} 1 & 0 & -5 \\ 0 & 1 & -5 \\ 0 & 0 & 1 \end{bmatrix} \\
 &= \begin{bmatrix} 2 & 0 & -5 \\ 0 & 2 & -5 \\ 0 & 0 & 1 \end{bmatrix}
 \end{aligned}$$

$$P' = M \times P$$

$$= \begin{bmatrix} 2 & 0 & -5 \\ 0 & 2 & -5 \\ 0 & 0 & 1 \end{bmatrix} \begin{bmatrix} 10 \\ 10 \\ 1 \end{bmatrix}$$
$$= \begin{bmatrix} 15 \\ 15 \\ 1 \end{bmatrix}$$

So, the new coordinate of P is (15, 15)

Reflection about line L , M_L

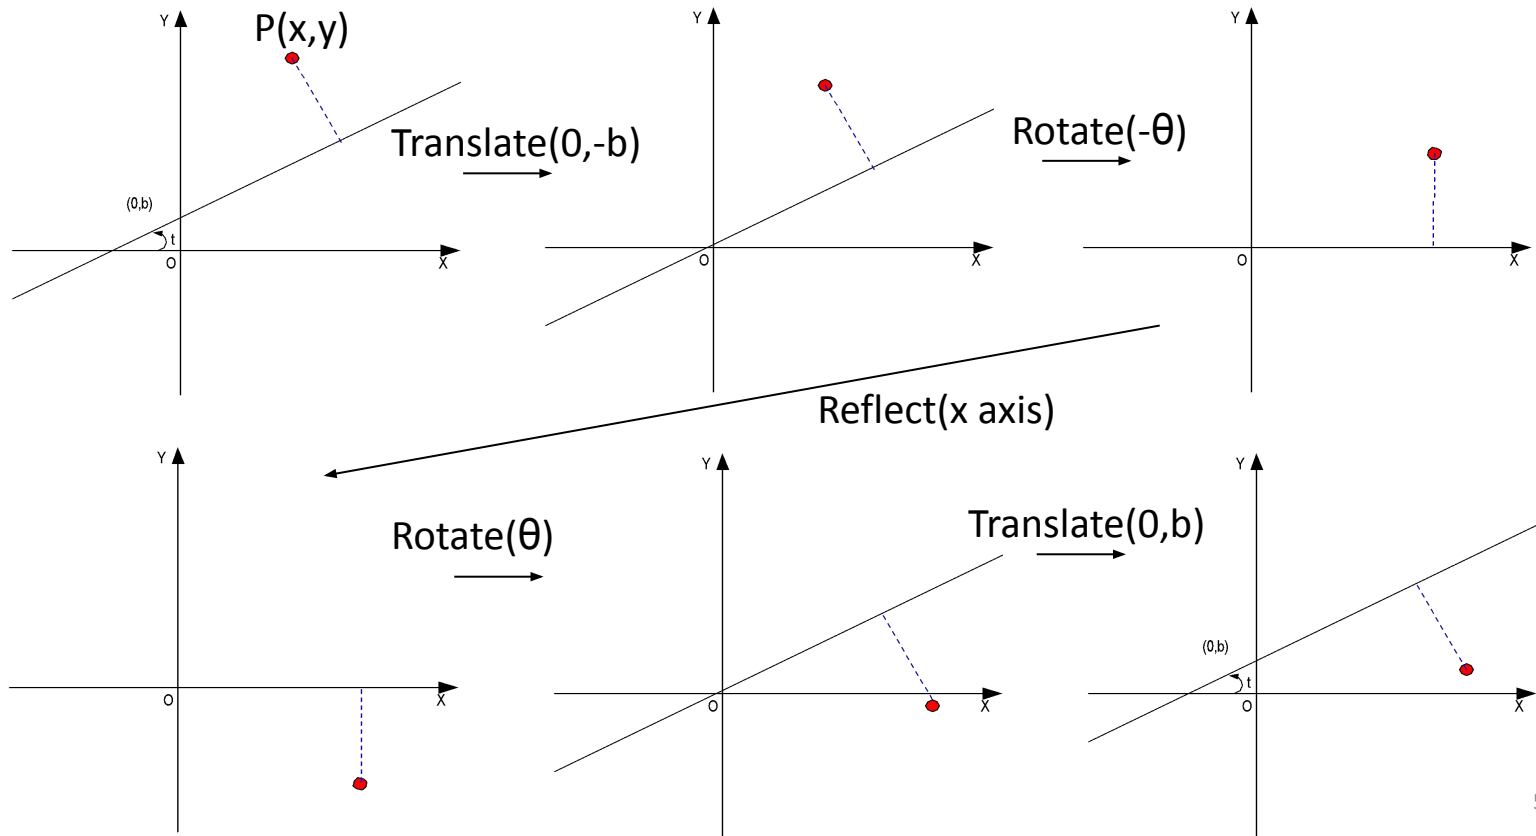

Reflection about line L, M_L


Step 1: Translate $(0, -b)$ to origin

Step 2: Rotate $-\theta$ degrees

Step 3: Mirror reflect about X-axis

Step 4: Rotate θ degrees

Step 5: Translate origin to $(0, b)$

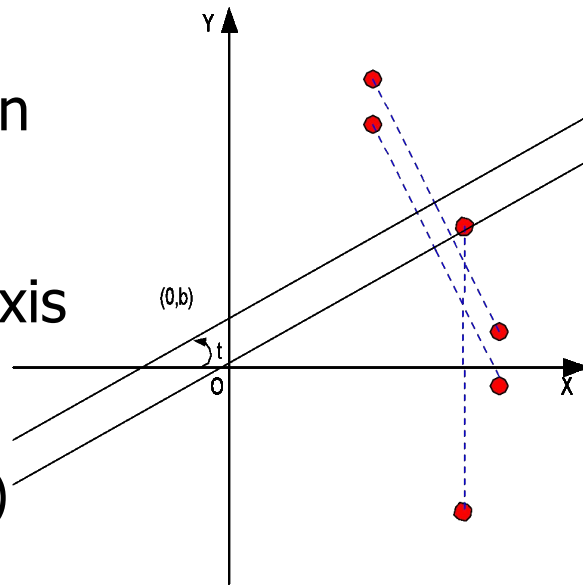

$$M_L = T(0, b) * R(\theta) * M_x * R(-\theta) * T(0, -b)$$

Reflect the point (10, 5) with respect to the line $y=x+2$.

$$b = 2, m = 1, \theta = \tan^{-1} 1 = 45$$

$$M_{composite} = T_{(0,2)} \times R_{(45)} \times Refl_{(x \text{ axis})} \times R_{(-45)} \times T_{(0,-2)}$$

$$= \begin{bmatrix} 1 & 0 & 0 \\ 0 & 1 & 2 \\ 0 & 0 & 1 \end{bmatrix} \begin{bmatrix} \cos 45 & -\sin 45 & 0 \\ \sin 45 & \cos 45 & 0 \\ 0 & 0 & 1 \end{bmatrix} \begin{bmatrix} 1 & 0 & 0 \\ 0 & -1 & 0 \\ 0 & 0 & 1 \end{bmatrix} \begin{bmatrix} \cos(-45) & -\sin(-45) & 0 \\ \sin(-45) & \cos(-45) & 0 \\ 0 & 0 & 1 \end{bmatrix} \begin{bmatrix} 1 & 0 & 0 \\ 0 & 1 & -2 \\ 0 & 0 & 1 \end{bmatrix}$$

$$= \begin{bmatrix} 0 & 1 & -2 \\ 1 & 0 & 2 \\ 0 & 0 & 1 \end{bmatrix}$$

$$P' = \begin{bmatrix} 0 & 1 & -2 \\ 1 & 0 & 2 \\ 0 & 0 & 1 \end{bmatrix} \begin{bmatrix} 10 \\ 5 \\ 1 \end{bmatrix} = \begin{bmatrix} 3 \\ 12 \\ 1 \end{bmatrix}$$

New coordinate (3, 12)

Exercise

Check this link for the sample problems:

<https://docs.google.com/document/d/1FGYfEREicKold6MJ6hzQoVzP5hbnD-2lu23xl5vNYSQ/edit?usp=sharing>

References

- ★ Chapter 4 and Chapter 6, Schaum's Outline of Computer Graphics (2nd Edition) by Zhigang Xiang, Roy A. Plastock
- ★ Chapter 5, Computer Graphics: Principles and Practice in C (2nd Edition) by James D. Foley, Andries van Dam, Steven K. Feiner, John F. Hughes
- ★ Chapter 6, Fundamentals of Computer Graphics, by Peter Shirley

